

Status: 03/2018



cab devices and systems

Products need labeling



For any requirement a proper solution

Since more than 40 years cab develops and manufactures solutions and a large amount of accessories for product marking. The product range includes label printers, print & apply systems, label dispensers and marking laser systems. In addition, cab provides ribbons and labels for the perfect imprint.

PRODUCTS NEED LABELING

In the automotive sector, labeling ensures traceability of components to the smallest screw. In logistics, it guarantees scheduled delivery. On electrical devices, typeplates refer to performance data and use. Pharmacy sees labeling prevent from errors relevant to health, in chemistry it points out to risks associated with the handling of a product - multi-colored and without any barrier as regards language. On food, labeling informs about ingredients and on textiles about its best possible care.



FOR THE CUSTOMER'S BENEFIT

When it comes to using the devices, cab customers expect both a long service life and 100 per cent availability. All the printing and labeling processes have to be precise and reliable. Intuitive operability is a further criterion especially with alternating staff. On this basis, cab continuously develops ideas and assigns new technologies to real applications.

88 per cent of all the customers steadily rely on cab solutions - many of them for 20 years or more.

Long before Advanced Manufacturing and the Internet of Things became evident, cab devices did far more than just printing on a label. The products' architecture has always been designed according to easy operation, integration in automated production lines as well as reliability. The interfaces and protocols of cab's current printer generation enable bi-directional interaction with master networks, production planning or PLC.

Shaping innovation together

COMPANY FACTS AND FIGURES

- founded 1975
- nine sites in seven countries
- Production and distribution of more than 35,000 devices every year
- 85 million Euros group turnover in fiscal year 2017
- Industry leader in automated and high-precision labeling
- Europe's major manufacturer of label printing systems



For further information see
www.cab.de/en

MADE IN GERMANY

As an owner-operated family company cab offers customer focus and economic continuity.

Foresight, ideas, added by curiosity and joy in its own products and their further development have always been driving forces in the company.

Local subsidiaries in Germany, France, USA, Mexico, South Africa and Asia form the basis to meet the individual markets in the best possible way.

cab headquarters in Karlsruhe, Germany:
Product Development and Engineering,
International Sales, Marketing, Administration



**KLAUS BARDUTZKY**

Managing Director and company founder

ALEXANDER BARDUTZKY

2nd generation Managing Director



Get an overview!

Label printers

Pages

7 - 15



Print and apply systems

Pages

18 - 19



Labeling heads

Pages

20 - 21



Print modules

Page

22



Label dispensers

Page

23



Marking laser systems

Pages

24 - 26



Software

Page

27



Labels, Ribbons

Pages

28 - 29



Design and technical specifications correspond to the date of the printing. Subject to change.

The data provided in the catalog do not represent any warranty or guarantee.

For current data see website www.cab.de/en

Label printers MACH1, MACH2



MACH1 with control buttons and LED signal

MACH2 with colored LCD display and navigator pad

4“ desktop printers in proven technology

With the MACH1 and MACH2 cab completes its printer range in the lower price segment.

The devices ideally fit with small to medium duty applications in thermal transfer and direct thermal printing.

MACH1 is provided with control buttons and a LED signal, while MACH2 has a colored LCD display and a navigator pad.

■ Standard □ Option

Label printer		MACH1		MACH2	
Print head	Printing method	Thermal transfer, thermal direct			
	Printable resolution dpi	203	300	203	300
	Print speed up to mm/s	127	102	177	127
	Print width up to mm	108	105.7	108	105.7
Labels	Roll outside diameter up to mm	127			
	Width mm	25 - 112			
	Height mm	4 - 1,727	4 - 762	4 - 1,727	4 - 762
Ribbon	Ink side	outside or inside			
	Variable length up to m	300			
Printer sizes and weights	Width x Height x Depth mm	210 x 186 x 280			
	Weight kg	2.7	3		
Electronics	Data storage MB	16			
	Main storage SDRAM MB	8			
Interfaces	RS232-C	■	■		
	USB for PC	■	■		
	Ethernet	■	■		
	USB host	-	■		

The device can be opened up widely to insert the ribbon and the label roll.



For further information see www.cab.de/en/mach1-2

Label printers EOS1, EOS4



EOS1 for label rolls up to diameter 152 mm
EOS4 for label rolls up to diameter 203 mm

Compact printers providing many features of large industrial printers
 The EOS combine all the functions of a solid label printer with highest ease of operation.

EOS1 is the compact one requiring little space, EOS4 processes label rolls up to diameter 203 mm.

■ Standard □ Option

Label printer			EOS1		EOS4	
Print head	Printing method		Thermal transfer, thermal direct			
	Printable resolution	dpi	203	300	203	300
	Print speed	up to mm/s	125			
	Print width	up to mm	108	105.7	108	105.7
Labels	Roll outside diameter	up to mm	152		203	
	Width	mm	single lane 10 - 116, multi lane 5 - 116			
	Height	mm	5 - 1,000			
Ribbon	Ink side		outside or inside			
	Variable length	up to m	360			
Printer sizes and weights	Width x Height x Depth	mm	253 x 189 x 322		264 x 245 x 412	
	Weight	kg	4		5	
Electronics	Processor clock rate	MHz	400			
	Data storage	MB	16			
	Main storage RAM	MB	64			
Interfaces	USB for PC		■			
	Ethernet		■			
	Periphery		■			
	USB host		■			

The EOS can be supplied with the battery pack provided by cab - wherever labels are needed but no socket for power connection is available.



For further information see www.cab.de/en/eos

Label printers MACH 4S



MACH 4S to insert consumables from the front.

Industrial printers to insert consumables from the front

The MACH 4S provide all features of an industrial printer with a wide application range. Labels and ribbons are easy to insert from the front.

The large, colored touchdisplay with self-explanatory symbols offers best operability. The centered material guide eliminates any need of adjustments.

■ Standard □ Option

Label printer		MACH 4S		
Print head	Thermal transfer	■		
	Thermal direct	■		
	Printable resolution dpi	203	300	600
	Print speed up to mm/s	250	300	150
	Print width up to mm	108.4		
Labels	Roll, reel outside diameter up to mm	205		
	Width mm	5 - 116		
	Height without label backfeed from mm	5		
	Height peel-off, single cut	12		
Ribbon	Ink side	outside or inside		
	Variable length up to m	360		
Printer sizes and weights	Width x Height x Depth mm	240 x 317 x 435		
	Height when cover is open mm	596		
	Weight kg	6		
Electronics	Processor clock rate MHz	800		
	Data storage MB	50		
	Main storage RAM MB	256		
Interfaces	RS232-C	■		
	USB for PC	■		
	Ethernet	■		
	Periphery	■		
	USB host	■		



Printer version with a tear-off edge

Printer version with peel-off function

Printer version with a cutter



For further information see www.cab.de/en/mach4s

Label printers **SQUIX 2, SQUIX 4, SQUIX 6**



Material guide
 left-aligned



SQUIX label printers with left-aligned material guide

Flexible printers for industrial applications

The SQUIX are the further development of the successful printer series A+. They represent innovative technology, accuracy of impression, fast printing and highest quality standards.

Their development is foremost focused on simple and convenient operation coupled with high reliability.

All materials wound on rolls resp. fanfold can be printed.

■ Standard □ Option

Label printer		SQUIX 2		SQUIX 4			SQUIX 6		
Print head	Thermal transfer	■							
	Thermal direct	□	-	■	■	-	■		
	Printable resolution	dpi	300	600	203	300	600	203	300
	Print speed	up to mm/s	250	150	250	300	150	250	
	Print width	up to mm	56.9		104	108.4	105.7	168	162.6
Labels	Roll outside diameter	mm	205 / 38,1 - 76						
	with core diameter								
	Width	mm	4 - 63		20 - 116			46 - 176	
	Height	from mm	4		4			6	
Ribbon	without label backfeed								
	Ink side		outside or inside						
Printer sizes and weights	Variable length	up to m	450						
	Width x Height x Depth	mm	200 x 288 x 460		252 x 288 x 460			312 x 288 x 460	
	Weight	kg	9		10			14	
Electronics	Processor clock rate	MHz	800						
	Data storage	MB	50						
	Main storage RAM	MB	256						
Interfaces	RS232-C, USB for PC, Ethernet, Periphery, USB host, WLAN		■						
	Digital I/O		Peel-off version ■, basic version □						



For further information see
www.cab.de/en/squix



Customized handling

Labels can either be cut or perforated. Various peel-off adapters enable either automatic or manual dispensing. The labels can also be rewound for further processing.

For operation in production lines various applicators are provided that allow semi-automatic printing and applying.

Reliability

Due to comprehensive peripheral equipment the printers fully tackle any task, allowing to demonstrate their reliability in continuous operation in any working environment.



Tester for linear and 2D barcodes



Cutter and cutter tray



Internal rewinder



External rewinder



Applicators to be integrated in production lines



Demand module for packaging in motion

Label printers SQUIX 4 M, SQUIX 4 MT



Material guide
centered



SQUIX label printers with centered material guide

M series - precise and versatile

For printing on all materials that are wound on rolls or reels or fanfold - especially very small labels or slim continuous materials such as pressed shrink tubes.

MT series - textile printers

It is also possible to print on labels or continuous materials that are wound on rolls or reels.

Valid for both printer series:

As regards the label width, no adjustment of the plungers is needed. Adapted print rollers are provided for slim materials.

Standard Option

Label printer		SQUIX 4 M			SQUIX 4 MT	
Print head	Thermal transfer					
	Thermal direct	■	■	-	■	-
	Printable resolution dpi	203	300	600	300	600
	Print speed up to mm/s	250	300	150	300	150
	Print width up to mm	104	108.4	105.7	108.4	105.7
Labels	Roll, reel outside diameter mm	205 / 38.1 - 76			205 / 38.1 - 76	
	with core diameter	180 / 100			180 / 100	
	Width mm	4 - 110			4 - 110	
	Height from mm	3			4	
Ribbon	Ink side	outside or inside				
	Variable length up to m	450			450	
Printer sizes and weights	Width x Height x Depth mm	252 x 288 x 460			252 x 288 x 460	
	Weight kg	10			10	
Electronics	Processor clock rate MHz	800			800	
	Data storage MB	50			50	
	Main storage RAM MB	256			256	
Interfaces	RS232-C, USB for PC, Ethernet, Periphery, USB host, WLAN	■			■	
	Digital I/O	□			□	



SQUIX 4 M with a
stacker and cutter



For further information see
www.cab.de/en/squix

Label printers A8+



A8+ for pallet and barrel labeling

8" printers for wide label applications

The print mechanics and chassis of SQUIX and A+ printers match in terms of shape and function.

The highspeed processor ensures fast processing of a print job and immediate label output.

■ Standard □ Option

Label printer			A8+
Print head	Thermal transfer		■
	Thermal direct		■
	Printable resolution	dpi	300
	Print speed	up to mm/s	150
	Print width	up to mm	216
Labels	Roll outside diameter	up to mm	205
	Width	mm	46 - 220
	Height without label backfeed	from mm	10
Ribbon	Ink side		outside or inside
	Variable length	up to m	360
Printer sizes and weight	Width x Height x Depth	mm	352 x 274 x 446
	Weight	kg	15
Electronics	Processor clock rate	MHz	266
	Data storage	MB	8
	Main storage RAM	MB	64
Interfaces	Centronics		□
	RS232-C		■
	USB for PC		■
	Ethernet		■
	RS422 / RS485		□
	Periphery		■
	USB host		■
	WLAN		□
	Digital I/O		-



For further information see
www.cob.de/en/a8plus

Label printers XD4T



XD4T for double-sided printing also on textile materials

Textile printer XD4T

The XD4T prints on both sides of a textile tape, cardboard labels, pressed tubes, continuous or ready-for-use, as well as on continuous plastic, paper or cardboard materials:

- No print head adjustment for different material widths
- Print rollers for narrow and slim materials

■ Standard □ Option

Label printer			XD4T
Print head	Printing method		Thermal transfer
	Printable resolution	dpi	300
	Print speed	up to mm/s	125
	Print width	up to mm	105,6
Labels	Roll outside diameter	up to mm	300
	Width	mm	10 - 110
	Height without label backfeed	from mm	20
Ribbon	Ink side		outside or inside
	Variable length	up to m	360
Printer sizes and weight	Width x Height x Depth	mm	248 x 395 x 554
Electronics	Weight	kg	21
	Processor clock rate	MHz	266
	Data storage	MB	8
Interfaces	Main storage RAM	MB	64
	RS232-C		■
	USB for PC		■
	Ethernet		■
	Periphery		■
	USB host		■
	WLAN		□
	Digital I/O		-



XD4T with a stacker and cutter



For further information see www.cab.de/en/xd4t

Label printers XC4, XC6



XC4, XC6 for two-color printing up to printhead width 162.6 mm

Printing two colors in one operation

In order to simultaneously print with two colors in one label, the XC have two thermal transfer units arranged in-line:

- Meets the conditions for the Classification and Labeling Inventory according to GHS
- For large label rolls to diameter 300 mm
- Provides ribbon saving function at one print head

■ Standard □ Option

Label printer			XC4	XC6
Print head	Printing method		Thermal transfer	
	Printable resolution	dpi	300	
	Print speed	up to mm/s	125	
	Print width	up to mm	105.6	162.6
Labels	Roll outside diameter	up to mm	300	
	Width	mm	20 - 116	46 - 176
	Height	mm	20 - 2,000	20 - 1,500
Ribbon	Ink side		outside or inside	
	Variable length	up to m	360	
Printer sizes and weights	Width x Height x Depth	mm	248 x 395 x 554	358 x 395 x 554
	Weight	kg	22	24
Electronics	Processor clock rate	MHz	266	
	Data storage	MB	8	
	Main storage RAM	MB	64	
Interfaces	USB for PC		■	
	Ethernet		■	
	Periphery		■	
	USB host		■	
	WLAN		□	



XC6 with a cutter



For further information see
www.cab.de/en/xc

we identify more

Consistent know-how, high level vertical integration

All mechanical and plastic components used in cab devices and systems are manufactured in-house at the Sömmerda site. Facilities, machinery and equipment are always using the latest technology.

Substantial equipment provides the preconditions to economically manufacture even complex marking systems that set demanding requirements on production processes. The competencies for the whole process chain of electronics, mechanics and software are provided within cab.



For further information see
<https://we-identify-more.com/en>

cab
we identify more



Print and apply systems **Hermes+**, **Hermes C**



Hermes+ with stroke applicator 4114



Hermes C with stroke applicator 4136

Hermes+

Hermes+ has been designed for automatic printing and applying in production lines.



Dispensing to the left



Dispensing to the right

Hermes C

Hermes C is for printing and applying with two colors in one operation. It has been developed and optimized especially for applications compliant to the Classification Inventory according to GHS.









For further information see
www.cab.de/en/print-apply

■ Standard □ Option

Print and apply system		Hermes ⁺ 2		Hermes ⁺ 4			Hermes ⁺ 6		Hermes C 6L	
Print head	Thermal transfer	■		■			■		■	
	Thermal direct	■	-	■		-	■		-	
	Printable resolution dpi	300	600	203	300	600	203	300	300	
	Print speed up to mm/s	150	100	250		100	200		125	
	Print width up to mm	54.2	57	104	108.4	105.6	168	162.6		
Labels	Roll outside diameter up to mm	305								
	Width mm	4 - 58		10 - 114			50 - 174		46 - 176	
	Height mm	4 - 200		8 - 320			25 - 320		20 - 356	
Ribbon	Ink side	outside or inside								
	Variable length up to m	500						450		
Device sizes and weights	Width x Height x Depth mm	207 x 538 x 518		260 x 538 x 518			320 x 538 x 518		320 x 550 x 630	
	Weight kg	15		16			20		30	
Electronics	Processor clock rate MHz	266								
	Data storage MB	8								
	Main storage RAM MB	64								
Interfaces	Centronics							□		-
	RS232-C							■		
	USB for PC							■		
	Ethernet							■		
	USB master							■		
	RS422 / RS485							□		-
	Digital I/O							■		
	Applicator							■		
	Warning light							■		
	E-stop							■		
	Main valve for air pressure supply							■		

Applicators for **product marking with Hermes+**

					
3214 Swing applicator	4114/4116 Stroke applicators	4214 Stroke turn applicator	4414 Stroke applicator	4514 Swing stroke applicator	4712 Flag applicator

Labels may be applied from all sides. Depending from the type of applicator, the product is either in motion or not in motion during labeling.

Applicators for **package marking with Hermes+**

					
3014/3016 Front side applicators	4014/4016 Stroke applicators	4614 Stroke blow applicator	5114 Demand module	5314/5316 and 5414/5416 Vacuum belt applicators	6114 Air jet box

Labels may be applied from all sides. Depending from the type of pad, the packaging / product is in motion or not in motion during labeling.

Applicators for **Hermes C**

 <p>4126C / 4136C Stroke applicators</p> <p>Labels may be applied from all sides. Depending from the type of pad, the product is in motion or not in motion during labeling.</p>	Transfer modules for stroke applicators		 <p>5326C / 5426C Vacuum belt applicators</p> <p>For labeling on packaging or products in motion.</p>
	 <p>Tamp pad To press labels on flat surfaces</p>		
	 <p>Tamp pad spring-mounted To apply labels even on surfaces up to approx. 8° inclination</p>		
	 <p>Roll-on pad To roll labels on flat surfaces in motion</p>		

Labeling heads IXOR



IXOR is driven by a high-torque servo motor.

Highly performant devices to be integrated into labeling machines

54 mm chassis depth and a modular construction kit perfectly allow IXOR to be integrated into labeling machines or attached to conveyors in a production line via a wide range of accessories such as mounting equipment. A large-scale modular system of rewinders, unwinders and peel edges enable to configure the labeling head according to any customer specification.

Wide voltage input allows IXOR to be linked to all common power supplies. By means of the LAN and the serial interface, IXOR can be easily connected to existent control units. As regards service purposes such as firmware updates, reading out formats and diagnostics, IXOR comes standard with WLAN.

■ Standard □ Option

Labeling head			IXOR			
Basic unit	Construction width	mm	124	186	248	310
Power data	Label web speed	up to m/min	50, 100, 150, 200 - depending from type			
Labels	Roll outside diameter	up to mm	310 / 410			410
	Width	up to mm	120	182	244	306
	Length	mm	5 - 6,000			
Device sizes and weights	Width x Height with supply roll 310 mm	mm	600 x 600			-
	Width x Height with supply roll 410 mm	mm	680 x 700			925 x 825
	Depth	mm	266	328	390	452
	Weight	kg	14	14.5	15	32
Interfaces	Analog		■			
	Periphery		■			
	WLAN		■			
	Digital I/O		■			
	End of label web sensor		■			
	Start and stop sensor		■			
	Product speed synchronization		■			
	Serial		□			
	LAN		□			

Customized configuration

Every IXOR application follows individual demands. To evaluate all your requirements and apply them to the specifications of IXOR, cab has set up its own contact and sales department. Please contact our specialist staff at labeling@cab.de

IXOR types and assembly examples



Labeling head 124 L

Label web width 124 mm
Dispensing to the left
Unwinder: D310 V 124 L

Vertical assembly



Labeling head 124 R

Label web width 124 mm
Dispensing to the right
Unwinder: D310 V 124 R

Vertical assembly



Labeling head 124 L

Label web width 124 mm
Dispensing to the left
Unwinder: D410 V 124 L

Vertical assembly



Labeling head 186 L

Label web width 186 mm
Dispensing to the left
Unwinder: D410 H 186 L

Horizontal assembly



For further information see
www.cab.de/en/ixor

Print modules PX4, PX6



PX4 for a large number of applications

PX6 for Odette and UCC labels

Fully automatic printing and applying in industrial applications

Perfect performance, high reliability, comfortable operation and little maintenance downtimes - the PX can be integrated in any mounting orientation and solves even complex marking applications.

In case of a repair, components and units are easy to replace.

The footprint of the device is screw compatible with other manufacturers.

■ Standard □ Option

Print module		PX4			PX6	
Print head	Printing method	Thermal transfer, thermal direct				
	Printable resolution dpi	203	300	600	203	300
	Print speed up to mm/s	300	250	100	200	
	Print width up to mm	104	105.6		168	162.6
Labels	Width mm	10 - 116			50 - 174	
	Height without backfeed from mm	6			12	
Ribbons	Ink side	outside or inside				
	Variable length up to m	600				
Electronics	Processor clock rate MHz	266				
	Data storage MB	8				
	Main storage RAM MB	64				
Interfaces	Centronics	<input type="checkbox"/>				
	RS232-C	<input checked="" type="checkbox"/>				
	USB for PC	<input checked="" type="checkbox"/>				
	Ethernet	<input checked="" type="checkbox"/>				
	USB host	<input checked="" type="checkbox"/>				
	RS422 / RS485	<input type="checkbox"/>				
	Wireless Bridge	<input type="checkbox"/>				
	Digital I/O	<input checked="" type="checkbox"/>				



For further information see www.cab.de/en/px

Label dispensers HS, VS



HS60+ for horizontal dispensing

VS120 for vertical dispensing

VS180+ for wide labels up to 180 mm

Dispensing labels - automatic or on request

With the HS and VS all label sizes can be easily dispensed. Labels may be punched or cut without space in between. Any outside shape, square or round, can be processed. Even transparent material can be dispensed:

- With horizontal dispensers (HS) the labels are peeled off in upward direction from their bottom edge and stuck to the product.
- With vertical dispensers (VS) the labels are peeled off in forward direction from their upper edge and stuck to the product via the shortest path.

“+” models have an operation panel added.

■ Standard □ Option

Label dispenser		HS	VS	HS+, VS+
	Materials	Paper, textile, plastics on roll, punched or die cut, Leporello as an option		
	Feed rate up to mm/s	200		100 / 200
Rewinder	Carrier material outside diameter up to mm	155		
Label sensor	Scanning	Label front edge		
	Distance to locating edge mm	5 - 55		
	Height pre-dispense mm	4 - 18		
Connectors	Peel-off on request via external signal	-		■
	Power socket for non-heating apparatus	Power supply		
	Power switch	ON, OFF		
Device specific		HS60, VS60	HS120, VS120	HS180+, VS180+
Labels	Roll outside diameter up to mm	200		
	Width ¹⁾ mm	8 - 65	20 - 120	80 - 180
	Height one wide mm	5 - 300	8 - 600	20 - 600
	Height multi wide mm	5 - 110	8 - 110	20 - 110
Device sizes and weights	Width x Height x Depth mm	180 x 250 x 360	230 x 250 x 360	300 x 250 x 360
	Weight kg	3.3	3.6	4

¹⁾ carrier material included



For further information see
www.cab.de/en/hsvs

Marking laser systems FL+



FL+20 with scan head

Durable marking of metal and plastics

Marking is possible with stationary metal or plastic products in Medtech, aerospace, electronics and in the automotive industries.

FL+ are diode-pumped and air-cooled. They offer a high beam quality and pulse peak power.

FL+ consist of two units: the control unit with the laser source and the scan head

The laser sources provide 50 W maximum output power.

■ Standard □ Option

Marking laser system			FL+10	FL+20	FL+30	FL+50
Laser source	cw output power	up to W	10	20	30	50
	Pulse energy	mJ	0.5	1		
	Wave length	nm	1,064			
	Beam quality M²		< 1.8			
	Pulse width	ns	90 - 120	80 - 120		
	Pulse frequency	kHz	20 - 80	2 - 200		
	Connecting line	m	4.5	2.5		
Scan head	Mounting orientation		horizontal, vertical			
	Marking speed	mm/s	approx. 5,000			
Pilot laser	Wave length	nm	650			
	cw output power	mW	< 1			
Electronics	Processor clock rate	MHz	600			
	Data storage	MB	512			
	Main storage RAM	MB	256			
Laser safety class EN60825-1	Laser source		Class 4			
	Pilot laser		Class 2			
Interfaces	RS232-C		■			
	Ethernet		■			
	Digital I/O		■			
	Remote		■			
	E-stop		■			
			Rack 4RU 19“			
Device sizes and weights	Control unit	mm	420 x 178 x 420			
	Width x Height x Depth					
	Control unit weight	kg	16			
	Scan head	mm	170 x 110 x 330			
	Width x Height x Depth					
	Scan head weight	kg	7			



For further information see
www.cab.de/en/laser

Periphery samples for marking laser systems FL+



LSG+100E for the marking of serial parts

LM+ for the marking of labels made of laser markable foil

Laser safety housing LSG+100E

The LSG+100E is the industrial solution for marking serial parts with the FL+. The solid metal design besides a large work area provides enough space to integrate the laser source and an industrial PC within the 19" assembly frame.

The operation door is electronically opened and closed.

Laser label marker LM+

The LM+ allows to precisely mark labels of different sizes directly from the roll and cut them without the need of additional tools.

After the marking, the labels made of laser markable foil can either be separated with a cutter or rewound with an external rewinder.

■ Standard □ Option


Laser safety housing		LSG+100E 230 V	LSG+100E 120 V
	Work area mm	980 x 460 x 980	
	Width x Height x Depth		
	Traversing speed up to mm/s	60	
	Positional accuracy mm	0.02	
Device sizes and weight	Width x Height x Depth mm	1,000 x 2,280 x 1,120	
	Weight kg	395	
Interfaces	Digital I/O	■	
	Remote	■	
	E-stop	■	
	Step motor Z axis, X axis, rotary axis	■	
	Extraction and filter device	■	
Laser label marker		LM+160.1	LM+254.1
	Work area mm	160 x 5 x 190	
	Width x Height x Depth		
	Transport speed mm/s	200	
	Positional accuracy mm	0.2	
Labels	Roll outside diameter up to mm	300	
	Width mm	25 - 120	
	Height up to mm	180	
Device sizes and weights	Width x Height x Depth mm	440 x 520 x 802	
	Weight kg	22	
Interfaces	RS232-C	■	
	E-stop FL+	■	
	E-stop external	■	
	Cutter	■	



Typeplates made of aluminum



Code traceability in sterilization

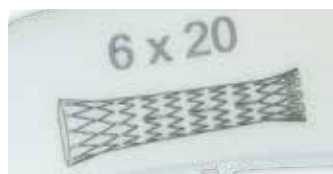

Size allocation in Medtech



Ident clips made of plastic

Marking laser systems XENO 1



XENO 1 marking laser system “out of the box”

Easy and fast marking of single workpieces and series

XENO 1 is a desktop device easy to handle and intuitively operable. At the same time it provides the features and functionality of a premium system. The laser sources provide 20 or 30 W maximum output power.

XENO 1 completes the range of cab marking laser systems in the lower price segment.


■ Standard □ Option

Marking laser system			XENO 1	
Laser source	cw output power	up to W	20	30
	Pulse energy	mJ	1	
	Wave length	nm	1,064	
	Beam quality M ²		< 1.6	
	Pulse width	ns	120	
	Pulse frequency	kHz	20 - 60	
Pilot laser / focus finder	Wave length	nm	650	
	cw output power	mW	< 0.4	
	Work area	mm	500 x 200 (100) x 250	
	Width x Height x Depth			
	Traversing speed	mm/s	20	
	Positional accuracy	mm	0.1	
Interfaces	Laser safety class		Class 1	
	EN60825-1			
	USB host		■	
	Ethernet		■	
	Extraction and filter device		■	
	RS232-C		□	
Device sizes and weight	Digital I/O		□	
	Width x Height x Depth	mm	580 x 660 x 700	
	Weight	approx. kg	50	



For further information see
www.cab.de/en/laser

Software for cab devices

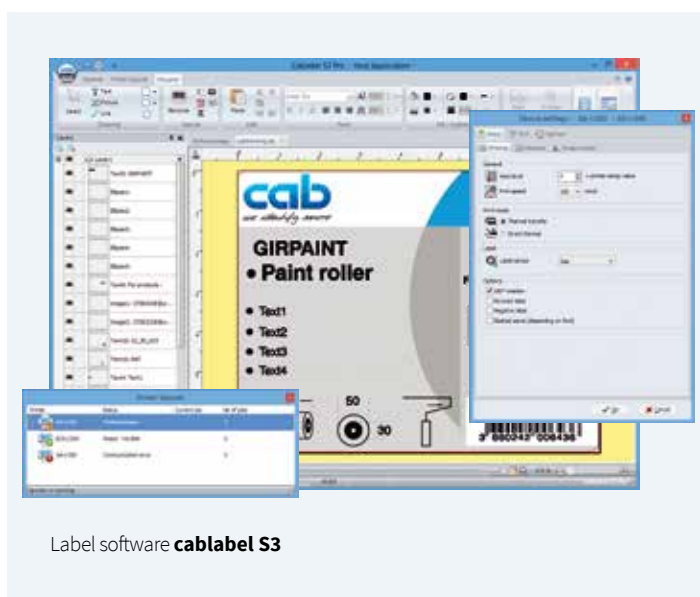


Designing, printing, administrating with cablabel S3

The cablabel S3 software opens up the full potential of cab devices. First of all the label must be designed. Only when it comes to printing it has to be decided whether the label shall be processed on a label printer, a print and apply or marking laser system.

cablabel S3 is of a modular design which makes it adaptable to requirements step by step. To support functions like native JScript programming elements such as the JScript Viewer are embedded as plug-ins. The designer user interface and the JScript code are synchronized in real time. Special functions like the Database connector or barcode testers can be integrated.



For further information see
www.cab.de/en/cablabel

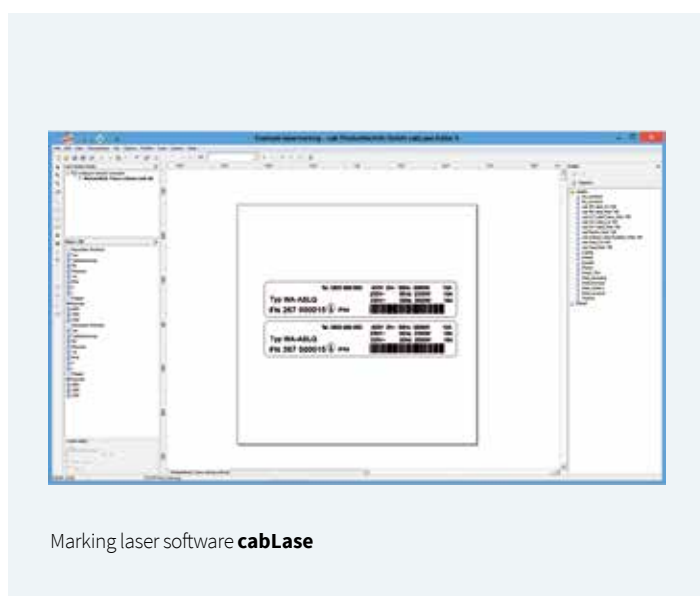

Designing, controlling, monitoring with cabLase

cab marking lasers have installed cabLase Editor 5. It offers the key features

- graphic design of layouts,
- control of marking,
- monitoring the marking process.

Further software features are

- support of marking without a PC,
- remote control,
- remote API interface for integration in manufacturing processes,
- integrability in MES and ERP platforms.



For further information see
www.cab.de/en/cablase

Stand-alone operation of cab printers

This operating mode is the printer's ability to select and print labels even when it is not connected to a host system.

The label has to be designed with a software such as cablabel S3 or by direct programming with a text editor on a PC. Label formats, texts, graphics as well as database contents are stored on a memory card, a USB memory stick or in the internal IFFS memory.

Only variable data are sent to the printer via a keyboard, a barcode scanner, scales or other systems. With the Database Connector, these data are recalled from the host and printed.



Precise printing with cab labels



cab labels are custom made from more than 400 materials - plain or pre-printed.

Good reasons to choose cab labels

The surfaces of cab labels are optimized for high image fidelity in thermal transfer printing. The roll and core diameters as well as the winding are tailored specifically to cab printers. Three samples of stock materials:



Paper white - slightly glossy

Applications are address labeling as well as the marking of product and goods in general in industry, logistics, trading or services.

This material offers high whiteness combined with a permanent adhesive.



Polyester white - matt

Applications are with customized stock materials resp. storage locations, goods on consignment, outdoor and production areas as well as potential hazards.

This material is highly resistant to tearing, oils and extreme temperatures, repelling dirt and water.



Polyester silver - matt

Applications are with printers having a high printable resolution: e. g. product type-plates or indicating labels when labeling devices indoor and outdoor

This material convinces with a strong adhesive power on smooth surfaces and high resistance to extreme temperatures.



For further information see
www.cab.de/en/labels

High-quality printing with **cab ribbons**



cab ribbons have a special back coating to avoid static electrification and better dissipate residual heat.

Good reasons to choose cab ribbons

Whether narrow or wide labels have to be applied, if it is for product or typeplate marking - cab provides more than 20 types of ribbons for any demand. Tailored specifically for cab printers, these ribbons offer a consistent high quality.

Wax ribbons

Fitting with fast and economical printing on vellum or coated paper, wax ribbons produce high-contrast, sharp and clear imprints with a high density. Recommended if wipe resistance is not a top priority.

Resin/wax ribbons

Resin/wax ribbons provide a higher abrasion and scratch resistance than pure wax ribbons while offering the same density. Recommended for a bunch of applications with chromated or coated papers as well as plastics.

Resin ribbons

Resin ribbons are highly resistant to scratching, extreme temperatures and dissolvers. They are therefore primarily used with plastic materials, even with coated surfaces. Ribbons withstanding washing and ironing are also available.

Colored ribbons on request

Colored cab ribbons in pure wax, resin/wax or pure resin qualities exhibit the same characteristics as the black ribbons. Golden or silver wax ribbons are specifically recommended for high-quality decorative labels.



For further information see
www.cab.de/en/ribbons

At home in any industry

A quarter of a million cab devices and systems are in continuous operation all over the world. They are in use in the automotive, chemical, pharmaceutical and textile industries, in electronics and medtech, transport and logistics as well as in retail and wholesale trading and the services sector.



Applications

Informational labels, warning labels, inventory, product labels, logging, labels for certification or testing, patient admission, pricing, storage location marking, shelf marking, address labels, shipping labels, incoming goods, tickets, typeplate marking, warranty labels, cable marking, tube marking, barrel labels, encoding, container labels, spare parts marking resp. identification

Customers

cab devices are operated by global players as well as by small and medium-sized companies.



„We set milestones in the development and manufacturing of devices and systems for product marking.“

*Roman Schnider
Head of Software Development*



Services and Training

Services

Well-trained cab service engineers worldwide support in the maintenance and repair of the devices.

Send your printer to a cab service center or a service partner selected by us. Your device will be checked and repaired within few workdays. If requested, a loan device will be offered.

You prefer maintenance and repair on-site in your company? Then make an appointment with our Services Department:

Phone **+49 721 6626 300**, Email: service.de@cab.de


Training

Enhance your know-how on cab devices with regard to an effective use, service and repair.

In Karlsruhe we offer trainings on the handling of the devices, label design, software, printer drivers, programming, database access as well as on how to integrate in networks or superior ERP systems. We gladly send you detailed information on all our current training offers on request.

Individually we offer trainings according to your specific demands – in Karlsruhe or on-site in your company.

cab printers are
industrious machines

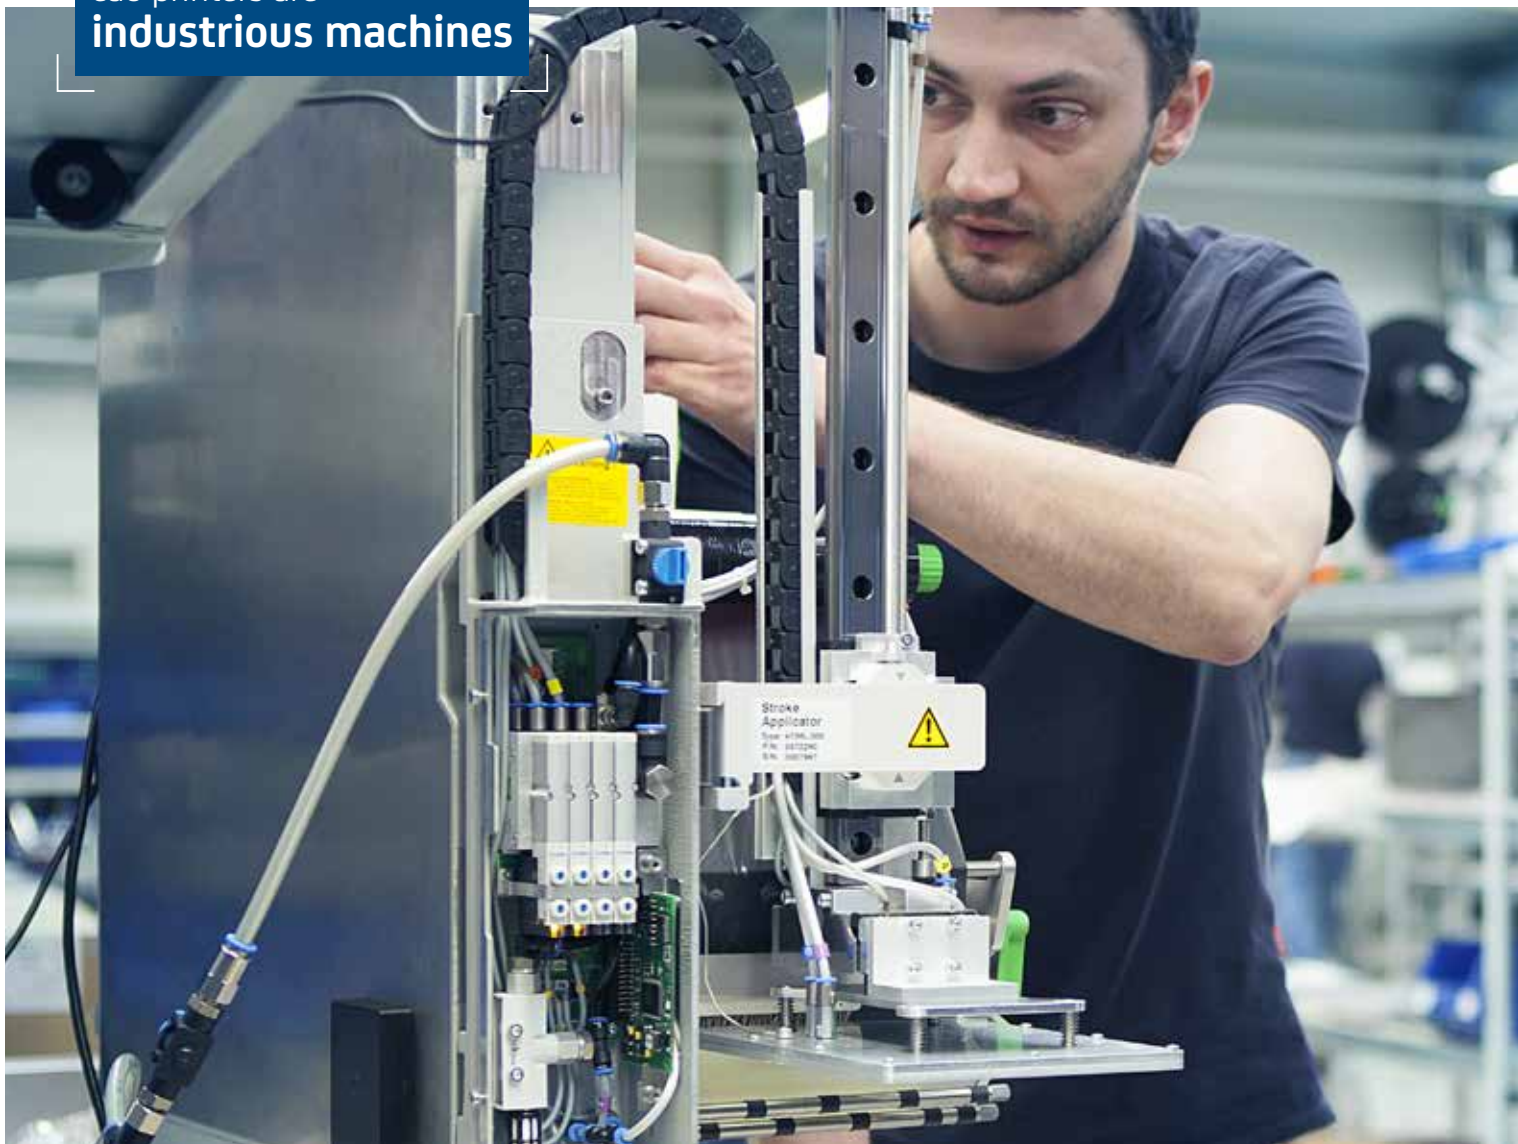

Germany

cab Produkttechnik GmbH & Co KG

Karlsruhe

Phone +49 721 6626 0

www.cab.de

France

cab Technologies S.à.r.l.

Niedermörsen

Phone +33 388 722501

www.cab.de/fr

USA

cab Technology, Inc.

Chelmsford, MA

Phone +1 978 250 8321

www.cab.de/us

Mexico

cab Technology, Inc.

Juárez

Phone +52 656 682 4301

www.cab.de/es

Taiwan

cab Technology Co., Ltd.

Taipei

Phone +886 (02) 8227 3966

www.cab.de/tw

China

cab (Shanghai) Trading Co., Ltd.

Shanghai

Phone +86 (021) 6236 3161

www.cab.de/cn

China

cab (Shanghai) Trading Co., Ltd.

Guangzhou

Phone +86 (020) 2831 7358

www.cab.de/cn

South Africa

cab Technology (Pty) Ltd.

Randburg

Phone +27 11 886 3580

www.cab.de/za

cab // 820 distribution partners in more than 80 countries