



江苏省舒恒管夹制造有限公司
江苏省舒达管件制造有限公司

Jiangsu Shuheng Pipe Clamp Manufacturing Co.,Ltd
Jiangsu Shuda Pipe fitting manufacturing Co.,Ltd

地址：江苏省阜宁县经济开发区8号
销售一部热线：0515-82099333
销售二部热线：0515-82099555
销售三部热线：0515-82099666
外贸部热线：0515-87736666
客服服务热线：0515-87738888
传真：0515-87229809 82099708
电邮：shgj8888@vip.163.com
网址：http://www.china-shuheng.com
邮编：224400

Add: 8Open Road,Funing Economic
Development Zone,Jiangsu Province
Group one of domestic trade: 0515-82099333
Group two of domestic trade: 0515-82099555
Group three of domestic trade: 0515-82099666
The foreign trade: 0515-87736666
Customer Service: 0515-87738888
Fax: 0515-87229809 82099708
E-mail: shgj8888@vip.163.com
Website: http://www.china-shuheng.com
Postcode: 224400

本公司所有产品均为本公司生产，不得随意复制或仿造，违者必究。本公司所有产品均经过严格的质量控制，确保质量。如有任何质量问题，请及时反馈，我们将及时处理。本公司所有产品均符合国家标准，请放心使用。

The contents disclosed in this catalogue including pictures, data, writings & drawings are exclusive property of
Chin Peng Machine Tooling Co., Ltd. Any unauthorized duplication or use part or whole of this catalogue is prohibited.
Chin Peng reserves the right to modify the specifications, features due to product improvements without further
notification. optional accessories showing on this picture are for reference only.

SHU HENG PIPE CLAMP

舒恒管夹

管道附件

产品手册

PIPE ACCESSORIES CATALOGUE



江苏省舒恒管夹制造有限公司
江苏省舒达管件制造有限公司
Jiangsu Shuheng Pipe Clamp Manufacturing Co.,Ltd
Jiangsu Shuda Pipe Fitting Manufacturing Co.,Ltd

(2011年版)

企业简介

江苏舒恒管夹制造有限公司 国内规模最大，专业研发、生产管夹、法兰集
江苏舒达管件制造有限公司 生产与销售为一体的生产企业，厂区占地面积40000平方米，厂房建筑面积20000多平方米，其中现代化办公大楼2000平方米。

公司拥有现代化管夹生产线12条，拥有大型金属挤压机、加工中心、数控机床及机械加工设备260多台。舒恒成立了专业的实验室，拥有最先进的仪器设备，其中包括万能测试仪、冲击试验机、高精度光谱仪等设备。

公司现有员工280多人，其中具有认证资格的工程技术人员38人，目前公司拥有大批资深的技术人才与经验丰富的管理人才，为“舒恒创造”打造了坚实的基础。

舒恒 舒达品牌已获国家工商总局注册，并获得国家强制性产品认证证书（CCC）。企业已通过ISO9001:2008质量体系认证。并成功通过了德国GL、法国BV、美国ABS和中国四大国际知名船级社的认证。

公司拥有产品自营进出口权。舒恒品牌产品远销美国、德国、荷兰、日本、意大利、韩国和台湾登国家和地区；已有中国航天研究所、704、707船舶研究所、玖龙纸业、首钢等100多个大型企业已与舒恒建立了良好的合作关系。

舒恒 舒达公司以“以质量求生存、以创新求发展”为理念，使海内外客户方便快捷的享受到舒恒的服务。

BRIEF INTRODUCTION OF SHUSHENG

Jiangsu Shuheng Pipe Clamp
Manufacturing Co.,Ltd.

Jiangsu Shuda Fitting
Manufacturing Co.,Ltd.is located between Changjiang River and Huai River, It is the biggest company who specilize in R&D,manufacturing,selling pipe clamps and flanges in China . The factory covers an area of more than 60 mu and the building area of more than 20,000 square meters, modern office buildings 2000 square meters.



舒恒公司航拍图

The company owns 12 modernized production lines, it has large metal extruding machines, digital control processing machining centers, and more than two hundred sixty mechanical processing equipments. Shuheng costs millions build the laboratory, owns the most advanced equipments including universal tester, impact test enginery, sitzerlan spectrometer and so on.

Currently,there are more than 280 employees, 38 of whom are certified engineers. At present, the company has large quantities of senior technical personnel and experienced management personnel,which is laid a solid foundation of “made by Shuheng”. Shuheng brand has obtained the state administration of industry and commerce registration, and obtained national mandatory product certification (CCC). The enterprise has passed the ISO9001:2008 quality system authentication and obtained the classification certificates of GL,BV,ABS and CCS. Shuheng owns the right of import and export. ShuHeng brand products are exported to USA, Germany, Italy, Holland, Japan, South Korea and Taiwan, and other countries and regions; Shuheng has builded good relations of cooperation with more than one hundred big enterprises, including China aerospace research institute, 704, 707 ships, Nine dragons paper, Shougang group ect.

The concept of Shuheng is survive on good quality and develop by creating, which makes the customers both at home and abroad enjoy convenient to ShuHeng service.

Shuheng pipe clamps

we are always trying to satisfy you!


舒恒管夹——为了您的满意，一直在努力！



ENTERPRISE HONOR




对外贸易经营者备案登记表			
备案登记编号: 00887414		进出口企业代码: 3200784394019	
经营者中文名称	江苏舒恒管夹制造有限公司		
经营者英文名称	JIANGSU SHUHENG PIPE CLAMP MANUFACTURING CO., LTD		
组织机构代码	784394019	经营者类型 (由备案登记机关填写)	有限责任公司
住所	江苏省阜宁经济开发区开放大道8号		
经营场所(中文)	江苏省阜宁经济开发区开放大道8号		
经营场所(英文)	8 Open Road, Funing Economic Development Zone, Jiangsu Province		
联系电话	0515-82099666	联系传真	0515-87229809
邮政编码	224400	电子邮箱	shgj888@vip.163.com
工商登记注册日期	2006-3-7	工商登记注册号	320923000009003
依法办理工商登记的企业还须填写以下内容			
企业法定代表人姓名	王斯如	有效证件号	320923194409170010
注册资金	伍佰万元		(折美元)
依法办理工商登记的外国(地区)企业或个体工商户(独资经营者)还须填写以下内容			
企业法定代表人/ 个体工商户负责人姓名		有效证件号	
企业资产/个人财产			(折美元)
备注			
填表前请认真阅读背面的条款,并由企业法定代表人或个体工商户负责人签字、盖章。			
备案登记机关 签章			
2009 年 08 月 26 日			

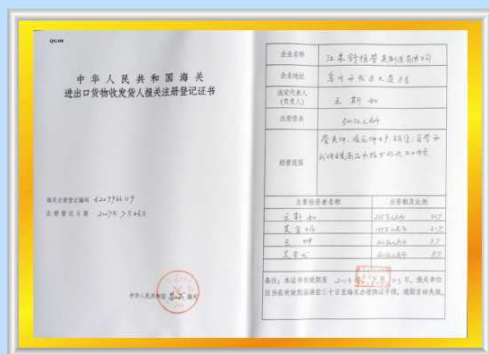

企业资质

ENTERPRISE HONOR

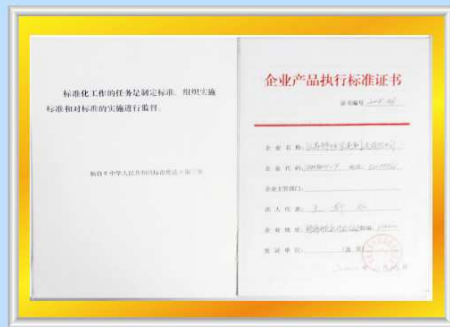

产品目录

舒恒 舒达－销售与服务 Shuheng Shuda sale and service	1-2
管夹说明 Pipe clamp FAQ	3-6
轻型管夹Light pipe clamps	7-28
舒恒 舒达－制造能力Shuheng shuda production capacity	29-30
双联管夹Twin pipe clamps	31-40
舒恒 舒达－品质的保证Shuheng Shuda quality assurance	41-42
重型管夹Heavy pipe clamps	43-55
小型管夹Small pipe clamps	56-59
单管夹Single pipe clamps	60
多管径管夹Multi pipe clamps	61-65
拉紧式加厚管平Tightening thick pipe clamps	66-69
双联式钢制管夹Twin steel pipe clamps	70-71
单面管夹One side pipe clamps	72
钢制多排管夹Multiple steel pipe clamps	73
方钢多管径管夹Square steel multi-pipe clamps	74-75
扁钢管夹系列Flat steel pipe clamps	76-81
多功能管道连接修补品application of multi-function pipe coupling	82
沟槽管件Grooved Couplings and fittings	83-84
U型管夹U-form pipe clamps	85-88
强力喉箍Powerful hose hoops	89
防震管夹系列Grooved steel pipe clamps	90-97
管通支架pipe Bracket	98-124
舒恒 舒达－创新能力Shuheng Shuda-innovation capacity	125-126
产品示意图Sketch drawing	127-132
舒恒 舒达-仓储与物流 Shuheng Shuda storage and logistics	133-134



舒恒 舒达公司拥有完整的销售与服务网络体系，公司按市场区域划分成立了：销售一部、销售二部、销售三部、外贸部。

公司拥有成功的市场推广经验。通过加大宣传力度，促进用户对公司产品的认可，通过媒体广告、行业杂志、网站、参加产品交易会等方式广泛宣传公司产品，加大顾客对产品的了解，提高公司舒恒品牌的知名度。并建立了中英文网站，介绍技术与产品开发情况，推广新产品，并运营电子商务进行材料采购及产品营销

公司通过稳健的产品营销策略占领市场。公司采用由各省、市内代理商、国内销售部、国外销售部、大型终端用户在内的销售网络，争取更大的市场占有率。同时建立了完善的售后服务体系，成立服务中心，服务网络辐射到地级城市。

企业的优势在市场，潜力也在市场。舒恒公司一方面通过自身的营销能力，大力挖掘市场潜力，立足于改善服务质量，提高供应水平，通过加大科研投入，不断开发新产品等措施提高企业的研发和生产能力，建立面向市场、反应灵敏的经营管理机制，并积极与国内外知名企业进行进行长期合作，提高本公司产品的市场占有率。在国内同行企业中“舒恒”品牌已经深入人心。



销售部
Sales department



定制商标
Print trademark

销售一部热线(Group one of domestic trade): 0515-82099333
销售二部热线(Group two of domestic trade): 0515-82099555
销售三部热线(Group three of domestic trade): 0515-82099666
外贸部热线(The foreign trade): 0515-87736666
服务客服热线(Customer Service): 0515-87738888

Shuheng/Shuda has a whole sale and a service network system. The sale department is divided to three parts: group one of domestic trade, group two of domestic trade, group three of domestic trade and the foreign trade.

Our company owns the whole marketing experience. Promoting customers to approve and acquaint with the production and the fame of Shuheng company by the media advertising, magazines, website and the exhibition. We also build the Chinese and the English websites to introduce the situation of product development and introduce new products, the staff buy the raw material and sell production by the e-commerce. Shuheng uses marketing strategy to occupy the market. Our company strives for the greater market by agents and sales in the domestic, the foreign countries and the internet and builds the centre of service, the whole system of after-sales service for customer is all over the word.

The advantage and the potential of the enterprise is the market. Shuheng company mines vigorously market potential, improves the quantity of service, improves the supply level, increases research and develops the new produce ect., in order to improve the ability of the researching and production. Shuheng builds the flexible management mechanism to the market and the long relationship with many famous companies in foreign countries to increased market share. Shuheng brand has been accepted by customers in the domestic and foreign countries.



军方代表参观
The military representatives investigate shuheng company



技术交流
Technical exchange



产品展示
Product exhibition



接待大厅
Reception hall

管 夹

PIPE CLAMP

(一) 概述 General information

1、范围 Range

轻型系列管夹应用于9种尺寸系列的普通机械压力管子，管子外径**6-102mm**。

Clamps in light series can be supplied in 6 series

for normal mechanical stress. Pipe o.d. **6 to 102mm**.

双联系列管夹应用于5种尺寸系列的机械压力管

子，管子外径**6-42mm**。

Clamps in twin series can be supplied in 5 series

for normal mechanical stress. Pipe o.d. **6 to 42mm**.

重型系列管夹应用于11种尺寸系列的高机械压力

管子，管子外径**6-508mm**。

Clamps in heavy series can be supplied in 8 series

for high mechanical stress. Pipe o.d. **8 to 508mm**.



2、材料特性 Material properties

特性 Properties	聚丙烯 Polypropylene	尼龙 Polyamide
密度 Density	0.906g/cm ³	1.12-1.15g/cm ³
弯曲强度 Flexural deflection	36N/mm ²	130...200N/mm ²
冲击韧性 Impact resistance	不断no break	不断no break
压缩强度 Compressive strength	90N/mm ²	120N/mm ²
弹性模量 Modulus of elasticity	1500N/mm ²	3000N/mm ²
拉伸强度 Tensile stress	25-35N/mm ²	80-90N/mm ²
耐温 Max temperature resistance	25-35N/mm ²	-40...+120℃
颜色 Color	-30...+90℃	黑black
	绿、蓝green、blue	

根据要求可选用其它材料
Other materials upon request

注：执行国标: JB/ZQ4008-97
Note: acc to national standard: JB/ZQ4008-97

管 夹

PIPE CLAMP


3、订货代号 Order code

管夹 Pipe clamp	SH	L	P	G	1-3	20
系列 Series						管外径 Pipe O.D.
L: 轻型系列 L: light						尺寸系列 Size
T: 双联系列 T: twin						组合 Group
H: 重型系列 H: heavy						
材料 Material						内表面 Interior surface
P: 聚丙烯 P: Polypropylene						G: 凹槽型 G: profiles inside
N: 尼龙 N: Polyamide						S: 光滑型 S: smooth inside
L: 铝合金 L: Aluminium						
G: 钢制 G: Steel						
S: 塑钢 S: POM						
B: 不锈钢 B: Stainless steel						

对单个零件及附件有对应的订货代号，它们根据系列代号变化而变化。

The order codes vary according to different series

4、管夹安装的推荐距离 Recommended clamp pitch

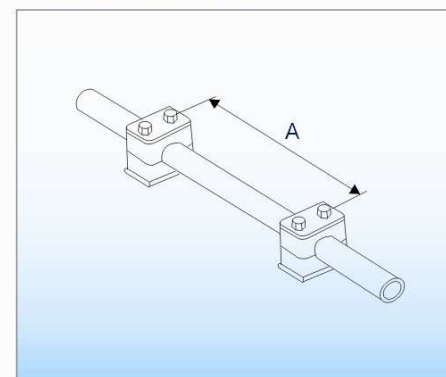

管子外径 Pipe O.D. (Mm)	管夹距离 (mm) Clamp pitch A (m)
6-14	0.9
15-22	1.2
23-28	1.5
30-38	2
40-48.3	2.5
50-57	3
60.3-70	3.4
73-88.9	3.7
90-108	4
114-165.1	4.3
140-165.1	5
168.3-220	5.5

当弯头或变管处用管夹固定时，应该尽可能近地在弯管的两旁。

Pipe bends must be fixed with SH-pipe clamps immediately and behind the bend.

注：执行国标: JB/ZQ4008-97
Note: acc to national standard: JB/ZQ4008-97

5、装配说明

装配在焊接板上

装配前,为更好地确定夹的方向,建议先在固定处做好标记,后焊上焊接,嵌上管夹身的下半部分,放上需固定的管子。再放上另一半管夹身和盖板,用螺钉拧紧。

切忌直接焊接已装好管夹的底板。

装地导轨上

导轨可焊在基础上,或用螺钉固定,随后将导轨螺母推入轨内,并转90度,将下半个管夹身嵌入螺母,放上需固定的管子,再放上上半个管夹身和盖板,用螺钉固定。

叠起装配

导轨可焊在基础上,或用螺钉固定,先装上下半个管夹身,放上需固定的管子再放上上半个管夹身,用螺钉固定,通过防松盖板防止它转动。然后安装第二个管夹,方法同上。

Installation information

Installation on weld plates

For best alignment of Shuheng clamps it is recommended to mark their location first. Weld plates, push on bottom half of clamp, install pipe, mount top half of clamp and cover plate and bolt unit together. In order to avoid damage to the clamp bodies it is recommended to mount the plastic clamp bodies after having welded the weld plates.

Installation on mounting rails

The rails are either welded or bolted to the supporting construction. Insert hexagon rail nut and turn to lock.. push on bottom half of clamp, install pipe, mount top half of clamp and cover plate and bolt unit together. Clamp units can be adjusted before being firmly bolted.

Multi-level assembly

Multi-level pipe clamps permit easy stacking of several pipes. The clamps are connected by stacking bolts. Safety plates inserted between the clamps prevent stacking bolts from turning. Stacking assembly can be fitted to weld plates or rails.


轻型系列 (按照DIN 3015 第1部分) Light series (acc. to DIN 3015, part 1)

尺寸系列 Size	固定用 Hexagon 螺栓 head bolt GB5782-86	聚丙烯 Polypropylene		尼龙6 Polyamide	
		螺栓紧固 Tightening 力矩 (Nm) torque(Nm)	管子夹持 Max. load 力F (kN) direction F (kN)	螺栓紧固 Tightening 力矩 (Nm) torque (Nm)	管子夹持 Max. load in 力F (kN) pipe direction F (kN)
0	M6	8	0.6	10	0.6
1	M6	8	1.1	10	0.7
2	M6	8	1.3	10	0.8
3	M6	8	1.4	10	1.6
4	M6	8	1.5	10	1.7
5	M6	8	1.9	10	2.0
6	M6	8	2.0	10	2.5

注: 执行国标: JB/ZQ4008-97
Note: acc to national standard: JB/ZQ4008-97

弯管的装配

Pipe bend assembly

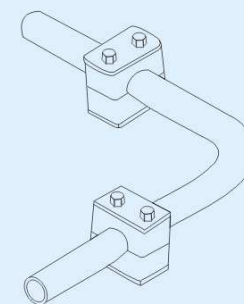


装配弯管时,应直接在弯管的前部和后部用舒恒管夹固定。建议这样的支承点应为固定位置。

Pipe bends must be fixed with Shuheng clamps immediately in front of and behind the bend.

重型系列 (按照DIN 3015 第2部分) Heavy series (acc. to DIN 3015, part 2)					
尺寸系列 Size	固定用螺栓 Hexagon head bolt GB5782-86	聚丙烯 Polypropylene		尼龙6 Polyamide	
		螺栓紧固力矩 (Nm) Tightening torque(Nm)	管子夹持力F (kN) Max. load in pipe direction F (kN)	螺栓紧固力矩 (Nm) Tightening torque (Nm)	管子夹持力F (kN) Max. load in pipe direction F (kN)
1	M10	12	1.6	20	4.2
2		12	2.9	20	4.5
3		15	3.3	25	5.1
4	M12	30	8.2	40	9.3
5	M16	45	11.0	55	21.0
6	M20	80	14.0	150	25.8
7	M24	110	28.0	200	32.0
8	M30	180	40.0	350	48.0

螺栓的紧固力矩和管上的轴向夹持力

Tightening torques and maximum loads in pipe direction



管上的轴向夹持力 (根据DIN 3015第10部分) 是一个平均值,它是由3次试验值计算出来的。试验时用一根按照DIN448的st37号钢管,温度为23℃,管上有静摩擦。管夹在管子的轴向上受到一个列出的测试力(F)时,管夹内的管子不会滑动。

The max. load in pipe direction (according to DIN 3015, part 10) is an average value, determined by three tests made with a steel pipe according to DIN 2448 of st37, for which static friction is presupposed (temperature during tests:23°C). When loading the clamp with the indicated test force (F) in axial pipe direction, the pipe does not slide in the clamp.

双联系列 (按照DIN 3015 第3部分) Twin series (acc. to DIN 3015, part 3)					
尺寸系列 Size	固定用螺栓 Hexagon head bolt	聚丙烯 Polypropylene		尼龙6 Polyamide	
		螺栓紧固力矩 (Nm) Tightening torque(Nm)	管子夹持力F (kN) Max. load in pipe direction F (kN)	螺栓紧固力矩 (Nm) Tightening torque (Nm)	管子夹持力F (kN) Max. load in pipe direction F (kN)
1	GB5782-86	5	0.9	5	0.9
2	M6	12	2.1	12	2.2
3	M8	12	1.9	12	2.0
4		12	2.7	12	2.9
5		8	1.7	8	2.5

注: 执行国标: JB/ZQ4008-97
Note: acc to national standard: JB/ZQ4008-97

轻型管夹 Light pipe clamps

L0系列单螺栓固定式 Lo series with single bolt

L1~L8系列双螺栓固定式 L1~L8 series with double bolts

轻型管夹: 本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道管夹。

轻型系列管夹适用于中压、低压 (PN≤8MPa) 管道固定。

Light pipe clamps: This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in different areas such as the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and so on

1. SHLPG*-工程聚丙烯轻型内孔凹槽型管夹工作温度-30~+90℃
1. SHLPG*-polypropylene profiled inside with tension clearance work temperature-30~+90℃
2. SHLPS*-工程聚丙烯轻型内孔光滑型管夹工作温度-30~+90℃
2. SHLPS*- polypropylene smooth inside without tension clearance work temperature-30~+90℃
3. SHLNG*-增强尼龙轻型内孔凹槽型管夹工作温度-40~+120℃
3. SHLNG*-polyamide profiled inside with tension clearance work temperature-40~+120℃
4. SHLNS*-增强尼龙轻型内孔光滑型管夹工作温度-40~+120℃
4. SHLNS*-polyamide smooth inside without tension clearance work temperature-40~+120℃
5. SHLLG*-铝合金轻型内孔凹槽型管夹工作温度-50~+300℃
5. SHLLG*-aluminum alloy profiled inside with tension clearance work temperature-50~+300℃
6. SHLSG*-塑钢轻型内孔凹槽型管夹工作温度-50~+300℃
6. SHLSG*-POM profiled inside with tension clearance work temperature-50~+300℃
7. SHLGG*-钢制轻型内孔凹槽型管夹工作温度-80~+500℃
7. SHLGG*-steel profiled inside with tension clearance work temperature-80~+500℃
8. SHLBG*-不锈钢轻型内孔凹槽型管夹工作温度-80~+500℃
8. SHLBG*-stainless steel profiled inside with tension clearance work temperature-80~+500℃

说明: 1、盖板、焊接底板、导轨、导轨螺母、螺栓标准材料为碳钢, 根据客户需要可选用其它材料。请在订货时说明

2、(可以设计多层管夹, 最多五层)


Note: 1. for the cover plate, weld plate, rail, rail nut and bolt, the standard material is carbon steel. Other materials upon request.

2. multi-layer clamps are possible, five layers at most


如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

轻型组合系列 Light combination series

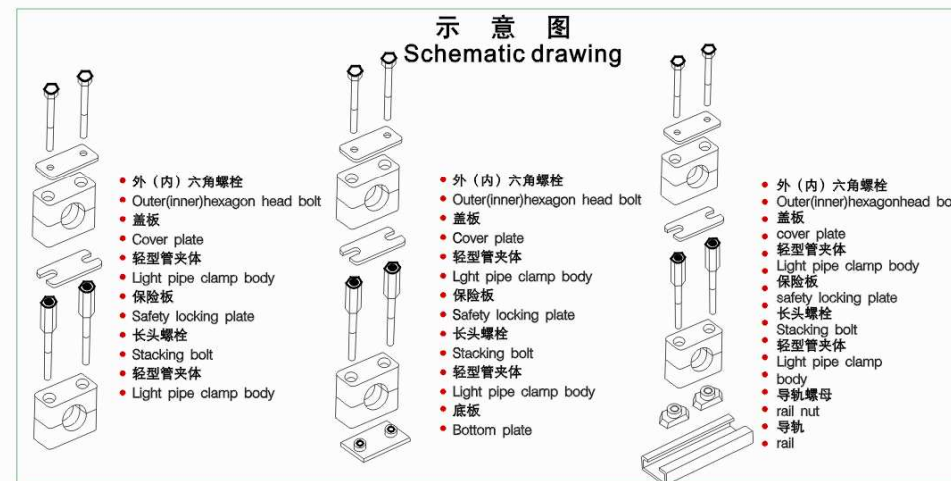

L0系列单螺栓管夹参数 Lo series with single bolt Clamps

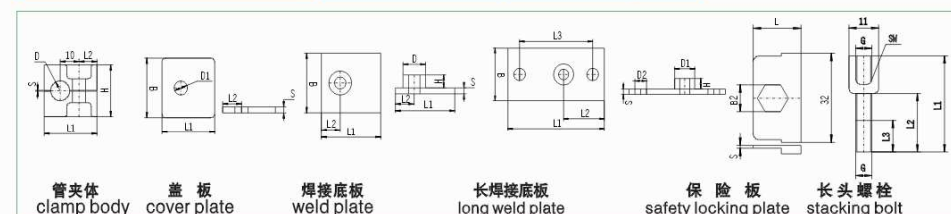


系列	管 外 径 D	英寸 内径 Inch bore	英寸 外径 Inch O.D.	盖 板 cover plate			管 夹 体 Clamp body					焊 接 底 板 Weld plate					长焊接底板 long weld plate					保 险 板 safety locking plate				长头螺栓 stacking bolt				螺 栓 bolt									
				L1	L2	B	D	S	L1	L2	H	D	S	宽 width	L1	L2	H	D	S	B	L1	L2	L3	B	S	H	D1	D2	L		B1	B2	S	G	L1	L2	L3	SW	
L0	6									Ø6																													
	6.4	1/4								Ø6.4																													
	8	5/16		28	9.5	30	7	3	28	9.5	27	Ø8	0.4	30	31	10	6	5	12	3	30	58	24	54	30	3	6.5	12	6.5	17	32	11	1	M6	34	20	12	11	M6
	9.5	3/8									Ø9.5																												
	10	1/8									Ø10																												
	12										Ø12																												

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

L1~L8系列双螺栓管夹参数 L1~L8 series with double bolts clamps

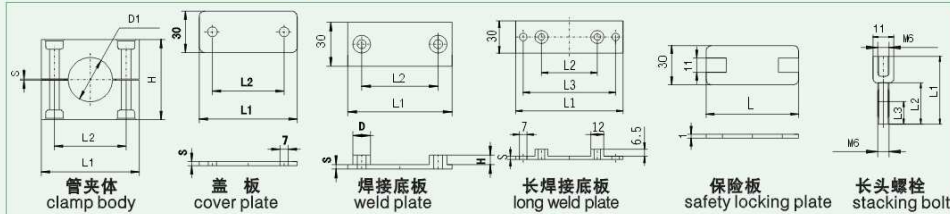

系列 Series	管外径 D1 Pipe O.D.	内径 Inch bore	外径 Inch O.D.	盖板 cover plate			管夹体 clamp body				焊接底板 weld plate				长焊接底板 long weld plate			保险板 safety locking plate	长头螺栓 stacking bolt					
	L1	L2	S	L1	L2	H	S	宽 width	L1	L2	S	H	D	L1	L2	L3	S	L	L1	L2	L3			
L1	6																							
	6.4		1/4																					
	8		5/16	37	20	3	37	20	27	0.4	30	37	20	3	6.5	12	64	20	50	3	34	34	20	12
	9.5		3/8																					
	10	1/8																						
L2	12																							
	12.7		1/2																					
	13.5	1/4																						
	14																							
	15			42	26	3	42	26	33	0.6	30	42	26	3	6.5	12	70	26	56	3	40	40	25	12
L3	16		5/8																					
	17.2	3/8																						
	18																							
	19		3/4																					
	20																							
L4	21.3	1/2		50	33	3	50	33	36	0.6	30	50	33	3	6.5	12	78	33	64	3	47	44	30	12
	22		7/8																					
	25		1																					
	26.9	3/4																						
	28			59	40	3	59	40	42	0.6	30	59	40	3	6.5	12	87	40	73	3	56	48	35	12
L5	30																							
	32		1 1/4																					
	33.7	1																						
	35																							
	38		1 1/2	71	52	3	71	52	58	0.8	30	71	52	3	6.5	12	100	52	86	3	69	64	50	12
L6	40																							
	42	1 1/4																						
	44.5		1 3/4																					
	48.3	1 1/2		86	66	3	86	66	66	0.8	30	86	66	3	6.5	12	115	66	100	3	85	73	60	12
	50.8		2																					
L7	57.2		2 1/4																					
	60.3		2																					
	63.5		2 1/2	121	94	5	121	94	93	0.8	30	121	94	5	6.5	12	150	94	136	5	117	99	85	12
	70		2 3/4																					
	73																							
L8	76.1	2 1/2	3																					
	88.9	3		147	120	5	147	120	118	0.8	30	147	120	5	6.5	12	178	120	162	5	143	124	110	12
	102		4																					

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

轻型工程聚丙烯管夹 Light Duty Polypropylene pipe Clamp

工作温度: -30℃—+90℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø12
Work temperature: -30℃—+90℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø12

轻型L0系列单螺栓固定式 Light duty L0 series with one bolt

订货图示: Order figure:

	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLPG1-006—SHLPG012 开槽螺栓+PP管夹体+焊接底板 Slot head bolts+clamp body(pp)+weld plate		轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLPS1-006—SHLPS012 开槽螺栓+PP管夹体+焊接底板 Slot head bolts+clamp body(pp)+weld plate
	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLPG2-006—SHLPG012 内六角螺栓+PP管夹体+焊接底板 Hexagon head bolt+clamp body(pp) +weld plate		轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLPS2-006—SHLPS012 内六角螺栓+PP管夹体+焊接底板 Hexagon head bolt+clamp body(pp) +weld plate
	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLPG3-006—SHLPG012 外六角螺栓+PP管夹体+盖板+焊接底板 Hexagon head bolt+cover(pp)+clamp body +weld plate		轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLPS3-006—SHLPS012 外六角螺栓+PP管夹体+盖板+焊接底板 Hexagon head bolt+cover(pp)+clamp body +weld plate
	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLPG2-006—SHLPG012 开槽螺栓+PP管夹体+长焊接底板 Slot head bolts+clamp body(pp) +Long weld plate		轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLPS2-006—SHLPS012 开槽螺栓+PP管夹体+长焊接底板 Slot head bolts+clamp body(pp) +Long weld plate

例如: 1、图示内孔凹槽型管夹, 管外径为Ø10请填写订货代号为: SHLPG1-010;

2、图示内孔光滑型管夹, 管外径为Ø06请填写订货代号为: SHLPS1-006。

E.G: 1、If you need the clamp with OD Ø10mm, profiled inside with tension clearance, order code is: SHLPG1-010;

2、If you need the clamp with OD Ø06mm, smooth inside without tension clearance, order code is: SHLPS1-006。

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

轻型工程聚丙烯管夹

Light Duty Polypropylene pipe Clamp

工作温度: -30℃—+90℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø12

Work temperature: -30℃—+90℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø12

轻型L0系列单螺栓固定式 Light duty L0 series with one bolt

订货图示: Order figure:

	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLPG5-006—SHLPG012		轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLPS5-006—SHLPS012
SHLPG5—0(管外径)	内六角螺栓+PP管夹体+长焊接底板 Socket cap screw+clamp body(pp) +long weld plate	SHLPS5—0(管外径)	内六角螺栓+PP管夹体+长焊接底板 Socket cap screw+clamp body(pp) +long weld plate
	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLPG6-006—SHLPG012		轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLPS6-006—SHLPS012
SHLPG6—0(管外径)	外六角螺栓+盖板+PP管夹体+焊接底板 Hexagon head bolt+cover +plate clamp body(pp)+long weld plate	SHLPS6—0(管外径)	外六角螺栓+盖板+PP管夹体+焊接底板 Hexagon head bolt+cover +plate clamp body(pp)+long weld plate
	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLPG7-006—SHLPG012		轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLPS7-006—SHLPS012
SHLPG7—0(管外径)	开槽螺栓+PP管夹体+导轨螺母 Slot head bolt+clamp body(pp) +rail nut	SHLPS7—0(管外径)	开槽螺栓+PP管夹体+导轨螺母 Slot head bolt+clamp body(pp) +rail nut
	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG8-006—SHLNG012		轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLPS8-006—SHLPS012
SHLNG8—0(管外径)	内六角螺栓+PP管夹体+导轨螺母 Socket cap screw+clamp body(pp) +rail nut	SHLPS8—0(管外径)	内六角螺栓+PP管夹体+导轨螺母 Socket cap screw+clamp body(pp) +rail nut

例如: 1、图示内孔凹槽型管夹, 管外径为Ø10请填写订货代号为: SHLPG8-010;

2、图示内孔光滑型管夹, 管外径为Ø06请填写订货代号为: SHLPS8-006。

E.G: 1、If you need the clamp with OD Ø10mm, profiled inside with tension clearance, order code is: SHLPG8-010;

2、If you need the clamp with OD Ø06mm, smooth inside without tension clearance, order code is: SHLPS8-006。

如使用不同的形式或其它要求在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

轻型工程聚丙烯管夹

Light Duty Polypropylene pipe Clamp

工作温度: -30℃—+90℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø12

Work temperature: -30℃—+90℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø12

轻型L0系列单螺栓固定式 Light duty L0 series with one bolt

订货图示: Order figure:

	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLPG9-006—SHLPG012		轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLPS9-006—SHLPS012
SHLPG9—0(管外径)	外六角螺栓+盖板+PP管夹体+导轨螺母 Hexagon head bolt+cover plate +clamp body(pp)+rail nut	SHLPS9—0(管外径)	外六角螺栓+盖板+PP管夹体+导轨螺母 Hexagon head bolt+cover plate +clamp body(pp)+rail nut
	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLPG10-006—SHLPG012		轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLPS10-006—SHLPS012
SHLPG10—0(管外径)	开槽螺栓+PP管夹体 Slotted bolt+clamp body(pp)	SHLPS10—0(管外径)	开槽螺栓+PP管夹体 Slotted bolt+clamp body(pp)
	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLPG11-006—SHLPG012		轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLPS11-006—SHLPS012
SHLPG11—0(管外径)	内六角螺栓+PP管夹体 Socket cap screw+clamp body(pp)	SHLPS11—0(管外径)	内六角螺栓+PP管夹体 Socket cap screw+clamp body(pp)
	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLPG12-006—SHLPG012		轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLPS12-006—SHLPS012
SHLPG12—0(管外径)	外六角螺栓+盖板+PP管夹体 Hexagon head bolts+cover plate +clamp body(pp)	SHLPS12—0(管外径)	外六角螺栓+盖板+PP管夹体 Hexagon head bolts+cover plate +clamp body(pp)

例如: 1、图示内孔凹槽型管夹, 管外径为Ø10请填写订货代号为: SHLPG11-010;

2、图示内孔光滑型管夹, 管外径为Ø06请填写订货代号为: SHLPS11-006。

E.G: 1、If you need the clamp with OD Ø10mm, profiled inside with tension clearance, order code is: SHLPG11-010;

2、If you need the clamp with OD Ø06mm, smooth inside without tension clearance, order code is: SHLPS11-006。

如使用不同的形式或其它要求在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

轻型工程聚丙烯管夹

Light Duty Polypropylene pipe Clamp

工作温度: -30℃—+90℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø12

Work temperature: -30℃—+90℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø12

轻型L0系列单螺栓固定式 Light duty L0 series with one bolt

订货图示: Order figure:



轻型增强尼龙管夹

Light Duty Polyamide pipe Clamp

工作温度: -40℃—+120℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø12

Work temperature: -40℃—+120℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø12

轻型L0系列单螺栓固定式 Light duty L0 series with one bolt



例如: 1、图示内孔凹槽型管夹, 管外径为Ø10请填写订货代号为: SHLNG1-010;

2、图示内孔光滑型管夹, 管外径为Ø06请填写订货代号为: SHLNS1-006。

E.G: 1、If you need the clamp with OD Ø10mm, profiled inside with tension clearance, order code is: SHLNG1-010;

2、If you need the clamp with OD Ø06mm, smooth inside without tension clearance, order code is: SHLNS1-006。

如使用不同的形式或其它要求在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

轻型增强尼龙管夹

Light Duty Polyamide pipe Clamp

工作温度: -40℃—+120℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø12

Work temperature: -40℃—+120℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø12

轻型L0系列单螺栓固定式 Light duty L0 series with one bolt

订货图示: Order figure:



例如: 1、图示内孔凹槽型管夹, 管外径为Ø10请填写订货代号为: SHLNG6-010;

2、图示内孔光滑型管夹, 管外径为Ø06请填写订货代号为: SHLNS6-006。

E.G: 1、If you need the clamp with OD Ø10mm, profiled inside with tension clearance, order code is: SHLNG6-010;

2、If you need the clamp with OD Ø06mm, smooth inside without tension clearance, order code is: SHLNS6-006。

如使用不同的形式或其它要求在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

轻型增强尼龙管夹

Light Duty Polyamide pipe Clamp

工作温度: -40℃—+120℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø12

Work temperature: -40℃—+120℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø12

轻型L0系列单螺栓固定式 Light duty L0 series with one bolt

订货图示: Order figure:

轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG7-006—SHLNG012 开槽螺栓+PA管夹体+导轨螺母 Slot head bolt+clamp body(PA)+rail nut SHLNG7—0(管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS7-006—SHLNS012 开槽螺栓+PA管夹体+导轨螺母 Slot head bolt+clamp body(PA)+rail nut SHLNS7—0(管外径)
轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG8-006—SHLNG012 内六角螺栓+PA管夹体+导轨螺母 Socket cap screw+clamp body(PA) +rail nut SHLNG8—0(管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS8-006—SHLNS012 内六角螺栓+PA管夹体+导轨螺母 Socket cap screw+clamp body(PA) +rail nut SHLNS8—0(管外径)
轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG9-006—SHLNG012 外六角螺栓+盖板+PA管夹体+导轨螺母 Hexagon head bolt+cover plate +clamp body(PA)+rail nut SHLNG9—0(管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS9-006—SHLNS012 外六角螺栓+盖板+PA管夹体+导轨螺母 Hexagon head bolt+cover plate +clamp body+rail nut SHLNS9—0(管外径)
轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG10-006—SHLNG012 开槽螺栓+PA管夹体 Slotted bolt+clamp body(PA) SHLNG10—0(管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS10-006—SHLNS012 开槽螺栓+PA管夹体 Slotted bolt+clamp body(PA) SHLNS10—0(管外径)

例如: 1、图示内孔凹槽型管夹, 管外径为Ø10请填写订货代号为: SHLNG10-010;

2、图示内孔光滑型管夹, 管外径为Ø06请填写订货代号为: SHLNS10-006。

E.G: 1、If you need the clamp with OD Ø10mm, profiled inside with tension clearance, order code is: SHLNG10-010;

2、If you need the clamp with OD Ø06mm, smooth inside without tension clearance, order code is: SHLNS10-006。

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

轻型增强尼龙管夹

Light Duty Polyamide pipe Clamp

工作温度: -40℃—+120℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø12

Work temperature: -40℃—+120℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø12

轻型L0系列单螺栓固定式 Light duty L0 series with one bolt

订货图示: Order figure:

轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG11-006—SHLNG012 内六角螺栓+PA管夹体 Socket cap screw+clamp body(PA) SHLNG11—0(管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS11-006—SHLNS012 内六角螺栓+PA管夹体 Socket cap screw+clamp body(PA) SHLNS11—0(管外径)
轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG12-006—SHLNG012 外六角螺栓+盖板+PA管夹体 Hexagon head bolt+cover plate +clamp body(PA) SHLNG12—0(管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS12-006—SHLNS012 外六角螺栓+盖板+PA管夹体 Hexagon head bolt+cover plate +clamp body(PA) SHLNS12—0(管外径)
轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG13-006—SHLNG012 长头螺栓+保险板+PA管夹体 Stacking bolt+safety locking plate +clamp body(PA) SHLNG13—0(管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS13-006—SHLNS012 长头螺栓+保险板+PA管夹体 Stacking bolt+safety locking plate +clamp body(PA) SHLNS13—0(管外径)

例如: 1、图示内孔凹槽型管夹, 管外径为Ø10请填写订货代号为: SHLNG12-010;

2、图示内孔光滑型管夹, 管外径为Ø06请填写订货代号为: SHLNS12-006。

E.G: 1、If you need the clamp with OD Ø10mm, profiled inside with tension clearance, order code is: SHLNG12-010;

2、If you need the clamp with OD Ø06mm, smooth inside without tension clearance, order code is: SHLNS12-006。

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

轻型铝合金管夹

Light Duty Aluminium pipe Clamp

工作温度: -50℃—+300℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø12
Work temperature: -50℃—+300℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø12

轻型L0系列单螺栓固定式 Light duty L0 series with one bolt

订货图示: Order figure:



例如: 图示内孔凹槽型管夹, 管外径为Ø06请填写订货代号为: SHLLG6-006。

E.G: If you need the clamp with OD Ø06mm, profiled inside with tension clearance, order code is: SHLLG6-006.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

轻型铝合金管夹

Light Duty Aluminium pipe Clamp

工作温度: -50℃—+300℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø12
Work temperature: -50℃—+300℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø12

轻型L0系列单螺栓固定式 Light duty L0 series with one bolt

订货图示: Order figure:



例如: 图示内孔凹槽型管夹, 管外径为Ø11请填写订货代号为: SHLLG1-011。

E.G: If you need the clamp with OD Ø11mm, profiled inside with tension clearance, order code is: SHLLG1-011.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

轻型工程聚丙烯管夹

Light Duty Polypropylene pipe Clamp

工作温度: -30℃—+90℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø102

Work temperature: -30℃—+90℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø102

轻型L1-L8系列双螺栓固定式 Light duty L0-L8 series with two bolts

订货图示: Order figure:



例如: 1、图示内孔凹槽型管夹, 管外径为Ø100请填写订货代号为: SHLPG1-110;

2、图示内孔光滑型管夹, 管外径为Ø06请填写订货代号为: SHLPS1-106.

E.G: 1、If you need the clamp with OD Ø100mm, profiled inside with tension clearance, order code is: SHLPG1-110;

2、If you need the clamp with OD Ø06mm, smooth inside without tension clearance, order code is: SHLPS1-106.

如使用不同的形式或其它要求请在订货时说明

Different forms or requirements upon request

符合德标: DIN3015 I

Acc. to German standard: DIN3015 I

轻型工程聚丙烯管夹

Light Duty Polypropylene pipe Clamp

工作温度: -30℃—+90℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø102

Work temperature: -30℃—+90℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø102

轻型L1-L8系列双螺栓固定式 Light duty L0-L8 series with two bolt

订货图示: Order figure:



例如: 1、图示内孔凹槽型管夹, 管外径为Ø100请填写订货代号为: SHLPG8-110;

2、图示内孔光滑型管夹, 管外径为Ø06请填写订货代号为: SHLPS8-106.

E.G: 1、If you need the clamp with OD Ø100mm, profiled inside with tension clearance, order code is: SHLPG8-110;

2、If you need the clamp with OD Ø06mm, smooth inside without tension clearance, order code is: SHLPS8-106.

如使用不同的形式或其它要求请在订货时说明

Different forms or requirements upon request

符合德标: DIN3015 I

Acc. to German standard: DIN3015 I

轻型工程聚丙烯管夹

Light Duty Polypropylene pipe Clamp

工作温度: -30℃—+90℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø102

Work temperature: -30℃—+90℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø102

轻型L1-L8系列双螺栓固定式 Light duty L0-L8 series with two bolts

订货图示: Order figure:



例如: 1、图示内孔凹槽型管夹, 管外径为Ø10请填写订货代号为: SHLPG11-110;

2、图示内孔光滑型管夹, 管外径为Ø06请填写订货代号为: SHLPS11-106。

E.G: 1、If you need the clamp with OD Ø10mm, profiled inside with tension clearance, order code is: SHLPG11-110;

2、If you need the clamp with OD Ø06mm, smooth inside without tension clearance, order code is: SHLPS11-106。

如使用不同的形式或其它要求请在订货时说明

Different forms or requirements upon request

符合德标: DIN3015 I

Acc. to German standard: DIN3015 I

轻型工程聚丙烯管夹

Light Duty Polypropylene pipe Clamp

工作温度: -30℃—+90℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø102

Work temperature: -30℃—+90℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø102

轻型L1-L8系列双螺栓固定式 Light duty L0-L8 series with two bolts

订货图示: Order figure:



例如: 1、图示内孔凹槽型管夹, 管外径为Ø10请填写订货代号为: SHLPG11-110;

2、图示内孔光滑型管夹, 管外径为Ø06请填写订货代号为: SHLPS11-106。

轻型增强尼龙管夹

Light Duty Polyamide pipe Clamp

工作温度: -40℃—+120℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø102

Work temperature: -40℃—+120℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø102

轻型L1-L8系列双螺栓固定式 Light duty L0-L8 series with two bolts



例如: 1、图示内孔凹槽型管夹, 管外径为Ø10请填写订货代号为: SHLPG11-110;

2、图示内孔光滑型管夹, 管外径为Ø06请填写订货代号为: SHLPS11-106。

E.G: 1、If you need the clamp with OD Ø10mm, profiled inside with tension clearance, order code is: SHLPG11-110;

2、If you need the clamp with OD Ø06mm, smooth inside without tension clearance, order code is: SHLPS11-106。

如使用不同的形式或其它要求请在订货时说明

Different forms or requirements upon request

符合德标: DIN3015 I

Acc. to German standard: DIN3015 I

轻型增强尼龙管夹

Light Duty Polyamide pipe Clamp

工作温度: -40℃—+120℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø102

Work temperature: -40℃—+120℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø102

轻型L1-L8系列双螺栓固定式 Light duty L0-L8 series with two bolts.

订货图示: Order figure:

 SHLNG3—* (管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG3-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 外六角螺栓+PA管夹体+盖板+焊接底板 Hexagon head bolt+cover plate +clamp body(PA)+weld plate	 SHLNS3—* (管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS3-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 外六角螺栓+PA管夹体+盖板+焊接底板 Hexagon head bolt+cover plate +clamp body(PA)+weld plate
 SHLNG4—* (管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG4-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 开槽螺栓+PA管夹体+长焊接底板 Slot head bolts+clamp body(PA) +Long weld plate	 SHLNS4—* (管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS4-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 开槽螺栓+PA管夹体+长焊接底板 Slot head bolts+clamp body(PA) +Long weld plate
 SHLNG5—* (管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG5-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 内六角螺栓+PA管夹体+长焊接底板 Socket cap screw+clamp body(PA) +long weld plate	 SHLNS5—* (管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS5-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 内六角螺栓+PA管夹体+长焊接底板 Socket cap screw+clamp body(PA) +long weld plate
 SHLNG6—* (管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG6-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 外六角螺栓+盖板+PA管夹体+焊接底板 Hexagon head bolt+cover plate +clamp body(PA)+long weld plate	 SHLNS6—* (管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS6-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 外六角螺栓+盖板+PA管夹体+焊接底板 Hexagon head bolt+cover +plate clamp body(PA)+long weld plate

例如: 1、图示内孔凹槽型管夹, 管外径为Ø102请填写订货代号为: SHLPG5-110;

2、图示内孔光滑型管夹, 管外径为Ø102请填写订货代号为: SHLPS5-106.

E.G: 1、If you need the clamp with OD Ø102mm, profiled inside with tension clearance, order code is: SHLPG5-110;

2、If you need the clamp with OD Ø102mm, smooth inside without tension clearance, order code is: SHLPS5-106.

如使用不同的形式或其它要求请在订货时说明

Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

轻型增强尼龙管夹

Light Duty Polyamide pipe Clamp

工作温度: -40℃—+120℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø102

Work temperature: -40℃—+120℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø102

轻型L1-L8系列双螺栓固定式 Light duty L0-L8 series with two bolts

订货图示: Order figure:

 SHLNG7—* (管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG7-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 开槽螺栓+PA管夹体+导轨螺母 Slot head bolt+clamp body(PA)+rail nut	 SHLNS7—* (管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS7-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 开槽螺栓+PA管夹体+导轨螺母 Slot head bolt+clamp body(PA)+rail nut
 SHLNG8—* (管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG8-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 内六角螺栓+PA管夹体+导轨螺母 Socket cap screw+clamp body(PA)+rail nut	 SHLNS8—* (管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS8-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 内六角螺栓+PA管夹体+导轨螺母 Socket cap screw+clamp body(PA)+rail nut
 SHLNG9—* (管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG9-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 外六角螺栓+盖板+PA管夹体+导轨螺母 Hexagon head bolt+cover plate +clamp body(PA)+rail nut	 SHLNS9—* (管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS9-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 外六角螺栓+盖板+PA管夹体+导轨螺母 Hexagon head bolt+cover plate +clamp body(PA)+rail nut
 SHLNG10—* (管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG10-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 开槽螺栓+PA管夹体 Slotted bolt+clamp body(PA)	 SHLNS10—* (管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS10-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 开槽螺栓+PA管夹体 Slotted bolt+clamp body(PA)

例如: 1、图示内孔凹槽型管夹, 管外径为Ø102请填写订货代号为: SHLPG9-110;

2、图示内孔光滑型管夹, 管外径为Ø102请填写订货代号为: SHLPS9-106.

E.G: 1、If you need the clamp with OD Ø102mm, profiled inside with tension clearance, order code is: SHLPG9-110;

2、If you need the clamp with OD Ø102mm, smooth inside without tension clearance, order code is: SHLPS9-106.

如使用不同的形式或其它要求请在订货时说明

Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

轻型增强尼龙管夹

Light Duty Polyamide pipe Clamp

工作温度: -40℃—+120℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø102

Work temperature: -40℃—+120℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø102

轻型L1-L8系列双螺栓固定式 Light duty L0-L8 series with two bolts

订货图示: Order figure:

 SHLNG11—*(管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG11-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 内六角螺栓+PA管夹体 Socket cap screw+clamp body(PA)	 SHLNS11—*(管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS11-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 内六角螺栓+PA管夹体 Socket cap screw+clamp body(PA)
 SHLNG12—*(管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG12-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 外六角螺栓+盖板+PA管夹体 Hexagon head bolt+cover plate +clamp body(PA)	 SHLNS12—*(管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS12-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 外六角螺栓+盖板+PA管夹体 Hexagon head bolt+cover plate +clamp body(PA)
 SHLNG13—*(管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLNG13-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 外六角螺栓+盖板+PA管夹体+导轨螺母 Hexagon head bolt+cover plate +clamp body(PA)+rail nut	 SHLNS13—*(管外径)	轻型内孔光滑型管夹 Light Duty Smooth inside, without tension clearance pipe Clamp SHLNS13-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 外六角螺栓+盖板+PA管夹体+导轨螺母 Hexagon head bolt+cover plate +clamp body(PA)+rail nut

例如: 1、图示内孔凹槽型管夹, 管外径为Ø10请填写订货代号为: SHLPG12-110;

2、图示内孔光滑型管夹, 管外径为Ø06请填写订货代号为: SHLPS12-106。

E.G: 1、If you need the clamp with OD Ø10mm, profiled inside with tension clearance, order code is: SHLPG12-110;

2、If you need the clamp with OD Ø06mm, smooth inside without tension clearance, order code is: SHLPS12-106。

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

轻型铝合金管夹

Light Duty Aluminium pipe Clamp

工作温度: -50℃—+300℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø102

Work temperature: -50℃—+300℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø102

轻型L1-L8系列双螺栓固定式 Light duty L0-L8 series with two bolts

订货图示: Order figure:

 SHLLG1—*(管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLLG1-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 开槽螺栓+AL管夹体+焊接底板 Slot head bolts+clamp body(AL)+weld plate	 SHLLG2—*(管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLLG2-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 内六角螺栓+AL管夹体+焊接底板 Hexagon head bolt+clamp body(AL) +weld plate
 SHLLG3—*(管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLLG3-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 外六角螺栓+AL管夹体+盖板+焊接底板 Hexagon head bolt+cover +clamp body(AL)+weld plate	 SHLLG4—*(管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLLG4-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 开槽螺栓+AL管夹体+长焊接底板 Slot head bolts+clamp body(AL) +Long weld plate
 SHLLG5—*(管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLLG5-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 内六角螺栓+AL管夹体+长焊接底板 Socket cap screw+clamp body(AL) +long weld plate	 SHLLG6—*(管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLLG6-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 外六角螺栓+盖板+AL管夹体+焊接底板 Hexagon head bolt+cover plate +clamp body(AL)+long weld plate
 SHLLG7—*(管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLLG7-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 开槽螺栓+AL管夹体+导轨螺母 Slot head bolt+clamp body(AL) +rail nut	 SHLLG8—*(管外径)	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLLG8-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 内六角螺栓+AL管夹体+导轨螺母 Socket cap screw+clamp body(AL) +rail nut

例如: 图示内孔凹槽型管夹, 管外径为Ø10请填写订货代号为: SHLLG1-110。

E.G: If you need the clamp with OD Ø10mm, profiled inside with tension clearance, order code is: SHLLG1-110。

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

轻型铝合金管夹


Light Duty Aluminium pipe Clamp

工作温度: -50℃—+300℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø102

Work temperature: -50℃—+300℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø102

轻型L1-L8系列双螺栓固定式 Light duty L0-L8 series with two bolts

订货图示: Order figure:

	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLLG9-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 外六角螺栓+盖板+AL管夹体+导轨螺母 Hexagon head bolt +cover plate +clamp body(AL)+rail nut SHLLG9—*(管外径)		轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLLG10-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 开槽螺栓+AL管夹体 Slotted bolt+clamp body(AL) SHLLG10—*(管外径)
	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLLG11-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 内六角螺栓+AL管夹体 Socket cap screw+clamp body(AL) SHLLG11—*(管外径)		轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLLG12-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 外六角螺栓+盖板+AL管夹体 Hexagon head bolts+cover plate +clamp body(AL) SHLLG12—*(管外径)
	轻型内孔凹槽型管夹 Light Duty Profiled inside, with tension clearance pipe Clamp SHLLG13-106-112 212.7-218 319-325 426.9-430 532-542 644.5-650.8 757.2-776.1 888.9-8102 外六角螺栓+盖板+AL管夹体+导轨螺母 Hexagon head bolt +cover plate +clamp body(AL)+rail nut SHLLG13—*(管外径)		其它形式 Other forms
	其它形式 Other forms		其它形式 Other forms
	其它形式 Other forms		

例如: 1、图示内孔凹槽型管夹, 管外径为Ø10请填写订货代号为: SHLLG11-110。










E.G: If you need the clamp with OD Ø10mm, profiled inside with tension clearance, order code is: SHLLG11-110.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

SHL*其它形式底板或导轨

SHL* bottom plate or rail of other forms

			
角型焊接底板	Angled weld plate	桥型焊接底板	Bridge weld plate
			
双联式焊接底板	Twin weld plate	多双联式焊接底板	Group weld plate
			
导轨螺母 rail nut	SHL-E1	SHL-E2	SHL-E3

系列 Series	安装导轨 Mounting rail			双联焊接底板 Twin weld plate				多联焊接底板 Group weld plate			角型焊接底板 Angled weld plate				桥型焊接底板 Bridge weld plate	
	SHL-E*			SHL-D0				SHL-D1			SHL-D2				SHL-D3	
	B1	B2	S	L1	L2	L3	S	L1	L2	L3	L1	L2	B1 B2	S	L1	L2
L1	28	11	2	77	20	37	3	More than three acc. to need 三联以上根据实际	20	37	36	20	30	3	48	20
L2				86	26	44	3		26	44	42	26	30	3	54	26
L3				102	33	52	3		33	52	50	33	30	3	62	33
L4				136	40	60	3		40	60	40	30	3	71	40	
L5				145	52	75	3		52	75	70	52	30	3	85	52
L6				178	66	90	3		66	90	88	66	30	3	98	66
L7																
L8																

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I



冷挤压车间
Cold extrusion workshop



精加工车间
Finishing workshop



1、精加工车间

精加工车间主要从事对粗加工产品的精细加工，该车间配备了全自动数控车床30余台、普通车床20余台，其中数控车床采用了目前先进的法兰克系统，极大的提高产品生产效率，并确保了产品质量的稳定性。

2、铝制品车间

铝制品车间主要从事铝制产品的压铸与加工。通过大型智能溶炼炉炉火对液体铝进行精确温度控制，将液体铝导入到压铸模、进行铝产品成型。

3、冲压车间

冲压车间配备3条生产流水线，主要从事对产品进行冲压、钻孔、攻丝等粗加工处理，车间内配备了冲床6.3T-500T、磨床、铣床等60多台设备。

4、注塑车间

主要从事塑料管夹产品的成型加工，车间内配备12台250-12000克注塑机。注塑车间由操纵员对注塑机设定参数后，由注塑机智能控制压力、流速及温度，通过塑料模具进行自动注塑生产。

5、金属冷挤压车间

配备了从200-4200吨位的多工位大型金属冷挤压机，9台共计投入6680万元人民币，专业生产，SAE法兰冷挤压毛坯。

I) the finishing workshop

Finishing workshop is mainly engaged in the processing of rough machining product, equips with more than thirty automatic lathes, more than twenty ordinary lathes, the NC lathes use the recent advanced frank system, which improves the production efficiency and ensure the stability of the product quality.

II) aluminum product workshop

The workshop is mainly in charge of aluminum alloy die-casting products and processing. Controlling accurate temperature by large intelligent hardening furnace and furnace stove, importing liquid aluminum into the mould, low pressure casting mould to make aluminum products shaped.

III) pressing workshop

There are three produce lines. Mainly engaging in product stamping, bricking, tapping hole as early treatment. The workshop equips with more sixty machine, milling machine, punch.

IV) injection workshop

The workers of workshop mainly engages in polypropylene(PP) molding products and the workshop, equips with 12 injection molding machines of 250-12,000 grams. Operators in injection workshop set parameters, the injection machines intelligently control temperature, pressure, and flow through an automatic injection plastic mold production.

V) metal cold extrusion workshop

The workshop equips with nine multistage large metal cold extrusion machines of 200-4200 tons which cost RMB66,800,000. These machines are used to produce flange cold extrusion blank professionally.



注塑车间
injection workshop



冲压车间
Pressing workshop



粗加工车间
Rough machining workshop



注塑车间
molding workshop



铝制品车间一角
A corner of aluminum products workshop



冲压车间大型500T冲床
The large punching of 500 tons

双联管夹

Twin pipe clamps

双联系列单螺栓固定式 Twin series with single bolt

轻型管夹: 本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道管夹。

轻型系列管夹适用于中压、低压 ($PN \leq 6MPa$) 管道固定。

Twin clamps: This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in different areas such as the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and so on

1. SHTPG*-工程聚丙烯轻型内孔凹槽型管夹 工作温度-30~+90℃
1.SHTPG*-polypropylene profiled inside with tension clearance work temperature-30+90°C
2. SHTPS*-工程聚丙烯轻型内孔光滑型管夹 工作温度-30~+90℃
2.SHTPS*-polypropylene smooth inside without tension clearance work temperature-30+90°C
3. SHTNG*-增强尼龙轻型内孔凹槽型管夹 工作温度-40~+120℃
3.SHTNG*-polyamide profiled inside with tension clearance work temperature-40+120°C
4. SHTNS*-增强尼龙轻型内孔光滑型管夹 工作温度-40~+120℃
4.SHTNS*-polyamide smooth inside without tension clearance work temperature-40+120°C
5. SHTLG*-铝合金轻型内孔凹槽型管夹 工作温度-50~+300℃
5.SHTLG*-aluminum alloy profiled inside with tension clearance work temperature-50+300°C
6. SHTSG*-铸钢轻型内孔凹槽型管夹 工作温度-50~+300℃
6.SHTSG*-POM profiled inside with tension clearance work temperature-50+300°C
7. SHTGG*-钢制轻型内孔凹槽型管夹 工作温度-80~+500℃
7.SHTGG*-steel profiled inside with tension clearance work temperature-80+500°C
8. SHTBG*-不锈钢轻型内孔凹槽型管夹 工作温度-80~+500℃
8.SHTBG*-stainless steel profiled inside with tension clearance work temperature-80+500°C

说明: 1、盖板、焊接底板、导轨、导轨螺母、螺栓标准材料为碳钢, 根据客户需要可选用其它材料。请在订货时说明

2、可以设计多层管夹, 最多五层

3、其它形式底板或导轨使用SHAL*形式底板或导轨

Note: 1. for the cover plate, weld plate, rail, rail nut and bolt, the standard material is carbon steel. Other materials upon request.

2. multi-layer clamps are possible, five layers at most.

3. the bottom plates and rails of other forms are the same as SHL* series.


如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

双联组合系列

Twin combination series


示意图 Schematic drawing

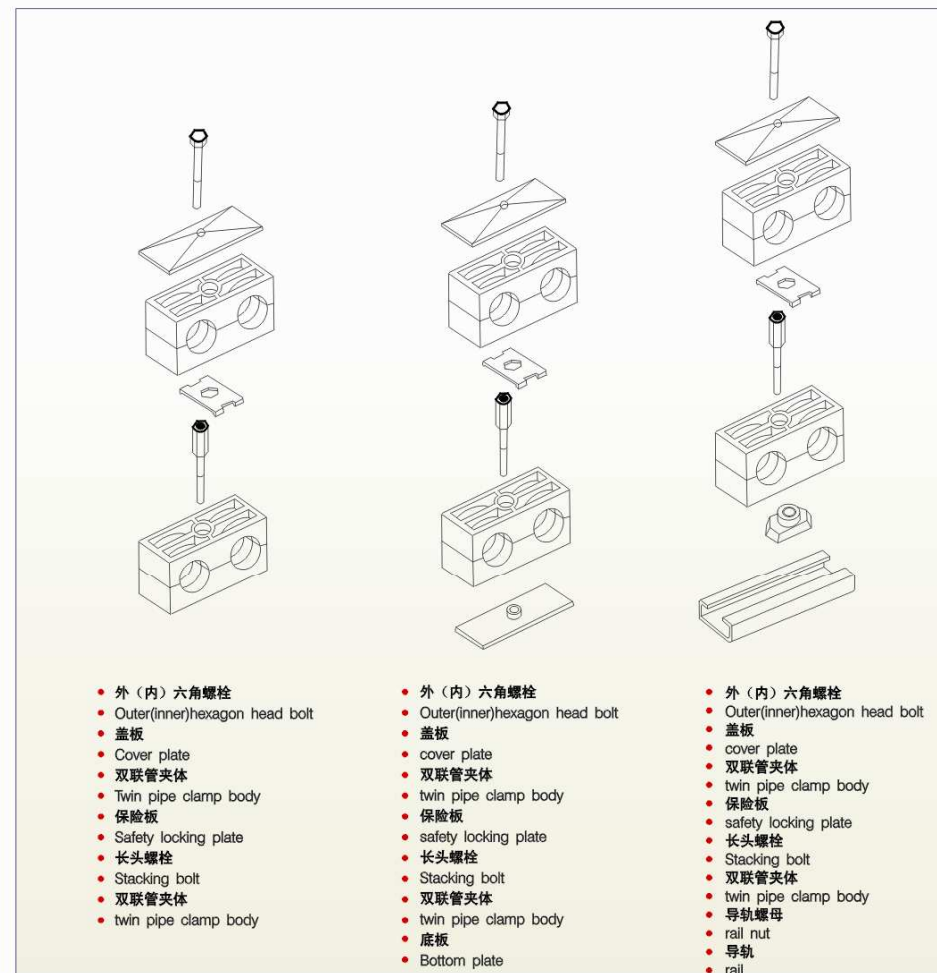

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

双联T1-T5系列单螺栓管夹参数 Twin series T1-T5 series with one bolt parameter

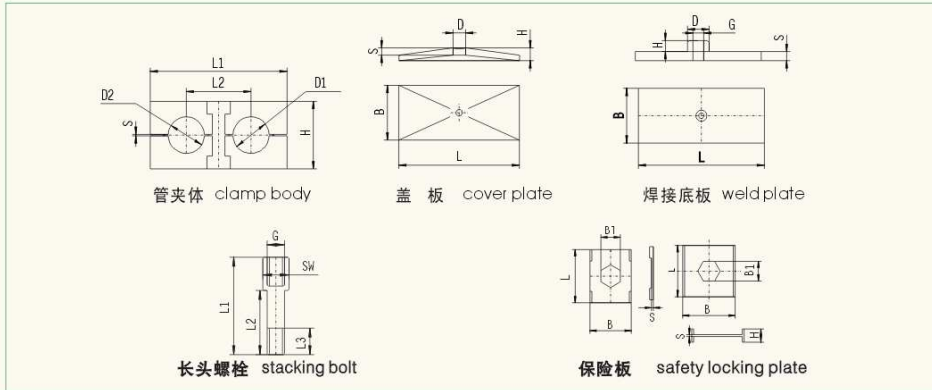

系列 Series	管外径 Pipe O.D. D1/D2	盖板 Cover plate L H S D	管夹体 clamp body L1 L2 H S 宽 Width	焊接底板 Weld plate L S H D G	长头螺栓 stacking bolt L1 L2 L3 SW	保险板 safety locking plate L B B1 S
T1	6/6					
	6.4/6.4					
	8/8	36	7	3	7 36	20 27 0.8 30 37 3 6 12 M6 M6 34 20 12 11 A27 B27 A22 B28 11 1
	9.5/9.5					
	10/10					
T2	12/12					
	12.7/12.7					
	13.5/13.5	53	7	3	9 53	29 27 0.8 30 55 5 6 14 M8 M8 33 20 12 12 A27 B45 A22 B28 12 1
	14/14					
	15/15					
T3	16/16					
	17.2/17.2					
	18/18					
	19/19					
	20/20	67	7	3	9 67	36 37 0.8 30 70 5 6 14 M8 M8 44 29 12 12 A27 B45 A22 B28 12 1
T4	21.3/21.3					
	22/22					
	25/25					
	26.9/26.9					
	28/28	80	7	3	9 80	45 40 0.8 30 85 5 6 14 M8 M8 49 34 12 12 A27 B45 A22 B28 12 1
T5	30/30					
	32/32					
	33.7/33.7					
	35/35	106	7	3	9 106	56 53 0.8 30 110 5 6 14 M8 M8 61 46 12 12 A27 B45 A22 B28 12 1
	38/38					
T5	40/40					
	42/42					

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

双联工程聚丙烯管夹 Twin series Polypropylene pipe Clamp

工作温度: -30℃—+90℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø42

Work temperature: -30℃—+90℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø42

双联T1-T5系列双螺栓固定式 Twin series T1-T5 series with one bolt

订货图示: Order figure:

 SHTPG1-106-112 (管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTPG1—106-112 212.7-218 319-325 426.9-430 532-542 外六角螺栓+盖板+PP管夹体 +焊接底板 Hexagon head bolt+cover plate +clamp body(PP)+weld plate	 SHTPS1-106-112 (管外径)	双联内孔光滑型管夹 Twin series Smooth inside, without tension clearance pipe Clamp SHTPS1—106-112 212.7-218 319-325 426.9-430 532-542 外六角螺栓+盖板+PP管夹体 +焊接底板 Hexagon head bolt+cover plate +clamp body(PP)+weld plate
 SHTPG2-106-112 (管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTPG2—106-112 212.7-218 319-325 426.9-430 532-542 内六角螺栓+盖板+PP管夹体 +焊接底板 Socket cap screw+cover plate +clamp body(PP)+weld plate	 SHTPS2-106-112 (管外径)	双联内孔光滑型管夹 Twin series Smooth inside, without tension clearance pipe Clamp SHTPS2—106-112 212.7-218 319-325 426.9-430 532-542 内六角螺栓+盖板+PP管夹体 +焊接底板 Socket cap screw+cover plate +clamp body(PP)+weld plate
 SHTPG3-106-112 (管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTPG3—106-112 212.7-218 319-325 426.9-430 532-542 外六角螺栓+盖板+PP管夹体 +导轨螺母 Hexagon head bolt+cover plate +clamp body(PP)+rail nut	 SHTPS3-106-112 (管外径)	双联内孔光滑型管夹 Twin series Smooth inside, without tension clearance pipe Clamp SHTPS3—106-112 212.7-218 319-325 426.9-430 532-542 外六角螺栓+盖板+PP管夹体 +导轨螺母 Hexagon head bolt+cover plate +clamp body(PP)+rail nut

例如: 1、图示内孔凹槽型管夹, 管外径为Ø6请填写订货代号为: SHTPG1-106;

2、图示内孔光滑型管夹, 管外径为Ø12请填写订货代号为: SHTPS1-112。

E.G: 1、If you need the clamp with OD Ø6mm, profiled inside with tension clearance, order code is: SHTPG1-106;

2、If you need the clamp with OD Ø12mm, smooth inside without tension clearance, order code is: SHTPS1-112。

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

双联工程聚丙烯管夹

Twin series Polypropylene pipe Clamp

工作温度: -30℃—+90℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø42

Work temperature: -30℃—+90℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø42

双联T1-T5系列双螺栓固定式 Twin series T1-T5 series with one bolt

订货图示: Order figure:

 SHTPG4—*(管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTPG4—106-112 212.7-218 319-325 426.9-430 532-542 内六角螺丝+盖板+PP管夹体 +导轨螺母 Socket cap screw+cover plate +clamp body(PP)+rail nut	 SHTPS4—*(管外径)	双联内孔光滑型管夹 Twin series Smooth inside, without tension clearance pipe Clamp SHTPS4—106-112 212.7-218 319-325 426.9-430 532-542 内六角螺丝+盖板+PP管夹体 +导轨螺母 Socket cap screw+cover plate +clamp body(PP)+rail nut
 SHTPG5—*(管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTPG5—106-112 212.7-218 319-325 426.9-430 532-542 外六角螺丝+盖板+PP管夹体 Hexagon head bolt+cover plate +clamp body(PP)	 SHTPS5—*(管外径)	双联内孔光滑型管夹 Twin series Smooth inside, without tension clearance pipe Clamp SHTPS5—106-112 212.7-218 319-325 426.9-430 532-542 外六角螺丝+盖板+PP管夹体 Hexagon head bolt+cover plate +clamp body(PP)
 SHTPG6—*(管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTPG6—106-112 212.7-218 319-325 426.9-430 532-542 长头螺栓+PP管夹体+保险板 Stacking bolt+clamp body(PP) +safety locking plate	 SHTPS6—*(管外径)	双联内孔光滑型管夹 Twin series Smooth inside, without tension clearance pipe Clamp SHTPS6—106-112 212.7-218 319-325 426.9-430 532-542 长头螺栓+PP管夹体+保险板 Stacking bolt+clamp body(PP) +safety locking plate

例如: 1、图示内孔凹槽型管夹, 管外径为Ø6请填写订货代号为: SHTPG6-106;

2、图示内孔光滑型管夹, 管外径为Ø12请填写订货代号为: SHTPS6-112。

E.G: 1、If you need the clamp with OD Ø6mm, profiled inside with tension clearance, order code is: SHTPG6-106;

2、If you need the clamp with OD Ø12mm, smooth inside without tension clearance, order code is: SHTPS6-112。

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

双联增强尼龙管夹

Twin series Polyamide pipe Clamp

工作温度: -40℃—+120℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø42

Work temperature: -40℃—+120℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø42

双联T1-T5系列双螺栓固定式 Twin series T1-T5 series with one bolt

订货图示: Order figure:

 SHTNG1—*(管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTNG1—106-112 212.7-218 319-325 426.9-430 532-542 外六角螺丝+盖板+PA管夹体 +焊接底板 Hexagon head bolt+cover plate +clamp body(PA)+weld plate	 SHTNS1—*(管外径)	双联内孔光滑型管夹 Twin series Smooth inside, without tension clearance pipe Clamp SHTNS1—106-112 212.7-218 319-325 426.9-430 532-542 外六角螺丝+盖板+PA管夹体 +焊接底板 Hexagon head bolt+cover plate +clamp body(PA)+weld plate
 SHTNG2—*(管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTNG2—106-112 212.7-218 319-325 426.9-430 532-542 内六角螺丝+盖板+PA管夹体 +焊接底板 Socket cap screw+cover plate +clamp body(PA)+weld plate	 SHTNS2—*(管外径)	双联内孔光滑型管夹 Twin series Smooth inside, without tension clearance pipe Clamp SHTNS2—106-112 212.7-218 319-325 426.9-430 532-542 内六角螺丝+盖板+PA管夹体 +焊接底板 Socket cap screw+cover plate +clamp body(PA)+weld plate
 SHTNG3—*(管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTNG3—106-112 212.7-218 319-325 426.9-430 532-542 外六角螺丝+盖板+PA管夹体 +导轨螺母 Hexagon head bolt+cover plate +clamp body(PA)+rail nut	 SHTNS3—*(管外径)	双联内孔光滑型管夹 Twin series Smooth inside, without tension clearance pipe Clamp SHTNS3—106-112 212.7-218 319-325 426.9-430 532-542 外六角螺丝+盖板+PA管夹体 +导轨螺母 Hexagon head bolt+cover plate +clamp body(PA)+rail nut

例如: 1、图示内孔凹槽型管夹, 管外径为Ø6请填写订货代号为: SHTNG3-106;

2、图示内孔光滑型管夹, 管外径为Ø12请填写订货代号为: SHTNS3-112。

E.G: 1、If you need the clamp with OD Ø6mm, profiled inside with tension clearance, order code is: SHTNG3-106;

2、If you need the clamp with OD Ø12mm, smooth inside without tension clearance, order code is: SHTNS3-112。

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

双联增强尼龙管夹

Twin series Polyamide pipe Clamp

工作温度: -40℃—+120℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø42

Work temperature: -40℃—+120℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø42

双联T1-T5系列双螺栓固定式 Twin series T1-T5 series with one bolt

订货图示: Order figure:

 SHTNG4—*(管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTNG4—106-112 212.7-218 319-325 426.9-430 532-542 内六角螺丝+盖板+PA管夹体 +导轨螺母 Socket cap screw+cover plate +clamp body(PA)+rail nut	 SHTNS4—*(管外径)	双联内孔光滑型管夹 Twin series Smooth inside, without tension clearance pipe Clamp SHTNS4—106-112 212.7-218 319-325 426.9-430 532-542 内六角螺丝+盖板+PA管夹体 +导轨螺母 Socket cap screw+cover plate +clamp body(PA)+rail nut
---	---	--	--

 SHTNG5—*(管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTNG5—106-112 212.7-218 319-325 426.9-430 532-542 外六角螺丝+盖板+PA管夹体 +导轨螺母 Hexagon head bolt+cover plate +clamp body(PA)+rail nut	 SHTNS5—*(管外径)	双联内孔光滑型管夹 Twin series Smooth inside, without tension clearance pipe Clamp SHTNS5—106-112 212.7-218 319-325 426.9-430 532-542 外六角螺丝+盖板+PA管夹体 +导轨螺母 Hexagon head bolt+cover plate +clamp body(PA)+rail nut
--	--	---	---

 SHTNG6—*(管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTNG6—106-112 212.7-218 319-325 426.9-430 532-542 长头螺栓+PA管夹体+保险板 Stacking bolt+clamp body(PA) +safety locking plate	 SHTNS6—*(管外径)	双联内孔光滑型管夹 Twin series Smooth inside, without tension clearance pipe Clamp SHTNS6—106-112 212.7-218 319-325 426.9-430 532-542 长头螺栓+PA管夹体+保险板 Stacking bolt+clamp body(PA) +safety locking plate
---	--	--	---

例如: 1、图示内孔凹槽型管夹, 管外径为Ø6请填写订货代号为: SHTPG6-106;

2、图示内孔光滑型管夹, 管外径为Ø12请填写订货代号为: SHTPS6-112。

E.G: 1、If you need the clamp with OD Ø6mm, profiled inside with tension clearance, order code is: SHTPG6-106;

2、If you need the clamp with OD Ø12mm, smooth inside without tension clearance, order code is: SHTPS6-112。

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

双联铝合金管夹

Twin series Aluminium pipe Clamp

工作温度: -50℃—+300℃ 工作压力: PN≤8MPa 适用管外径: Ø6—Ø42

Work temperature: -50℃—+120℃ Work Pressure: PN≤8MPa Suitable for pipe OD: Ø6—Ø42

双联T1-T5系列双螺栓固定式 Twin series T1-T5 series with one bolt

订货图示: Order figure:

 SHTLG1—*(管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTLG1—106-112 212.7-218 319-325 426.9-430 532-542 外六角螺丝+盖板+AL管夹体 +焊接底板 Hexagon head bolt+cover plate +clamp body(AL)+weld plate	 SHTLG2—*(管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTLG2—106-112 212.7-218 319-325 426.9-430 532-542 内六角螺丝+盖板+AL管夹体 +焊接底板 Socket cap screw+cover plate +clamp body(AL)+weld plate
--	--	--	---

 SHTLG3—*(管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTLG3—106-112 212.7-218 319-325 426.9-430 532-542 外六角螺丝+盖板+AL管夹体 +导轨螺母 Hexagon head bolt+cover plate +clamp body(AL)+rail nut	 SHTLG4—*(管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTLG4—106-112 212.7-218 319-325 426.9-430 532-542 内六角螺丝+盖板+AL管夹体 +导轨螺母 Socket cap screw+cover plate +clamp body(AL)+rail nut
---	--	---	---

 SHTLG5—*(管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTLG5—106-112 212.7-218 319-325 426.9-430 532-542 外六角螺丝+盖板+AL管夹体 +导轨螺母 Hexagon head bolt+cover plate +clamp body(AL)+rail nut	 SHTLG6—*(管外径)	双联内孔凹槽型管夹 Twin series Profiled inside, with tension clearance pipe Clamp SHTLG6—106-112 212.7-218 319-325 426.9-430 532-542 长头螺栓+AL管夹体+保险板 Stacking bolt+clamp body(AL) +safety locking plate
--	--	--	--


例如: 1、图示内孔凹槽型管夹, 管外径为Ø6请填写订货代号为: SHTPG1-106。

E.G: 1、If you need the clamp with OD Ø6mm, profiled inside with tension clearance, order code is: SHTPG1-106。

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

SHT*其它形式底板或导轨 SHT*bottom plates or rails of other forms

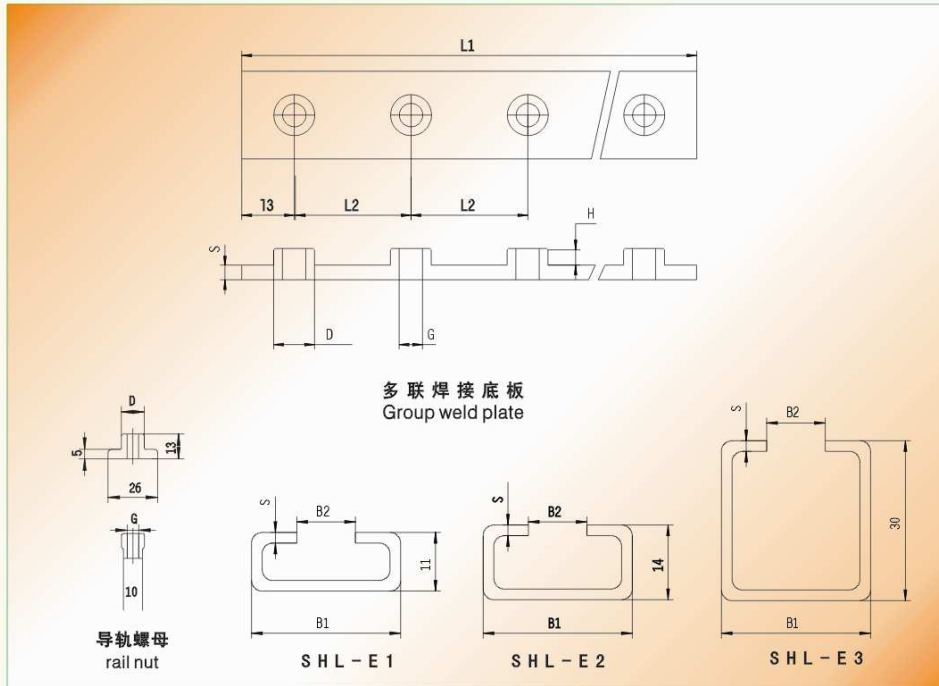

series 系列	多联焊接底板 Group weld plate							安装导轨 Mounting rail		
	L1	L2	L3	S	H	G	ØD	B1	B2	S
T1	双联以上根据实际 More than twin acc. to need	40	18	3	6	M6	12	28	11	2
T2		58	28	5	6	M8	14			
T3		72	35	5	6	M8	14			
T4		90	42	5	6	M8	14			
T5		112	55	5	6	M8	14			

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

SHT*其它形式底板或导轨 SHT*bottom plates or rails of other forms



舒恒舒达公司投资百万元，打造成国家级质量检验部，检验部内配备了大量的国际、国内先进的高精密密度检验、检测设备。其中部分设备如下：高精密度直读光谱仪、JB-300冲击试验机、WES数显式万能试验机、硬度仪、探伤仪、盐雾机等多台先进的检测设备。

公司质量检验部，利用高精密度直读光谱仪对原材料成分进行分析，确保原材料性能参数达到相关要求；利用冲击试验机对成品进行动负荷抵抗冲击试验，测试产品在不同的工作环境下各项性能指标变化；利用万能试验机对材料进行拉伸、压缩、弯曲、剪切等多项性能的检测；利用硬度计检测原材料的硬度。探伤仪用来探伤产品的内部情况，盐雾机检测产品防腐性能。

公司质量检验部，对产品从原材料直到成品的质量进行层层把关，优秀的人才，先进的生产设备，严格的检验程序是舒恒公司产品品质的重要保证。

Shuheng Shuda costs millions to build the national quality inspection department and equips large international and domestic advanced sitzerlan inspection testing equipments,for example sitzerlan spectrometer, JB - 300 impact test enginery, WES display type universal test enginery, hardness, detectors, salt fog machine and so on.

Shuheng quality inspection department uses sitzerlan spectrometer to analyse raw material to ensure raw material properties to requirements; uses impact test enginery to load resistance to impact test and test the product in different working conditions various performance indicators; uses the universal test for material stretching, compression, bending, cutting ect. of the detection performance; uses the hardness of hardness testing raw materials; Uses detector to test the inside of the product, salt fog machine detecting products anticorrosive property.

Shuheng quality inspection department check strictly the produce quanlity from the raw material to finished product, which is the important guarantee of product quality.



一丝不苟
Meticulosity



专注于心
Focus



检测设备 Detection equipment



法兰制造车间 Flange manufacture workshop



高档数控车 High-grade cnc lathe



认真检测
Serious



尖端科技
Cutting-edge technology



细心分析
Careful analysis

重型管夹

Heavy pipe clamps

重型系列双螺栓固定式 heavy series with double bolts

重型管夹: 本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道管夹。

轻型系列管夹适用于中压、低压 ($PN \leq 31.5\text{MPa}$) 管道固定。

Heavy pipe clamp This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in different areas such as the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and so on

1. SHHPG*-工程聚丙烯轻型内孔凹槽型管夹工作温度-30~+90℃

1. SHHPG*-polypropylene profiled inside with tension clearance work temperature-30~+90℃

2. SHHTPS*-工程聚丙烯轻型内孔光滑型管夹工作温度-30~+90℃

2. SHHTPS*-polypropylene smooth inside without tension clearance work temperature-30~+90℃

3. SHHNG*-增强尼龙轻型内孔凹槽型管夹工作温度-40~+120℃

3. SHHNG*-polyamide profiled inside with tension clearance work temperature-40~+120℃

4. SHHNS*-增强尼龙轻型内孔光滑型管夹工作温度-40~+120℃

4. SHHNS*-polyamide smooth inside without tension clearance work temperature-40~+120℃

5. SHHLG*-铝合金轻型内孔凹槽型管夹工作温度-50~+300℃

5. SHHLG*-aluminum alloy profiled inside with tension clearance work temperature-50~+300℃

6. SHHSG*-塑钢轻型内孔凹槽型管夹工作温度-50~+300℃

6. SHHSG*-POM profiled inside with tension clearance work temperature-50~+300℃

7. SHHGG*-钢制轻型内孔凹槽型管夹工作温度-80~+500℃

7. SHHGG*-steel profiled inside with tension clearance work temperature-80~+500℃

8. SHHBG*-不锈钢轻型内孔凹槽型管夹工作温度-80~+500℃

8. SHHBG*-stainless steel profiled inside with tension clearance work temperature-80~+500℃

说明: 1. 盖板、焊接底板、导轨、导轨螺母、螺栓标准材料为碳钢, 根据客户需要可选用其它材料。请在订货时说明

2. 可以设计多联多层管夹, 最多五层

3. 其它形式底板或导轨使用SHHD*形式底板或导轨

Note: 1. for the cover plate, weld plate, rail, rail nut and bolt, the standard material is carbon steel. Other materials upon request.

2. multi-layer clamps are possible, five layers at most.

3. the bottom plates and rails of other forms are the same as SHHD* series.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I


重型组合系列

Heavy combination series

示意图 Schematic drawing



重型H1-H13系列双螺栓管夹参数 Heavy duty H1-H13 series with two bolts clamps

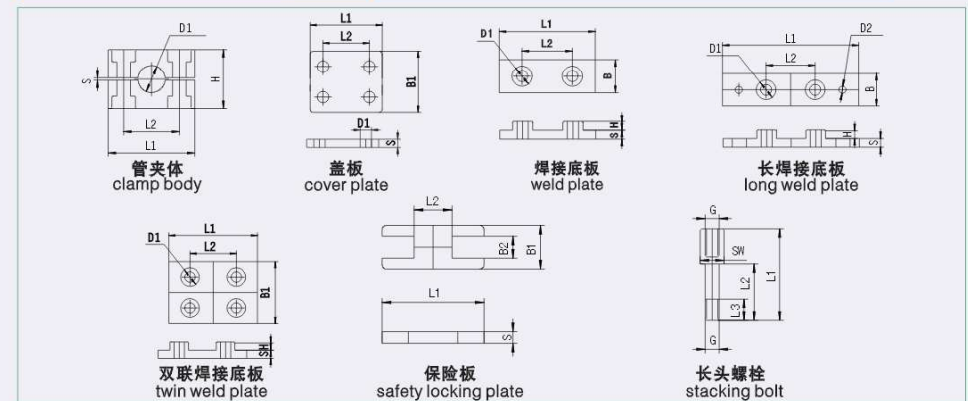

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

重型H1-H13系列双螺栓管夹参数 Heavy duty H1-H13 series with two bolts clamps


系列 Series	管外径 Pipe O.D. D1	内径 Inch bore	管体厚度 Inch o.d.	盖板 cover plate				管夹体 clamp body				焊接底板 weld plate				长焊接底板 long weld plate				双联焊接底板 twin weld plate				长焊接底板 long weld plate				保险板 safety locking plate				防震圈 anti-vibration washer									
				L1	L2	S	B	D1	L1	L2	H	S	管宽 Widh	L1	L2	B	S	H	D	L1	L2	B	S	H	D1	D2	L1	L2	B	S	H	D1	D2	L1	L2	B	S	H	D1	D2	
H1	6																																								
	8.5																																								
	10	1/8																																							
	13.5	1/4																																							
	14																																								
	15																																								
	16																																								
	17.2	3/8																																							
	18																																								
	18																																								
H2	20																																								
	21.3	1/2																																							
	23	7/8																																							
	25	1																																							
	26.9	3/4																																							
	28																																								
	30																																								
	32																																								
	33.7	1																																							
	35																																								
H3	38																																								
	40																																								
	42																																								
	44																																								
	45	1 1/4																																							
	47	1 1/4																																							
	48.3	1 1/2																																							
	50.8	2																																							
	55																																								
	57	2 1/4																																							
H4	60.3	2																																							
	63.5	2 1/2																																							
	70																																								
	70																																								
	76.1	2 1/2	3																																						
	80																																								
	82.5	3 1/4																																							
	88.9	3																																							
	88.9	3																																							
	100																																								
H5	102	3 1/2																																							
	108	4 1/4																																							
	114	4																																							

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

SHH*G-12重型管夹参数 SHH*G12 heavy pipe clamps

外六角螺栓+盖板+管夹体+焊接底板 Hexagon head bolt+cover plate+clamp body+weld plate
Japanese standard

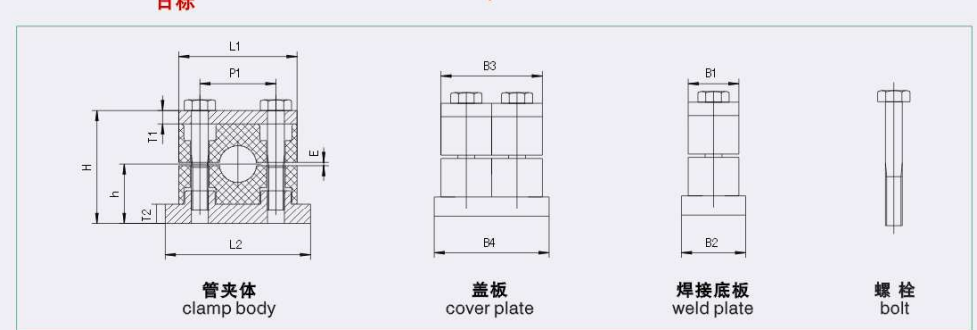

系列 Series	订货号 Order code	管外径D Inch bore	管外径Pipe O.D.				管夹标注Pipe clamp Sign														螺丝 bolt
			日标 Japanese standard		外径 O.D.	D	L1	L2	B1	B2	B3	B4	E	T1	T2	H	h	P1			
			A	B																	
B1	SHH*G12 106~118	6~18	6	2/5	10.5	10.5	55	73	30	38	60	65	2	8	12	52	28	33	M10X45		
			8	1/4	13.8	13.8															
			10	3/4	17.3	17.3															
B2	SHH*G12 218~228	18~28	15	1/2	21.7	21.7	70	85	30	38	60	65	2	8	12	68	36	45	M10X60		
			20	3/4	27.2	27.2															
B3	SHH*G12 330~342	30~42	25	1	34	34	85	100	30	38	60	65	2	8	12	80	42	60	M10X70		
			32	1 1/1	42.7	42.7															
B4	SHH*G12 438~470	38~70	40	1 1/2	18.6	48.6	115	150	45	50	90	100	3	10	16	116	61	90	M12X105		
			50	2	60.5	60.5															
B5	SHH*G12 576~589	76~89	65	2 1/2	76.3	76.3	155	200	50	65	120	125	3	10	16	146	76	122	M16X135		
			80	3	89.1	89.1															
B6	SHH*G12 690~6114	90~127	90	3 1/2	106.6	106.6	205	270	80	90	160	180	3	15	20	204	104	168	M20X200		
			100	4	114.3	114.3															
B7	SHH*G12 7133~7168	133~168	125	5	139.8	139.8	250	310	90	100	180	200	3	15	20	234	119	206	M24X230		
			150	6	165.2	165.2															
B8	SHH*G12 8170~8219	170~219	175	7	190.7	190.7	336	400	120	130	240	260	3	25	25	320	160	265	M30X300		
			200	8	216.3	216.3															
B9	SHH*G12 9240~9340	240~340	225	9	241.8	241.8	466	520	160	170	320	340	10	30	30	470	235	395	M30X450		
			250	10	267.4	267.4															
			300	12	318.5	318.5															
B10	SHH*G12 0~103406	350~406	350	14	355.5	355.5	630	680	180	190	360	380	30	36	36	607	301	537	M30X580		
			400	16	406.4	406.4															

重型工程聚丙烯管夹 Heavy Duty Polypropylene pipe Clamp

工作温度: -30℃—+90℃ 工作压力: PN≤31.5MPa 适用管外径: Ø6—Ø508

Work temperature: -30℃—+90℃ Work Pressure: PN≤31.5MPa Suitable for pipe OD: Ø6—Ø508

重型H1-H13系列双螺栓固定式 Heavy duty H1-H13 series with two bolts

订货图示: Order figure:

 SHHPG1—*(管外径)	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHPG1-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 外六角螺栓+盖板+PP管夹体+焊接底板 Hexagon head bolt+cover plate+clamp body(PP)+weld plate	 SHHPS1—*(管外径)	重型内孔光滑型管夹 Heavy Duty Smooth inside, without tension clearance pipe Clamp SHHPS1-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 外六角螺栓+盖板+PP管夹体+焊接底板 Hexagon head bolt+cover plate+clamp body(PP)+weld plate
 SHHPG2—*(管外径)	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHPG2-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 内六角螺栓+盖板+PP管夹体+焊接底板 Socket cap screw+cover plate+clamp body(PP)+weld plate	 SHHPS2—*(管外径)	重型内孔光滑型管夹 Heavy Duty Smooth inside, without tension clearance pipe Clamp SHHPS2-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 内六角螺栓+盖板+PP管夹体+焊接底板 Socket cap screw+cover plate+clamp body(PP)+weld plate
 SHHPG3—*(管外径)	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHPG3-106-118 218-230 330-342 442-470 外六角螺栓+盖板+PP管夹体+导轨螺母 Hexagon head bolt+cover plate+clamp body(PP)+rail nut	 SHHPS3—*(管外径)	重型内孔光滑型管夹 Heavy Duty Smooth inside, without tension clearance pipe Clamp SHHPS3-106-118 218-230 330-342 442-470 外六角螺栓+盖板+PP管夹体+导轨螺母 Hexagon head bolt+cover plate+clamp body(PP)+rail nut
 SHHPG4—*(管外径)	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHPG4-106-118 218-230 330-342 442-470 内六角螺栓+盖板+PP管夹体+导轨螺母 Socket cap screw+cover plate+clamp body(PP)+rail nut	 SHHPS4—*(管外径)	重型内孔光滑型管夹 Heavy Duty Smooth inside, without tension clearance pipe Clamp SHHPS4-106-118 218-230 330-342 442-470 内六角螺栓+盖板+PP管夹体+导轨螺母 Socket cap screw+cover plate+clamp body(PP)+rail nut

例如: 1、图示内孔凹槽型管夹, 管外径为Ø100请填写订货代号为: SHHNG1-110;

2、图示内孔光滑型管夹, 管外径为Ø06请填写订货代号为: SHHNS1-106。

E.G: 1、If you need the clamp with OD Ø100mm, profiled inside with tension clearance, order code is: SHHNG1-110;

2、If you need the clamp with OD Ø100mm, smooth inside without tension clearance, order code is: SHHNS1-106。

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

重型工程聚丙烯管夹 Heavy Duty Polypropylene pipe Clamp

工作温度: -30℃—+90℃ 工作压力: PN≤31.5MPa 适用管外径: Ø6—Ø508

Work temperature: -30℃—+90℃ Work Pressure: PN≤31.5MPa Suitable for pipe OD: Ø6—Ø508

重型H1-H13系列双螺栓固定式 Heavy duty H1-H13 series with two bolts

订货图示: Order figure:

 SHHPG5—*(管外径)	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHPG5-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 长头螺栓+保险板+PP管夹体(可用多层最多5层) Stacking bolt+safety locking plate +clamp body(PP)(five layers at most)	 SHHPS5—*(管外径)	重型内孔光滑型管夹 Heavy Duty Smooth inside, without tension clearance pipe Clamp SHHPS5-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 长头螺栓+保险板+PP管夹体(可用多层最多5层) Stacking bolt+safety locking plate +clamp body(PP)(five layers at most)
 SHHPG6—*(管外径)	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHPG6-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 外六角螺栓+盖板+PP管夹体 Hexagon head bolt+cover plate+clamp body(PP)	 SHHPS6—*(管外径)	重型内孔光滑型管夹 Heavy Duty Smooth inside, without tension clearance pipe Clamp SHHPS6-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 外六角螺栓+盖板+PP管夹体 Hexagon head bolt+cover plate+clamp body(PP)
 SHHPG7—*(管外径)	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHPG7-106-118 218-230 330-342 442-470 内六角螺栓+PP管夹体 Socket cap screw+clamp body(PP)	 SHHPS7—*(管外径)	重型内孔光滑型管夹 Heavy Duty Smooth inside, without tension clearance pipe Clamp SHHPS7-106-118 218-230 330-342 442-470 内六角螺栓+PP管夹体 Socket cap screw+clamp body(PP)
 SHHPG8—*(管外径)	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHPG8-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 外六角螺栓+盖板+PP管夹体+长焊接底板 Hexagon head bolt+cover plate+clamp body(PP)+long weld plate	 SHHPS8—*(管外径)	重型内孔光滑型管夹 Heavy Duty Smooth inside, without tension clearance pipe Clamp SHHPS8-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 外六角螺栓+盖板+PP管夹体+长焊接底板 Hexagon head bolt+cover plate+clamp body(PP)+long weld plate

例如: 1、图示内孔凹槽型管夹, 管外径为Ø100请填写订货代号为: SHHNG6-110;

2、图示内孔光滑型管夹, 管外径为Ø100请填写订货代号为: SHHNS6-110。

E.G: 1、If you need the clamp with OD Ø100mm, profiled inside with tension clearance, order code is: SHHNG6-110;

2、If you need the clamp with OD Ø100mm, smooth inside without tension clearance, order code is: SHHNS6-110。

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

重型工程聚丙烯管夹 Heavy Duty Polypropylene pipe Clamp

工作温度: -30℃—+90℃ 工作压力: PN≤31.5MPa 适用管外径: Ø6—Ø508

Work temperature: -30℃—+90℃ Work Pressure: PN≤31.5MPa Suitable for pipe OD: Ø6—Ø508

重型H1-H13系列双螺栓固定式 Heavy duty H1-H13 series with two bolts

订货图示: Order figure:

 SHHPG9—*(管外径)	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHPG9-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 内六角螺栓+盖板(或不加盖板)+PP管夹体+长焊接底板 Socket cap screw+(cover plate)+clamp body(PP)+long weld plate	 SHHPS9—*(管外径)	重型内孔光滑型管夹 Heavy Duty Smooth inside, without tension clearance pipe Clamp SHHPS9-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 内六角螺栓+盖板(或不加盖板)+PP管夹体+长焊接底板 Socket cap screw+(cover plate)+clamp body(PP)+long weld plate
 SHHPG10—*(管外径)	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHPG10-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 外(内)六角螺栓+双联盖板+PP管夹体+双联焊接底板 Outer(inner)hexagon head bolt+twin cover plate+twin clamp body(PP)+twin weld plate	 SHHPS10—*(管外径)	重型内孔光滑型管夹 Heavy Duty Smooth inside, without tension clearance pipe Clamp SHHPS10-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 外(内)六角螺栓+双联盖板+PP管夹体+双联焊接底板 Outer(inner)hexagon head bolt+twin cover plate+twin clamp body(PP)+twin weld plate
 SHHPG11—*(管外径)	重型防震型管夹 SHHPG11-106-118 218-230 330-342 442-470 570-588.9 外六角螺栓+盖板+PP管夹体+防震圈+焊接底板 Hexagon head bolt+cover plate+clamp body(PP)+anti-vibration plate+plate	 SHHPG12—*(管外径)	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHPG12-106-118 218-228 330-342 438-470 570-589 690-6114 7133-7168 8170-8219 9240-9340 0-103406 外六角螺栓+盖板+PP管夹体+焊接底板 Hexagon head bolt+cover plate+clamp body(PP)+weld plate 日本标准 Japanese standard
 SHHPG13—*(管外径)	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHPS13-119/119-226.9/226.9 332/332-442/442 外(内)六角螺栓+盖板+PP管夹体+焊接底板 Outer(inner)hexagon head bolt+cover plate+clamp body(PP)+weld plate		

例如: 1、图示内孔凹槽型管夹, 管外径为Ø324请填写订货代号为: SHHNG12-9324;

2、图示内孔光滑型管夹, 管外径为Ø324请填写订货代号为: SHHNS12-9324.

E.G: 1、If you need the clamp with OD Ø324mm, profiled inside with tension clearance, order code is: SHHNG12-9324;

2、If you need the clamp with OD Ø324mm, smooth inside without tension clearance, order code is: SHHNS12-9324.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

重型增加尼龙管夹 Heavy Duty Polyamide pipe Clamp

工作温度: -40℃—+120℃ 工作压力: PN≤31.5MPa 适用管外径: Ø6—Ø508

Work temperature: -40℃—+120℃ Work Pressure: PN≤31.5MPa Suitable for pipe OD: Ø6—Ø508

重型H1-H13系列双螺栓固定式 Heavy duty H1-H13 series with two bolts

订货图示: Order figure:

 SHHNG1—*(管外径)	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHNG1-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 外六角螺栓+盖板+PA管夹体+盖板+焊接底板 Hexagon head bolt+cover plate+clamp body(PA)+weld plate	 SHHNS1—*(管外径)	重型内孔光滑型管夹 Heavy Duty Smooth inside, without tension clearance pipe Clamp SHHNS1-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 外六角螺栓+盖板+PA管夹体+盖板+焊接底板 Hexagon head bolt+cover plate+clamp body(PA)+weld plate
 SHHNG2—*(管外径)	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHNG2-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 内六角螺栓+盖板+PA管夹体+盖板+焊接底板 Socket cap screw+cover plate+clamp body(PA)+weld plate	 SHHNS2—*(管外径)	重型内孔光滑型管夹 Heavy Duty Smooth inside, without tension clearance pipe Clamp SHHNS2-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 内六角螺栓+盖板+PA管夹体+盖板+焊接底板 Socket cap screw+cover plate+clamp body(PA)+weld plate
 SHHNG3—*(管外径)	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHNG3-106-118 218-230 330-342 442-470 外六角螺栓+盖板+PA管夹体+导轨螺母 Hexagon head bolt+cover plate+clamp body(PA)+rail nut	 SHHNS3—*(管外径)	重型内孔光滑型管夹 Heavy Duty Smooth inside, without tension clearance pipe Clamp SHHNS3-106-118 218-230 330-342 442-470 外六角螺栓+盖板+PA管夹体+导轨螺母 Hexagon head bolt+cover plate+clamp body(PA)+rail nut
 SHHNG4—*(管外径)	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHNG4-106-118 218-230 330-342 442-470 内六角螺栓+盖板+PA管夹体+导轨螺母 Socket cap screw+cover plate+clamp body(PA)+rail nut	 SHHNS4—*(管外径)	重型内孔光滑型管夹 Heavy Duty Smooth inside, without tension clearance pipe Clamp SHHNS4-106-118 218-230 330-342 442-470 内六角螺栓+盖板+PA管夹体+导轨螺母 Socket cap screw+cover plate+clamp body(PA)+rail nut

例如: 1、图示内孔凹槽型管夹, 管外径为Ø16请填写订货代号为: SHHNG1-116;

2、图示内孔光滑型管夹, 管外径为Ø16请填写订货代号为: SHHNS1-116.

E.G: 1、If you need the clamp with OD Ø16mm, profiled inside with tension clearance, order code is: SHHNG1-116;

2、If you need the clamp with OD Ø16mm, smooth inside without tension clearance, order code is: SHHNS1-116.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

重型增加尼龙管夹

Heavy Duty Polyamide pipe Clamp

工作温度: -40℃—+120℃ 工作压力: PN<31.5MPa 适用管外径: Ø6—Ø508

Work temperature: -40℃—+120℃ Work Pressure: PN<31.5MPa Suitable for pipe OD: Ø6—Ø508

重型H1-H13系列双螺栓固定式 Heavy duty H1-H13 series with two bolts

订货图示: Order figure:



重型内孔凹槽型管夹
Heavy Duty Profiled inside,
with tension clearance pipe Clamp
SHHNG5-106-118 218-230
330-342 442-470
570-588.9 688.9-6133
7133-7168 8168-8219
长头螺栓+保险板+PA管夹体(可用多层
最多5层)
Stacking bolt+safety locking plate
+clamp body(PA)(rive layers at most)



重型内孔光滑型管夹
Heavy Duty Smooth inside,
without tension clearance pipe Clamp
SHHNS5-106-118 218-230
330-342 442-470
570-588.9 688.9-6133
7133-7168 8168-8219
长头螺栓+保险板+PA管夹体(可用多层
最多5层)
Stacking bolt+safety locking plate
+clamp body(PA)(rive layers at most)



重型内孔凹槽型管夹
Heavy Duty Profiled inside,
with tension clearance pipe Clamp
SHHNG6-106-118 218-230
330-342 442-470
570-588.9 688.9-6133
7133-7168 8168-8219
9219-9324 10356-10406
11419-11508
外六角螺栓+盖板+PA管夹体
Hexagon head bolt+cover plate+clamp body(PA)



重型内孔光滑型管夹
Heavy Duty Smooth inside,
without tension clearance pipe Clamp
SHHNS6-106-118 218-230
330-342 442-470
570-588.9 688.9-6133
7133-7168 8168-8219
9219-9324 10356-10406
11419-11508
外六角螺栓+盖板+PA管夹体
Hexagon head bolt+cover plate+clamp body(PA)



重型内孔凹槽型管夹
Heavy Duty Profiled inside,
with tension clearance pipe Clamp
SHHNG7-106-118 218-230
330-342 442-470
内六角螺栓+PA管夹体
Socket cap screw+clamp body(PA)



重型内孔光滑型管夹
Heavy Duty Smooth inside,
without tension clearance pipe Clamp
SHHNS7-106-118 218-230
330-342 442-470
内六角螺栓+PA管夹体
Socket cap screw+clamp body(PA)



重型内孔凹槽型管夹
Heavy Duty Profiled inside,
with tension clearance pipe Clamp
SHHNG8-106-118 218-230
330-342 442-470
570-588.9 688.9-6133
7133-7168 8168-8219
9219-9324 10356-10406
11419-11508
外六角螺栓+盖板+PA管夹体+长焊接底板
Hexagon head bolt+cover plate+clamp body(PA)
+long weld plate



重型内孔光滑型管夹
Heavy Duty Smooth inside,
without tension clearance pipe Clamp
SHHNS8-106-118 218-230
330-342 442-470
570-588.9 688.9-6133
7133-7168 8168-8219
9219-9324 10356-10406
11419-11508
外六角螺栓+盖板+PA管夹体+长焊接底板
Hexagon head bolt+cover plate+clamp body(PA)
+long weld plate

例如: 1、图示内孔凹槽型管夹, 管外径为Ø219请填写订货代号为: SHHNG8-8219;
2、图示内孔光滑型管夹, 管外径为Ø219请填写订货代号为: SHHNS8-8219;

E.G: 1、If you need the clamp with OD Ø219mm, profiled inside with tension clearance, order code is: SHHNG8-8219;
2、If you need the clamp with OD Ø219mm, smooth inside without tension clearance, order code is: SHHNS8-8219.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

重型增加尼龙管夹

Heavy Duty Polyamide pipe Clamp

工作温度: -40℃—+120℃ 工作压力: PN<31.5MPa 适用管外径: Ø6—Ø508

Work temperature: -40℃—+120℃ Work Pressure: PN<31.5MPa Suitable for pipe OD: Ø6—Ø508

重型H1-H13系列双螺栓固定式 Heavy duty H1-H13 series with two bolts

订货图示: Order figure:



重型内孔凹槽型管夹
Heavy Duty Profiled inside,
with tension clearance pipe Clamp
SHHNG9-106-118 218-230
330-342 442-470
570-588.9 688.9-6133
7133-7168 8168-8219
9219-9324 10356-10406
11419-11508
内六角螺栓+盖板(或不加盖板)+
PA管夹体+长焊接底板
Socket cap screw+cover plate+clamp body(PA)
+long weld plate



重型内孔光滑型管夹
Heavy Duty Smooth inside,
without tension clearance pipe Clamp
SHHNS9-106-118 218-230
330-342 442-470
570-588.9 688.9-6133
7133-7168 8168-8219
9219-9324 10356-10406
11419-11508
内六角螺栓+盖板(或不加盖板)+
PA管夹体+长焊接底板
Socket cap screw+cover plate+clamp body(PA)
+long weld plate



重型内孔凹槽型管夹
Heavy Duty Profiled inside,
with tension clearance pipe Clamp
SHHPN10-106-118 218-230
330-342 442-470
570-588.9 688.9-6133
7133-7168 8168-8219
9219-9324 10356-10406
11419-11508
外(内)六角螺栓+双联盖板+PA管夹体
+双联焊接底板
Outer(inner) hexagon head bolt+twin cover
plate+twin clamp body(PA)+twin weld plate



重型内孔光滑型管夹
Heavy Duty Smooth inside,
without tension clearance pipe Clamp
SHHPS10-106-118 218-230
330-342 442-470
570-588.9 688.9-6133
7133-7168 8168-8219
9219-9324 10356-10406
11419-11508
外(内)六角螺栓+双联盖板+PA管夹体
+双联焊接底板
Outer(inner) hexagon head bolt+twin cover
plate+twin clamp body(PA)+twin weld plate



重型防震型管夹
Heavy Duty Profiled inside,
with tension clearance pipe Clamp
SHHNG11-106-118 218-230
330-342 442-470
570-588.9
外六角螺栓+盖板+PA管夹体
+防震圈+焊接底板
Hexagon head bolt+cover plate
+clamp body(PA)+anti-vibration plate+plate



重型内孔凹槽型管夹
Heavy Duty Profiled inside,
with tension clearance pipe Clamp
SHHNG12-106-118 218-228
330-342 438-470
570-589 690-6114
7133-7168 8170-8219
9240-9340 0-103406
外六角螺栓+盖板+PA管夹体+焊接底板
Hexagon head bolt+cover plate
+clamp body(PA)+weld plate
Japanese standard



重型内孔凹槽型管夹
Heavy Duty Profiled inside,
with tension clearance pipe Clamp
SHHNS13-119/119-226.9/226.9
332/332-442/442
外(内)六角螺栓+盖板+管夹体
+焊接底板
Outer(inner) hexagon head bolt+ cover
plate+clamp body + weld plate



例如: 1、图示内孔凹槽型管夹, 管外径为Ø168请填写订货代号为: SHHNG10-7168;
2、图示内孔光滑型管夹, 管外径为Ø168请填写订货代号为: SHHNS10-7168;

E.G: 1、If you need the clamp with OD Ø168mm, profiled inside with tension clearance, order code is: SHHNG10-7168;
2、If you need the clamp with OD Ø168mm, smooth inside without tension clearance, order code is: SHHNS10-7168.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

重型铝合金管夹

Heavy Duty Aluminium pipe Clamp

工作温度: -50℃—+300℃ 工作压力: PN≤31.5MPa 适用管外径: Ø6—Ø508

Work temperature: -50℃—+300℃ Work Pressure: PN≤31.5MPa Suitable for pipe OD: Ø6—Ø508

重型H1-H13系列双螺栓固定式 Heavy duty H1-H13 series with two bolts

订货图示: Order figure:

	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHLG1-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 外六角螺栓+盖板+AL管夹体+焊接底板 Hexagon head bolt+cover plate+clamp body(AL)+weld plate SHHLG1—*(管外径)		重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHLG2-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 内六角螺栓+盖板+AL管夹体+盖板+焊接底板 Socket cap screw+cover plate+clamp body(AL)+weld plate SHHLG2—*(管外径)
	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHLG3-106-118 218-230 330-342 442-470 外六角螺栓+盖板+AL管夹体+导轨螺母 Hexagon head bolt+cover plate+clamp body(AL)+rail nut SHHLG3—*(管外径)		重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHLG4-106-118 218-230 330-342 442-470 内六角螺栓+盖板+AL管夹体+导轨螺母 Socket cap screw+cover plate+clamp body(AL)+rail nut SHHLG4—*(管外径)
	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHLG5-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 长头螺栓+保险板+AL管夹体(可用多层最多5层) Stacking bolt+safety locking plate+clamp body(AL)(five layers at most) SHHLG5—*(管外径)		重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHLG6-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 外六角螺栓+盖板+AL管夹体 Hexagon head bolt+cover plate+clamp body(AL) SHHLG6—*(管外径)
	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHLG7-106-118 218-230 330-342 442-470 内六角螺栓+AL管夹体 Socket cap screw+clamp body(AL) SHHLG7—*(管外径)		重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHLG8-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 外六角螺栓+盖板+AL管夹体+长焊接底板 Hexagon head bolt+cover plate+clamp body(AL)+long weld plate SHHLG8—*(管外径)

例如: 图示内孔凹槽型管夹, 管外径为Ø10请填写订货代号为: SHHLG1-110。

E.G: 1. If you need the clamp with OD Ø10mm, profiled inside with tension clearance, order code is: SHHLG1-110.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

重型铝合金管夹

Heavy Duty Aluminium pipe Clamp


工作温度: -50℃—+300℃ 工作压力: PN≤31.5MPa 适用管外径: Ø6—Ø508

Work temperature: -50℃—+300℃ Work Pressure: PN≤31.5MPa Suitable for pipe OD: Ø6—Ø508

重型H1-H13系列双螺栓固定式 Heavy duty H1-H13 series with two bolts

订货图示: Order figure:

	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHLG9-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 内六角螺栓+盖板(或不加盖板)+AL管夹体+焊接底板 Socket cap screw+(cover plate)+clamp body(AL)+weld plate SHHLG9—*(管外径)		重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHLG10-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 外(内)六角螺栓+双联盖板+管夹体+双联焊接底板 Outer(inner) hexagon head bolt+twain cover plate+twain clamp body(AL)+twain weld plate SHHLG10—*(管外径)
	重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHLG12-106-118 218-230 330-342 442-470 570-588.9 688.9-6133 7133-7168 8168-8219 9219-9324 10356-10406 11419-11508 外六角螺栓+盖板+AL管夹体+焊接底板 Hexagon head bolt+cover plate+clamp body(AL)+weld plate SHHLG12—*(管外径)		重型内孔凹槽型管夹 Heavy Duty Profiled inside, with tension clearance pipe Clamp SHHLG13-119/119-226.9/226.9 332/332-442/442 外(内)六角螺栓+盖板+AL管夹体+焊接底板 Outer(inner) hexagon head bolt+cover plate+clamp body(AL)+weld plate SHHLG13—*(管外径)

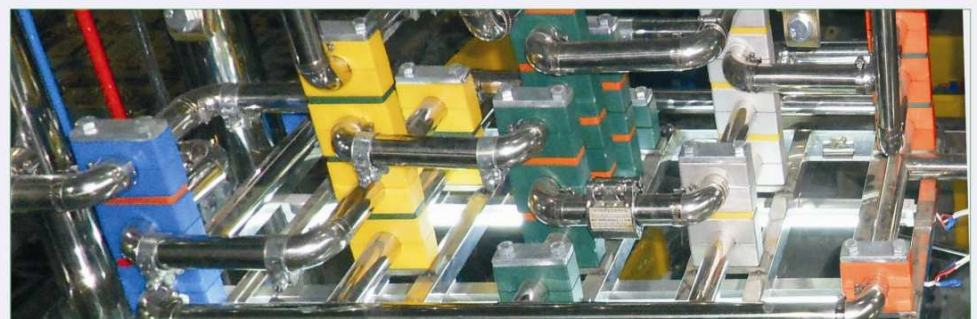

例如: 图示内孔凹槽型管夹, 管外径为Ø9请填写订货代号为: SHHLG9-110。

E.G: 1. If you need the clamp with OD Ø9mm, profiled inside with tension clearance, order code is: SHHLG9-110.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 I
Acc. to German standard: DIN3015 I

SHB*2小型管夹

SHB*2 small pipe clamps

工作温度: -30℃—+90℃ 工作压力: PN≤31.5MPa 适用管外径: Ø06—Ø25
Work temperature: -30℃—+90℃ Work Pressure: PN≤31.5MPa Suitable for pipe OD: Ø6—Ø25
压缩空气管路, 车辆、机械制造, 测量和控制设备机床等使用。
It is used in the following areas: compressed air pipeline, vehicles, machine manufacture, measuring and controlling equipment, machine tool, etc.



系列 Series	订货号 Order code	管外径 D1 Pipe O.D. D1	内径 英寸 Inch bore	外径 英寸 Inch O.D.	L1	L2	宽 width	H	S	D3	D4
1	SHB*2-106	06			31	18	12	10	2	7	7
	SHB*2-106.4	06.4		1/4							
	SHB*2-108	08									
2	SHB*2-209.5	09.5		3/8	39	22	16	15	2	7	7
	SHB*2-210	10	1/8								
	SHB*2-212	12									
3	SHB*2-312.7	12.7		1/2	53	30	20	22	2	7	7
	SHB*2-313.5	13.5	1/4								
	SHB*2-314	14									
	SHB*2-315	15									
	SHB*2-316	16		5/8							
	SHB*2-317.2	17.2	3/8								
	SHB*2-318	18									
4	SHB*2-419	19		3/4	70	38	20	30	2	7	7
	SHB*2-420	20									
	SHB*2-421.3	21.3	1/2								
	SHB*2-422	22									
	SHB*2-425	25		1							

例如: 1、图示小型内孔凹槽型管夹, 管外径为Ø10请填写订货代号为: SHBP2-210;

2、图示小型内孔凹槽型管夹, 管外径为Ø16请填写订货代号为: SHBP2-316;

E.G: 1、If you need small clamp with ODØ10mm, profiled inside with tension clearance, order code is :SHBP2-210

2、If you need small clamp with ODØ16mm, profiled inside with tension clearance, order code is :SHBP2-316

如使用不同的形式或其它要求请在订货时说明

Different forms or requirements upon request

符合德标: DIN3015 I

Acc. to German standard: DIN3015 I

SHB*3小型管夹

SHB*3 small pipe clamps

工作温度: -30℃—+90℃ 工作压力: PN≤31.5MPa 适用管外径: Ø06—Ø25
Work temperature: -30℃—+90℃ Work Pressure: PN≤31.5MPa Suitable for pipe OD: Ø6—Ø25
压缩空气管路, 车辆、机械制造、电缆、螺管、测量和控制设备机床等使用。
It is used in the following areas: compressed air pipeline, vehicles, machine manufacture, measuring and controlling equipment, machine tool, etc.



系列 Series	订货号 Order code	管外径 D1 Pipe O.D. D1	内径 英寸 Inch bore	外径 英寸 Inch O.D.	L1	L2	L3	B	H	D2
1	SHB*3-106	06			22	9	7	14.5	13.5	7
	SHB*3-106.4	06.4		1/4						
	SHB*3-108	08								
2	SHB*3-208	08			27	11	7	14.5	18.5	7
	SHB*3-209.5	09.5		3/8						
	SHB*3-210	10	1/8							
	SHB*3-212	12								
3	SHB*3-212.7	12.7		1/2	33	15	7	14.5	23.5	7
	SHB*3-310	10	1/8							
	SHB*3-312	12								
	SHB*3-312.7	12.7		1/2						
	SHB*3-313.5	13.5	1/4							
	SHB*3-314	14								
	SHB*3-315	15								
4	SHB*3-316	16		5/8	40	19	7	14.5	30.5	7
	SHB*3-414	14								
	SHB*3-415	15								
	SHB*3-416	16		5/8						
	SHB*3-417.2	17.2								
	SHB*3-418	18	3/8							
	SHB*3-419	19		3/4						
	SHB*3-420	20								
	SHB*3-421.3	21.3			40	19	7	14.5	30.5	7
	SHB*3-422	22	1/2	1						

例如: 1、图示小型内孔凹槽型管夹, 管外径为Ø10请填写订货代号为: SHBP3-210;

2、图示小型内孔凹槽型管夹, 管外径为Ø16请填写订货代号为: SHBP3-316;

E.G: 1、If you need small clamp with ODØ10mm, profiled inside with tension clearance, order code is :SHBP3-210

2、If you need small clamp with ODØ16mm, profiled inside with tension clearance, order code is :SHBP3-316

如使用不同的形式或其它要求请在订货时说明

Different forms or requirements upon request

符合德标: DIN3015 I

Acc. to German standard: DIN3015 I

SHB*4小型管夹

SHB*4 small pipe clamps

工作温度: -30℃—+90℃ 工作压力: PN≤31.5MPa 适用管外径: Ø6—Ø25
Work temperature: -30℃—+90℃ Work Pressure: PN≤31.5MPa Suitable for pipe OD: Ø6—Ø25
压缩空气管路, 车辆、机械制造、电缆、螺管、测量和控制设备机床等使用。
It is used in the following areas: compressed air pipeline, vehicles, machine manufacture, measuring and controlling equipment, machine tool, etc.



系列 Series	订货号 Order code	管外径 D1 Pipe O.D. D1	内径 英寸 Inch bore	外径 英寸 Inch O.D.	L1	L2	B	H
1	SHB*4-106/106	06			32	18	14.5	13.5
	SHB*4-106.4/106.4	06.4		1/4				
	SHB*4-108/108	08						
2	SHB*4-208/208	08			41	22	14.5	18.5
	SHB*4-209.5/209.5	09.5		3/8				
	SHB*4-210/210	10	1/8					
3	SHB*4-212/212	12			54	30	14.5	23.5
	SHB*4-212.7/212.7	12.7		1/2				
	SHB*4-310/310	10	1/8					
4	SHB*4-312/312	12			7	38	14.5	30.5
	SHB*4-312.7/312.7	12.7		1/2				
	SHB*4-313.5/313.5	13.5	1/4					
5	SHB*4-314/314	14			7	38	14.5	30.5
	SHB*4-315/315	15						
	SHB*4-316/316	16		5/8				
6	SHB*4-414/414	14			7	38	14.5	30.5
	SHB*4-415/415	15						
	SHB*4-416/416	16		5/8				
7	SHB*4-417.2/417.2	17.2	3/8		7	38	14.5	30.5
	SHB*4-418/418	18						
	SHB*4-419/419	19		3/4				
8	SHB*4-420/420	20			7	38	14.5	30.5
	SHB*4-421.3/421.3	21.3	1/2					
	SHB*4-422/422	22		1				

例如: 1、图示小型内孔凹槽型管夹, 管外径为Ø10请填写订货代号为: SHBP4-210;

2、图示小型内孔凹槽型管夹, 管外径为Ø16请填写订货代号为: SHBN4-316;

E.G: 1、If you need small clamp with ODØ10mm, profiled inside with tension clearance, order code is :SHBP4-210

2、If you need small clamp with ODØ16mm, profiled inside with tension clearance, order code is :SHBN4-316

如使用不同的形式或其它要求请在订货时说明

Different forms or requirements upon request

符合德标: DIN3015 I

Acc. to German standard: DIN3015 I

SHGJ×1*—**单管夹

SHGJ×1*—** single pipe clamps


简介: 本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道单管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas: the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SH	GJ	1	*	**
舒恒管夹 shuheng	舒恒规格 Shuheng group	型号结构 type	材质 material	管径 Pipe O.D.

- 组成: 管夹体、底板和螺栓组成
- Components: clamp body, plate and bolt
- 管夹体材质 Clamp body material:
 - SHGJ×1C—**表示均为碳钢不带底板单管夹
SHGJ×1C—** carbon steel single pipe clamp without plate
 - SHGJ×1C—**A (B) 表示均为碳钢带底板单管夹
SHGJ×1C—**A(B) carbon steel single pipe clamp with plate
 - SHGJ×1B—**表示均为不锈钢不带底板单管夹
SHGJ×1B—** stainless steel single pipe clamp without plate
 - SHGJ×1B—**A (B) 表示均为不锈钢带底板单管夹
SHGJ×1B—**A(B) stainless steel single pipe clamp with plate

执行国家标准为Acc. to national standard: JB/ZQ4492-2006
执行德国标准为Acc. to German standard: JB/ZQ4499-2006

- 订货示例: 管外径为Ø16订货示例
- Order model: Take pipe outside diameter 16 as an example
 - 碳钢单管夹SHGJ×1C-16 (不带底板)
carbon steel single pipe clamp SHGJ×1C-16 (without plate)
 - 碳钢单管夹SHGJ×1C-16A (B) (带底板)
carbon steel single pipe clamp SHGJ×1C-16A(B) (with plate)
 - 不锈钢单管夹SHGJ×1B-16 (不带底板)
stainless steel single pipe clamp SHGJ×1B-16 (without plate)
 - 不锈钢单管夹SHGJ×1B-16A (B) (带底板)
stainless steel single pipe clamp SHGJ×1B-16A(B) (with plate)

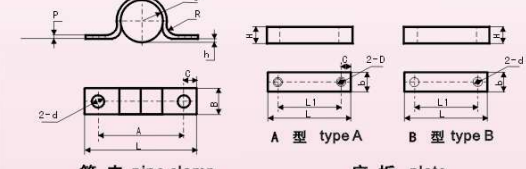

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。

1、The clamp surface is zinc plated. Different treatments upon request

2、本公司可根据客户要求 (设计) 生产或使用其它材料和管径。

2、Other materials and pipe o.d. upon request..

订货代号 Order code	Ø	D	P	h	C	A	L	B	R	d	底板 plate	L	b	H	L1	C	D	d
6	6	2	2	7.5	25	40	15	2	7	7	底板 plate	40	15	8	25	7.5	M6	7
8	8	2	2	7.5	28	43	15	2	7	7	底板 plate	43	15	8	28	7.5	M6	7
10	10	2	2	7.5	30	45	15	2	7	7	底板 plate	45	15	8	30	7.5	M6	7
12	12	2	2	7.5	32	47	15	2	7	7	底板 plate	47	15	8	32	7.5	M6	7
14	14	2	2	7.5	35	50	15	2	7	7	底板 plate	50	15	8	35	7.5	M6	7
16	16	2	2	7.5	38	53	15	2	7	7	底板 plate	53	15	8	38	7.5	M6	7
18	18	2	2	7.5	40	55	15	2	7	7	底板 plate	55	15	8	40	7.5	M6	7
22	22	2	2	7.5	45	60	15	2	7	7	底板 plate	60	15	8	45	7.5	M6	7
24	24	2	2	7.5	48	63	15	2	7	7	底板 plate	63	15	8	48	7.5	M6	7
28	28	2	2	7.5	50	65	15	2	7	7	底板 plate	65	15	8	50	7.5	M6	7
34	34	3	5	10	65	85	20	3	9	9	底板 plate	85	20	14	65	10	M8	9
42	42	3	5	10	70	90	20	3	9	9	底板 plate	90	20	14	70	10	M8	9
48	48	3	5	10	80	100	20	3	9	9	底板 plate	100	20	14	80	10	M8	9
60	60	3	5	10	90	110	20	3	9	9	底板 plate	110	20	14	90	10	M8	9
76	76	4	5	12.5	110	135	25	3	9	9	底板 plate	135	25	14	110	12.5	M8	9
89	89	4	5	12.5	125	150	25	3	9	9	底板 plate	150	25	14	125	12.5	M8	9

如使用不同的形式或其它要求请在订货时说明

Different forms or requirements upon request

SHGJ×2*-**双管夹

SHGJ×2*-**two pipe clamps

简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道双管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas: the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SH	GJ	2	*	**
舒恒管夹 shuheng	舒恒规格 shuheng group	型号结构 type	材 质 material	管 径 Pipe O.D.

• 组成：管夹体、底板和螺栓组成

• Components: clamp body, plate and bolt

• 管夹体材质Clamp body material:

SHGJ×2C-**表示均为碳钢不带底板双管夹

SHGJ×2C-**(B)表示均为碳钢带底板双管夹

SHGJ×2C-**(B)碳素钢 two pipe clamp with plate

SHGJ×2B-**表示均为不锈钢不带底板双管夹

SHGJ×2B-**(B)表示均为不锈钢带底板双管夹

SHGJ×2B-**(B) stainless steel two pipe clamp with plate

SHGJ×2B-**(B) stainless steel two pipe clamp with plate

执行国家标准为Acc. to national standard: JB/ZQ4494-2006
执行德国标准为Acc. to German standard: JB/ZQ4590-2006

• 订货示例：管外径为16订货示例

• Order model: Take pipe outside diameter 16 as an example

碳钢双管夹SHGJ×2C-16 (不带底板)

carbon steel two pipe clamp SHGJ×2C-16 (without plate)

碳钢双管夹SHGJ×1C-16A (带底板)


carbon steel two pipe clamp SHGJ×2C-16A(B) (with plate)

不锈钢双管夹SHGJ×1B-16 (不带底板)

stainless steel two pipe clamp SHGJ×2B-16 (without plate)

不锈钢双管夹SHGJ×2B-16A (带底板)

stainless steel two pipe clamp SHGJ×2B-16A(B) (with plate)

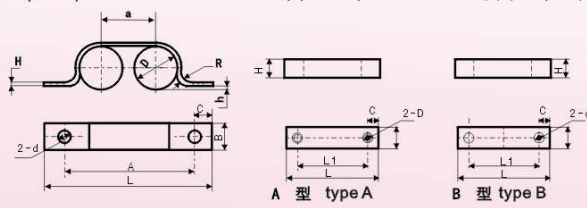

管 夹 pipe clamp

底 板 plate

说明Note: 1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方法。 2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
1、The clamp surface is zinc plated. Different treatments upon request 2、Other materials and pipe o.d. upon request.

订货代号 Order code	D	P	h	C	A	L	a	B	R	d	底板 plate	L	b	H	L1	C	D	d
6	6	2	2	7.5	35	50	10	15	2	7	底板 plate	50	15	8	35	7.5	M6	7
8	8	2	2	7.5	40	55	12	15	2	7	底板 plate	55	15	8	40	7.5	M6	7
10	10	2	2	7.5	44	59	14	15	2	7	底板 plate	59	15	8	44	7.5	M6	7
12	12	2	2	7.5	48	63	16	15	2	7	底板 plate	63	15	8	48	7.5	M6	7
14	14	2	2	7.5	54	69	18	15	2	7	底板 plate	69	15	8	54	7.5	M6	7
16	16	2	2	7.5	58	73	20	15	2	7	底板 plate	73	15	8	58	7.5	M6	7
18	18	2	2	7.5	62	77	22	15	2	7	底板 plate	77	15	8	62	7.5	M6	7
22	22	2	2	7.5	72	87	26	15	2	7	底板 plate	87	15	8	72	7.5	M6	7
24	24	2	2	7.5	76	91	28	15	2	7	底板 plate	91	15	8	76	7.5	M6	7
28	28	2	2	7.5	82	97	32	15	2	7	底板 plate	97	15	8	82	7.5	M6	7
34	34	3	5	10	104	124	38	20	3	9	底板 plate	124	20	14	104	10	M8	9
42	42	3	5	10	116	136	46	20	3	9	底板 plate	136	20	14	116	10	M8	9
48	48	3	5	10	134	156	54	20	3	9	底板 plate	156	20	14	134	10	M8	9
60	60	3	5	10	155	175	65	20	3	9	底板 plate	175	20	14	155	10	M8	9

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHGJ×3*-**三管夹

SHGJ×3*-** three pipe clamps

简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道三管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas: the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SH	GJ	3	*	**
舒恒管夹 shuheng	舒恒规格 shuheng group	型号结构 type	材 质 material	管 径 Pipe O.D.

• 组成：管夹体、底板和螺栓组成

• Components: clamp body, plate and bolt

• 管夹体材质Clamp body material:

SHGJ×3C-**表示均为碳钢不带底板三管夹

SHGJ×3C-**(B)表示均为碳钢带底板三管夹

SHGJ×3C-**(B)碳素钢 three pipe clamp with plate

SHGJ×3B-**表示均为不锈钢不带底板三管夹

SHGJ×3B-**(B)表示均为不锈钢带底板三管夹

SHGJ×3B-**(B) stainless steel three pipe clamp with plate

执行国家标准为Acc. to national standard: JB/ZQ4495-2006
执行德国标准为Acc. to German standard: JB/ZQ4501-2006

• 订货示例：管外径为16订货示例

• Order model: Take pipe outside diameter 16 as an example

碳钢三管夹SHGJ×3C-16 (不带底板)

carbon steel three pipe clamp SHGJ×3C-16 (without plate)

碳钢三管夹SHGJ×3C-16A (带底板)


carbon steel three pipe clamp SHGJ×3C-16A(B) (with plate)

不锈钢三管夹SHGJ×3B-16 (不带底板)

stainless steel three pipe clamp SHGJ×3B-16 (without plate)

不锈钢三管夹SHGJ×3B-16A (带底板)

stainless steel three pipe clamp SHGJ×3B-16A(B) (with plate)

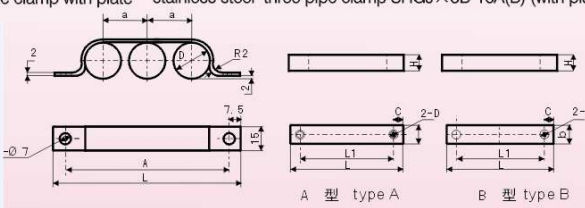

管 夹 pipe clamp

底 板 plate

说明Note: 1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方法。 2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
1、The clamp surface is zinc plated. Different treatments upon request 2、Other materials and pipe o.d. upon request.

订货代号 Order code	D	A	L	a	底板 plate	L	b	H	L1	C	D	d
6	6	45	60	10	底板 plate	60	15	8	45	7.5	M6	7
8	8	52	67	12	底板 plate	67	15	8	52	7.5	M6	7
10	10	58	73	14	底板 plate	73	15	8	58	7.5	M6	7
12	12	64	79	16	底板 plate	79	15	8	64	7.5	M6	7
14	14	72	87	18	底板 plate	87	15	8	72	7.5	M6	7
16	16	78	93	20	底板 plate	93	15	8	78	7.5	M6	7
18	18	84	99	22	底板 plate	99	15	8	84	7.5	M6	7
22	22	98	113	26	底板 plate	113	15	8	98	7.5	M6	7
24	24	104	119	28	底板 plate	119	15	8	104	7.5	M6	7
28	28	114	129	32	底板 plate	129	15	8	114	7.5	M6	7

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHGJ×4*-**四管夹

SHGJ×4*-** four pipe clamps


简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道四管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas: the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SH	6J	4	*	**
舒恒管夹 shuheng	舒恒规格 shuheng group	型号结构 type	材 质 material	管径 Pipe O.D.

- 组成：管夹体、底板和螺栓组成
- Components: clamp body, plate and bolt
- 管夹体材质Clamp body material:
SHGJ×4C-**-**表示均为碳钢不带底板四管夹
SHGJ×4C-**-**A(B) 表示均为碳钢带底板四管夹
SHGJ×4B-**-**表示均为不锈钢不带底板四管夹
SHGJ×4B-**-**A(B) 表示均为不锈钢带底板四管夹
SHGJ×4B-**-**A(B) stainless steel four pipe clamp with plate

执行国家标准为Acc. to national standard: JB/ZQ4496-2006
执行德国标准为Acc. to German standard: JB/ZQ4502-2006

- 订货示例：管外径为16订货示例
- Order model: Take pipe outside diameter 16 as an example
碳钢三管夹SHGJ×4C-16 (不带底板)
carbon steel four pipe clamp SHGJ×4C-16 (without plate)
碳钢三管夹SHGJ×4C-16A(B) (带底板)
carbon steel four pipe clamp SHGJ×4C-16A(B) (with plate)
不锈钢三管夹SHGJ×4B-16 (不带底板)
stainless steel four pipe clamp SHGJ×4B-16 (without plate)
不锈钢三管夹SHGJ×4B-16A(B) (带底板)
stainless steel four pipe clamp SHGJ×4B-16A(B) (with plate)

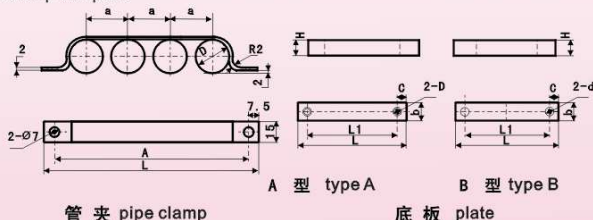

管夹 pipe clamp

底板 plate

说明Note: 1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方式。 2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
1. The clamp surface is zinc plated. Different treatments upon request 2. Other materials and pipe o.d. upon request..

订货代号 Order code	D	A	L	a	底板 plate	L	b	H	L1	C	D	d
6	6	45	60	10	底板 plate	70	15	8	55	7.5	M6	7
8	8	52	67	12	底板 plate	79	15	8	64	7.5	M6	7
10	10	58	73	14	底板 plate	87	15	8	72	7.5	M6	7
12	12	64	79	16	底板 plate	95	15	8	80	7.5	M6	7
14	14	72	87	18	底板 plate	105	15	8	90	7.5	M6	7
16	16	78	93	20	底板 plate	113	15	8	98	7.5	M6	7
18	18	84	99	22	底板 plate	121	15	8	106	7.5	M6	7
22	22	98	113	26	底板 plate	139	15	8	124	7.5	M6	7
24	24	104	119	28	底板 plate	147	15	8	134	7.5	M6	7
28	28	114	129	32	底板 plate	161	15	8	146	7.5	M6	7

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHGJ×**-**多管径管夹

SHGJ×**-** multi pipe clamps

简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道多管径管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas: the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SHGJ×5*-**五管夹 SHGJ×5*-** five-pipe clamps

注：五管夹用于10-12管径使用
Note: for pipe o.d. 10-12



- 订货示例Order model:
管外径为10订货示例
Take pipe outside diameter 10 as an example
碳钢五管夹SHGJ×5C-10 (不带底板)
carbon steel five-pipe clamp SHGJ×5C-10 (without plate)
碳钢五管夹SHGJ×5C-10A(B) (带底板)
carbon steel five-pipe clamp SHGJ×5C-10A(B) (with plate)
不锈钢五管夹SHGJ×5B-10 (不带底板)
stainless steel five-pipe clamp SHGJ×5B-10 (without plate)
不锈钢五管夹SHGJ×5B-10A(B) (带底板)
stainless steel five-pipe clamp SHGJ×5B-10A(B) (with plate)

SHGJ×6*-**六管夹 SHGJ×6*-** six-pipe clamps

注：六管夹用于10-12管径使用
Note: for pipe o.d. 10-12



- 订货示例Order model:
管外径为10订货示例
Take pipe outside diameter 10 as an example
碳钢六管夹SHGJ×6C-10 (不带底板)
carbon steel six-pipe clamp SHGJ×6C-10 (without plate)
碳钢六管夹SHGJ×6C-10A(B) (带底板)
carbon steel six-pipe clamp SHGJ×6C-10A(B) (with plate)
不锈钢六管夹SHGJ×6B-10 (不带底板)
stainless steel six-pipe clamp SHGJ×6B-10 (without plate)
不锈钢六管夹SHGJ×6B-10A(B) (带底板)
stainless steel six-pipe clamp SHGJ×6B-10A(B) (with plate)

SHGJ×7*-**七管夹 SHGJ×7*-** seven-pipe clamps

注：七管夹用于10-12管径使用
Note: for pipe o.d. 10-12



- 订货示例Order model:
管外径为10订货示例
Take pipe outside diameter 10 as an example
碳钢七管夹SHGJ×7C-10 (不带底板)
carbon steel seven-pipe clamp SHGJ×7C-10 (without plate)
碳钢七管夹SHGJ×7C-10A(B) (带底板)
carbon steel seven-pipe clamp SHGJ×7C-10A(B) (with plate)
不锈钢七管夹SHGJ×7B-10 (不带底板)
stainless steel seven-pipe clamp SHGJ×7B-10 (without plate)
不锈钢七管夹SHGJ×7B-10A(B) (带底板)
stainless steel seven-pipe clamp SHGJ×7B-10A(B) (with plate)

SHGJ×8*-**八管夹 SHGJ×8*-** eight-pipe clamps

注：八管夹用于10-12管径使用
Note: for pipe o.d. 10-12



- 订货示例Order model:
管外径为10订货示例
Take pipe outside diameter 10 as an example
碳钢八管夹SHGJ×8C-10 (不带底板)
carbon steel eight-pipe clamp SHGJ×8C-10 (without plate)
碳钢八管夹SHGJ×8C-10A(B) (带底板)
carbon steel eight-pipe clamp SHGJ×8C-10A(B) (with plate)
不锈钢八管夹SHGJ×8B-10 (不带底板)
stainless steel eight-pipe clamp SHGJ×8B-10 (without plate)
不锈钢八管夹SHGJ×8B-10A(B) (带底板)
stainless steel eight-pipe clamp SHGJ×8B-10A(B) (with plate)

SHGJ×9*-**九管夹 SHGJ×9*-** nine-pipe clamps

注：九管夹用于10-12管径使用
Note: for pipe o.d. 10-12



- 订货示例Order model:
管外径为10订货示例
Take pipe outside diameter 10 as an example
碳钢九管夹SHGJ×9C-10 (不带底板)；碳钢九管夹SHGJ×9C-10A(B) (带底板)。
carbon steel nine-pipe clamp SHGJ×9C-10 (without plate)；carbon steel nine-pipe clamp SHGJ×9C-10A(B) (with plate)。
不锈钢九管夹SHGJ×9B-10 (不带底板)；不锈钢九管夹SHGJ×9B-10A(B) (带底板)。
stainless steel nine-pipe clamp SHGJ×9B-10 (without plate)；stainless steel nine-pipe clamp SHGJ×9B-10A(B) (with plate)。

说明Note: 1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方式。 2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
1. The clamp surface is zinc plated. Different treatments upon request 2. Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request


SHGJ×**-**多管径管夹

SHGJ×**-** multi pipe clamps

简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas: the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SHGJ×10×**-**十管夹 SHGJ×10×**-** ten-pipe clamps

注：十管夹用于Φ6-12管径使用
Note: for pipe o.d. 6~12



管外径为Φ6订货示例。

Take pipe outside diameter 6 as an example

碳钢十管夹SHGJ×100-6（不带底板）；碳钢十管夹SHGJ×100-6A(B)（带底板）。


carbon steel ten-pipe clamp SHGJ×10C-6 (without plate). carbon steel ten-pipe clamp SHGJ×10C-6A(B) (with plate).

不锈钢十管夹SHGJ×10B-6（不带底板）；不锈钢十管夹SHGJ×10B-6A(B)（带底板）。

stainless steel ten-pipe clamp SHGJ×10B-6 (without plate). stainless steel ten-pipe clamp SHGJ×10B-6A(B) (with plate).

SHGJ×11×**-**十一管夹 SHGJ×11×**-** eleven-pipe clamps

注：十一管夹用于Φ6-12管径使用
Note: for pipe o.d. 6~12



管外径为Φ6订货示例。

Take pipe outside diameter 6 as an example

碳钢十一管夹SHGJ×110-6（不带底板）；碳钢十一管夹SHGJ×110-6A(B)（带底板）。


carbon steel eleven-pipe clamp SHGJ×11C-6 (without plate). carbon steel eleven-pipe clamp SHGJ×11C-6A(B) (with plate).

不锈钢十一管夹SHGJ×11B-6（不带底板）；不锈钢十一管夹SHGJ×11B-6A(B)（带底板）。

stainless steel eleven-pipe clamp SHGJ×11B-6 (without plate). stainless steel eleven-pipe clamp SHGJ×11B-6A(B) (with plate).

SHGJ×12×**-**十二管夹 SHGJ×12×**-** twelve-pipe clamps

注：十二管夹用于Φ6-12管径使用
Note: for pipe o.d. 6~12



订货示例Order model:

管外径为Φ6订货示例。

Take pipe outside diameter 6 as an example

碳钢十二管夹SHGJ×120-6（不带底板）；碳钢十二管夹SHGJ×120-6A(B)（带底板）。

carbon steel eleven-pipe clamp SHGJ×11C-6 (without plate). carbon steel eleven-pipe clamp SHGJ×11C-6A(B) (with plate).

不锈钢十二管夹SHGJ×12B-6（不带底板）；不锈钢十二管夹SHGJ×12B-6A(B)（带底板）。

stainless steel eleven-pipe clamp SHGJ×11B-6 (without plate). stainless steel eleven-pipe clamp SHGJ×11B-6A(B) (with plate).



说明Note: 1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方案。

1. The clamp surface is zinc plated. Different treatments upon request

2、本公司可根据客户要求（设计）生产或使用其它材料和管径。

2. Other materials and pipe o.d. upon request.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHGJA*-**拉紧式加厚管夹

SHGJA*-** tightening thick pipe clamps

SH	GJ	A	*	**
舒恒管夹 Shuheng	舒恒规格 Shuheng group	型号结构 type	材质 material	管径 Pipe O.D.

GJ为钢制管夹 A为拉紧式加厚管夹

GJ: steel pipe clamp A: tightening thick pipe clamp

• 组成：管夹体

• Components: clamp body




说明Note: 1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方案。

1. The clamp surface is zinc plated. Different treatments upon request

2、本公司可根据客户要求（设计）生产或使用其它材料和管径。

2. Other materials and pipe o.d. upon request.



订货代号 Order code	夹紧范围D1 Tightening range D1	L1	L2	L3	H	D2	B	S
SHGJA*-7	5.5-7	22	14	27.5	5	7	16	2
SHGJA*-9	7-9	27	18	33.5	6		20	
SHGJA*-13	9.5-13	40	25	49.5	9	11	25	3
SHGJA*-15.5	13-15.5	41	26	52	12		25	
SHGJA*-19	15.5-19	43	28	55.5	15	14	30	5
SHGJA*-23	20-23	51	35	67	19		30	
SHGJA*-26	23-26	52	36	70	22	14	40	5
SHGJA*-28.5	26-28.5	53	37	73	24		40	
SHGJA*-31	28.5-31	55	39	75.5	27	18	40	8
SHGJA*-36	33-36	57	41	81	32		40	
SHGJA*-39	36-39	59	43	83.5	34	14	40	5
SHGJA*-43	39-43	68	48	94.5	38		40	
SHGJA*-46	43-46	70	50	98	41	14	40	8
SHGJA*-49	46-49	73	53	105.5	44		40	
SHGJA*-52	49-52	76	56	110	47	14	40	8
SHGJA*-58	53-58	78	58	115	52		40	
SHGJA*-61	58-61	80	60	118.5	57	14	40	8
							40	

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN 3015 1592
Acc. to German standard: DIN 3015 1592

SHGJB*-**拉紧式加厚管夹

SHGJB*-** tightening thick pipe clamps

SH	GJ	B	*	**
舒恒管夹 Shuheng	舒恒规格 Shuheng group	型号结构 type	材质 material	管径 Pipe O.D.

GJ为钢制管夹 B为拉紧式加厚管夹


GJ: steel pipe clamp B: tightening thick pipe clamp

- 组成: 管夹体
- Components: clamp body



说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
1. The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
2. Other materials and pipe o.d. upon request..

- 管夹体材质Material:
SHGJAC-**表示均为碳钢管夹 SHGJBC-** carbon steel pipe clamp
SHGJAB-**表示均为不锈钢管夹 SHGJBB-** stainless steel pipe clamp
订货示例Order model:
碳钢拉紧式管夹SHGJBC-16
carbon steel tightening pipe clamp SHGJBC-16
不锈钢拉紧式管夹SHGJBB-16
stainless steel tightening pipe clamp SHGJBB-16



订货代号 Order code	夹紧范围D1 Tightening range ØD1	L1	L2	H	D2	B	S
SHGJB*-7	5.8-7	44	28	5	7	16	2
SHGJB*-9	7-9	48	32	6	7	20	2
SHGJB*-13	9.5-13	52	36	9			
SHGJB*-15.5	13-15.5	56	40	12			
SHGJB*-19	15.5-19	60	44	15			
SHGJB*-23	20-23	82	56	19			
SHGJB*-26	23-26	84	58	22	11	25	3
SHGJB*-28.5	26-28.5	90	64	24			
SHGJB*-31	28.5-31	90	64	27			
SHGJB*-36	33-36	106	80	32			
SHGJB*-39	36-39	110	84	34			
SHGJB*-43	39-43	120	88	38	14	30	5
SHGJB*-46	43-46	122	90	41			
SHGJB*-49	46-49	122	90	44			
SHGJB*-58	53-58	142	110	52			
SHGJB*-61	58-61	142	110	57			
SHGJB*-71	67-71	152	120	66	14	40	5
SHGJB*-77	73-77	176	136	72			
SHGJB*-81	77-81	184	144	76			
SHGJB*-91	86-91	198	158	85			
SHGJB*-103	99-103	214	174	98			
SHGJB*-115	105-115	220	180	104	18	40	8
SHGJB*-115	110-115	226	186	109			

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN 3015 1593
Acc. to German standard: DIN 3015 1593

SHGJC*-**拉紧式加厚管夹

SHGJC*-** tightening thick pipe clamps

SH	GJ	C	*	**
舒恒管夹 Shuheng	舒恒规格 Shuheng group	型号结构 type	材质 material	管径 Pipe O.D.

GJ为钢制管夹 C为拉紧式加厚管夹


GJ: steel pipe clamp C: tightening thick pipe clamp

- 组成: 管夹体
- Components: clamp body



说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
1. The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
2. Other materials and pipe o.d. upon request..

- 管夹体材质Material:
SHGJAC-**表示均为碳钢管夹 SHGJCC-** carbon steel pipe clamp
SHGJAB-**表示均为不锈钢管夹 SHGJCB-** stainless steel pipe clamp
订货示例Order model:
碳钢拉紧式管夹SHGJCC-16
carbon steel tightening pipe clamp SHGJCC-16
不锈钢拉紧式管夹SHGJCB-16
stainless steel tightening pipe clamp SHGJCB-16



订货代号 Order code	夹紧范围D1 Tightening range ØD1	L1	L2	L3	H	D2	B	S
SHGJC*-7	5.5-7	26	14	31.5	5	7	16	2
SHGJC*-9	7-9	28	16	34.5	6			
SHGJC*-13	9.5-13	30	18	38.5	9			
SHGJC*-15.5	13-15.5	32	20	41.75	12	7	20	2
SHGJC*-19	15.5-19	34	22	45.5	15			
SHGJC*-23	20-23	43	28	57.5	19			
SHGJC*-26	23-26	44	29	60	22	9	25	3
SHGJC*-28.5	26-28.5	47	32	64.25	24			
SHGJC*-31	28.5-31	47	32	65.5	27			
SHGJC*-33	31-33	56	36	75.5	29			
SHGJC*-36	33-36	57	40	78	32			
SHGJC*-39	36-39	59	42	81.5	34	11	30	3
SHGJC*-43	39-43	61	44	85.5	38			
SHGJC*-46	43-46	62	45	88	41			
SHGJC*-49	46-49	67	48	95.5	44			
SHGJC*-52	49-52	72	53	102	47			
SHGJC*-58	53-58	74	55	107	52	14	40	4
SHGJC*-61	58-61	77	58	111.5	56			

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN 3015 1596
Acc. to German standard: DIN 3015 1596

SHGJD*-**拉紧式加厚管夹

SHGJD*-** tightening thick pipe clamps

SH	GJ	D	*	**
舒恒管夹 Shuheng	舒恒规格 Shuheng group	型号结构 type	材质 material	管径 Pipe O.D.

GJ为钢制管夹 D为拉紧式加厚管夹
GJ: steel pipe clamp D: tightening thick pipe clamp


- 组成: 管夹体
- Components: clamp body



说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
1、The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
2、Other materials and pipe o.d. upon request..

管夹体材质Material:
SHGJAC*-**表示均为碳钢管夹 SHGJDC*-** carbon steel pipe clamp
SHGJAB*-**表示均为不锈钢管夹 SHGJDB*-** stainless steel pipe clamp

订货示例Order model:
碳钢拉紧式管夹SHGJDC-16
carbon steel tightening pipe clamp SHGJDC-16
不锈钢拉紧式管夹SHGJDB-16
stainless steel tightening pipe clamp SHGJDB-16



订货代号 Order code	夹紧范围D1 Tightening range D1	L1	L2	H	D2	B	S
SHGJD*-7	5-7	44	28	5	6	16	1.5
SHGJD*-9	7-9	48	32	6			
SHGJD*-13	9-13	52	36	9			
SHGJD*-15.5	13-15.5	56	40	12			
SHGJD*-19	15-19	60	44	15			
SHGJD*-23	20-23	76	56	19	7	20	2
SHGJD*-26	23-26	78	58	22			
SHGJD*-28.5	26-28.5	84	64	24			
SHGJD*-31	28-31	84	64	27			
SHGJD*-33	31-33	92	72	29			
SHGJD*-36	33-36	104	80	32	9	25	3
SHGJD*-39	36-39	108	84	34			
SHGJD*-43	39-43	112	88	38			
SHGJD*-46	43-46	114	90	41			
SHGJD*-49	46-49	118	90	44			
SHGJD*-52	49-52	134	106	47	11	30	3
SHGJD*-58	53-58	138	110	52			
SHGJD*-61	58-61	138	110	56			

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN 3015 1597
Acc. to German standard: DIN 3015 1597

SHGJE1*-**双联式钢制管夹

SHGJE1*-** twin steel pipe clamps

简介: 本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas:
the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.


SH	GJ	E1	*	**
舒恒管夹 Shuheng	舒恒规格 Shuheng group	型号结构 type	材质 material	管径 Pipe O.D.

执行国家标准为: 管夹 JB/ZQ 4498-2006 底板 JB/ZQ 4501-2006
Acc. to national standard: clamp: JB/ZQ 4498-2006 plate: JB/ZQ 4501-2006

- 组成: 管夹体、底板和螺栓组成
Components: clamp body, plate and bolt
- 管夹体材质Clamp body material:
SHGJE1C*-**表示均为碳钢不带底板单管夹
SHGJE1C*-** carbon steel twin pipe clamp without plate
SHGJE1C*-*A(B)表示均为碳钢带底板单管夹
SHGJE1C*-*A(B) carbon steel twin pipe clamp with plate
SHGJE1B*-**表示均为不锈钢不带底板单管夹
SHGJE1B*-** stainless steel twin pipe clamp without plate
SHGJE1B*-*A(B)表示均为不锈钢带底板单管夹
SHGJE1B*-*A(B) stainless steel twin pipe clamp with plate
- 订货示例Order model:
管外径为D16订货示例
Take pipe outside diameter 16 as an example
碳钢管夹SHGJE1C-16(不带底板)
carbon steel twin pipe clamp SHGJE1C-16 (without plate)
碳钢管夹SHGJE1C-16A(B)(带底板)
carbon steel twin pipe clamp SHGJE1C-16A(B) (with plate)
不锈钢管夹SHGJE1B-16(不带底板)
stainless steel twin pipe clamp SHGJE1B-16 (without plate)
不锈钢管夹SHGJE1B-16A(B)(带底板)
stainless steel twin pipe clamp SHGJE1B-16A(B) (with plate)



说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
1、The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
2、Other materials and pipe o.d. upon request..

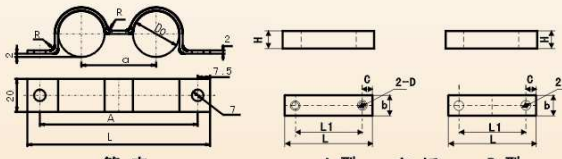

订货代号 Order code	A	L	a	R	底板 plate	L	b	H	L1	C	D	d
6	38	53	13	2	底板 plate	53	20	10	38	7.5	M6	7
8	44	59	16	2	底板 plate	59	20	10	44	7.5	M6	7
10	50	65	20	2	底板 plate	65	20	15	50	7.5	M6	7
12	54	69	22	2	底板 plate	69	20	15	54	7.5	M6	7
14	62	77	26	2	底板 plate	77	20	15	62	7.5	M6	7
16	68	83	30	2	底板 plate	83	20	15	68	7.5	M6	7
18	72	87	32	3	底板 plate	87	20	15	72	7.5	M6	7
22	80	95	35	3	底板 plate	95	20	15	80	7.5	M6	7
24	86	101	40	3	底板 plate	101	20	20	86	7.5	M6	7
28	95	110	45	3	底板 plate	110	20	20	95	7.5	M6	7

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHGJE2*-**双联式钢制管夹 SHGJE2*-** twin steel pipe clamps


简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas:
the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SH	GJ	E2	*	**
舒恒管夹 Shuheng	舒恒规格 Shuheng group	型号结构 type	材质 material	管径 Pipe O.D.

- 组成：管夹体、底板和螺栓组成
Components: clamp body, plate and bolt
- 管夹体材质Clamp body material:
SHGJE2C-**表示均为碳钢不带底板单管夹
SHGJE2C-** carbon steel twin pipe clamp without plate
SHGJE2C-***A (B) 表示均为碳钢带底板单管夹
SHGJE2C-***A(B) carbon steel twin pipe clamp with plate
SHGJE2B-**表示均为不锈钢不带底板单管夹
SHGJE2B-** stainless steel twin pipe clamp without plate
SHGJE2B-***A (B) 表示均为不锈钢带底板单管夹
SHGJE2B-***A(B) stainless steel twin pipe clamp with plate

执行国家标准为：管夹 JB/ZQ 4498-2006(2)
底板 JB/ZQ 4501-2006(2)
Acc. to national standard: clamp: JB/ZQ 4498-2006(2)
plate: JB/ZQ 4501-2006(2)

- 订货示例Order model:
管外径为Ø16订货示例
Take pipe outside diameter 16 as an example
碳钢单管夹SHGJE2C-16 (不带底板)
carbon steel twin pipe clamp SHGJE2C-16 (without plate)
碳钢单管夹SHGJE2C-16A (带底板)
carbon steel twin pipe clamp SHGJE2C-16A(B) (with plate)
不锈钢单管夹SHGJE2B-16 (不带底板)
stainless steel twin pipe clamp SHGJE2B-16 (without plate)
不锈钢单管夹SHGJE2B-16A (带底板)
stainless steel twin pipe clamp SHGJE2B-16A(B) (with plate)

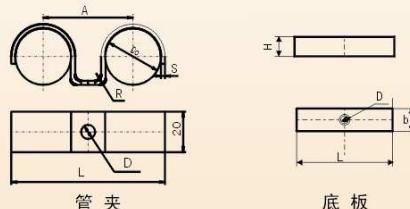

说明Note: 1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方法。
1、The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
2、Other materials and pipe o.d. upon request..

订货代号 Order code	A	L	R	S	D	底板plate	L	b	H	D
6	38	53	2	2	7	底板plate	53	15	10	M6
8	44	59	2	2	7	底板plate	59	15	10	M6
10	50	65	2	2	7	底板plate	65	15	15	M6
12	54	69	2	2	7	底板plate	69	15	15	M6
14	62	77	2	2	7	底板plate	77	15	15	M6
16	68	83	3	3	9	底板plate	83	20	15	M8
18	72	87	3	3	9	底板plate	87	20	15	M8
22	80	95	3	3	9	底板plate	95	20	15	M8
24	86	101	3	3	9	底板plate	101	20	20	M8
28	95	110	3	3	9	底板plate	110	20	20	M8

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHGJE3*-**单面管夹 SHGJE3*-**one side pipe clamps


简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas:
the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SH	GJ	E3	*	**
舒恒管夹 Shuheng	舒恒规格 Shuheng group	型号结构 type	材质 material	管径 Pipe O.D.

- 组成：管夹体、底板和螺栓组成
Components: clamp body, plate and bolt
- 管夹体材质Clamp body material:
SHGJE2C-**表示均为碳钢不带底板单管夹
SHGJE2C-** carbon steel twin pipe clamp without plate
SHGJE2C-***A (B) 表示均为碳钢带底板单管夹
SHGJE2C-***A(B) carbon steel twin pipe clamp with plate
SHGJE2B-**表示均为不锈钢不带底板单管夹
SHGJE2B-** stainless steel twin pipe clamp without plate
SHGJE2B-***A (B) 表示均为不锈钢带底板单管夹
SHGJE2B-***A(B) stainless steel twin pipe clamp with plate

执行国家标准为：管夹 JB/ZQ 4498-2006
底板 JB/ZQ 4501-2006
Acc. to national standard: clamp: JB/ZQ 4498-2006
plate: JB/ZQ 4501-2006

- 订货示例Order model:
管外径为Ø16订货示例
Take pipe outside diameter 16 as an example
碳钢单管夹SHGJE2C-16 (不带底板)
carbon steel twin pipe clamp SHGJE2C-16 (without plate)
碳钢单管夹SHGJE2C-16A (带底板)
carbon steel twin pipe clamp SHGJE2C-16A(B) (with plate)
不锈钢单管夹SHGJE2B-16 (不带底板)
stainless steel twin pipe clamp SHGJE2B-16 (without plate)
不锈钢单管夹SHGJE2B-16A (带底板)
stainless steel twin pipe clamp SHGJE2B-16A(B) (with plate)

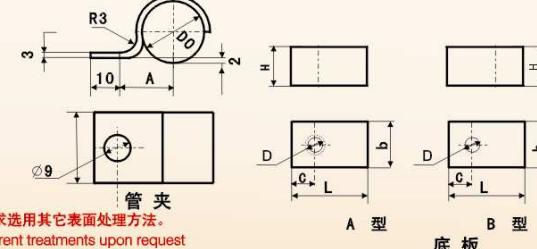

说明Note: 1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方法。
1、The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
2、Other materials and pipe o.d. upon request..

订货代号 Order code	D	A	底板plate	L	b	H	C	D	d
6	6	21	底板plate	40	20	20	15	M8	9
8	8	21	底板plate	40	20	20	15	M8	9
10	10	25	底板plate	45	20	20	15	M8	9
12	12	25	底板plate	45	20	20	15	M8	9
14	14	28	底板plate	50	20	20	15	M8	9
16	16	28	底板plate	50	20	20	15	M8	9
18	18	30	底板plate	55	20	20	15	M8	9
22	22	32	底板plate	60	20	20	15	M8	9
24	24	32	底板plate	60	20	20	15	M8	9
28	28	35	底板plate	65	20	20	15	M8	9

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHGJN1*-**钢制多排管夹

SHGJN1*-** multiple steel pipe clamps

简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas:
the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.


SH	GJ	N1	*	**
舒恒管夹 Shuheng	舒恒规格 Shuheng group	型号结构 type	材质 material	管径 Pipe O.D.



说明Note: 1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方法。
1. The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
2. Other materials and pipe o.d. upon request..

执行国家标准为：Acc. to national standard:
管夹 JB/ZQ 4512-2006 clamp: JB/ZQ 4512-2006

- 组成：管夹体、底板和螺栓组成
Components: clamp body, plate and bolt
- 管夹体材质Clamp body material:
SHGJN1C-**表示均为碳钢不带底板单管夹
SHGJN1B-**表示均为不锈钢多排管夹
- 订货示例：管外径为 $\phi 16$ 的五条管道的多排管夹订货示例
Order model: Take pipe outside diameter 16 with five pipes as an example
碳钢多排管夹SHGJN1C-16 $\times$ 5
carbon steel multiple pipe clamp SHGJN1C-16 $\times$ 5
不锈钢多排管夹SHGJN1B-16 $\times$ 5
stainless steel multiple pipe clamp SHGJN1B-16 $\times$ 5

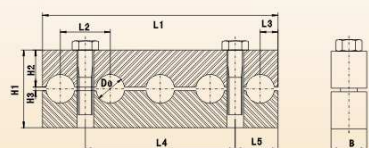


管夹 pipe clamp 底板 plate

管子 数量 No.	管径 O.D. Dg	B	H1	H2	H3	L1	L2	L3	L4	L5	配用螺栓 Provided bolt	
											数量 No.	规格 size
1	10	20	42	20	2	45	-	22.5	25	10	2	M8 $\times$ 35
2						70	25	22.5	50	10		
3						95	25	22.5	75	10		
4						95	25	10	50	22.5		
5						120	25	10	75	22.5		
1	16	25	52.5	25	2.5	60	-	30	35	12.5	2	M10 $\times$ 45
2						95	35	30	70	12.5		
3						130	35	30	105	12.5		
4						130	35	12.5	70	30		
5						165	35	12.5	105	30		
1	25	30	63	30	3	75	-	37.5	70	12.5	2	M12 $\times$ 50
2						125	50	37.5	105	12.5		
3						175	50	37.5	50	12.5		
4						190	50	20	100	45		
5						240	50	20	150	45		
1	38	40	83	40	3	100	-	50	70	15	2	M16 $\times$ 70
2						160	60	50	130	15		
3						220	60	50	190	15		
4						230	60	25	120	55		
5						290	60	25	180	55		

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request


SHGJN $\times$ **-*方钢多管径管夹

SHGJN $\times$ **-* square steel multi-pipe clamps

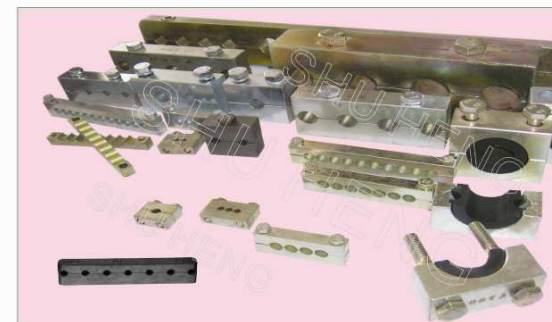

SHGJN $\times$ 1*-**单管径管夹 SHGJN $\times$ 1*-** one-pipe clamps


注：单管径管夹用于 $\phi 3-\phi 28$ 管道使用
Note: for pipe O.D. $\phi 3-\phi 28$



- 订货示例Order model:
管外径为 $\phi 6$ 订货示例。 碳钢管夹SHGJN $\times$ 1A-6; 不锈钢管夹SHGJN $\times$ 1A-6
Take pipe outside diameter 6 as an example: carbon steel clamp SHGJN $\times$ 1A-6; stainless steel clamp SHGJN $\times$ 1A-6

SHGJN $\times$ 2*-**双管径管夹 SHGJN $\times$ 2*-** two-pipe clamps


注：单管径管夹用于 $\phi 3-\phi 28$ 管道使用
Note: for pipe O.D. $\phi 3-\phi 28$



- 订货示例Order model:
管外径为 $\phi 6$ 订货示例。 碳钢管夹SHGJN $\times$ 2A-6; 不锈钢管夹SHGJN $\times$ 2A-6
Take pipe outside diameter 6 as an example: carbon steel clamp SHGJN $\times$ 2A-6; stainless steel clamp SHGJN $\times$ 2A-6

SHGJN $\times$ 3*-**三管径管夹 SHGJN $\times$ 3*-** three-pipe clamps

注：单管径管夹用于 $\phi 3-\phi 28$ 管道使用
Note: for pipe O.D. $\phi 3-\phi 28$



- 订货示例Order model:
管外径为 $\phi 6$ 订货示例。 碳钢管夹SHGJN $\times$ 3A-6; 不锈钢管夹SHGJN $\times$ 3A-6
Take pipe outside diameter 6 as an example: carbon steel clamp SHGJN $\times$ 3A-6; stainless steel clamp SHGJN $\times$ 3A-6

说明Note: 1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方法。
1. The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
2. Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

— 76 —

SHGJF2-**三螺栓扁钢管夹


SHGJF2-** flat steel pipe clamps with three bolts

简介: 本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas:
the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SH	GJ	F2	*	**
舒恒管夹	舒恒规格	型号结构	材质	管径
shuheng	Shuheng group	type	material	Pipe O.D.

- 组成: 管夹体和螺栓组成
- Components: clamp body and bolt
- 管夹体材质: SHGJF2-**表示均为碳钢三螺栓扁钢管夹
- Clamp body material: SHGJF2-** flat carbon steel pipe clamp with three bolts
- 订货示例: 管外径为 $\varnothing 168$
- Order model: Take pipe outside diameter 168 as an example
- 双螺栓扁钢管夹SHGJF2-168
- Flat carbon steel pipe clamp with two bolts SHGJF2-168

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
1. The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
2. Other materials and pipe o.d. upon request..

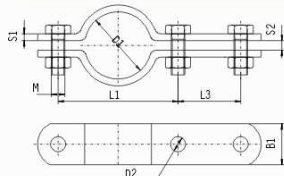

系列 series	公称宽度 Nominal width	L1	L2	L3	S1	S2	D2	B1	外六角螺栓螺母
D1	mm	管英寸 inch							Hexagon bolt nut
20	15								
22	15								
25	20								
27	20	3/4							
30	25								
34	25	1							
38	32								
43	32	1 1/4							
45	40								
49	40	1 1/2							
57	50								
61	50	2							
77	65	2 1/2							
89	80	3							
108	100								
115	100	4							
133	125								
140	125								
159	150								
169	150								
194	175								
216	200								
220	200								
267	250								
273	250								
318	300								
324	300								
368	350								
407	400								
419	400								
521	500								

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN3015 1592
Acc. to German standard: DIN3015 1592


SHGJF3-**型扁钢管夹

SHGJF3-** flat steel pipe clamps

简介: 本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道U型管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas:
the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SH	GJ	F3	*	**
舒恒管夹	舒恒规格	型号结构	材质	管径
shuheng	Shuheng group	type	material	Pipe O.D.

- 组成: 管夹体、垫块、底板和螺栓组成
- Components: clamp body, pipe saddle, plate and bolt
- 管夹体材质 Clamp body material:
- SHGJF3-**表示均为碳钢不带垫块U型扁钢管夹
- SHGJF3-** carbon steel flat U-form pipe clamp without washer
- SHGJF3-***A表示均为碳钢带垫块U型扁钢管夹
- SHGJF3-***A carbon steel flat U-form pipe clamp with washer

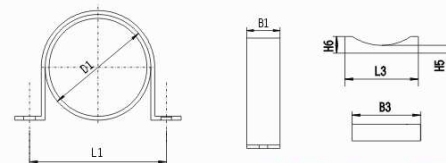

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
1. The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
2. Other materials and pipe o.d. upon request..

系列 series	管径D Pipe O.D.		扁 钢 夹 F B Flat steel clamp FB		U形槽钢 U grooved steel	塑 料 垫 块 Plastic washer R U K			
	mm	管英寸 inch	L 1	B1扁钢 B1 Flat steel	B2×H4	L3	B3	H5	n H6
40	48.3	1 1/2	76	20×3	50×38	24	35	5	8
	57		85			10			
50	60.3	2	88						
65	76.1	2 1/2	104						
80	88.9	3	122	40×4			75	70	17
	108		140						
100	114.3	4	147						
	133		165						
125	139.7	5	172	40×6	80×45	140	75	8	26
	159		201						
150	168.3	6	211						
	193.7		236						
175	216		260	40×8		220			32
200	219.1	8	261						
	267		325						
250	273	10	330						
	318		375	60×8	100×50	220	75	8	32
300	323.9	12	382						
	355.6	14	420						
350	368		430						
	406.4	16	470						
400	419		482						
	457	18	520						
500	508	20	570						
	521		585						

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN
Acc. to German standard: DIN

SHGJF4*-**型扁钢管夹

SHGJF4**-** flat steel pipe clamps

简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas:
the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SH	GJ	F4	*	**
舒恒管夹 shuheng	舒恒规格 Shuheng group	型号结构 type	材质 material	管径 Pipe O.D.

- 组成：管夹体、垫块、底板和螺栓组成
- Components: clamp body, pipe saddle, plate and bolt

- 管夹体材质 Clamp body materia :
- SHGJF4**-**表示均为碳钢不带垫块U型扁钢管夹
SHGJF4**-** carbon steel flat U-form pipe clamp without washer
- SHGJF4**-**A表示均为碳钢带垫块U型扁钢管夹
SHGJF4**-**A carbon steel flat U-form pipe clamp with washer




大直径单管夹 Long diameter one-pipe clamps

执行国家标准为Acc. to national standard: JB/ZQ 4493-2006(2)
执行德国标准为Acc. to German standard: FB/RUK

- 订货示例 Order model:

管外径为 $\phi 168$
Take pipe outside diameter 168 as an example
碳钢U型扁钢管夹SHGJF4-168 (不带垫块)
carbon steel flat U-form pipe clamp SHGJF4-168 (without washer)
碳钢U型扁钢管夹SHGJF4-168A (带垫块)
carbon steel flat U-form pipe clamp SHGJF4-168A (with washer)

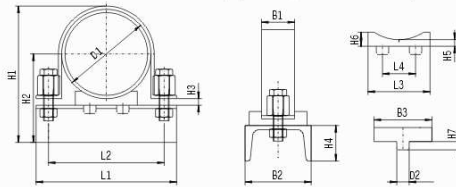

说明Note: 1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方法。 2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
1、The clamp surface is zinc plated. Different treatments upon request 2、Other materials and pipe o.d. upon request..

系列 series	管径D Pipe O.D.		扁 钢 箍 F Flat steel clamp FB				U形槽钢 U grooved steel		塑料垫块Plastic washerRUK							附 件 accessories		
	mm	管英寸 inch	L1	L2	H1	H2	H3	B1 扁钢 Flat steel	B2×H4	L3	L4	B3	D2	H5	n H6	H7	外六角螺栓 Hexagon bolt	
40	48.3	1 1/2	100	76	95	67	5	20×3	50×38	24	25	35	8	5	8	5	M10×40	
50	57	2	115	85	103	71.5				38	25	50	10		10	6		
65	60.3	2 1/2	132	104	122	81												
80	76.1	3	160	122	146	97.5												
100	108		170	140	165	107	8	40×4	80×45	75	40	70	15	8	17	10	M12×55	
125	114.3	4	180	147	171	110												
150	133	5	210	165	190	119.5												
175	139.7	6	210	172	197	123												
200	159		265	201	220	132.5	8	40×6	80×45	140	90	75	25	8	26	10	M16×75	
250	168.3	8	305	236	255	150												
300	216		320	260	277	161												
350	219.1	10	320	261	280	162.5												
400	267		380	325	328	186.5	12	60×8	100×50	220	150	75	30	8	32	10	M20×80	
450	273	12	385	330	334	189.5												
500	318	14	440	375	384	212												
550	323.9	16	450	382	390	215												
600	355.6	18	480	420	421	236	12	60×8	100×50	220	150	75	30	8	32	10	M24×100	
650	368	20	490	430	434	242												
700	406.4		550	470	472	261												
750	419	16	550	482	485	267.5												
800	457	18	585	520	523	286.5	12	60×8	100×50	220	150	75	30	8	32	10	M24×100	
850	508	20	630	570	574	312												
900	521		640	585	587	319												
950																		

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN
Acc. to German standard: DIN

SHGJF**-**型扁钢管夹

SHGJF5**-** flat steel pipe clamps


简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas:
the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SH	GJ	*	*	**
舒恒管夹 shuheng	舒恒规格 Shuheng group	型号结构 type	材质 material	管径 Pipe O.D.

本公司可根据客户要求（设计）生产或使用其它材料和管径。
Other materials and pipe o.d. upon request..


SHGJFF5

管外径为 $\phi 24-\phi 168$
Take pipe outside
diameter $\phi 24-\phi 168$




SHGJFF6

管外径为 $\phi 168-\phi 325$
Take pipe outside
diameter $\phi 168-\phi 325$



SHGJFF7

管外径为 $\phi 24-\phi 219$
Take pipe outside
diameter $\phi 24-\phi 219$



说明Note: 1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方法。 2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
1、The clamp surface is zinc plated. Different treatments upon request 2、Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHGJF**-**型扁钢管夹

SHGJF5*~**flat steel pipe clamps


简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas:
the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SH	GJ	*	*	**
舒恒管夹 shuheng	舒恒规格 Shuheng group	型号结构 type	材质 material	管径 Pipe O.D.

本公司可根据客户要求（设计）生产或使用其它材料和管径。
Other materials and pipe o.d. upon request.


SHGJF8

管外径为 $\phi 219-\phi 723$
Take pipe outside
diameter $\phi 219-\phi 723$




SHGJF9

管外径为 $\phi 89-\phi 723$
Take pipe outside
diameter $\phi 89-\phi 723$



SHGJF10

管外径为 $\phi 89-\phi 723$
Take pipe outside
diameter $\phi 89-\phi 723$



说明Note: 1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方法。 2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
1. The clamp surface is zinc plated. Different treatments upon request 2. Other materials and pipe o.d. upon request.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

多功能管道连接修补器

Application of multi-function pipe coupling

简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas:
the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.




本公司可根据客户要求（设计）生产或使用其它材料和管径。
Other materials and pipe o.d. upon request.

SH	XBQ	*	*
舒恒管夹 shuheng	规格 group	材质 material	管外径 Pipe O.D.

管外径为 $\phi 24-\phi 723$.C 碳钢, B 不锈钢
Take pipe outside diameter $\phi 24-\phi 723$.carbon C,
Stainless B


SHXBQ1-**-**



齿环型 管道连接器修补器 (标准及加长型)
Gear ring application of pipe coupling(standard and extend-type)




SHXBQ2-**-**



多功能管道连接器 (标准及加长型)
Multi pipe connector(standard and extend-type)




SHXBQ3-**-**



开启式管道修补器 (标准及加长型)
Open-type pipe repair device(standard and extend-type)




SHXBQ4-**-**



双卡式管道连接器, 修补器。(标准及加长型)
Dual cassette pipe connection-repair device(standard and extend-type)



SHXBQ5-**-**



双卡式管道弯头接口修补器
Double cassette piping elbow patch device(standard and extend-type)



如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

沟槽管件A Grooved Couplings and Fittings(A)

简介: 本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道U型管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas:
the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.



列系 series	订货号 Order code	公称通径 mm	管外径 Pipe o.d. mm	公称压力 Mpa	最大外形尺寸mm				螺栓尺寸 Bolt
					K	Φ	L	H	
1	SHGR-A *	100 × 50	108 × 57	110	134	185	140	76	2-M12 × 70
2	SHGR-A *	100 × 50	108 × 60					111	
3	SHGR-A *	100 × 65	108 × 76					76	
4	SHGR-A *	100 × 50	114 × 57					111	
5	SHGR-A *	100 × 50	114 × 60					118	
6	SHGR-A *	100 × 65	114 × 76						
7	SHGR-A *	125 × 50	133 × 57	125	187	215	140		
8	SHGR-A *	125 × 50	133 × 60						
9	SHGR-A *	125 × 65	133 × 76						
10	SHGR-A *	125 × 80	133 × 89						
11	SHGR-A *	125 × 50	140 × 57						
12	SHGR-A *	125 × 50	140 × 60						
13	SHGR-A *	125 × 65	140 × 76	155	187	242	129		2-M12 × 75
14	SHGR-A *	125 × 80	140 × 89						
15	SHGR-A *	150 × 50	159 × 57						
16	SHGR-A *	150 × 50	159 × 60						
17	SHGR-A *	150 × 60	159 × 79						
18	SHGR-A *	150 × 80	159 × 89						
19	SHGR-A *	150 × 100	159 × 108	155	193	245	108		2-M12 × 75
20	SHGR-A *	150 × 100	159 × 114						
21	SHGR-A *	150 × 50	165 × 57						
22	SHGR-A *	150 × 50	165 × 60						
23	SHGR-A *	150 × 65	165 × 76						
24	SHGR-A *	150 × 80	165 × 89						
25	SHGR-A *	150 × 100	165 × 108	155	196	250	129		2-M12 × 75
26	SHGR-A *	150 × 100	165 × 114						
27	SHGR-A *	150 × 50	168 × 57						
28	SHGR-A *	150 × 50	168 × 60						
29	SHGR-A *	150 × 65	168 × 76						
30	SHGR-A *	150 × 80	168 × 89						
31	SHGR-A *	150 × 100	168 × 108	155	155	250	300		2-M12 × 75
32	SHGR-A *	150 × 100	168 × 114						
33	SHGR-A *	200 × 50	219 × 57						
34	SHGR-A *	200 × 50	219 × 60						
35	SHGR-A *	200 × 65	219 × 76						
36	SHGR-A *	200 × 80	219 × 89						
37	SHGR-A *	200 × 100	219 × 108	155	155	250	300		2-M12 × 75
38	SHGR-A *	200 × 100	219 × 114						
39	SHGR-A *	200 × 125	219 × 133						
40	SHGR-A *	100 × 125	219 × 140						

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

密封圈应用 seal ring application

沟槽式管接头管道连接系统是借助管道内部的压力影响密封圈增加密封圈的密封性。外钢套扣住钢管两端并包裹密封圈, 实现钢管密封连接。
钢管连接前须用专用滚槽或现在钢管端部压出标准深度的凹槽, 镀锌钢管用滚槽方式在钢管上滚压出凹槽, 厚壁钢管可用车槽方式开槽, 该连接方式可用于连接钢管、铜管、不锈钢管、铝塑钢管、球墨铸铁管。

密封圈可根据不同的流体介质选用不同的材料。

管接头通常采用球墨铸铁件, 特殊场合可采用耐腐蚀的不锈钢或铜。

Grooved pipe connection system is to increase sealing ring through joint pipeline the internal pressure.

Outer steel fastened both ends and wrapped steel ring to make steel tube seal.

It should be a professional roller pressure tank or pipe ends of a standard depth of the groove before connecting pipe, galvanized steel pipe with a rolling groove on the way out of the groove rolling, thick-walled tube method used car slot. The connection can be used to connect steel pipe, brass pipe, stainless steel pipe, aluminum pipe, ductile iron pipe.

The material of ring can be selected according to different fluids.

Pipe connection are usually used of ductile iron, special occasions can be corrosion-resistant stainless steel or copper.

密封胶圈应用 rubber ring application


密封胶圈采用美国杜邦优质材料和先进橡胶硫化工艺, 自动控温、自动成型, 其弹性、抗老化性、扯断强度、扯断伸长率等指标均超过相关国家标准, 我们可根据客户使用流介质的不同而为您推荐不同材料的密封胶圈。

The seal ring controls temperature automatically and auto-forms with high-quality raw materials and advanced American DuPont Jue rubber vulcanization process, its elasticity, aging resistance, tensile strength, elongation at break and other indicators are over relevant national standards, we can use different media materials for you to choose different materials of ring according to the customer stream.

材料成份	适用温度	颜色 Color	应用范围 The scope of application
三元乙丙 EPDM	-34℃ + 150℃	黑色 Black	冷水、无油气体、稀酸、碱盐及多种化学品(不含碳氢化合物)。石油类介质禁用。 Cold water, oil gas, acid, alkali salt and various chemicals (excluding hydrocarbons). Petroleum medium is disabled.
硅橡胶 Silicon rubber	-40℃ + 177℃	白色 White	生活饮用水、热水、高温空气及某些高温化学品。石油类介质禁用。 Drinking water, hot water, high temperature air and some chemicals. Petroleum medium is disabled.
丁腈橡胶 Nitrile rubber	-29℃ + 85℃	橙色 Orange	石油、油气、矿物油、植物油、热水, 温度超过65℃禁用。 Petroleum, oil and gas, mineral oil, vegetable oil, hot water, the temperature exceeds 65℃ is disabled.

沟槽管件B Grooved Couplings and Fittings(B)

简介: 本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道U型管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas:
the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

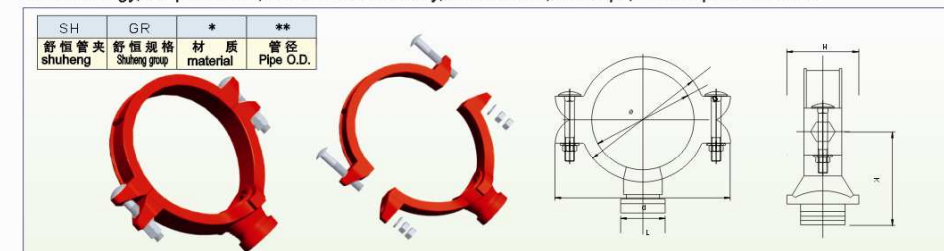


列系 series	订货号 Order code	公称通径 mm	管外径 Pipe o.d. mm	公称压力 Mpa	最大外形尺寸mm				螺栓尺寸 Bolt
					Φ	L	H		
1	SHGR-B 50	50	57	2.5	92	124	47		2-M10 × 55
2	SHGR-B 50	50	60		92	124			
3	SHGR-B 65	65	76		110	140			
4	SHGR-B 80	80	89		122	154			
5	SHGR-B 100	100	108		148	178	54		2-M12 × 70
6	SHGR-B 100	100	114		154	186			
7	SHGR-B 125	125	133		173	220			
8	SHGR-B 125	125	140		180	226			
9	SHGR-B 150	150	159		200	238	66		2-M12 × 75
10	SHGR-B 150	150	165		205	244			
11	SHGR-B 150	150	168		210	250			
12	SHGR-B 200	200	219		266	345			
13	SHGR-B 250	250	273		330	452			
14	SHGR-B 300	300	325		382	505			

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

执行国标(Acc. to national standard): JB/ZQ 4519-2006

简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道U型管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas:
the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

- 订货示例Order model:
150 (管外径 $\phi 159-168.3$) 订货示例。
Take 150 (pipe outside diameter159~168.3) as an example
碳钢U型管夹SHGJU1C-150
carbon steel U-form pipe clamp SHGJU1C-150
不锈钢U型管夹SHGU1B-150
stainless steel U-form pipe clamp SHGU1B-150



说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。 2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
1、The clamp surface is zinc plated. Different treatments upon request 2、Other materials and pipe o.d. upon request.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: **RB/RUL**
Acc. to German standard: **RB/RUL**

- 订货示例 Order model:
150 (管外径 $\phi 159-168.3$) 订货示例。
Take 150 (pipe outside diameter 159-168.3) as an example
碳钢U型管夹 SHGJU3C-150
carbon steel U-form pipe clamp SHGJU3C-150
不锈钢U型管夹 SHGJU3B-150
stainless steel U-form pipe clamp SHGJU3B-150



说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。 2、本公司可根据客户要求 (设计) 生产或使用其它材料和管径。
1、The clamp surface is zinc plated. Different treatments upon request 2、Other materials and pipe o.d. upon request.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: **RB/RUK**
Acc. to German standard: **RB/RUK**

SHGJU3*-**U型管夹

SHGJU3*-** U-form pipe clamps



简介: 本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道U型管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas:
the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SH	GJ	U3	*	**
舒恒管夹 shuheng	舒恒规格 Shuheng group	型号结构 type	材 质 material	管 径 Pipe O.D.

- 组成: 管夹体、长垫块和螺母组成
Components: clamp body, long washer and nut
- 管夹体材质Clamp body material:
SHGJU3C-**表示均为碳钢U型管夹;
SHGJU3C-** carbon steel U-form pipe clamp
SHGJU3B-**表示均为不锈钢U型管夹;
SHGJU3B-** stainless steel U-form pipe clamp

执行国家标准为Acc. to national standard: JB/ZQ 4519-2006(3)
执行德国标准为Acc. to German standard: FB/RUL

- 订货示例Order model:
150 (管外径 $\phi 159-168.3$) 订货示例。
Take 150 (pipe outside diameter $159-168.3$) as an example
碳钢U型管夹SHGJU3C-150
carbon steel U-form pipe clamp SHGJU3C-150
不锈钢U型管夹SHGJU3B-150
stainless steel U-form pipe clamp SHGJU3B-150



说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
1. The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
2. Other materials and pipe o.d. upon request.

系 列 Series	管 径 Pipe O.D. mm	圆 钢 箍 R B Round steel clamp RB						塑 料 垫 块 Plastic washer RUL							
		A	L1	H1	H2	H3	H4	G	L2	L3	B	H5	H6	D2	
20	25	30	40	73.5	46	30	17.5	M10	75	40	30	5	12	11	
	26.9						18.5								
25	30	38	48	81	50	30	20	M10	80	48	30	5	12	11	
	33.7						22								
32	38	46	56	89	50	30	24	M10	90	56	30	5	12	11	
	42.4						26.2								
40	44.5	52	62	100	55	35	27.2	M10	95	62	35	5	15	11	
	48.3						29								
50	57	64	76	118	63	39	33.5	M12	110	76	35	5	15	14	
	60.3						35.2								
65	76.1	82	94	135	77	39	43	M12	135	94	35	5	20	14	
80	88.9	94	106	152	82	39	54.5	M12	145	106	40	10	20	18	
	108						64								
100	114.3	120	136	190	105	47	67	M16	190	136	40	10	20	18	
	133						76.5								
125	139.7	148	164	217	105	47	80	M16	220	164	40	10	20	18	
	159						91.5								
150	168.3	176	192	247	105	47	96	M16	250	192	50	12	25	18	
	193.7						109								
175	193.7	202	218	273	105	47	109	M16	270	218	50	12	25	18	
	216						120								
200	219.1	228	248	311	125	55	121.5	M20	315	248	50	12	25	22	
	267						145.5								
250	273	282	302	364	125	55	148.5	M20	370	302	50	12	25	22	
	318						174								
300	323.9	332	352	418	125	55	177	M20	420	352	60	15	30	22	
	355.6						193								
350	368	378	402	475	145	63	199	M24	480	402	60	15	30	26	
	406.4						218								
400	419	428	452	526	145	63	224.5	M24	540	452	60	15	30	26	
	508						269								
500	521	530	554	627	145	63	276	M24	640	554	60	15	30	26	

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: RB/RUL
Acc. to German standard: RB/RUL

SHGJU**-**其它型式U型管夹

SHGJU**-** other U-form pipe clamps

简介: 本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道U型管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas:
the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SH	GJ	U*	*	**
舒恒管夹 shuheng	舒恒规格 Shuheng group	型号结构 type	材 质 material	管 径 Pipe O.D.

- 组成: 管夹体、长垫块和螺母组成
Components: clamp body, long washer and nut
- 管夹体材质Clamp body material:
SHGJU*C-**表示均为碳钢U型管夹;
SHGJU*C-** carbon steel U-form pipe clamp
SHGJU*B-**表示均为不锈钢U型管夹;
SHGJU*B-** stainless steel U-form pipe clamp

执行国家标准为Acc. to national standard: JB/ZQ 4519-2006(*)
执行德国标准为Acc. to German standard: FB/RUL

- 订货示例Order model:
150 (管外径 $\phi 159-168.3$) 订货示例。
Take 150 (pipe outside diameter $159-168.3$) as an example
碳钢U型管夹SHGJU*C-150
carbon steel U-form pipe clamp SHGJU*C-150
不锈钢U型管夹SHGJU*B-150
stainless steel U-form pipe clamp SHGJU*B-150



U4型管夹 U4 clamp



U5型管夹 U5 clamp



U6型管夹 U6 clamp



U7型管夹 U7 clamp



U8型管夹 U8 clamp



U9型管夹 U9 clamp

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
1. The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
2. Other materials and pipe o.d. upon request.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: RB/RU*
Acc. to German standard: RB/RU*

强力喉箍 Powerful hose hoops

简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas:
the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SH	QLHG	*	**
舒恒管夹 shuheng	规格 group	材质 material	管径 Pipe O.D.

订货示例Order model:

组 成：管夹体

Component: clamp body materia

管外径为 $\phi 48$, 不锈钢304

Take pipe outside diameter 48 as an example, Stainless 304



列系 series	订货号 Order code	ϕD		带宽H Bandwidth or band (mm)	螺栓尺寸 Bolt	负载扭矩 Bresj tirque (mm)
		mm	Inch			
1	SHQLHG*17-19	17-19	0.67"-0.75"	18	M5 × 40	5
2	SHQLHG*20-22	20-22	0.67"-0.75"	18	M5 × 40	5
3	SHQLHG*23-25	23-25	0.67"-0.75"	18	M5 × 40	5
4	SHQLHG*26-28	26-28	0.67"-0.75"	18	M5 × 40	5
5	SHQLHG*29-31	29-31	0.67"-0.75"	20	M6 × 50	15
6	SHQLHG*32-35	32-35	0.67"-0.75"	20	M6 × 50	15
7	SHQLHG*36-39	36-39	0.67"-0.75"	20	M6 × 50	15
8	SHQLHG*40-46	40-43	0.67"-0.75"	20	M6 × 50	15
9	SHQLHG*44-47	44-47	0.67"-0.75"	22	M6 × 60	15
10	SHQLHG*48-51	48-51	0.67"-0.75"	22	M6 × 60	16
11	SHQLHG*52-55	52-55	0.67"-0.75"	22	M6 × 60	15
12	SHQLHG*56-59	56-59	0.67"-0.75"	22	M6 × 60	15
13	SHQLHG*60-63	60-63	0.67"-0.75"	22	M6 × 60	15
14	SHQLHG*64-67	64-67	0.67"-0.75"	22	M8 × 70	25
15	SHQLHG*68-73	68-73	0.67"-0.75"	24	M8 × 70	25
16	SHQLHG*74-79	74-79	0.67"-0.75"	24	M8 × 70	25
17	SHQLHG*80-85	80-85	0.67"-0.75"	24	M8 × 80	25
18	SHQLHG*86-91	86-91	0.67"-0.75"	24	M8 × 80	25
19	SHQLHG*86-97	92-97	0.67"-0.75"	24	M8 × 80	25
20	SHQLHG*98-103	98-103	0.67"-0.75"	24	M8 × 80	25
21	SHQLHG*104-112	104-112	0.67"-0.75"	24	M8 × 105	25
22	SHQLHG*113-121	113-121	0.67"-0.75"	24	M8 × 105	25
23	SHQLHG*122-130	122-130	0.67"-0.75"	24	M8 × 105	25
24	SHQLHG*131-139	131-139	0.67"-0.75"	26	M10 × 105	40
25	SHQLHG*140-148	140-148	0.67"-0.75"	26	M10 × 120	40
26	SHQLHG*149-161	149-161	0.67"-0.75"	26	M10 × 120	40
27	SHQLHG*162-174	162-174	0.67"-0.75"	26	M10 × 120	40
28	SHQLHG*175-187	175-187	0.67"-0.75"	26	M10 × 120	40
29	SHQLHG*188-200	188-200	0.67"-0.75"	26	M10 × 120	40
30	SHQLHG*201-213	201-213	0.67"-0.75"	26	M10 × 120	40
31	SHQLHG*214-226	214-226	0.67"-0.75"	26	M10 × 120	40
32	SHQLHG*227-239	227-239	0.67"-0.75"	26	M10 × 120	40
33	SHQLHG*240-252	240-252	0.67"-0.75"	26	M10 × 120	40

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHGJM(A)*-**防震钢制管夹 SHGJM(A)*-** anti-vibration steel pipe clamps

简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas:
the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SH	GJ	M(A)	*	**
舒恒管夹 shuheng	舒恒规格 Shuheng group	型号结构 type	材质 material	管径 Pipe O.D.

• 订货示范：管外径为 $\phi 20$ 管道

• Order model: Take pipe outside diameter 20 as an example

1、防震钢制管夹单管径单层管夹的为SHGJM(A)50- $\phi 20$ (不带底板)

1、anti-vibration steel one-pipe one-layer clamp SHGJM(A)50- $\phi 20$ (without plate)

2、防震钢制管夹单管径单层管夹的为SHGJM(A)50- $\phi 20C$ (带底板)

2、anti-vibration steel one-pipe one-layer clamp SHGJM(A)50- $\phi 20C$ (with plate)

3、防震钢制管夹双管径双层管夹的为SHGJM(AB)50- $\phi 20 \times \phi 20$, 或SHGJM(B)50- $\phi 20 \times \phi 25$ 同规格内可用不同管径(不带底板)


3、anti-vibration steel one-pipe two-layer clamp SHGJM(AB)50- $\phi 20 \times \phi 20$ or SHGJM(B)50- $\phi 20 \times \phi 25$ different pipe o.d. in the same series (without plate)

4、防震钢制管夹单管径双层管夹的为SHGJM(AB)50- $\phi 20 \times \phi 20C$, 或SHGJM(B)50- $\phi 20 \times \phi 25C$ 同规格内可用不同管径(带底板)

4、anti-vibration steel one-pipe two-layer clamp SHGJM(AB)50- $\phi 20 \times \phi 20$ or SHGJM(B)50- $\phi 20 \times \phi 25C$ different pipe o.d. in the same series (with plate)

5、如使用不锈钢材料或其它要求请在订货时说明。

5、stainless steel or other requirements upon request.

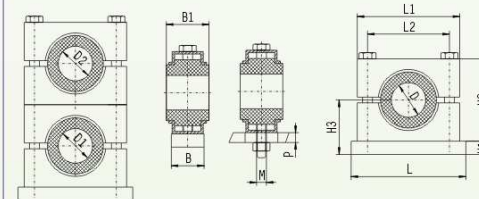

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方式。 2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
1、The clamp surface is zinc plated. Different treatments upon request 2、Other materials and pipe o.d. upon request..

列系 series	订货号 Order code	管外径 Pipe o.d. D, D1, D2	L	L1	L2	H1	H2	H3	B	B1	P	M
1	SHGJF (A) 38 SHGJF (AB) 38	$\phi 6, \phi 8, \phi 10, \phi 12, \phi 14, \phi 16$	65	58	38	12	38	33	18	32	6	M8
2	SHGJF (A) 50 SHGJF (AB) 50	$\phi 16, \phi 18, \phi 20, \phi 22, \phi 25$	80	70	50	12	50	39	18	36	6-8	M8
3	SHGJF (A) 75 SHGJF (AB) 75	$\phi 25, \phi 28, \phi 32, \phi 34, \phi 40, \phi 42$	110	96	75	14	75	56	25	44	10-12	M10
4	SHGJF (A) 100 SHGJF (AB) 100	$\phi 42, \phi 48, \phi 50, \phi 60, \phi 63$	140	125	100	16	100	66	40	52	12-15	M12
5	SHGJF (A) 150 SHGJF (AB) 150	$\phi 63, \phi 70, \phi 76, \phi 83, \phi 89, \phi 102$	190	176	150	18	150	93	50	62	12-15	M12
6	SHGJF (A) 170 SHGJF (AB) 170	$\phi 102, \phi 108, \phi 114, \phi 127, \phi 133$	214	208	172	18	190	115	60	70	15-25	M14
7	SHGJF (A) 180 SHGJF (AB) 180	$\phi 133, \phi 140, \phi 152, \phi 159, \phi 168$	290	260	212	22	240	145	60	80	15-25	M16
8	SHGJF (A) 190	$\phi 168, \phi 194, \phi 219$	318	311	265	25	300	173	70	84	25-30	M18
9	SHGJF (A) 200	$\phi 219, \phi 245, \phi 273, \phi 299, \phi 325$	465	459	375	30	435	245	80	122	25-30	M24
10	SHGJF (A) 250	$\phi 325, \phi 351, \phi 377, \phi 426$	668	660	508	35	572	321	110	152	25-30	M30

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: RB/RU*
Acc. to German standard: RB/RU*

SHGJM(B)*-**防震钢制管夹 SHGJM(B)*-** anti-vibration steel pipe clamps

简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定管道管夹。
This product is suitable for oil, water and gas pipes in the mechanical hydraulic system in the following areas: the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SH	GJ	M(B)	*	**
舒恒管夹 shuheng	舒恒规格 Shuheng group	型号结构 type	材质 material	管径 Pipe O.D.

• 订货示范：管外径为 $\varnothing 20$ 管道

• Order model: Take pipe outside diameter 20 as an example

1、防震钢制管夹双管径单层管夹的为SHGJM(B)50- $\varnothing 20/\varnothing 20$ ，或SHGJM(B)50- $\varnothing 20/\varnothing 25$ 同规格内可用不同管径（不带底板）

1、anti-vibration steel two-pipe one-layer clamp SHGJM(B)50- $\varnothing 20/\varnothing 20$ or SHGJM(B)50- $\varnothing 20/\varnothing 25$ different pipe o.d. in the same series(without plate)

2、防震钢制管夹双管径单层管夹的为SHGJM(B)50- $\varnothing 20/\varnothing 20C$ ，或SHGJM(B)50- $\varnothing 20/\varnothing 25C$ 同规格内可用不同管径（带底板）

2、anti-vibration steel two-pipe one-layer clamp SHGJM(B)50- $\varnothing 20/\varnothing 20C$ or SHGJM(B)50- $\varnothing 20/\varnothing 25C$ different pipe o.d. in the same series (with plate)


3、防震钢制管夹双管径双层管夹的为SHGJM(BB)50- $\varnothing 20/\varnothing 20 \times \varnothing 20/\varnothing 20$ ，或SHGJM(BB)50- $\varnothing 20/\varnothing 25$ 同规格内可用不同管径（不带底板）

3、anti-vibration steel two-pipe two-layer clamp SHGJM(BB)50- $\varnothing 20/\varnothing 20 \times \varnothing 20/\varnothing 20$ or SHGJM(BB)50- $\varnothing 20/\varnothing 25$ different pipe o.d. in the same series (without plate)

4、防震钢制管夹双管径双层管夹的为SHGJM(BB)50- $\varnothing 20/\varnothing 20 \times \varnothing 20/\varnothing 20C$ ，或SHGJM(BB)50- $\varnothing 16/\varnothing 18 \times \varnothing 20/\varnothing 25C$ 同规格内可用不同管径（带底板）

4、anti-vibration steel two-pipe one-layer clamp SHGJM(BB)50- $\varnothing 20/\varnothing 20C$ or SHGJM(BB)50- $\varnothing 20/\varnothing 25C$ different pipe o.d. in the same series (with plate)

5、如使用不锈钢材料或其它要求请在订货时说明 5、stainless steel or other requirements upon request.

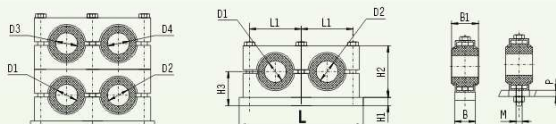

说明Note: 1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方法。 2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
1. The clamp surface is zinc plated. Different treatments upon request 2. Other materials and pipe o.d. upon request..

列系 series	订货号 Order code	管外径 Pipe o.d. D, D1, D2	L	L1	H1	H2	H3	B	B1	P	M
1	SHGJF (B) 38 SHGJF (BB) 38	$\varnothing 6, \varnothing 8, \varnothing 10, \varnothing 12, \varnothing 14, \varnothing 16$	104	38	12	38	33	18	32	6	M8
2	SHGJF (B) 50 SHGJF (BB) 50	$\varnothing 16, \varnothing 18, \varnothing 20, \varnothing 22, \varnothing 25$	130	50	12	50	39	18	36	6-8	M8
3	SHGJF (B) 75 SHGJF (BB) 75	$\varnothing 25, \varnothing 28, \varnothing 32, \varnothing 34, \varnothing 40, \varnothing 42$	185	75	14	75	56	25	44	10-12	M10
4	SHGJF (B) 100 SHGJF (BB) 100	$\varnothing 42, \varnothing 48, \varnothing 50, \varnothing 60, \varnothing 63$	240	100	16	100	66	40	52	12-15	M12
5	SHGJF (B) 150 SHGJF (BB) 150	$\varnothing 63, \varnothing 70, \varnothing 76, \varnothing 83, \varnothing 89, \varnothing 102$	340	150	18	150	93	50	62	12-15	M12
6	SHGJF (B) 170 SHGJF (BB) 170	$\varnothing 102, \varnothing 108, \varnothing 114, \varnothing 127, \varnothing 133$	386	172	18	190	115	60	70	15-25	M14
7	SHGJF (B) 180 SHGJF (BB) 180	$\varnothing 133, \varnothing 140, \varnothing 152, \varnothing 159, \varnothing 168$	478	212	22	240	145	60	80	15-25	M16
8	SHGJF (B) 190	$\varnothing 168, \varnothing 194, \varnothing 219$	581	265	25	300	173	70	84	25-30	M18
9	SHGJF (B) 200	$\varnothing 219, \varnothing 245, \varnothing 273 \varnothing 299, \varnothing 325$	840	375	30	435	245	80	122	25-30	M24
10	SHGJF (B) 250	$\varnothing 325, \varnothing 351, \varnothing 377, \varnothing 426$	1176	508	35	572	321	110	152	25-30	M30

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request




SHG(A)*-**槽钢防震管夹 SHG(A)*-** anti-vibration grooved steel pipe clamps

简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定高温管道槽钢防震管夹。

This product is suitable for oil, water and gas pipes of high temperature in the mechanical hydraulic system in the following areas: the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

SH	GJ	(A)	*	**
舒恒管夹 Shuheng pipe clamp	舒恒规格 Shuheng group	型号结构 Type	系列 Series	管径 Pipe O.D.

用于高压强力震动管道
For high pressure strong vibration pipes



• 订货示范：管外径为 $\varnothing 168$ 管道

• Order model: Take pipe outside diameter 168 as an example.

1. 槽钢防震管夹为SHG(A)4-168

1.anti-vibration grooved steel pipe clamp SHG(A)4-168

2. 如使用不锈钢材料或其它要求请在订货时说明。

2.stainless steel or other requirements upon request.

系列 series	管外径 $\varnothing D1$ Pipe O.D.	L1	L2	H1	H2	H3	B1	B2	B3	M
1	$\varnothing 73-\varnothing 89$	190	140	100	100	40	60	120	60	M20
2	$\varnothing 102-\varnothing 114$	210	150	115	115	40	60	120	60	M20
3	$\varnothing 127-\varnothing 140$	250	190	135	135	50	80	160	80	M24
4	$\varnothing 152-\varnothing 168$	280	220	140	140	50	80	160	80	M30
5	$\varnothing 194-\varnothing 219$	340	270	170	170	50	100	200	100	M30
6	$\varnothing 220-\varnothing 273$	420	330	220	220	60	140	280	140	M30
7	$\varnothing 276-\varnothing 325$	460	370	240	240	60	140	280	140	M30
8	$\varnothing 326-\varnothing 370$	510	420	260	260	60	140	280	140	M30
9	$\varnothing 371-\varnothing 425$	570	480	290	290	60	140	280	140	M30
10	$\varnothing 426-\varnothing 485$	620	530	305	305	60	140	280	140	M30
11	$\varnothing 486-\varnothing 550$	680	590	370	370	60	140	280	140	M30
12	$\varnothing 551-\varnothing 630$	760	670	410	410	60	140	280	140	M30
13	$\varnothing 631-\varnothing 715$	845	755	452	452	60	140	280	140	M30
14	$\varnothing 716-\varnothing 800$	940	850	495	495	60	140	280	140	M30

说明：1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方法。 2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
Note: 1. The clamp surface is zinc plated. Different treatments upon request. 2. Other materials and pipe o.d. upon request.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

符合德标: DIN KS/DKS
Acc. to German standard: DIN KS/DKS

SHG(B)*-**槽钢防震管夹

SHG(B)*-** anti-vibration grooved steel pipe clamps

简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定高温管道槽钢防震管夹。

This product is suitable for oil, water and gas pipes of high temperature in the mechanical hydraulic system in the following areas: the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.



SH	GJ	(B)	*	**
舒恒管夹 Shuheng pipe clamp	舒恒规格 Shuheng group	型号结构 Type	系列 Series	管径 Pipe O.D.

用于高压强力震动管道
For high pressure strong vibration pipes



• 订货示范Order model:

1. 钢制防震管夹为SHG(B) 5-Φ219C (带底板)
1. anti-vibration steel pipe clamp SHG(B) 5-Φ219C (with plate)
2. 钢制防震管夹为SHG(B) 5-Φ219 (不带底板) 使用双头螺栓
2. anti-vibration steel pipe clamp SHG(B) 5-Φ219C (without plate) using two-head bolts
3. 如使用不锈钢材料或其它要求请在订货时说明。
3. stainless steel or other requirements upon request.



系 列 series	管外径ØD Pipe O.D.	L1	L2	L3	H1	H2	B	S	S1	P	M
1	73	190	140	65	170	85	115	20	20	5	M20
	76										
	89										
2	102	210	150	65	210	105	115	20	20	5	M24
	108										
	114										
3	127	250	190	90	250	125	155	40	25	5	M24
	133										
	140										
4	152, 159	290	220	100	280	140	180	50	30	8	M30
	168										
	219										
5	245	400	310	150	330	165	220	90	30	8	M30
	273										
	290										
7	325	500	400	170	480	240	260	140	36	10	M36
8	351	530	430	180	510	255	280	150	36	10	M36
9	377	580	480	190	540	270	290	160	36	10	M36
10	426	610	510	200	530	290	300	180	36	10	M36

说 明：1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方法。2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
Note: 1. The clamp surface is zinc plated. Different treatments upon request. 2. Other materials and pipe o.d. upon request.
如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHG(C)*-**槽钢防震管夹

SHG(B)*-** anti-vibration grooved steel pipe clamps

简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定高温管道槽钢防震管夹。

This product is suitable for oil, water and gas pipes of high temperature in the mechanical hydraulic system in the following areas: the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.



SH	GJ	□	*	**
舒恒管夹 Shuheng pipe clamp	舒恒规格 Shuheng group	型号结构 Type	系列 Series	管径 Pipe O.D.

用于高压强力震动管道
For high pressure strong vibration pipes



• 订货示范Order model:

1. 钢制防震管夹为SHG(B) 5-Φ219C (带底板)
1. anti-vibration steel pipe clamp SHG(B) 5-Φ219C (with plate)
2. 钢制防震管夹为SHG(B) 5-Φ219 (不带底板) 使用双头螺栓
2. anti-vibration steel pipe clamp SHG(B) 5-Φ219C (without plate) using two-head bolts
3. 如使用不锈钢材料或其它要求请在订货时说明。
3. stainless steel or other requirements upon request.



系 列 series	管外径ØD Pipe O.D.	L1	L2	L3	H1	H2	B	S	S1	P	M
1	73	220	160	80	170	86	150	25	20	5	M20
	76				170	86					
	89				180	90					
	102				190	95					
	108				200	100					
	114				200	100					
2	127	280	210	110	230	115	180	40	20	8	M24
	133, 140				240	120		45			
	152				260	130		50			
3	159, 168	350	260	130	280	140	220	70	30	8	M30
	194				310	155		90			
	219				330	165		90			
4	245	400	310	150	360	180	240	110	30	8	M30
	273	480	380		430	215		120			
6	290	480	380	160	460	230	260	130	36	10	M36
7	325	500	400		480	240		140			
8	351	530	430	180	510	255	280	150			
9	377	580	480		540	270		160			
10	426	610	510	200	530	290	300	180			


说 明：1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方法。2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
Note: 1. The clamp surface is zinc plated. Different treatments upon request. 2. Other materials and pipe o.d. upon request.
如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHAL (A) 铝合金组合管夹(国标JB/ZQ4513-86)
SHAL (B) 铝合金组合管夹(国标JB/ZQ4514-86)

SHAL (A) combined aluminum alloy pipe clamps (national standard JB/ZQ4513-86)
SHAL (B) combined aluminum alloy pipe clamps (national standard JB/ZQ4513-86)

订货示范Order mode:

- 1、铝合金组合管夹单层管夹的为SHAL (A) $\Phi 20$ (不带底板)。
- 1、combined aluminum alloy one-layer pipe clamp SHAL (A) $\Phi 20$ (without plate)
- 2、铝合金组合管夹单层管夹的为SHAL (A) $\Phi 20C$ (带底板)。
- 2、combined aluminum alloy one-layer pipe clamp SHAL (A) $\Phi 20C$ (with plate)
- 3、铝合金组合管夹多层管夹的为SHAL (A) $\Phi 20 \times 20C$ 、同规格内可用不同管径，最多五层。
- 3、combined aluminum alloy multi-layer pipe clamp SHAL (A) $\Phi 20 \times 20C$ different pipe o.d. in the same series, five layers at most.
- 4、铝合金组合管夹SHAL (B) *为SHAL (A) 的半边管夹体。
- 4、combined aluminum alloy pipe clamp SHAL (B): half clamp body of SHAL(A)
- 5、如使用其它要求请在订货时说明， $\Phi 219$ — $\Phi 406$ 使用国标JB/ZQ400897标准。
- 5、Other materials and requirements upon request. $\Phi 219$ — $\Phi 406$ acc. to national standard JB/ZQ400897.

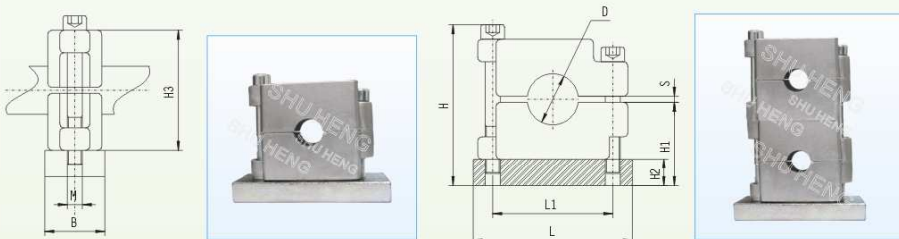

列系	订货号	管外径OD	L1	L2	L3	H1	H2	B	S	S1	P	M
1	SHAL (*)	$\Phi 6-\Phi 8$	54	36	54	30	12	36	20	18	2	M6
2	SHAL (*)	$\Phi 10-\Phi 42$	106	80	108	58	18	80	40	36	4	M10
3	SHAL (*)	$\Phi 45-\Phi 65$	136	100	137	72	20	105	50	40	4	M12
4	SHAL (*)	$\Phi 70-\Phi 89$	188	150	190	99	25	150	56	50	4	M16
5	SHAL (*)	$\Phi 90-\Phi 127$	255	205	245	125	30	190	70	60	4	M20
6	SHAL (*)	$\Phi 133-\Phi 168$	305	250	300	150	30	240	80	70	5	M24
7	SHAL (*)	$\Phi 170-\Phi 219$	355	290	360	180	35	290	90	80	8	M30


如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHG**-**其它型式管夹

SHG**-** other pipe clamps

简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定高温管道槽钢防震管夹。

This product is suitable for oil, water and gas pipes of high temperature in the mechanical hydraulic system in the following areas: the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

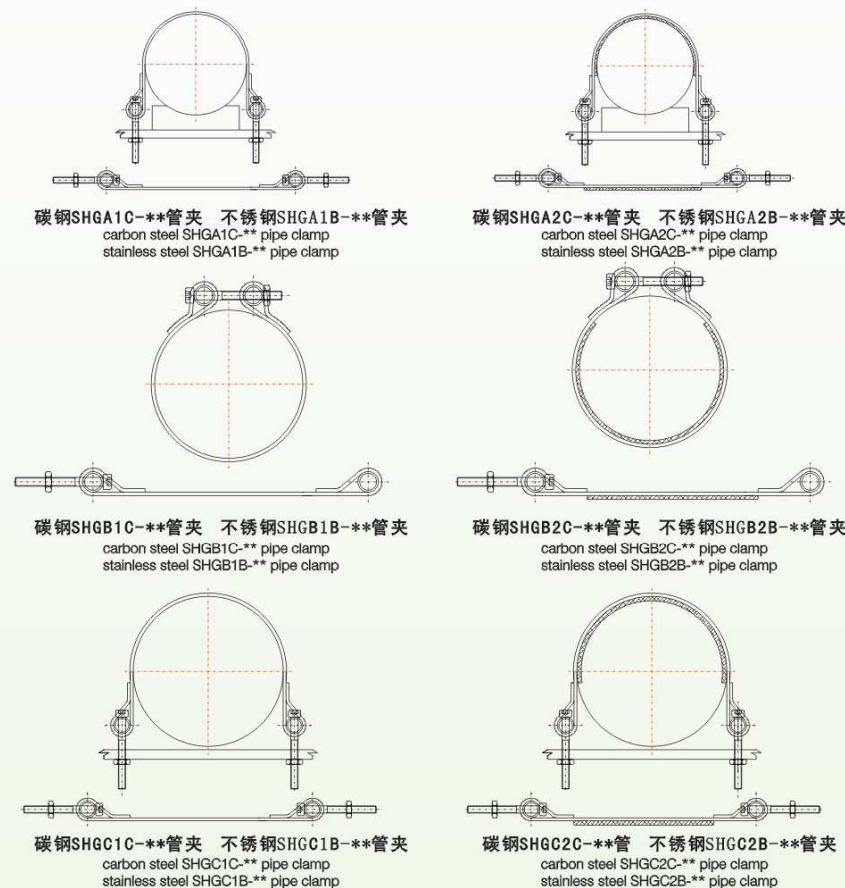


说明：1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方法。2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
Note: 1. The clamp surface is zinc plated. Different treatments upon request. 2. Other materials and pipe o.d. upon request.
如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHAL (A) 铝合金组合管夹(国标JB/ZQ4513-86)
SHAL (B) 铝合金组合管夹(国标JB/ZQ4514-86)

SHAL (A) combined aluminum alloy pipe clamps (national standard JB/ZQ4513-86)
SHAL (B) combined aluminum alloy pipe clamps (national standard JB/ZQ4513-86)

订货示范Order mode:

- 1、铝合金组合管夹单层管夹的为SHAL (A) $\Phi 20$ (不带底板)。
- 1、combined aluminum alloy one-layer pipe clamp SHAL (A) $\Phi 20$ (without plate)
- 2、铝合金组合管夹单层管夹的为SHAL (A) $\Phi 20C$ (带底板)。
- 2、combined aluminum alloy one-layer pipe clamp SHAL (A) $\Phi 20C$ (with plate)
- 3、铝合金组合管夹多层管夹的为SHAL (A) $\Phi 20 \times 20C$ 、同规格内可用不同管径，最多五层。
- 3、combined aluminum alloy multi-layer pipe clamp SHAL (A) $\Phi 20 \times 20C$ different pipe o.d. in the same series, five layers at most.
- 4、铝合金组合管夹SHAL (B) *为SHAL (A) 的半边管夹体。
- 4、combined aluminum alloy pipe clamp SHAL (B): half clamp body of SHAL(A)
- 5、如使用其它要求请在订货时说明， $\Phi 219$ — $\Phi 406$ 使用国标JB/ZQ400897标准。
- 5、Other materials and requirements upon request. $\Phi 219$ — $\Phi 406$ acc. to national standard JB/ZQ400897.

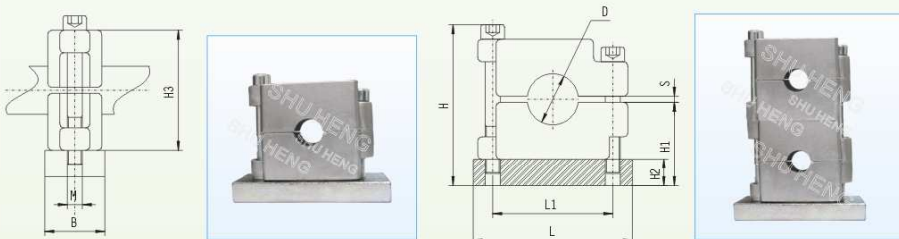

列系	订货号	管外径OD	L1	L2	L3	H1	H2	B	S	S1	P	M
1	SHAL (*)	$\Phi 6-\Phi 8$	54	36	54	30	12	36	20	18	2	M6
2	SHAL (*)	$\Phi 10-\Phi 42$	106	80	108	58	18	80	40	36	4	M10
3	SHAL (*)	$\Phi 45-\Phi 65$	136	100	137	72	20	105	50	40	4	M12
4	SHAL (*)	$\Phi 70-\Phi 89$	188	150	190	99	25	150	56	50	4	M16
5	SHAL (*)	$\Phi 90-\Phi 127$	255	205	245	125	30	190	70	60	4	M20
6	SHAL (*)	$\Phi 133-\Phi 168$	305	250	300	150	30	240	80	70	5	M24
7	SHAL (*)	$\Phi 170-\Phi 219$	355	290	360	180	35	290	90	80	8	M30


如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHG**-**其它型式管夹

SHG**-** other pipe clamps

简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定高温管道槽钢防震管夹。

This product is suitable for oil, water and gas pipes of high temperature in the mechanical hydraulic system in the following areas: the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.

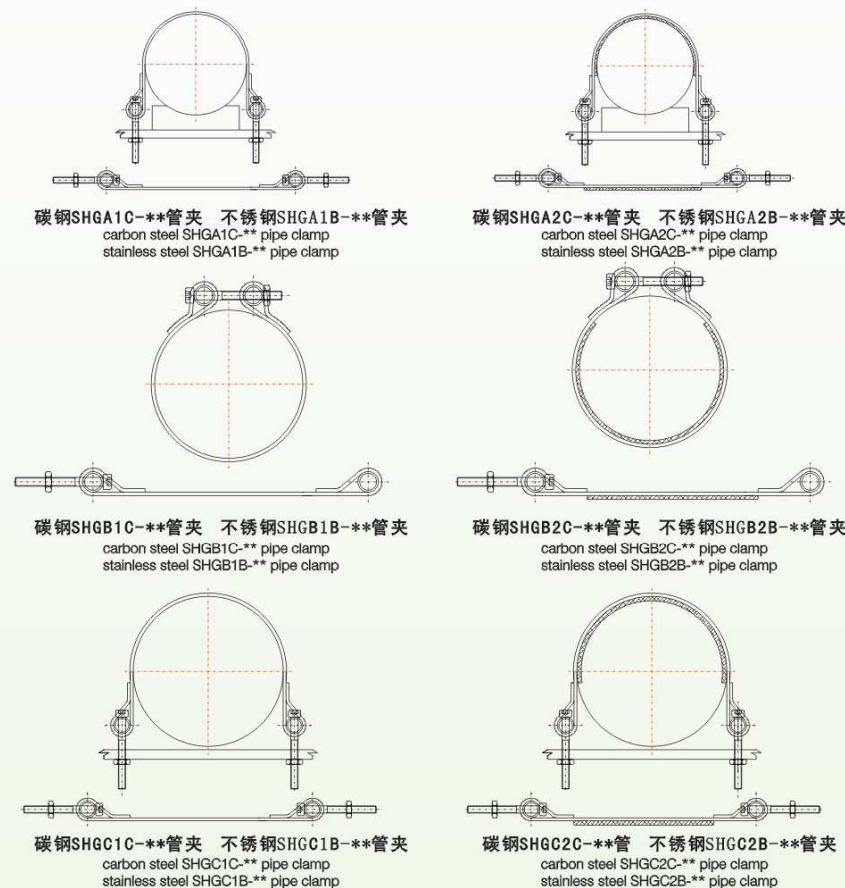

说明：1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方法。2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
Note: 1. The clamp surface is zinc plated. Different treatments upon request. 2. Other materials and pipe o.d. upon request.
如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SH其它型式管夹

SHG**-** other pipe clamps

简介：本产品适用于冶金、石油、化工、车辆、船舶、电力等机械液压系统中的油、水、气为介质的固定高温管道槽钢防震管夹。


This product is suitable for oil, water and gas pipes of high temperature in the mechanical hydraulic system in the following areas: the metallurgy, the petroleum, the chemical industry, the vehicles, the ships, electric power and etc.



说明：1、管夹表面处理为镀锌，可根据客户要求选用其它表面处理方法。2、本公司可根据客户要求（设计）生产或使用其它材料和管径。
Note: 1. The clamp surface is zinc plated. Different treatments upon request. 2. Other materials and pipe o.d. upon request.
如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

管道支架 Pipe Bracket

(示意图) sketch map



管道用托钩支架（埋入型）

Pipe bracket (buried)

执行国标为：JB/ZQ 4515-97


Acc. to national standard: JB/ZQ4515-97

管道外径为：Φ22- Φ89

Pipe outside diameter: Φ22- Φ89

托钩支架之间的极限距离为：5m

Maximum pitch between brackets: 5m



管道用支架（焊接型）

Pipe bracket (welded)

执行国标为：JB/ZQ 4516-97


Acc. to national standard: JB/ZQ4516-97

管道外径为：Φ22- Φ89

Pipe outside diameter: Φ22- Φ89

托钩支架之间的极限距离为：5m

Maximum pitch between brackets: 5m



管道用支架（可拆型）

Pipe bracket (detachable)

执行国标为：JB/ZQ 4517-97


Acc. to national standard: JB/ZQ4517-97

管道外径为：Φ50- Φ600

Pipe outside diameter: Φ50- Φ600

托钩支架之间的极限距离为：5m

Maximum pitch between brackets: 5m

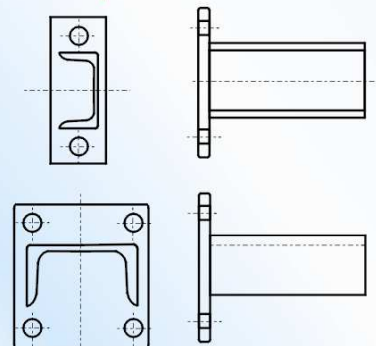

管道用支架（托架型）

Pipe bracket (supported)

执行国标为：JB/ZQ 4518-97


Acc. to national standard: JB/ZQ4518-97

管道外径为：Φ22- Φ521（大直径管道专用）

Pipe outside diameter: Φ22- Φ521 (for long diameter pipes)

托钩支架之间的极限距离为：5m

Maximum pitch between brackets: 5m

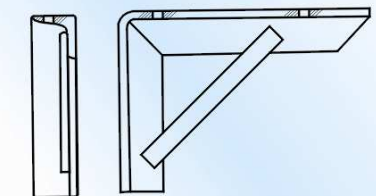

管架说明

Pipe bracket directions

管架: 以其先进、可靠、简便实用的特点,受到广大用户的认可和欢迎,被广泛应用于化工、液压、石化、医药、轻工、纺织、军工、等行业的工程设计中。

本公司严格按照国标HG/T21629-1999《管架标准图》生产。

在一个完整的管道布置设计中,设置管架是个相当重要的环节,应根据管道的操作条件和管道的布置要求,合理地选用不同类型的舒恒管架,舒恒管架,分为A、B、C、D、E、F、G、J、K、I、M、N十二大类供设计人员用户选择。

Pipe brackets: Our pipe bracket is well received because it is advanced, reliable and practical. It is widely used in the engineering designs in the following areas: chemical industry, hydraulic pressure, petroleum and chemical, medicine, light industry, spinning and weaving, war industry, etc.

Our product is produced strictly according to national standard HG/T21629-1999 "Pipe Bracket Standard Diagram".

The pipe bracket is an important part in the pipe layout. It is advisable to choose different Shuheng pipe clamps and Shuheng pipe brackets according to different operating conditions and requirements of the pipe layout. There are 12 groups for designers to choose from. Namely: A, B, C, D, E, F, G, J, K, I, M, N.

执行国标HG/T 21629-1999标准

Acc. to national standard HG/T21629-1999

A类: 管架标准零部件

A: standard pipe bracket components

B类: 管吊与吊架

B: pipe bracket and cradle

C类: 弹簧吊架和弹簧支架

C: spring cradle and spring bracket

D类: 托架

D: support

E类: 导向架

E: guide bracket

F类: 支腿(耳)

F: strut

G类: 支架

G: bracket

J类: 管托

J: pipe support

K类: 挡块

K: retainer

I类: 滚动支吊架

I: rolling bracket and cradle

M类: 非金属(塑料)管道支架及零部件

M: non-metal (plastic) pipe bracket and components

N类: 组合管架

N: combined pipe bracket

由于产品型号过多,我公司例举一些供客户选择,如选订舒恒管架本公司提供具体尺寸和图纸,如使用不同的形式或其它要求请在订货时说明。

Due to too many types, we list a few for you to choose from. If you choose and order Shuheng pipe brackets, we will supply measurements and designs. Different designs and requirements upon request.


SHA1-*(**) U型管卡

SHA1-*(**) U-bolt clamps

SH	A1	*	**
舒恒管夹 Shuheng	型号 type	结构 structure	管外径 Pipe O.D.

订货示范:公制管用管外径为 150的管道, SHA1-1 (150)

Order model: metric series pipe outside diameter 150, SHA1-1 (150)



注: (1) I 型为导向管卡, 适用于有轴向位移的管道,

Note: 1. type I is guide clamp, suitable for pipes with

II 型为固定管卡

axial displacement. Type II is set clamp.

(2) 材料: 碳钢

(2) material: carbon steel

(3) 管卡位置和数量, 按设计需要确定。

(3) clamp position and number acc. to design

(4) 350°C时最大荷载是指向上荷载 (+FY)

(4) at 350°C max load refers to upward load (+FY)

(5) 如使用不锈钢材料或其它要求请在订货时说明

(5) stainless steel or other requirements upon request

U型管卡(公制管用) U-bolt clamps (for metric series pipe)

系列号 Series No.	公称管径 Nominal caliber	350°C 最大荷载(N) 350°C max load (N)	d	C	F	G
A1-1 (15)	15	4710	M8	28	35	35
A1-1 (20)	20			35	40	38
A1-1 (25)	25			42	45	40
A1-1 (32)	32	7460	M10	50	50	45
A1-1 (40)	40			57	55	
A1-1 (50)	50			69	60	
A1-1 (65)	65	10990	M12	91	75	55
A1-1 (80)	80			104	80	
A1-1 (100)	100			123	90	
A1-1 (125)	125	20600	M16	153	110	70
A1-1 (150)	150			179	125	
A1-1 (200)	200			239	155	
A1-1 (250)	250	32180	M20	297	185	80
A1-1 (300)	300	46300	M24	354	220	90
A1-1 (350)	350			406	245	
A1-1 (400)	400			455	270	
A1-1 (450)	450			509	300	
A1-1 (500)	500			559	325	
A1-1 (600)	600			659	375	

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方式。 2、本公司可根据客户要求(设计)生产或使用其它材料和管径。

1. The clamp surface is zinc plated. Different treatments upon request 2. Other materials and pipe o.d. upon request.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

执行国标(Acc. to national standard):HG/T21629-1999

SHA1-* (**) U型管卡 SHA1-* (**) U-bolt clamps

U型管卡(英制管用) U-bolt clamps (for inch series pipe)

系列号 Series No.	公称管径 Nominal caliber	350℃ 最大荷载(N) 350°C max load (N)	d	C	F	G
A1-2 (1/2)	1/2"	4710	M8	31	35	35
A1-2 (3/4)	3/4"			37	40	38
A1-2 (1)	1"			43	45	40
A1-2 (1 1/4)	1 1/4"	7460	M10	54	55	45
A1-2 (1 1/2)	1 1/2"			60	55	
A1-2 (2)	2"			72	60	
A1-2 (2 1/2)	2 1/2"	10990	M12	88	75	55
A1-2 (3)	3"			104	80	
A1-2 (4)	4"			130	90	
A1-2 (5)	5"	20600	M16	160	115	70
A1-2 (6)	6"			188	130	
A1-2 (8)	8"			239	155	
A1-2 (10)	10"	32180	M20	297	185	80
A1-2 (12)	12"	46300	M24	353	220	90
A1-2 (14)	14"			385	225	
A1-2 (16)	16"			435	260	
A1-2 (18)	18"			486	285	
A1-2 (20)	20"			537	310	
A1-2 (24)	24"			639	365	

U型管卡(铸铁管用) U-bolt clamps (for cast iron pipe)

系列号 Series No.	公称管径 Nominal caliber	350℃ 最大荷载(N) 350°C max load (N)	d	C	F	G
A1-3 (50)	50	7460	M10	77	65	45
A1-3 (65)	65	10990	M12	96	75	50
A1-3 (80)	80			112	85	
A1-3 (100)	100			133	95	
A1-3 (125)	125	20600	M16	164	115	55
A1-3 (150)	150			190	130	
A1-3 (200)	200			242	155	
A1-3 (250)	250	32180	M20	298	185	65
A1-3 (300)	300	46300	M24	355	220	70
A1-3 (350)	350			407	245	
A1-3 (400)	400			457	270	
A1-3 (450)	450			509	295	
A1-3 (500)	500			561	325	
A1-3 (600)	600			665	375	


说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。 2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
1. The clamp surface is zinc plated. Different treatments upon request 2. Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA2-* (**) U型管卡 SHA2-* (**) U-bolt clamps

SH	A2	*	**
舒恒管夹 Shuheng	型号 type	结构 structure	管外径 Pipe O.D.

订货示范:公制管用管外径为 150的管道, SHA1-1 (150)
Order model: metric series pipe outside diameter 150, SHA1-1 (150)

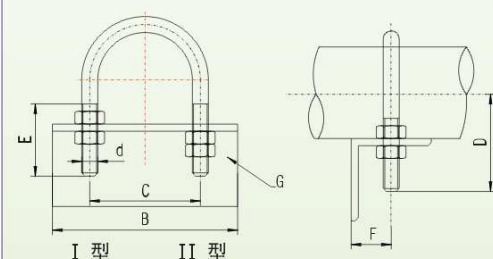

注: (1) I型为导向管卡, 适用于有轴向位移的管道,

Note: 1. type I is guide clamp, suitable for pipes with

II型为固定管卡

axial displacement. Type II is set clamp.

(2) 材料: 碳钢

(2) material: carbon steel

(3) 管卡位置和数量, 按设计需要确定。

(3) clamp position and number acc. to design

(4) 350℃时最大荷载是指向上荷载 (+FY)

(4) at 350°C max load refers to upward load (+FY)

(5) 如使用不锈钢材料或其它要求请在订货时说明

(5) stainless steel or other requirements upon request

U型管卡(带角钢)(留铸铁管用)
U-bolt clamps (with angled steel) (for cast iron pipe)

系列号 Series No.	公称管径 Nominal caliber	350℃最大荷载(N) 350°C max load (N)	d	B	C	D	E	F	G
A2-3 (50)	50	7460	M10	120	77	65	45	30	L50×50×6
A2-3 (65)	65	10990	M12	135	96	75	50		
A2-3 (80)	80			155	112	85	50		
A2-3 (100)	100			175	133	95	50		
A2-3 (125)	125	20600	M16	220	164	115	55	35	L63×63×6
A2-3 (150)	150			250	190	130			
A2-3 (200)	200			300	242	155			
A2-3 (250)	250	32180	M20	370	298	185	65	45	L80×80×10
A2-3 (300)	300	46300	M24	450	355	220	70	55	L100×100×10

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。

1. The clamp surface is zinc plated. Different treatments upon request

2、本公司可根据客户要求(设计)生产或使用其它材料和管径。

2. Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA2-* (**) U型管卡 SHA2-* (**) U-bolt clamps

U型管卡(带角钢) (公制管用)
U-bolt clamps (with angled steel) (for metric series pipe)

系列号	公称管径	350℃最大 荷载(N)	d	B	C	D	E	F	G
A2-1 (15)	15	4710	M8	70	28	35	35		L50×50×6
A2-1 (20)	20			75	35	40	38		
A2-1 (25)	25			85	42	45	40		
A2-1 (32)	32	7480	M10	90	50	50	45	30	L50×50×6
A2-1 (40)	40			100	57	55			
A2-1 (50)	50			110	69	60			
A2-1 (65)	65	10990	M12	130	91	75	55	30	L50×50×6
A2-1 (80)	80			145	104	80			
A2-1 (100)	100			165	123	90			
A2-1 (125)	125	20600	M16	210	153	110	70	35	L63×63×6
A2-1 (150)	150			240	179	125			
A2-1 (200)	200			300	239	155			
A2-1 (250)	250	32180	M20	370	297	185	80	45	L80×80×10
A2-1 (300)	300	46300	M24	450	354	220	90	55	L100×100×10

U型管卡(带角钢) (英制管用)
U-bolt clamps (with angled steel) (for inch series pipe)

系列号 Series No.	公称管径 Nominal caliber	350℃最大荷载(N) 350°C max load (N)	d	B	C	D	E	F	G
A2-2 (1/2)	1/2"	4710	M8	70	28	35	35	30	L50×50×6
A2-2 (3/4)	3/4"			80	37	40	38		
A2-2 (1)	1"			85	43	45	40		
A2-2 (1 1/4)	1 1/4"	7480	M10	95	54	55	45	30	L50×50×6
A2-2 (1 1/2)	1 1/2"			100	60	55			
A2-2 (2)	2"			115	72	60			
A2-2 (2 1/2)	2 1/2"	10990	M12	130	88	75	55	30	L50×50×6
A2-2 (3)	3"			145	104	80			
A2-2 (4)	4"			170	130	95			
A2-2 (5)	5"	20600	M16	215	160	115	70	35	L63×63×6
A2-2 (6)	6"			250	188	130			
A2-2 (8)	8"			300	239	155			
A2-2 (10)	10"	32180	M20	370	297	185	80	45	L80×80×10
A2-2 (12)	12"	46300	M24	450	353	220	90	55	L100×100×10

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
1. The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
2. Other materials and pipe o.d. upon request..


如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA3-* (**) 导向管卡 SHA4-* (**) guide pipe clamps

SH	A3	*	**
舒恒管夹 Shuheng	型号 type	结构 structure	管外径 Pipe O.D.

订货示范:公制管用管外径为 150的管道, SHA3-1 (150)
Order model: metric series pipe outside diameter 150, SHA3-1 (150)

注: (1) 材料: 碳钢
Note: (1) material: carbon steel
(2) 最大荷载是指夹紧荷载
(2) max load refers to tightening load
(3) 如使用不锈钢材料或其它要求请在订货时说明
(3) stainless steel or other requirements upon request



导向管卡(公制管用)
Guide pipe clamps (for metric series pipe)

系列号 Series No.	公称管径 Nominal caliber	螺栓 Bolt D×1	A	B	C R	G
A3-1 (15)	15	M8×35	100	70	11	□30×4
A3-1 (20)	20		110	80	15	
A3-1 (25)	25		120	90	18	
A3-1 (32)	32	M10×40	140	100	21	□40×4
A3-1 (40)	40		150	110	25	
A3-1 (50)	50		160	120	31	
A3-1 (65)	65	M12×50	190	140	40	□50×6
A3-1 (80)	80		210	160	47	
A3-1 (100)	100		230	180	56	
A3-1 (125)	125	M16×60	290	230	70	□60×10
A3-1 (150)	150		310	250	83	
A3-1 (200)	200		370	310	113	
A3-1 (250)	250	M20×70	440	370	140	□70×10
A3-1 (300)	300		520	440	165	
A3-1 (350)	350		570	490	192	
A3-1 (400)	400	M24×80	620	540	216	□80×12
A3-1 (450)	450		680	600	244	
A3-1 (500)	500		730	650	270	
A3-1 (600)	600		830	750	320	

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
1. The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
2. Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

导向管卡(英制管用)
Guide pipe clamps (for inch series pipe)


系列号 Series No.	公称管径 Nominal caliber	螺栓 Bolt D×1	A	B	C R	G
A3-2 (1/2)	1/2"	M8×35	100	70	13	□30×4
A3-2 (3/4)	3/4"		110	80	16	
A3-2 (1)	1"		120	90	19	
A3-2 (1 1/4)	1 1/4"	M10×40	140	100	23	□40×4
A3-2 (1 1/2)	1 1/2"		150	110	26	
A3-2 (2)	2"		160	120	32	
A3-2 (2 1/2)	2 1/2"	M12×50	190	140	39	□50×6
A3-2 (3)	3"		210	160	47	
A3-2 (4)	4"		230	180	60	
A3-2 (5)	5"	M16×60	290	230	74	□60×10
A3-2 (6)	6"		320	260	87	
A3-2 (8)	8"		370	310	113	
A3-2 (10)	10"	M20×70	440	370	140	□70×10
A3-2 (12)	12"		520	440	165	
A3-2 (14)	14"		550	470	182	
A3-2 (16)	16"	M24×80	600	520	206	□80×12
A3-2 (18)	18"		660	580	232	
A3-2 (20)	20"		710	630	258	
A3-2 (24)	24"		820	740	310	

SHA4-*(**) 紧固管卡 SHA4-*(**) guide pipe clamps

SH	A4	*	**
舒恒管夹 Shuheng	型号 type	结构 structure	管外径 Pipe O.D.

订货示范:公制管用管外径为 $\varnothing 150$ 的管道, SHA4-1 (150)
Order model: metric series pipe outside diameter 150 SHA4-1 (150)

- 注: (1) 扁钢弯曲半径 r 等于其厚度值
Note: (1) material: carbon steel
(2) 材料: 碳钢
(2) max load refers to tightening load
(3) 如使用不锈钢材料或其它要求请在订货时说明
(3) stainless steel or other requirements upon request

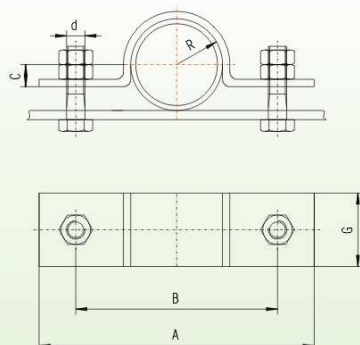

紧固管卡(公制管用) Tightening pipe clamps (for metric series pipe)

系列号 Series No.	公称管径 Nominal caliber	螺栓 Bolt d×1	A	B	C	R	G
A4-1 (15)	15	M8×30	100	70		9	□30×4
A4-1 (20)	20		110	80		13	
A4-1 (25)	25		110	80	5	16	
A4-1 (32)	32	M10×35	130	90	5	19	□40×4
A4-1 (40)	40		140	100	10	23	
A4-1 (50)	50		150	110	15	29	
A4-1 (65)	65	M12×50	190	140	15	38	□50×6
A4-1 (80)	80		210	160	20	45	
A4-1 (100)	100		230	180	30	54	
A4-1 (125)	125	M16×75	280	220	30	67	□60×10
A4-1 (150)	150		300	240	40	80	
A4-1 (200)	200		360	300	70	110	
A4-1 (250)	250	M20×90	420	350	90	137	□70×10
A4-1 (300)	300	M24×100	500	420	120	163	□80×12
A4-1 (350)	350		550	470	140	189	
A4-1 (400)	400		600	520	170	213	
A4-1 (450)	450		660	580	190	240	
A4-1 (500)	500	M24×120	730	630	200	265	□100×12
A4-1 (600)	600		830	730	250	315	

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
1、The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
2、Other materials and pipe o.d. upon request.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA4-*(**) 紧固管卡 SHA4-*(**) guide pipe clamps

紧固管卡(英制管用) tightening pipe clamps (for inch series pipe)

系列号 Series No.	公称管径 Nominal caliber	螺栓 Bolt d×1	A	B	C	R	G
A4-2 (1/2)	1/2"	M8×30	100	70		11	□30×4
A4-2 (3/4)	3/4"		110	80		14	
A4-2 (1)	1"		110	80	5	17	
A4-2 (1 1/4)	1 1/4"	M10×35	130	90	5	21	□40×4
A4-2 (1 1/2)	1 1/2"		140	100	10	24	
A4-2 (2)	2"		150	110	15	30	
A4-2 (2 1/2)	2 1/2"	M12×50	190	140	15	37	□50×6
A4-2 (3)	3"		210	160	20	45	
A4-2 (4)	4"		230	180	35	57	
A4-2 (5)	5"	M16×75	290	230	30	71	□60×10
A4-2 (6)	6"		310	250	45	84	
A4-2 (8)	8"		360	300	70	110	
A4-2 (10)	10"	M20×90	420	350	90	137	□70×10
A4-2 (12)	12"	M24×100	500	420	120	162	□80×12
A4-2 (14)	14"		530	450	130	178	
A4-2 (16)	16"		580	500	150	203	
A4-2 (18)	18"		630	550	180	229	
A4-2 (20)	20"	M24×120	710	610	190	254	□100×12
A4-2 (24)	24"		810	710	240	305	

紧固管卡(铸铁管用) tightening pipe clamps (for cast iron pipe)

系列号 Series No.	公称管径 Nominal caliber	螺栓 Bolt d×1	A	B	C	R	G
A4-3 (50)	50	M10×35	160	120	15	33	□40×4
A4-3 (65)	65	M12×50	200	150	20	41	□50×6
A4-3 (80)	80		210	160	25	49	
A4-3 (100)	100		230	180	30	59	
A4-3 (125)	125	M16×75	290	230	35	72	□60×10
A4-3 (150)	150		310	250	45	85	
A4-3 (200)	200		360	300	70	110	
A4-3 (250)	250	M20×90	420	350	90	137	□70×10
A4-3 (300)	300	M24×100	500	420	120	163	□80×12
A4-3 (350)	350		550	470	140	189	
A4-3 (400)	400		600	520	170	214	
A4-3 (450)	450		660	580	190	240	
A4-3 (500)	500	M24×120	730	630	200	266	□100×12
A4-3 (600)	600		830	730	250	317	

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。 2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
1、The clamp surface is zinc plated. Different treatments upon request 2、Other materials and pipe o.d. upon request.


如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA5-*(**) 基准型双螺栓管夹 SHA5-*(**) standard pipe clamps with double bolts

SH	A5	*	**
舒恒管夹 Shuheng	型号 type	结构 structure	管外径 Pipe O.D.

订货示范:公制管用管外径为Ø150的管道,SHA5-1 (150)
Order model: metric series pipe outside diameter 150SHA5-1 (150)

- 注: (1) 扁钢弯曲半径r等于其厚度值
Note: (1) flat steel bent radius r equals its thickness
(2) 材料: 碳钢
(2) material: carbon steel
(3) 定距管可根据安装需要设置
(3) set pitch pipe acc. to requirements
(4) 如使用不锈钢材料或其它要求请在订货时说明
(4) stainless steel or other requirements upon request

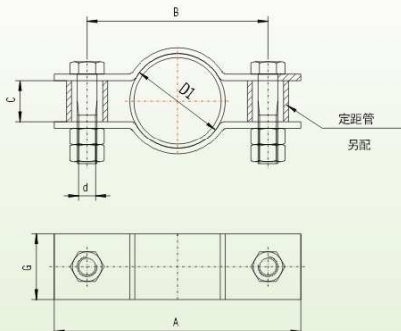

基准型双螺栓管夹(公制管用)
standard pipe clamps with double bolts (for metric series pipe)

系列号 Series No.	公称管径 Nominal caliber	D ₁	最大荷载(N) Max load (N)		螺栓 Bolt d×1	A	B	C	G	定距管 Set pitch pipe
			350℃	400℃						
A5-1 (15)	15	18	2160	1960	M8×40	80	50	20	□30×3	Ø18×3
A5-1 (20)	20	25				90	60			
A5-1 (25)	25	32				100	70			
A5-1 (32)	32	38	3530	3140	M10×45	110	80	25	□30×4	Ø18×3
A5-1 (40)	40	45				120	90			
A5-1 (50)	50	57				150	110			
A5-1 (65)	65	76	4610	4120	M12×55	170	130	25	□40×4	Ø25×3
A5-1 (80)	80	89				190	150			
A5-1 (100)	100	108				240	180			
A5-1 (125)	125	133	5870	5250	M16×65	270	210	25	□40×6	Ø25×3
A5-1 (150)	150	159				320	250			
A5-1 (200)	200	219				380	310			
A5-1 (250)	250	273	7160	6380	M20×75	460	380	35	□50×8	Ø32×3
A5-1 (300)	300	325				510	430			
A5-1 (350)	350	377				560	480			
A5-1 (400)	400	426	11000	9810	M24×90	610	530	40	□70×10	Ø32×3
A5-1 (450)	450	480				700	600			
A5-1 (500)	500	530				750	650			
A5-1 (600)	600	630	13540	12070	M30×100	890	770	50	□80×12	Ø38×3
A3-1 (600)	600	630	13540	12070	M36×115	890	770	50	□80×12	Ø45×3

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
1、The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
2、Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA5-*(**) 基准型双螺栓管夹 SHA5-*(**) standard pipe clamps with double bolts

基准型双螺栓管夹(英制管用)
standard pipe clamps with double bolts (for inch series pipe)

系列号 Series No.	公称管径 Nominal caliber	D ₁	最大荷载(N) Max load (N)		螺栓 Bolt d×1	A	B	C	G	定距管 Set pitch pipe
			350℃	400℃						
A5-2 (1/2)	1/2"	21	2160	1960	M8×40	90	60	20	□30×3	Ø18×3
A5-2 (3/4)	3/4"	27				100	70			
A5-2 (1)	1"	34				110	80			
A5-2 (1 1/4)	1 1/4"	42	3530	3140	M10×45	120	90	25	□30×4	Ø18×3
A5-2 (1 1/2)	1 1/2"	48				150	110			
A5-2 (2)	2"	61				170	130			
A5-2 (2 1/2)	2 1/2"	75	4610	4120	M12×55	190	150	25	□40×4	Ø25×3
A5-2 (3)	3"	90				240	180			
A5-2 (4)	4"	115				270	210			
A5-2 (5)	5"	142	5870	5250	M16×65	330	260	35	□50×8	Ø32×3
A5-2 (6)	6"	169				380	310			
A5-2 (8)	8"	220				460	380			
A5-2 (10)	10"	274	7160	6380	M20×75	510	430	40	□60×10	Ø32×3
A5-2 (12)	12"	325				540	460			
A5-2 (14)	14"	356				590	510			
A5-2 (16)	16"	408	11000	9810	M24×90	680	580	50	□70×10	Ø32×3
A5-2 (18)	18"	458				730	630			
A5-2 (20)	20"	510				870	750			
A5-2 (24)	24"	610	13540	12070	M36×115	890	770	50	□80×12	Ø45×3

基准型双螺栓管夹(铸铁管用)
standard pipe clamps with double bolts (for cast iron pipe)

系列号 Series No.	公称管径 Nominal caliber	D ₁	最大荷载(N) Max load (N)		螺栓 Bolt d×1	A	B	C	G	定距管 Set pitch pipe
			350℃	400℃						
A5-3 (50)	50	65	4610	4120	M12×55	160	120	25	□40×4	Ø25×3
A5-3 (65)	65	81				180	140			
A5-3 (80)	80	97				200	160			
A5-3 (100)	100	118	5870	5250	M16×65	250	190	25	□40×6	Ø25×3
A5-3 (125)	125	144				280	220			
A5-3 (150)	150	170				330	260			
A5-3 (200)	200	222	7160	6380	M20×75	380	310	35	□50×8	Ø32×3
A5-3 (250)	250	274				460	380			
A5-3 (300)	300	326				510	430			
A5-3 (350)	350	378	11000	9810	M24×90	560	480	40	□70×10	Ø32×3
A5-3 (400)	400	428				610	530			
A5-3 (450)	450	480				700	600			
A5-3 (500)	500	532	13540	12070	M30×100	750	650	40	□80×12	Ø38×3
A5-3 (600)	600	634				890	770			

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。 2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
1、The clamp surface is zinc plated. Different treatments upon request 2、Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA6-*(**)重型双螺栓管夹

SHA6-*(**) heavy pipe clamps with double bolts

SH	A6	*	**
舒恒管夹 Shuheng	型号 type	结构 structure	管外径 Pipe O.D.

订货示范: 公制管用管外径为 $\Phi 150$ 的管道, SHA6-1 (150)

Order model: metric series pipe outside diameter 150 SHA6-1 (150)

注: (1) 扁钢弯曲半径 r 等于其厚度值

Note: (1) flat steel bent radius r equals its thickness

(2) 材料: 碳钢


(2) material: carbon steel

(3) 定距管可根据安装需要设置

(3) set pitch pipe acc. to requirements

(4) 如使用不锈钢材料或其它要求请在订货时说明

(4) stainless steel or other requirements upon request

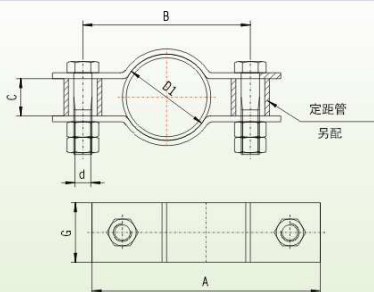

重型双螺栓管夹(公制管用) heavy pipe clamps with double bolts(for metric series pipe)

系列号 Series No.	公称管径 Nominal caliber	D ₁	最大荷载(N) Max load (N)		螺栓 Bolt d×1	A	B	C	G	定距管 Set pitch pipe
			350℃	400℃						
A6-1 (80)	80	89	15110	13340	M20×65	230	160	25	□40×6	Ø32×3
A6-1 (100)	100	108	15800	13930	M24×80	280	200		□50×10	Ø32×3
A6-1 (125)	125	133				300	220		□50×10	Ø32×3
A6-1 (150)	150	159				340	260		□50×10	Ø32×3
A6-1 (200)	200	219	21780	19330	M36×100	390	310	35	□70×10	Ø32×3
A6-1 (250)	250	273	26680	23940		510	400		□80×12	Ø45×3
A6-1 (300)	300	325	38650	34430		600	480		□80×16	Ø57×3
A6-1 (350)	350	377	40710	36200	M42×130	690	550		□90×20	Ø57×3
A6-1 (400)	400	426				740	600		□90×20	Ø57×3
A6-1 (450)	450	480				790	650		□90×20	Ø57×3

重型双螺栓管夹(英制管用) heavy pipe clamps with double bolts (for inch series pipe)

系列号 Series No.	公称管径 Nominal caliber	D ₁	最大荷载(N) Max load (N)		螺栓 Bolt d×1	A	B	C	G	定距管 Set pitch pipe
			350℃	400℃						
A6-2 (3)	3"	90	15110	13340	M20×65	230	160	25	□40×6	Ø32×3
A6-2 (4)	4"	115	15800	13930	M24×80	290	210		□50×10	Ø32×3
A6-2 (5)	5"	142				310	230		□50×10	Ø32×3
A6-2 (6)	6"	169				350	270		□50×10	Ø32×3
A6-2 (8)	8"	220	21780	19330	M36×100	390	310	35	□70×10	Ø32×3
A6-2 (10)	10"	274	26680	23940		510	400		□80×12	Ø45×3
A6-2 (12)	12"	325	38650	34430		600	480		□80×16	Ø57×3
A6-2 (14)	14"	377	40710	36200	M42×130	690	550		□90×20	Ø57×3
A6-2 (16)	16"	426				740	600		□90×20	Ø57×3
A6-2 (18)	18"	458				790	630		□90×20	Ø57×3

重型双螺栓管夹(铸铁管用) heavy pipe clamps with double bolts(for cast iron pipe)

系列号 Series No.	公称管径 Nominal caliber	D ₁	最大荷载(N) Max load (N)		螺栓 Bolt d×1	A	B	C	G	定距管 Set pitch pipe
			350℃	400℃						
A6-3 (80)	80	97	15110	13340	M20×65	240	170	25	□40×6	Ø32×3
A6-3 (100)	100	118	15800	13930	M24×80	290	210		□50×10	Ø32×3
A6-3 (125)	125	144				320	240		□50×10	Ø32×3
A6-3 (150)	150	170				350	270		□50×10	Ø32×3
A6-3 (200)	200	222	21780	19330	M36×100	390	310	35	□70×10	Ø32×3
A6-3 (250)	250	274	26680	23940		510	400		□80×12	Ø45×3
A6-3 (300)	300	326	38650	34430		600	480		□80×16	Ø57×3
A6-3 (350)	350	378	40710	36200	M42×130	690	550		□90×20	Ø57×3
A6-3 (400)	400	428				740	600		□90×20	Ø57×3
A6-3 (450)	450	480				790	650		□90×20	Ø57×3

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
1. The clamp surface is zinc plated. Different treatments upon request

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
2. Other materials and pipe o.d. upon request.

SHA7-*(**)三螺栓管夹(保温管用)

SHA8-*(**) pipe clamps with three bolts (for support)

SH	A7	*	**
舒恒管夹 Shuheng	型号 type	结构 structure	管外径 Pipe O.D.

订货示范: 公制管用管外径为 $\Phi 100$ 的管道, SHA7-1 (150)

Order model: metric series pipe outside diameter 100 SHA7-1 (150)

注: (1) 扁钢弯曲半径 r 等于其厚度值

Note: (1) flat steel bent radius r equals its thickness

(2) 材料: 碳钢


(2) material: carbon steel

(3) 定距管可根据安装需要设置

(3) set pitch pipe acc. to requirements

(4) 如使用不锈钢材料或其它要求请在订货时说明

(4) stainless steel or other requirements upon request

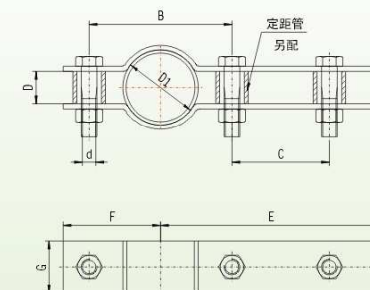

三螺栓管夹(保温管用)(公制管用) pipe clamps with three bolts(for support) (for metric series pipe)

系列号 Series No.	公称管径 Nominal caliber	D ₁	最大荷载(N) Max load (N)		螺栓 Bolt d×1	B	C	D	E	F	G	定距管 Set pitch pipe
			350℃	400℃								
A7-1 (25)	25	32	4220	3780	M10×40	70	30	16	85	55	□30×4	Ø18×3
A7-1 (32)	32	38				80			90	60		
A7-1 (40)	40	45	6870	6080	M16×60	100	55	28	135	80	□40×4	Ø25×3
A7-1 (50)	50	57				110			160	85		
A7-1 (65)	65	76				130	75		170	95		
A7-1 (80)	80	89				140	80		180	100		
A7-1 (100)	100	108	11090	9910	M20×80	180	80	34	205	125	□50×8	Ø32×35
A7-1 (125)	125	133				200			215	135		
A7-1 (150)	150	159	12850	11280	M24×90	250		38	255	165	□60×10	Ø32×35
A7-1 (200)	200	219				300	90		280	190		
A7-1 (250)	250	273	14320	12850	M24×90	360		50	310	220	□70×10	Ø45×35
A7-1 (300)	300	325				460			390	290		
A7-1 (350)	350	377				510			415	315		
A7-1 (400)	400	426				560			440	340		
A7-1 (450)	450	480				610	100		465	365		
A7-1 (500)	500	530				660			490	390		
A7-1 (600)	600	630				760			540	440		

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。

1. The clamp surface is zinc plated. Different treatments upon request

2、本公司可根据客户要求(设计)生产或使用其它材料和管径。

2. Other materials and pipe o.d. upon request.

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA7-*(**)三螺栓管夹(保温管用) SHA8-*(**) pipe clamps with three bolts (for support)

三螺栓管夹(保温管用)(英制管用)

pipe clamps with three bolts(for support) (for inch series pipe)

系列号 Series No.	公称管径 Nominal caliber	D ₁	最大荷载(N) Max load (N)		螺栓 Bolt d×1	B	C	D	E	F	G	定距管 Set pitchpipe
			350℃	400℃								
A7-2(1)	1"	34	4220	3730	M10×40	70	30	16	85	55	□30×4	Ø18×3
A7-2(1 1/4)	1 1/4"	42				80			90	60		
A7-2(1 1/2)	1 1/2"	48				100	55		135	80		
A7-2(2)	2"	61				110			160	85		
A7-2(2 1/2)	2 1/2"	75	6870	6080	M16×60	130	75	28	170	95	□40×4	Ø25×3
A7-2(3)	3"	90				140	80		180	100		
A7-2(4)	4"	115				190			210	130		
A7-2(5)	5"	142				210	80		220	140		
A7-2(6)	6"	169	12650	11280	M20×80	260		34	260	170	□60×10	Ø32×3.5
A7-2(8)	8"	220				300	90		280	190		
A7-2(10)	10"	274				360			310	220		
A7-2(12)	12"	325				460			390	290		
A7-2(14)	14"	356	20540	18260	M24×90	490		38	405	305	□80×16	Ø45×3.5
A7-2(16)	16"	408				540			430	330		
A7-2(18)	18"	458				590	100		455	355		
A7-2(20)	20"	510				650			485	385		
A7-2(24)	24"	610				750			535	435		

三螺栓管夹(保温管用)(铸铁管用)

pipe clamps with three bolts (for support) (for cast iron pipe)

系列号 Series No.	公称管径 Nominal caliber	D ₁	最大荷载(N) Max load (N)		螺栓 Bolt d×1	B	C	D	E	F	G	定距管 Set pitchpipe
			350℃	400℃								
A7-3(50)	50	65	6870	6080	M16×60	120	75	28	165	90	□40×4	Ø25×3
A7-3(65)	65	81				140			175	100		
A7-3(80)	80	97				150	80		185	105		
A7-3(100)	100	118				190			210	130		
A7-3(125)	125	144	11090	9910	M20×80	210	80	34	220	140	□50×8	Ø32×3.5
A7-3(150)	150	170				260			260	170		
A7-3(200)	200	222				310	90		285	195		
A7-3(250)	250	274				360			310	220		
A7-3(300)	300	326	12650	11280	M24×90	460		38	390	290	□70×10	Ø45×3.5
A7-3(350)	350	378				510			415	315		
A7-3(400)	400	428				560	100		440	340		
A7-3(450)	450	480				610			465	365		
A7-3(500)	500	532	20540	18260	M36×130	660		50	490	390	□80×16	Ø57×3.5
A7-3(600)	600	634				770			540	440		

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。

1、The clamp surface is zinc plated. Different treatments upon request

2、本公司可根据客户要求(设计)生产或使用其它材料和管径。

2、Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA8-*(**)三螺栓管夹(支托用) SHA8-*(**) pipe clamps with three bolts (for support)

SH	A8	*	**
舒恒管夹 Shuheng	型号 type	结构 structure	管外径 Pipe O.D.

订货示范: 公制管用管外径为Ø250的管道, SHA8-1 (250)

Order model: metric series pipe outside diameter 250 SHA8-1 (250)

注: (1) 扁钢弯曲半径r等于其厚度值

Note: (1) flat steel bent radius r equals its thickness

(2) 材料: 碳钢

(2) material: carbon steel


(3) 定距管可根据安装需要设置

(3) set pitch pipe acc. to requirements

(4) 最大允许荷载为扁钢厚度值(焊缝高度)乘单边管夹的焊缝长度(cm), 单位为KN

(5) 如使用不锈钢材料或其它要求请在订货时说明

(5) stainless steel or other requirements upon request

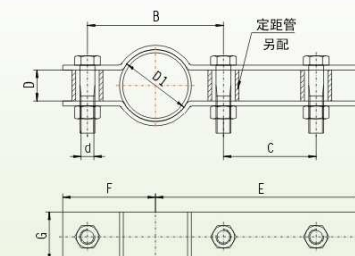

三螺栓管夹(支托用)(公制管用)

pipe clamps with three bolts(for support) (for metric series pipe)

系列号 Series No.	公称管径 Nominal caliber	D ₁	螺栓 Bolt B	d×l	C	D	E	H	G	定距管 Set pitchpipe	
A8-1 (15)	15	18	M10×30	60	8	90	40	50	□30×4	Ø18×3	
A8-1 (20)	20	25	M10×40	70	16	95		55			
A8-1 (25)	25	32		80		100		□40×4			
A8-1 (32)	32	38		M16×60	110	28			145		85
A8-1 (40)	40	45	120		150		90				
A8-1 (50)	50	57	130		155		95				
A8-1 (65)	65	76	150		165		105				
A8-1 (80)	80	89	M20×80		190	30	210	130	□60×10	Ø32×3.5	
A8-1 (100)	100	108		210	220		140				
A8-1 (125)	125	133		M24×100	250	45	265	165	□70×10		Ø38×3.5
A8-1 (150)	150	159	M30×110		320	50	310	210	□80×10	Ø45×3.5	
A8-1 (200)	200	219			M36×130	390	60	355	255		□90×12
A8-1 (250)	250	273				M36×140	460	65	390		290
A8-1 (300)	300	325	M42×160	540	65	460	120	340	□100×20	Ø57×3.5	
A8-1 (350)	350	377	M48×180	620	75	525	140	385	□100×25		
A8-1 (400)	400	426	M56×200	680	90	590	160	430			
A8-1 (450)	450	480								Ø76×4	

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。

1、The clamp surface is zinc plated. Different treatments upon request

2、本公司可根据客户要求(设计)生产或使用其它材料和管径。

2、Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA8-*(**)三螺栓管夹(支托用) SHA8-*(**) pipe clamps with three bolts (for support)

三螺栓管夹(保温管用)(英制管用)
pipe clamps with three bolts(for support) (for inch series pipe)

系列号 Series No.	公称管径 Nominal caliber	D ₁	螺栓 Bolt B	B	C	D	E	H	G	定距管 Set pitchpipe
A8-2 (1/2)	1/2"	21	M10×30	60	8	90	40	50	□30×4	Ø18×3
A8-2 (3/4)	3/4"	27	M10×40	70	16	95		55		
A8-2 (1)	1"	34		80		100		60	□40×4	
A8-2 (1 1/4)	1 1/4"	42		M16×60	110	28		145		
A8-2 (1 1/2)	1 1/2"	48	120		150		90			
A8-2 (2)	2"	61	130		155		95			
A8-2 (2 1/2)	2 1/2"	75	150		165		105			
A8-2 (3)	3"	90	M20×80		200	30	215	80	135	□60×10
A8-2 (4)	4"	115		220	225		145			
A8-2 (5)	5"	142		260	45	270	100		170	□70×10
A8-2 (6)	6"	169	M24×100	320	50	310		210	□80×10	Ø45×3.5
A8-2 (8)	8"	220	M30×110	390	60	355		255	□90×12	
A8-2 (10)	10"	274	M36×130	460	65	390		290	□90×16	
A8-2 (12)	12"	325	M36×140	520	65	450	120	330	□100×20	
A8-2 (14)	14"	356	M42×160	600	75	515	140	375	Ø76×4	
A8-2 (16)	16"	408	M48×180	660	90	580	160	420		□100×25
A8-2 (18)	18"	458	M56×200							

三螺栓管夹(保温管用)(铸铁管用)
pipe clamps with three bolts (for support) (for cast iron pipe)

系列号 Series No.	公称管径 Nominal caliber	D ₁	螺栓 Bolt B	B	C	D	E	H	G	定距管 Set pitchpipe
A8-3(50)	50	65	M16×60	120	28	150	60	90	□40×6	Ø25×3
A8-3(65)	65	81		140		160		100		
A8-3(80)	80	97		160		170		110		
A8-3(100)	100	118	M20×80	200	30	215	80	135	□60×10	Ø32×3.5
A8-3(125)	125	144		220		225		145		
A8-3(150)	150	170		M24×100		260		45		
A8-3(200)	200	222	M30×110	320	50	310	100	210	□80×10	Ø45×3.5
A8-3(250)	250	274	M36×130	390	60	355		255	□90×12	
A8-3(300)	300	326	M36×140	460	65	390		290	□90×16	
A8-3(350)	350	378	M42×160	540	65	460		120	340	□100×20
A8-3(400)	400	428	M48×180	620	75	525	140	385	□100×25	Ø57×3.5
A8-3(450)	450	480	M56×200	680	90	590	160	430		Ø76×4

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
1、The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
2、Other materials and pipe o.d. upon request..


如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA9-*(**)双排管卡管夹 SHA9-*(**) double-line clip pipe clamps

SH	A9	*	**
舒恒管夹 Shuheng	型号 type	结构 structure	管外径 Pipe O.D.

订货示范: 公制管用管外径为Ø300的管道, SHA9-1 (300)
Order model: metric series pipe outside diameter 300SHA9-1 (300)

- 注: (1) 扁钢弯曲半径r等于其厚度值
Note: (1) flat steel bent radius r equals its thickness
(2) 材料: 碳钢
(2) material: carbon steel
(3) 定距管可根据安装需要设置
(3) set pitch pipe acc. to requirements
(4) 如使用不锈钢材料或其它要求请在订货时说明
(4) stainless steel or other requirements upon request

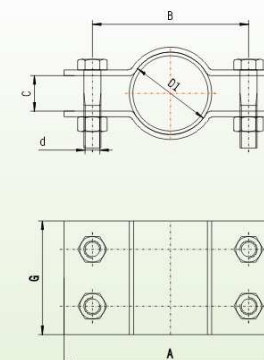

双排管卡管夹(公制管用)
double-line clip pipe clamps (for metric series pipe)

系列号 Series No.	公称管径 Nominal caliber	D ₁	螺栓 Bolt B	A	B	C	E	F	G
A9-1(25)	25	32	M12×45	120	80	8	18	34	□70×6
A9-1(32)	32	38		130	90	10			
A9-1(40)	40	45		140	100	15			
A9-1(50)	50	57	M12×50	150	110	20	30	68	□80×6
A9-1(65)	65	76		170	130				
A9-1(80)	80	89	M16×70	220	160	25	35	70	□120×10
A9-1(100)	100	100		240	180				
A9-1(125)	125	133	M20×80	280	210	30	50	100	□140×10
A9-1(150)	150	159		310	240				
A9-1(200)	200	219		370	300				
A9-1(250)	250	273	M24×100	420	350	30	50	100	□200×12
A9-1(300)	300	325		500	420				
A9-1(350)	350	377		550	470				
A9-1(400)	400	426		600	520				
A9-1(450)	450	480		660	580				
A9-1(500)	500	530		730	630				
A9-1(600)	600	630		830	730				

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
1、The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
2、Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA9-*(**)双排管卡管夹

SHA9-*(**) double-line clip pipe clamps

双排管卡管夹(英制管用)
double-line clip pipe clamps (for inch series pipe)

系列号 Series No.	公称管径 Nominal caliber	D _i	螺栓 Bolt B	A	B	C	E	F	G
A9-2 (1)	1 ^{''}	34	M12×45	130	90	8	18	34	□70×6
A9-2 (1 1/4)	1 1/4 ^{''}	42		130	90	10			
A9-2 (1 1/2)	1 1/2 ^{''}	48		140	100				
A9-2 (2)	2 ^{''}	61	M12×50	150	110	15	20	40	□80×6
A9-2 (2 1/2)	2 1/2 ^{''}	75		170	130				
A9-2 (3)	3 ^{''}	90	M16×70	220	160	20	30	60	□120×10
A9-2 (4)	4 ^{''}	115		250	190				
A9-2 (5)	5 ^{''}	142	M20×80	290	220	25	35	70	□140×10
A9-2 (6)	6 ^{''}	169		320	250				
A9-2 (8)	8 ^{''}	220		370	300				
A9-2 (10)	10 ^{''}	274		420	350				
A9-2 (12)	12 ^{''}	325	M24×100	500	420	30	50	100	□200×12
A9-2 (14)	14 ^{''}	356		530	450				
A9-2 (16)	16 ^{''}	408		580	500				
A9-2 (18)	18 ^{''}	458		630	550				
A9-2 (20)	20 ^{''}	510		710	610				
A9-2 (24)	24 ^{''}	610		810	710				

双排管卡管夹(铸铁管用)
double-line clip pipe clamps (for cast iron pipe)

系列号 Series No.	公称管径 Nominal caliber	D _i	螺栓 Bolt B	A	B	C	E	F	G
A9-3 (50)	50	65	M12×50	160	120	15	20	40	□80×6
A9-3 (65)	65	81		170	130				
A9-3 (80)	80	97	M16×70	230	170	20	30	60	□120×10
A9-3 (100)	100	118		250	190				
A9-3 (125)	125	144	M20×80	290	220	25	35	70	□140×10
A9-3 (150)	150	170		320	250				
A9-3 (200)	200	222		370	300				
A9-3 (250)	250	274		420	350				
A9-3 (300)	300	326	M24×100	500	420	30	50	100	□200×12
A9-3 (350)	350	378		550	470				
A9-3 (400)	400	428		600	520				
A9-3 (450)	450	480		660	580				
A9-3 (500)	500	532		730	630				
A9-3 (600)	600	634		830	730				

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
1. The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
2. Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request


SHA10-*(**)四螺栓管夹

SHA10-*(**) pipe clamps with four bolts

SH	A10	*	**
舒恒管夹 Shuheng	型号 type	结构 structure	管外径 Pipe O.D.

订货示范: 公制管用管外径为300的管道, SHA10-1 (300)
Order model: metric series pipe outside diameter 300 SHA10-1 (300)

- 注: (1) 扁钢弯曲半径r等于其厚度值
Note: (1) flat steel bent radius r equals its thickness
(2) 材料: 碳钢
(2) material: carbon steel
(3) 定距管作导向架时用
(3) set pitch pipe acc. to requirements
(4) 如使用不锈钢材料或其它要求请在订货时说明
(4) stainless steel or other requirements upon request

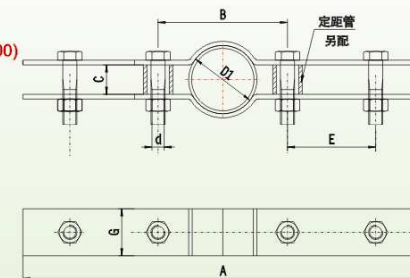

四螺栓管夹(公制管用)
pipe clamps with four bolts (for metric series pipe)

系列号 Series No.	公称管径 Nominal caliber	D _i	螺栓 Bolt B	A	B	C	E	G	定距管 Set pitch pipe
A10-1 (15)	15	18	M10×35	400	60	8	150	□30×4	Ø18×3
A10-1 (20)	20	25		410	70	10			
A10-1 (25)	25	32		420	80	15			
A10-1 (32)	32	38	M10×40	420	80	15	150	□40×4	Ø18×3
A10-1 (40)	40	45		450	100	20			
A10-1 (50)	50	57	M12×55	460	110	20	150	□40×6	Ø25×3
A10-1 (65)	65	76		480	130	25			
A10-1 (80)	80	89	M12×65	500	150	25	155	□50×8	Ø25×3
A10-1 (100)	100	108	M16×75	550	180	25			
A10-1 (125)	125	133		580	210	30	160	□80×10	Ø32×3.5
A10-1 (150)	150	159	M20×85	600	230	30			
A10-1 (200)	200	219		680	300	30	160	□70×10	Ø32×3.5
A10-1 (250)	250	273	M20×95	750	360	30			
A10-1 (300)	300	325		800	410	30			

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
1. The clamp surface is zinc plated. Different treatments upon request
2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
2. Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA10-*(**)四螺栓管夹

SHA10-*(**) pipe clamps with four bolts

四螺栓管夹(英制管用)

pipe clamps with four bolts (for inch series pipe)

系列号 Series No.	公称管径 Nominal caliber	D _i	螺栓 Bolt B	A	B	C	E	G	定距管 Set pitch pipe
A10-2 (1/2)	1/2"	21	M10×35	400	60	8	150	□30×4	Ø18×3
A10-2 (3/4)	3/4"	27		410	70	10			
A10-2 (1)	1"	34	M10×40	420	80	15	150	□40×4	Ø18×3
A10-2 (1 1/4)	1 1/4"	42		450	100	20			
A10-2 (1 1/2)	1 1/2"	48	M12×55	460	110	25	150	□40×6	Ø25×3
A10-2 (2)	2"	75		480	130	30			
A10-2 (2 1/2)	2 1/2"	90	M12×65	500	150	35	155	□50×8	Ø25×3
A10-2 (3)	3"	115		560	190	40			
A10-2 (4)	4"	142	M16×75	590	220	45	155	□60×10	Ø32×3.5
A10-2 (5)	5"	169		610	240	50			
A10-2 (6)	6"	220	M20×85	680	300	60	160	□70×10	Ø32×3.5
A10-2 (8)	8"	274		750	360	70			
A10-2 (10)	10"	325	M20×90	800	410	80	160	□80×12	Ø32×3.5
A10-2 (12)	12"								

四螺栓管夹(铸铁管用)

pipe clamps with four bolts (for cast iron pipe)

系列号 Series No.	公称管径 Nominal caliber	D _i	螺栓 Bolt B	A	B	C	E	G	定距管 Set pitch pipe
A10-3 (50)	50	65	M12×55	470	120	20	150	□40×6	Ø25×3
A10-3 (65)	65	81		480	130	25			
A10-3 (80)	80	97	M12×65	510	160	30	155	□50×8	Ø25×3
A10-3 (100)	100	118		560	190	35			
A10-3 (125)	125	144	M16×75	590	220	40	155	□60×10	Ø25×3
A10-3 (150)	150	170		610	240	45			
A10-3 (200)	200	222	M20×85	680	300	50	160	□70×10	Ø32×3.5
A10-3 (250)	250	274		750	360	60			
A10-3 (300)	300	326	M20×90	800	410	70	160	□80×12	Ø32×3.5

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。

1、The clamp surface is zinc plated. Different treatments upon request

2、本公司可根据客户要求(设计)生产或使用其它材料和管径。

如使用不同的形式或其它要求请在订货时说明。

Different forms or requirements upon request

SHA11-*(**)双排螺栓压紧管卡

SHA11-*(**) tightening pipe clamps with two-line bolts

SH	A11	*	**
舒恒管夹 Shuheng	型号 type	结构 structure	管外径 Pipe O.D.

订货示范: 公制管用管外径为Ø500的管道, SHA11-1 (300)

Order model: metric series pipe outside diameter 300 SHA11-1 (500)

注: (1) 扁钢弯曲半径r等于其厚度值

Note: (1) flat steel bent radius r equals its thickness

(2) 材料: 碳钢



(2) material: carbon steel

(3) 用于高压或振动管道上, 应垫以厚1~2毫米的石棉垫或石棉橡胶垫

(3) set pitch pipe acc. to requirements

(4) 如使用不锈钢材料或其它要求请在订货时说明

(4) stainless steel or other requirements upon request



双排螺栓压紧管卡(公制管用)

tightening pipe clamps with two-line bolts (for metric series pipe)

系列号 Series No.	公称管径 Nominal caliber	螺栓 Bolt d×1	A	B	C	E	F	R	G
A11-1 (25)	25	M12×40	130	90	0	18	34	16	□70×6
A11-1 (32)	32		130	90	5				
A11-1 (40)	40		140	100	10				
A11-1 (50)	50		150	110	15				
A11-1 (65)	65	M16×60	170	130	20	20	40	38	□80×6
A11-1 (80)	80		220	160	20				
A11-1 (100)	100		240	180	30				
A11-1 (125)	125		280	210	25				
A11-1 (150)	150	M20×80	310	240	40	35	70	80	□140×10
A11-1 (200)	200		370	300	70				
A11-1 (250)	250		420	350	100				
A11-1 (300)	300		500	420	120				
A11-1 (350)	350	M24×100	550	470	140	50	100	189	□200×12
A11-1 (400)	400		600	520	170				
A11-1 (450)	450		660	580	190				
A11-1 (500)	500		730	630	200				
A11-1 (600)	600	M24×120	830	730	250			315	

说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。

1、The clamp surface is zinc plated. Different treatments upon request

2、本公司可根据客户要求(设计)生产或使用其它材料和管径。

2、Other materials and pipe o.d. upon request.

如使用不同的形式或其它要求请在订货时说明

Different forms or requirements upon request

双排螺栓压紧管卡(英制管用)

tightening pipe clamps with two-line bolts (for inch series pipe)


系列号 Series No.	公称管径 Nominal caliber	螺栓 Bolt d×1	A	B	C	E	F	R	G
A11-2 (1)	1"	M12×40	130	90	0	18	34	17	□70×6
A11-2 (1 1/4)	1 1/4"		130	90	5				
A11-2 (1 1/2)	1 1/2"		140	100	10				
A11-2 (2)	2"		150	110	15				
A11-2 (2 1/2)	2 1/2"	M16×60	170	130	20	20	40	37	□80×6
A11-2 (3)	3"		220	160	20				
A11-2 (4)	4"		250	190	30				
A11-2 (5)	5"		290	220	30				
A11-2 (6)	6"	M20×80	310	250	40	35	70	84	□140×10
A11-2 (8)	8"		370	300	70				
A11-2 (10)	10"		420	350	100				
A11-2 (12)	12"		500	420	120				
A11-2 (14)	14"	M24×100	530	450	130	50	100	178	□200×12
A11-2 (16)	16"		580	500	150				
A11-2 (18)	18"		630	550	180				
A11-2 (20)	20"		710	610	190				
A11-2 (24)	24"	M24×120	810	710	240			305	

SHA12(**)管卡 SHA12(**) pipe clamps

SH	A12	**
舒恒管夹 Shuheng	型号 type	管外径 Pipe O.D.

保冷外径D Cold-retaining pipe O.D. (D)	R	C		螺栓Bolt d×l		G
		I型 type I	II型 type II	I型 type I	II型 type II	
≤590	D/2+3	R	D/2-10	M16×60	M16×70	□70×6
>590				M20×70	M20×80	□70×10

- 订货示范:公制管用管外径为Ø500的管道, SHA12 (50)
- Order model: metric series pipe outside diameter 500, SHA12 (50)
- 注: (1) I型为导向管卡, II型为固定管卡
- Note: (1) type I: guide pipe clamp; type II: set pipe clamp
- (2) 扁钢弯曲半径r等于其厚度值。
- (2) flat steel bent radius r equals its thickness
- (3) 材料: 碳钢
- (3) material: carbon steel
- (4) 支承块现场配作, 厚度同保冷厚度, 应满足GB/T11790和GB/T15586保冷技术要求, 材料为红松要。
- (4) supporting block is made on the work site. Its thickness equals the cold-retaining thickness. It meets the cold-retaining technology demands GB/T11790 and GB/T1558 The material is red pine .
- (5) 管卡重量未包括支承块重量。
- (5) The weight of the clamp doesn't include the supporting block.
- (6) 如使用不锈钢材料或其它要求请在订货时说明
- (6) stainless steel or other requirements upon request



- 说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
- 1、The clamp surface is zinc plated. Different treatments upon request
- 2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
- 2、Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA12(**)管卡 SHA12(**) pipe clamps

管卡系列表(一)(保冷管用)
pipe clamp series list (I) (for cold-retaining pipe)

系列号 Series No.	保冷外径 D cold-retaining pipe O.D. (D)	A	B
A12 (8)	80	230	160
A12 (9)	90	240	170
A12 (10)	100	250	180
A12 (11)	110	260	190
A12 (12)	120	270	200
A12 (13)	130	280	210
A12 (14)	140	290	220
A12 (15)	150	300	230
A12 (16)	160	310	240
A12 (17)	170	320	250
A12 (18)	180	330	260
A12 (19)	190	340	270
A12 (20)	200	350	280
A12 (21)	210	360	290
A12 (22)	220	370	300
A12 (23)	230	380	310
A12 (24)	240	390	320
A12 (25)	250	400	330
A12 (26)	260	410	340
A12 (27)	270	420	350
A12 (28)	280	430	360
A12 (29)	290	440	370
A12 (30)	300	450	380
A12 (31)	310	460	390
A12 (32)	320	470	400
A12 (33)	330	480	410
A12 (34)	340	490	420
A12 (35)	350	500	430
A12 (36)	360	510	440
A12 (37)	370	520	450
A12 (38)	380	530	460
A12 (39)	390	540	470
A12 (40)	400	550	480
A12 (41)	410	560	490
A12 (42)	420	570	500
A12 (43)	430	580	510
A12 (44)	440	590	520
A12 (45)	450	600	530
A12 (46)	460	610	540
A12 (47)	470	620	550

管卡系列表(二)(保冷管用)
pipe clamp series list (II) (for cold-retaining pipe)

系列号 Series No.	保冷外径 D cold-retaining pipe O.D. (D)	A	B
A12 (48)	480	630	560
A12 (49)	490	640	570
A12 (50)	500	650	580
A12 (51)	510	660	590
A12 (52)	520	670	600
A12 (53)	530	680	610
A12 (54)	540	690	620
A12 (55)	550	700	630
A12 (56)	560	710	640
A12 (57)	570	720	650
A12 (58)	580	730	660
A12 (59)	590	740	670
A12 (60)	600	770	700
A12 (61)	610	780	710
A12 (62)	620	790	720
A12 (63)	630	800	730
A12 (64)	640	810	740
A12 (65)	650	820	750
A12 (66)	660	830	760
A12 (67)	670	840	770
A12 (68)	680	850	780
A12 (69)	690	860	790
A12 (70)	700	870	800
A12 (71)	710	880	810
A12 (72)	720	890	820
A12 (73)	730	900	830
A12 (74)	740	910	840
A12 (75)	750	920	850
A12 (76)	760	930	860
A12 (77)	770	940	870
A12 (78)	780	950	880
A12 (79)	790	960	890
A12 (80)	800	970	900
A12 (81)	810	980	910
A12 (82)	820	990	920
A12 (83)	830	1000	930
A12 (84)	840	1010	940
A12 (85)	850	1020	950
A12 (86)	860	1030	960
A12 (87)	870	1040	970


- 说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
- 1、The clamp surface is zinc plated. Different treatments upon request
- 2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
- 2、Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA13 (**) 双螺栓管夹系列表 (一) SHA13(**) pipe clamps with two bolts series list (I)

SH	A13	**
舒恒管夹 Shuheng	型号 type	管外径 Pipe O.D.

- 订货示范: 公制管用管外径为 $\Phi 350$ 的管道, SHA13 (35)
- Order model: metric series pipe outside diameter 500, SHA13 (35)
- 注: (1) I 型为导向管卡, II 型为固定管卡
- Note: (1) type I: guide pipe clamp; type II: set pipe clamp
- (2) 扁钢弯曲半径 r 等于其厚度值。
- (2) flat steel bent radius r equals its thickness
- (3) 材料: 碳钢
- (3) material: carbon steel
- (4) 支承块现场配作, 厚度同保冷厚度, 应满足GB/T11790和GB/T15586保冷技术要求, 材料为红松要。
- (4) supporting block is made on the work site. Its thickness equals the cold-retaining thickness. It meets the cold-retaining technology demands GB/11790 and GB/T1558 The material is red pine .
- (5) 管卡重量未包括支承块重量。
- (5) The weight of the clamp doesn't include the supporting block.
- (6) 如使用不锈钢材料或其它要求请在订货时说明
- (6) stainless steel or other requirements upon request

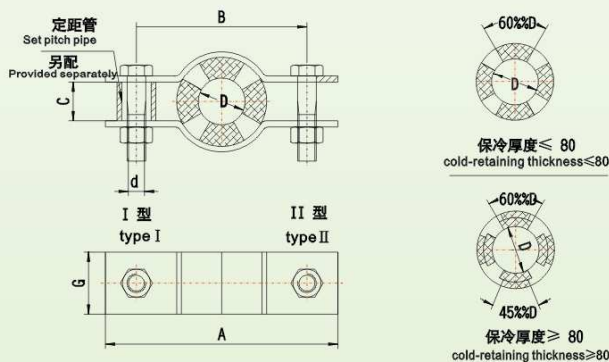

- 说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
- 1、The clamp surface is zinc plated. Different treatments upon request
- 2、本公司可根据客户要求 (设计) 生产或使用其它材料和管径。
- 2、Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA13 (**) 双螺栓管夹系列表 (一) SHA13(**) pipe clamps with two bolts series list (I)

双螺栓夹系列表 (一) (保冷管用)

pipe clamps with two bolts series list (I) (for cold-retaining pipe)

系列号 Series No.	管外径 Pipe O.D. (D)	螺栓 Bolt d×1	A	B	C	G	定距管 Set pitch pipe
A13 (8)	80	M12×50	170	130	16	□70×8	Φ25×3
A13 (9)	90		180	140			
A13 (10)	100		190	150			
A13 (11)	110		200	160			
A13 (12)	120	M12×60	240	180	20	□80×8	Φ25×3
A13 (13)	130		250	190			
A13 (14)	140		260	200			
A13 (15)	150		270	210			
A13 (16)	160	M20×75	300	230	24	□90×8	Φ32×3.5
A13 (17)	170		310	240			
A13 (18)	180		320	250			
A13 (19)	190		330	260			
A13 (20)	200	M24×90	340	270	26	□100×10	Φ32×3.5
A13 (21)	210		350	280			
A13 (22)	220		390	310			
A13 (23)	230		400	320			
A13 (24)	240	M24×100	410	330	30	□100×12	Φ32×3.5
A13 (25)	250		420	340			
A13 (26)	260		430	350			
A13 (27)	270		440	360			
A13 (28)	280	M30×120	450	370	40	□100×16	Φ38×3.5
A13 (29)	290		460	380			
A13 (30)	300		470	390			
A13 (31)	310		480	400			
A13 (32)	320	M24×100	500	420	30	□100×12	Φ32×3.5
A13 (33)	330		510	430			
A13 (34)	340		520	440			
A13 (35)	350		530	450			
A13 (36)	360	M30×120	540	460	40	□100×16	Φ38×3.5
A13 (37)	370		550	470			
A13 (38)	380		560	480			
A13 (39)	390		570	490			
A13 (40)	400	M30×120	620	520	40	□100×16	Φ38×3.5
A13 (41)	410		630	530			
A13 (42)	420		640	540			
A13 (43)	430		650	550			
A13 (44)	440	M30×120	660	560	40	□100×16	Φ38×3.5
A13 (45)	450		670	570			
A13 (46)	460		680	580			
A13 (47)	470		690	590			

双螺栓夹系列表 (二) (保冷管用)

pipe clamps with two bolts series list (II) (for cold-retaining pipe)

系列号 Series No.	管外径 Pipe O.D. (D)	螺栓 Bolt d×1	A	B	C	G	定距管 Set pitch pipe
A13 (48)	480	M12×50	700	600	40	□100×8	Φ38×3.5
A13 (49)	490		710	610			
A13 (50)	500		720	620			
A13 (51)	510		730	630			
A13 (52)	520	M30×120	740	640	40	□100×8	Φ38×3.5
A13 (53)	530		750	650			
A13 (54)	540		760	660			
A13 (55)	550		770	670			
A13 (56)	560	M20×75	780	680	40	□100×8	Φ38×3.5
A13 (57)	570		790	690			
A13 (58)	580		800	700			
A13 (59)	590		810	710			
A13 (60)	600	M24×90	820	720	40	□100×10	Φ32×3.5
A13 (61)	610		830	730			
A13 (62)	620		840	740			
A13 (63)	630		850	750			
A13 (64)	640	M24×100	860	760	40	□100×12	Φ32×3.5
A13 (65)	650		880	780			
A13 (66)	660		900	800			
A13 (67)	670		910	810			
A13 (68)	680	M30×140	920	820	50	□100×20	Φ38×3.5
A13 (69)	690		930	830			
A13 (70)	700		940	840			
A13 (71)	710		950	850			
A13 (72)	720	M24×100	960	860	50	□100×12	Φ32×3.5
A13 (73)	730		970	870			
A13 (74)	740		980	880			
A13 (75)	750		990	890			
A13 (76)	760	M30×140	1000	900	50	□100×20	Φ38×3.5
A13 (77)	770		1010	910			
A13 (78)	780		1020	920			
A13 (79)	790		1030	930			
A13 (80)	800	M30×120	1040	940	40	□100×16	Φ38×3.5
A13 (81)	810		1050	950			
A13 (82)	820		1060	960			
A13 (83)	830		1070	970			
A13 (84)	840	M30×120	1080	980	40	□100×16	Φ38×3.5
A13 (85)	850		1090	990			
A13 (86)	860		1100	1000			
A13 (87)	870		1110	1010			


- 说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
- 1、The clamp surface is zinc plated. Different treatments upon request
- 2、本公司可根据客户要求 (设计) 生产或使用其它材料和管径。
- 2、Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA14(**)四螺栓管夹系列表(一) SHA14(**) pipe clamps with four bolts series list (I)

SH	A14	**
舒恒管夹 Shuheng	型号 type	管外径 Pipe O.D.

- 订货示范:公制管用管外径为 $\varnothing 130$ 的管道, SHA14(13)
- Order model: metric series pipe outside diameter 130, SHA14(13)
- 注: (1) I 型为导向管卡, II 型为固定管卡
- Note: (1) type I: guide pipe clamp; type II: set pipe clamp
- (2) 扁钢弯曲半径 r 等于其厚度值。
- (2) flat steel bent radius r equals its thickness
- (3) 材料: 碳钢
- (3) material: carbon steel
- (4) 支承块现场配作, 厚度同保温厚度, 应满足 GB/T11790 和 GB/T15586 保温技术要求, 材料为红松要。
- (4) supporting block is made on the work site. Its thickness equals the cold-retaining thickness. It meets the cold-retaining technology demands GB/11790 and GB/T1558 The material is red pine .
- (5) 管卡重量未包括支承块重量。
- (5) The weight of the clamp doesn't include the supporting block.
- (6) 如使用不锈钢材料或其它要求请在订货时说明
- (6) stainless steel or other requirements upon request

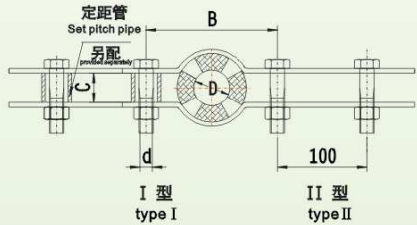

- 说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
- 1、The clamp surface is zinc plated. Different treatments upon request
- 2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
- 2、Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

SHA14(**)四螺栓管夹系列表(一) SHA14(**) pipe clamps with four bolts series list (I)

双螺栓夹系列表(一)(保冷管用)
pipe clamps with four bolts series list (I)
(for cold-retaining pipe)

系列号 Series No.	管外径 Pipe O.D. (D)	螺栓 Bolt d×1	A	B	C	G	定距管 Set pitch pipe
A14(8)	80		370	130			
A14(9)	90		380	140	16	$\square 70 \times 8$	$\varnothing 25 \times 3$
A14(10)	100		390	150			
A14(11)	110		400	160			
A14(12)	120		440	180	20	$\square 80 \times 8$	$\varnothing 25 \times 3$
A14(13)	130		450	190			
A14(14)	140		460	200			
A14(15)	150		470	210			
A14(16)	160		500	230			
A14(17)	170		510	240			
A14(18)	180		520	250	24	$\square 90 \times 8$	$\varnothing 32 \times 3.5$
A14(19)	190		530	260			
A14(20)	200		540	270			
A14(21)	210		550	280			
A14(22)	220		580	310			
A14(23)	230		590	320			
A14(24)	240		600	330			
A14(25)	250		610	340	26	$\square 100 \times 10$	$\varnothing 32 \times 3.5$
A14(26)	260		620	350			
A14(27)	270		630	360			
A14(28)	280		640	370			
A14(29)	290		650	380			
A14(30)	300		660	390			
A14(31)	310		670	400			
A14(32)	320		700	420			
A14(33)	330		710	430			
A14(34)	340		720	440			
A14(35)	350		730	450			
A14(36)	360		740	460	30	$\square 100 \times 12$	$\varnothing 32 \times 3.5$
A14(37)	370		750	470			
A14(38)	380		760	480			
A14(39)	390		770	490			
A14(40)	400		820	520			
A14(41)	410		830	530			
A14(42)	420		840	540			
A14(43)	430		850	550			
A14(44)	440		860	560	40	$\square 100 \times 16$	$\varnothing 38 \times 3.5$
A14(45)	450		870	570			
A14(46)	460		880	580			
A14(47)	470		890	590			

双螺栓夹系列表(二)(保冷管用)
pipe clamps with four bolts series list (II)
(for cold-retaining pipe)

系列号 Series No.	管外径 Pipe O.D. (D)	螺栓 Bolt d×1	A	B	C	G	定距管 Set pitch pipe
A14(48)	480		900	600			
A14(49)	490		910	610			
A14(50)	500		920	620			
A14(51)	510		930	630			
A14(52)	520		940	640			
A14(53)	530		950	650			
A14(54)	540		960	660			
A14(55)	550	M30×120	970	670	40	$\square 100 \times 16$	$\varnothing 38 \times 3.5$
A14(56)	560		980	680			
A14(57)	570		990	690			
A14(58)	580		1000	700			
A14(59)	590		1010	710			
A14(60)	600		1020	720			
A14(61)	610		1030	730			
A14(62)	620		1040	740			
A14(63)	630		1050	750			
A14(64)	640		1060	760			
A14(65)	650		1080	790			
A14(66)	660		1100	800			
A14(67)	670		1110	810			
A14(68)	680		1120	820			
A14(69)	690		1130	830			
A14(70)	700		1140	840			
A14(71)	710		1150	850			
A14(72)	720		1160	860			
A14(73)	730		1170	870			
A14(74)	740		1180	880			
A14(75)	750	M30×140	1190	890	50	$\square 100 \times 20$	$\varnothing 38 \times 3.5$
A14(76)	760		1200	900			
A14(77)	770		1210	910			
A14(78)	780		1220	920			
A14(79)	790		1230	930			
A14(80)	800		1240	940			
A14(81)	810		1250	950			
A14(82)	820		1260	960			
A14(83)	830		1270	970			
A14(84)	840		1280	980			
A14(85)	850		1290	990			
A14(86)	860		1300	1000			
A14(87)	870		1310	1010			

- 说明Note: 1、管夹表面处理为镀锌, 可根据客户要求选用其它表面处理方法。
- 1、The clamp surface is zinc plated. Different treatments upon request
- 2、本公司可根据客户要求(设计)生产或使用其它材料和管径。
- 2、Other materials and pipe o.d. upon request..

如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request



车间一角
A corner of a workshop

舒恒舒达拥有独立的产品开发、设计部门，并配备了模具制造车间（其他管夹、法兰生产企业基本没有）。舒恒产品的开发从创维到设计基本在3个工作日内完成。模具制作一般可在3-30个工作日内完成试样，试样确定后，可立即投入生产。而舒恒公司投资千万打造出如今的模具制造车间。

车间内配备2台加工中心、1台数控雕刻机、2台数控电火花机、10台数控线切割、16台其他辅助设备，合计41台数控模具制造设备。

公司通过自主创新，广纳模具设计、制作人才，通过先进的二维CAD和三维Pro/E软件，开发制作出精密的模具。如今，舒恒公司可以独立设计生产金属冷、温成型模具，具体包括：冲压模具、铝压铸模、低压铸造模、精密塑料模具。舒恒可以制作模具重达15吨的塑料模具。




公司开发新型管夹、法兰、二十个品种，并获得国家专利。因为有了独产的产品开发，设计部和模具制造车间，可以满足不同客户的需求，同时也是舒恒产品品质保证的源泉。

Shuheng Shuda has the independent development and design department and the mould-made workshop, other enterprises of pipe clamp and flange have no the wareshop. The development and design of Shuheng produce often finishes in the three-teen working days. We can finish the sample of the mould in three-teen days and produce at once after confirming the sample. Shuheng invests several millions to make the mould-made wokshop.

There are two machining centers, one CNC engraving machine, two Nc edmses, ten CNC cuttings, sixteen other auxiliary equipment in the workshop, the total is forty-one Numerical Control mould manufacturing equipments.

The mould talents of designing and producing in Shuheng company develop and manufacture precision mould by independent innovation and the advanced composition of two-dimensional CAD three-dimensional Pro/E. Now Shuheng company can design and manufacture independently the metal cold, hot molding including stamping mould, aluminum mould, low pressure casting mould, precision plastic mould. The heaviest plastic mould is up to 15 ton.

The company develops twenty varieties of new pipe clamps and flange, and owns national patent. Because there is a separate product design development and mould manufacturing workshop, we can satisfy the requirements of different customers and also it is the source of Shuheng products quality guarantee

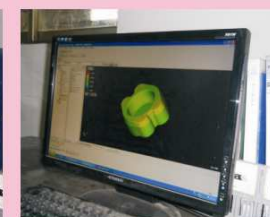








金属有限元素分析
Metal finite element analysis



开发与设计
Design and develop

产品示意图

Sketch drawing












如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

注: 如须订货本公司提供具体尺寸和图纸

产品示意图

Sketch drawing










如使用不同的形式或其它要求请在订货时说明
Different forms or requirements upon request

注: 如须订货本公司提供具体尺寸和图纸







产品示意图

Sketch drawing



产品示意图


Sketch drawing




产品示意图

Sketch drawing

SHI18** 安装在设备上的垂直管用悬臂导向架
标准号: HG/T21629-E18




SHE20** 安装在设备上的框式导向架 (保温管用)
标准号: HG/T21629-E20




SHJ1** T 型管托 (焊接型)
标准号: HG/T21629-J1



SHJ2** T 型管托 (管夹型)
标准号: HG/T21629-J2



SHJ3** T 型管托 (加筋焊接型)
标准号: HG/T21629-J3




SHJ4** T 型管托 (加筋管夹型)
标准号: HG/T21629-J4




SHJ5** H 型管托 (焊接型)
标准号: HG/T21629-J5




SHJ6** H 型管托 (带管夹)
标准号: HG/T21629-J6




SHJ7** 高压减振管托
标准号: HG/T21629-J7



SHJ8** 管托 (保冷管用)
标准号: HG/T21629-J8




SHJ9** 管托 (保冷管用)
标准号: HG/T21629-J9




SHJ10** 座式管托 (用于大型管道)
标准号: HG/T21629-J10



SHJ13** 振动管道用管托
标准号: HG/T21629-J13



SHL1** 双吊杆 I 型滚动吊架 (公、英制管用)
标准号: HG/T21629-L1




SHL2** 双吊杆 II 型滚动吊架 (保冷管用)
标准号: HG/T21629-L2




产品示意图

Sketch drawing


SHL3** 单吊杆 I 型滚动吊架 (公、英制管用)
标准号: HG/T21629-L3




SHL4** 单吊杆 II 型滚动吊架 (保冷管用)
标准号: HG/T21629-L4




SHL5** 扁钢 I 型滚动支架 (公、英制管用)
标准号: HG/T21629-L5




SHL6** 扁钢 II 型滚动支架 (保冷管用)
标准号: HG/T21629-L6



SHL7** 扁钢 III 型滚动支架 (公英制和保温管用)
标准号: HG/T21629-L7




SHL8** 搁置式 II 型滚动支架 (公英制和保冷管用)
标准号: HG/T21629-L8




SHL9** 搁置式 III 型滚动支架 (公英制和保温管用)
标准号: HG/T21629-L9




SHTD**-*-* 可变弹簧支吊架
标准号: JB/T8130.2-1999
A型为上螺栓悬吊可变弹簧支吊架




SHTD**-*-* 可变弹簧支吊架
标准号: JB/T8130.2-1999
B型为单耳悬吊可变弹簧支吊架




SHTD**-*-* 可变弹簧支吊架
标准号: JB/T8130.2-1999
C型为双耳悬吊可变弹簧支吊架




SHTD**-*-* 可变弹簧支吊架
标准号: JB/T8130.2-1999
D型为上调节器侧置可变弹簧支吊架




SHTD**-*-* 可变弹簧支吊架
标准号: JB/T8130.2-1999
E型为下调节器侧置可变弹簧支吊架




SHTD**-*-* 可变弹簧支吊架
标准号: JB/T8130.2-1999
F(1)型为支脚侧置可变弹簧支吊架



SHTD**-*-* 可变弹簧支吊架
标准号: JB/T8130.2-1999
F(2)型为支脚侧置可变弹簧支吊架



SHTD**-*-* 可变弹簧支吊架
标准号: JB/T8130.2-1999
G型为并联悬吊可变弹簧支吊架





原材料仓库
The raw material warehouse



原材料仓库
The raw material warehouse

舒恒舒达公司拥有独立的仓储与物流系统。公司设置了：原材料库、五金库、半成品库、成品库、装配车间、打包发货车间。

公司引进了先进的物流仓储系统软件，仓储系统集成ISO9001:2008质量管理体系相关流程，建立了统一可行的“物流指导书”，从供应商管理、物资采购，进而对原材料、五金库、半成品、成品、装配车间、到打包发货车间等一系列相关信息按照高效率、低成本流动和储存而进行的规划、组织、协调与控制，实现了高层次的管控企业物流管理水平，提升了企业的客户服务水平，体现物流管理是企业获取价值的第三利润来源的新思想。

1、原材料库

公司原材料库，占地面积2500平方米，主要负责对所有原材料的检验、入库、保管工作。仓库内采用了最先进的仓储管理系统软件，将原材料按照材质、种类、型号不同进行细分，录入仓储系统，并对供应商进行考核，严格对原材料质量进行把关，是舒恒公司产品质量的保证。

2、五金库

公司五金库，利用最先进的仓储管理系统软件，将日常生产所需要的易耗品、工具的进行检验、入库、保管、报损，所有工作流程均在仓储管理系统软件平台上完成。

3、半成品库

公司半成品库，主要负责公司半成品、产品配件的入库、管理、分类、出库等工作，是公司变成成品的中间环节，半成品库的产品质量直接关系到产品整体质量，所有工作流程均在仓储管理系统软件平台上完成，实现了高效率、低成本流动和储存。

4、装配车间

公司装配车间，配备仓库管理系统软件，分工明确。在仓储管理平台上，统筹生产周期与销售发货期，安排装配产品种类、数量及装配要求。由装配车间装配完成后，经过认真细致的检验，保证产品的质量剔除不合格品，方可进入成品库。

5、成品库

公司成品库，占地2500平方米，采用最先进、最稳固的钢结构货架，配备仓库管理软件。对入库的成品按规格型号、材质进行细化分类，将相关数据录入系统软件内，并及时更新成品库内实际库存，系统软件对出库产品的种类、数量进行统计分析，自动生成需增加库存产品种类及数量。为公司销售及生产提供最及时、有效的信息。

6、打包发货车间

公司打包发货车间，根据销售发货计划单，对产品按轻、重、缓、急进行统筹分类打包，车间内配备优质的打包设备，使得舒恒公司产品包装既美观又实用；及时的发货，使舒恒公司在客户心目中成为“快捷、方便”的代名词。



半成品组装
The assembly



半成品组装
The assembly



成品包装
The wrap of products



成品包装
The wrap of products



成品包装
The wrap of products



半成品仓库
The semi-finish products warehouse



半成品仓库
The semi-finish products warehouse



半成品仓库
The semi-finish products warehouse

Shuheng Shuda owns an independent storage and a system of logistics. Shuheng's warehouse includes the raw material warehouse, the hardware warehouse, the semi-finished products warehouse, the finished goods warehouse, the assembly shop and the packing workshop.

Shuheng introduces the advanced logistics warehousing system software, which integrates ISO9001:2008 relevant procedure quality management system and builds unified viable logistics instruction. It realizes high-level control of enterprise logistics management, improves the enterprise level of customer service from supplier management to material purchasing, then the staff can better use the relevant information from the raw material, the hardware warehouse, the semi-finished products warehouse, the finished goods warehouse and the packing workshop and the enterprise better realizes the idea of high efficiency, low cost flow and storage.

I) The raw material warehouse

The raw material warehouse covers two thousand five hundred kliometres. The employees are in charge of inspecting, treasuring and safekeeping to the raw material. The warehouse uses the most advanced storage management system software which distinguishes raw materials according to the different types, material quality and models, inputs storage system, checks the supplier of raw material inspection, controls strictly quality, which is the product quality guarantee of ShuHeng company.

II) the hardware warehouse

The hardware warehouse uses the storage management system software to inspect, treasure, safekeep and dispose of the daily life need stores and tools, the related operation is finished by the the storage management system software.

III) the semi-finished products warehouse

The warehouse manages to treasure, safekeep, classify, outbound the semi-finished products and product fittings. The quality of the semi-finished products warehouse depends to the overall quality of products, the operation is finished by the the storage management system software which realizes high efficiency, low cost flow and storage.

IV) the assembly shop

The assembly shop equips with warehouse management system software and clears division in the assembly shop. In warehouse management platform, the employees coordinate production cycle and delivery time, arrange to assemble the type, the quantity of production and the requirement assembly. After finishing the assemble, inspectors must check and pick out the unqualified ones, finally can be sent to the finished goods warehouse.

V) the finished goods warehouse

The warehouse covers two thousand five hundred kliometres, opens the most advanced and the most solid steel shelves, equipped with warehouse management software. We carefully classify these production according to the type and material, input the relevant data in the software, update practical inventory in time, statistic the types, quantity of the outbound products. The types, quantity of the products of needing to be added appear automatic in the software. The warehouse offers the promptest and most effective news.

VI) the packing and delivery workshop

The staff in the workshop pack production according to the detail develive time in production plans. There are good equipments in the workshop, which make the wrap look nice and apply. Prompt delivery makes Shuheng the pronoun of quick, convenience in the hearts of customers.