GENERAL CATALOGUE

Multipole connectors for industrial purposes

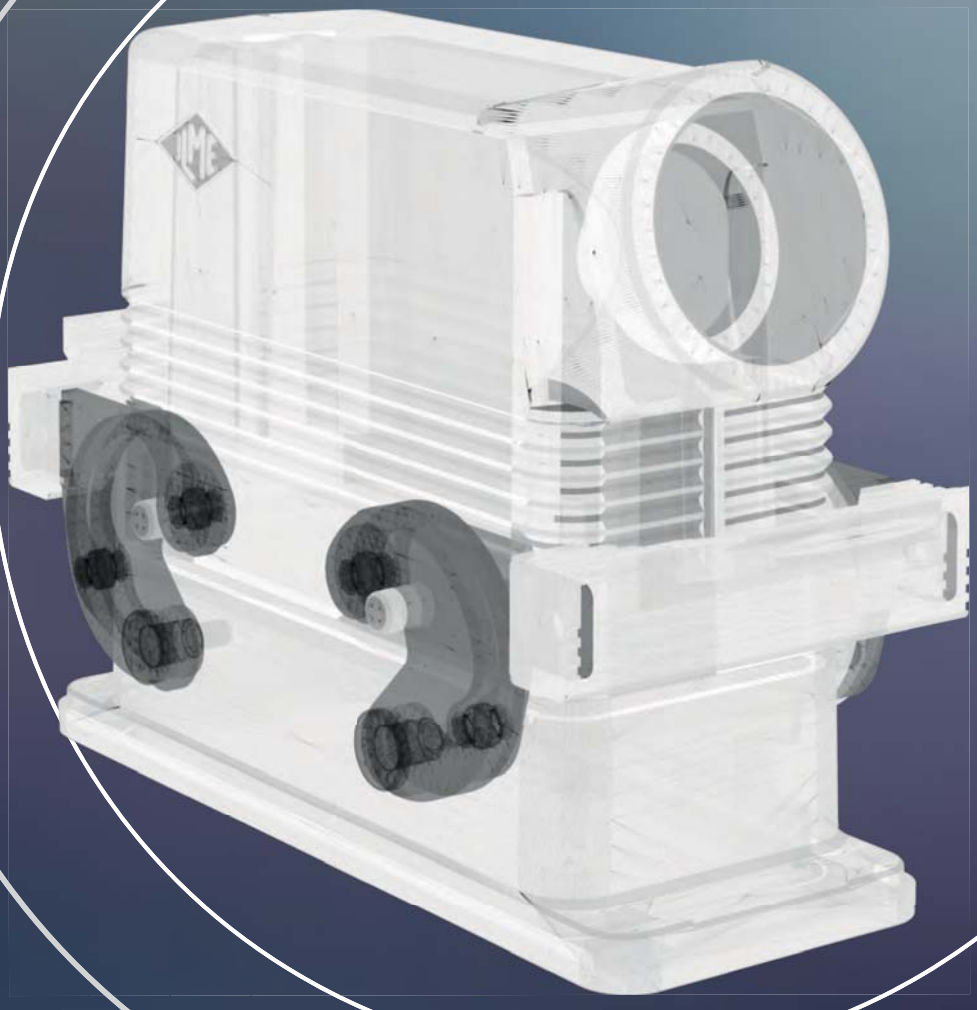

Printed in September 2019 - Issue 03

Multipole connectors for industrial purposes

GENERAL CATALOGUE

CN. 19

THE TRADITION
OF INNOVATION SINCE 1945

ILME designs and manufactures complete solutions for industrial connections.
Headquartered in Milan and with subsidiaries in the key countries driving the progress of automation, ILME is an industry leader in the main world markets.
People are vital to success and growth at ILME, sharing a passion for innovation, utmost responsibility and participation.
The Company is committed to developing technology in the areas that most impact the future of the industries it serves: high quality and safe cabling, research on the most suitable materials, rapid turnaround and readily available services while striving for energy saving and environmental safeguard.

COMMITMENT TO INDUSTRY

Technological innovation is the main pillar of ILME competitiveness.
In the electrical connection sector of industrial automation, characterized by the need for top performance and reliability, ILME is an acknowledged leader with its own patents and a global benchmark supplier of major companies worldwide.
ILME offers a fully integrated range of high-quality products and services for every type of connection to suit any application requirements.

AUTOMATION

RAILWAY

ENERGY

NAVAL

FOOD & BEVERAGE

AGRONOMY

OUTDOOR

TRANSPORT

LIGHT & SOUND

PLASTIC

CHEMICAL

AIRPORT

Practical advices for consulting the catalogue

Page layout and index

The ILME General Catalogue is divided into **six** sections to make it easier its consultation.
All the products included have been grouped together by product lines.

The **sections** are marked with different colours to facilitate their immediate identification.

Please refer to the example page at right.

1 **Six sections** marked by different colours:

- **INTRODUCTION**
- **INSERTS**
- **MIXO INSERTS**
- **ENCLOSURES**
- **ACCESSORIES AND TOOLS**
- **APPENDIX**

2 **Sub-sections** showing the specific product page

3 **Chapters and technical detail page**

4 **Combinations and pictures**
List of the possible combinations between inserts and enclosures

5 **Product descriptions and part numbers**

6 **Technical descriptions, 2D drawings**

7 **Load curves** (for more information please refer to page 28)

The **figurative index,** that opens each section, clearly shows the series of products relevant to each product line.

Icons

Published in the “Combinations and pictures“ area to to highlight specific points.

Important technical information

Key feature

Certifications and ratings

Availability of the products

Notes

- Dimensions shown are not binding and may be changed wthout notice.
- All pictures shown are for illustration purpose only. Actual products may vary due to product enhancement.
- Enclosures pictures are not exhaustive and show just a few representative examples. For more details of a specific part No., please consult the online product data sheet.

Example page

Inserts

CDD 38 poles + ⏚ 10A - 250V

enclosures: size "66.16"	page:
IL-BRID	378 - 382
CZ7 IP67, single lever	385
W-TYPE for aggressive environments	520
E-Xtreme® corrosion proof	541
EMC	577

panel supports:	page:
COB	652 - 653

inserts, crimp connections

10A crimp contacts silver and gold plated

CDD

description	part No.	part No.	part No.
without contacts (to be ordered separately)			
female inserts for female contacts	CDDF 38		
male inserts for male contacts	CDDM 38		
10A female contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		CDFA 0.3	CDFD 0.3
0,5 mm² AWG 20 identification No. 2		CDFA 0.5	CDFD 0.5
0,75 mm² AWG 18 identification No. ②		CDFA 0.7	CDFD 0.7
1 mm² AWG 18 identification No. 3		CDFA 1.0	CDFD 1.0
1,5 mm² AWG 16 identification No. 4		CDFA 1.5	CDFD 1.5
2,5 mm² AWG 14 identification No. 5		CDFA 2.5	CDFD 2.5
10A male contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		CDMA 0.3	CDMD 0.3
0,5 mm² AWG 20 identification No. 2		CDMA 0.5	CDMD 0.5
0,75 mm² AWG 18 identification No. ②		CDMA 0.7	CDMD 0.7
1 mm² AWG 18 identification No. 3		CDMA 1.0	CDMD 1.0
1,5 mm² AWG 16 identification No. 4		CDMA 1.5	CDMD 1.5
2,5 mm² AWG 14 identification No. 5		CDMA 2.5	CDMD 2.5

silver plated

gold plated÷

- characteristics according to EN 61984:
  10A 250V 4kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 75
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 705 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CDD 38 poles connector inserts
Maximum current load derating diagram





contacts side (front view)



CR CP coding pin with loss of one contact (page 689)



CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

÷ for basic or high thickness gold plating, please refer to page 674

dimensions shown in mm are not binding and may be changed without notice 77

INTRODUCTION

IMPORTANT NOTES ... 8
CE MARKING ... 9
GENERAL FEATURES OF MULTIPOLE CONNECTORS ... 10
- STANDARD **INSERTS** ... 12
- MIXO MODULAR UNITS ... 13
- INSERTS FEATURES ... 14
- MIXO INSERTS FEATURES ... 18
- RECOMMENDED TIGHTENING TORQUE ... 20
- RANGE OF CONDUCTOR CROSS-SECTIONAL AREA AND STRIPPING LENGHT ... 21
- CONDUCTOR CONNECTION TECHNOLOGY ... 22
- CRIMP CONTACTS OVERVIEW ... 27
- LOAD CURVES ... 28
- TYPE OF **ENCLOSURES** ... 30
- APPLICATIONS SECTORS ... 33
- LOCKING SYSTEMS ... 34
- TYPE OF COVERS ... 35
- TYPE OF HOODS / HOUSINGS ... 36
- ENCLOSURES FEATURES ... 42
- THE DEGREE OF PROTECTION ... 46
- CHANGEOVER FROM PG THREADS TO METRIC ... 47
- COMBINATIONS BETWEEN ENCLOSURES AND INSERTS ... 48
- ACCESSORIES AND TOOLS FOR INSERTS AND ENCLOSURES ... 50

From page

INSERTS 52
- **SCREW / SPRING / CRIMP CONNECTIONS** UP TO 10A ... 58
- **SQUICH® CONNECTION WITHOUT TOOLS** 6A, 10A, 16A ... 63
- **SCREW / SPRING / CRIMP CONNECTIONS** UP TO 16A ... 98
- **SCREW CONNECTIONS, CP - CP...RY SERIES** UP TO 35A ... 178
- **CRIMP CONNECTIONS, CQ SERIES** 6,5A, 10A, 16A, 40A ... 182
- **SCREW / CRIMP CONNECTIONS, CX SERIES** 10A, 16A, 40A, 80A, 100A ... 194
- **CRIMP CONNECTIONS, HNM SERIES** 10A, 16A, 40A ... 208
- **DATA CONNECTORS** ... 222
- **DESINA®** ... 244

MIXO INSERTS 252
- **MIXO** 4A, 5A, 10A, 16A, 40A, 70A, 100A, 200A ... 262
- **MIXO DATA** ... 286
- **CRIMP CONNECTIONS, MIXO HNM SERIES** 10A, 16A, 40A ... 320

ENCLOSURES 334
- **STANDARD APPLICATIONS:** CK-CKA-MKA, CQ, IL-BRID, CZ7 RIGID LEVER, C-TYPE, T-TYPE, COB ... 339
- **SPECIAL ENCLOSURES:** MIXO ONE, BIG, EMC, 180 °C, HNM, CENTRAL LEVER ... 369
- **WATERTIGHT:**
  - IP67 (V-TYPE) ... 436
  - IP65/IP66 (V-TYPE) ... 444
  - IP68 (CGK/MGK, CG/MG) ... 628
- **AGGRESSIVE ENVIRONMENTS:** T-TYPE/W, W-TYPE, E-Xtreme® ... 489
- **FOR SPECIFIC APPLICATIONS:**
  - HYGIENIC ... 501
  - LS-TYPE ... 618

ACCESSORIES AND TOOLS 662
- **ACCESSORIES** ... 666
- **CRIMPING TOOLS** ... 704

APPENDIX 742
- **DIMENSIONING OF CLEARANCES AND CREEPAGE DISTANCES** ... 744
- **EU ENVIRONMENTAL LEGISLATION** ... 750
- **FIRE PROTECTION STANDARDS FOR RAILWAY APPLICATIONS** ... 751
- **STANDARDS AND CERTIFICATIONS** ... 753
- **SPECIFICATIONS** ... 753
- **ILME SMART CONFIGURATOR** ... 754
- **INDEX OF PART NUMBERS** ... 756

IMPORTANT NOTES

Strictly tied to our general conditions of sales

1 ILME designs and manufactures complete solutions for Heavy Duty electrical power connections.
The connector (although offered to the user as a variety of elements, usually inserts and enclosures, to allow the selection of the ideal combination) has been **designed as a complete connector** and tested to be compliant with the essential safety requirements of the EU Low Voltage Directive 2006/95/EC (2014/35/EU from April 20, 2016) and in particular the EN 61984 standard. The design of this "whole" system guarantees that every allowed combination of inserts, enclosures and accessories cannot result as improper.

2 The products in this catalogue alone cannot guarantee the best functionality upon installation, as this depends also on their correct **"putting into service"** which must be performed in compliance with the applicable system safety standards and according to the "rule of the art". Therefore the effectiveness of the installation of the connector depends on the choices of the end user who must also take into account the following safety requirements.

3 Connectors must **not be connected or disconnected when live or under load.**

4 After wiring the inserts it is necessary **to verify the continuity of the protective earth connections.**

5 The **correct coupling of the inserts** is guaranteed only if they are installed (with the four fixing screws supplied *) inside the corresponding enclosures or onto compatible accessories in this catalogue. ILME S.p.A. is not responsible for any different application.

6 Wiring of **screw-type terminal connections** must be carried out applying the correct tightening torque in order to avoid false contacts or damage to the conductor, the screw or the terminal.

7 **Crimping tools** and **crimp contacts** used should preferably be supplied by the same manufacturer to avoid difficulties with the insertion and retention or damaging of the contacts themselves.

8 Correct wiring of **spring-clamp connection inserts** is guaranteed only when the correct screwdriver indicated in the specific catalogue, or possibly on the insert, is used **.

9 Avoid forcing the contacts during **connection and disconnection.** Connectors must be coupled and uncoupled in the axial direction with respect to the contacts, without bending and pulling the attached conductor bundles or cables.

10 Installation of two **inserts side by side,** in enclosures with two bays, must respect the polarity drawing marked on the insert (or the contact side view, as shown in this catalogue) to avoid inverted coupling.

11 Installation of two or more identical **connectors side by side** is recommended only with the use of **coding pins** in order to avoid mismatched couplings.

12 In order to keep the declared **degree of protection** (IP code according to EN 60529, or Enclosure Type Rating according to ANSI/UL 50E), enclosures must be completed with cable glands and/or other accessories with at least an equal degree of protection.

13 Moreover, the declared **degree of protection** (IP code according to EN 60529, or Enclosure Type Rating according to ANSI/UL 50E) is guaranteed when the enclosures, complete with inserts, are coupled and locked with their locking levers (or devices).

14 Connector inserts and their enclosures are generally compatible with similar/equivalent products from other manufacturers, according to the last samples tested. Full compatibility cannot be guaranteed in the event of technical changes made by other manufacturers.
In particular, maximum performance of IP68 enclosures (CG Series) cannot be guaranteed when coupled with other manufacturers' products.

15 **Spare parts** are supplied in minimum quantities only with the purpose to replace damaged parts. To avoid invalidation of warranty, products should be modified or repaired only by ILME: the integrity of their functionality - e.g. their degree of protection - can no longer be guaranteed if products are modified/repaired by end-users. In any case, the liability for correct choice, assembly and use is totally at charge of the installer and the end-user.

16 ILME S.p.A. takes no responsibility in verifying whether the components herein contained comply with any specific regulations of fields of application.

17 ILME cannot be held responsible for individual components in **uses other than those described in this catalogue.**
ILME cannot be held responsible for **incorrect connector selection** in relation to the environmental conditions of the application (e.g.: influence of ambient temperature, moisture, environmental pollution, etc.).

* Except one fixing screw for size "21.21" inserts, two fixing screws for size "32.13" inserts.
** Except for **Squich®** inserts (with spring-clamp terminals with actuator button) that do not require any tool to operate the terminal.

CE MARKING

As from 1st January 1997, in order to make available electrical products on the European market, the manufacturer must ensure that these bear the relevant **CE marking,** in line with the Low Voltage Directive 73/23/ EEC* (implemented in Italy as L. D. 18-10-1977 no. 791) and its modification 93/68/EEC* (implemented in Italy as L.D. 25-11-1996 no. 626/96, published in the supplement to the Gazzetta Ufficiale of 14-12-1996).

The CE marking must be visible on the product or, if this is not possible, on the packaging, the instructions for use or on the warranty certificate. It acts as a declaration by the manufacturer that the product complies with all relevant EU directives regarding its field of application.

ILME products bear the CE marking on the actual product or its packaging.

Almost all ILME products fall within the scope of the Low Voltage Directive. An EU declaration of conformity is required in order to be able to apply the CE marking. This declaration, to which the market is not directly entitled, must be made available to the controlling authorities (in Italy, the Ministry of Economic Development) at all times. In it, the manufacturer declares the technical safety standard(s) followed in the design and manufacture of the product. These standards must be, in decreasing order of preference:

— a European standard (EN prefix)
— a European harmonisation document (HD prefix)
— an international IEC standard
— a national standard
— in the absence of reference standards, the manufacturer's internal specifications guaranteeing compliance with the basic safety requirements of the directive.

Conformity with harmonised technical standards (i.e. ratified by CENELEC) also constitutes presumption of conformity with the basic safety requirements of the directives.

The CE marking of ILME products results from the declaration of conformity of the product to harmonised standards or international IEC standards.

Through the CE marking, ILME declares full compliance, not merely with the directive's basic safety requirements, but also with those international or national standards on which voluntary safety certification markings are based (e.g. IMQ and VDE). In this way, ILME intends to give the CE marking the value of self-certification in terms of safety, given the loss in legal value of voluntary certifications issued by third parties, ratified by directive 93/68/EEC*.

Notwithstanding the above, practically all ILME products still bear voluntary conformity markings.

The above mentioned EU declaration of conformity becomes null and void when the assembly of products includes one or more components not manufactured by ILME and without CE marking.

⚠ **The information contained in this catalogue is not binding and may be changed without notice.**

* Note: The next legal reference for the Low Voltage Directive was 2006/95/EC, as consolidation of the original Directive 73/23/EEC + Directive 93/68/EEC. On 29th March 2014, the Official Journal of the European Union published the new Low Voltage directive 2014/35/EU dd. 26th February 2014, a recast version of directive 2006/95/EC, which is in force since 20th April 2016.

UNI EN ISO 9001: 2015
Design, manufacture and distribution
of industrial electrical equipment (IAF 19)
Certificate No. 50 100 11133

GENERAL FEATURES OF MULTIPOLE CONNECTORS

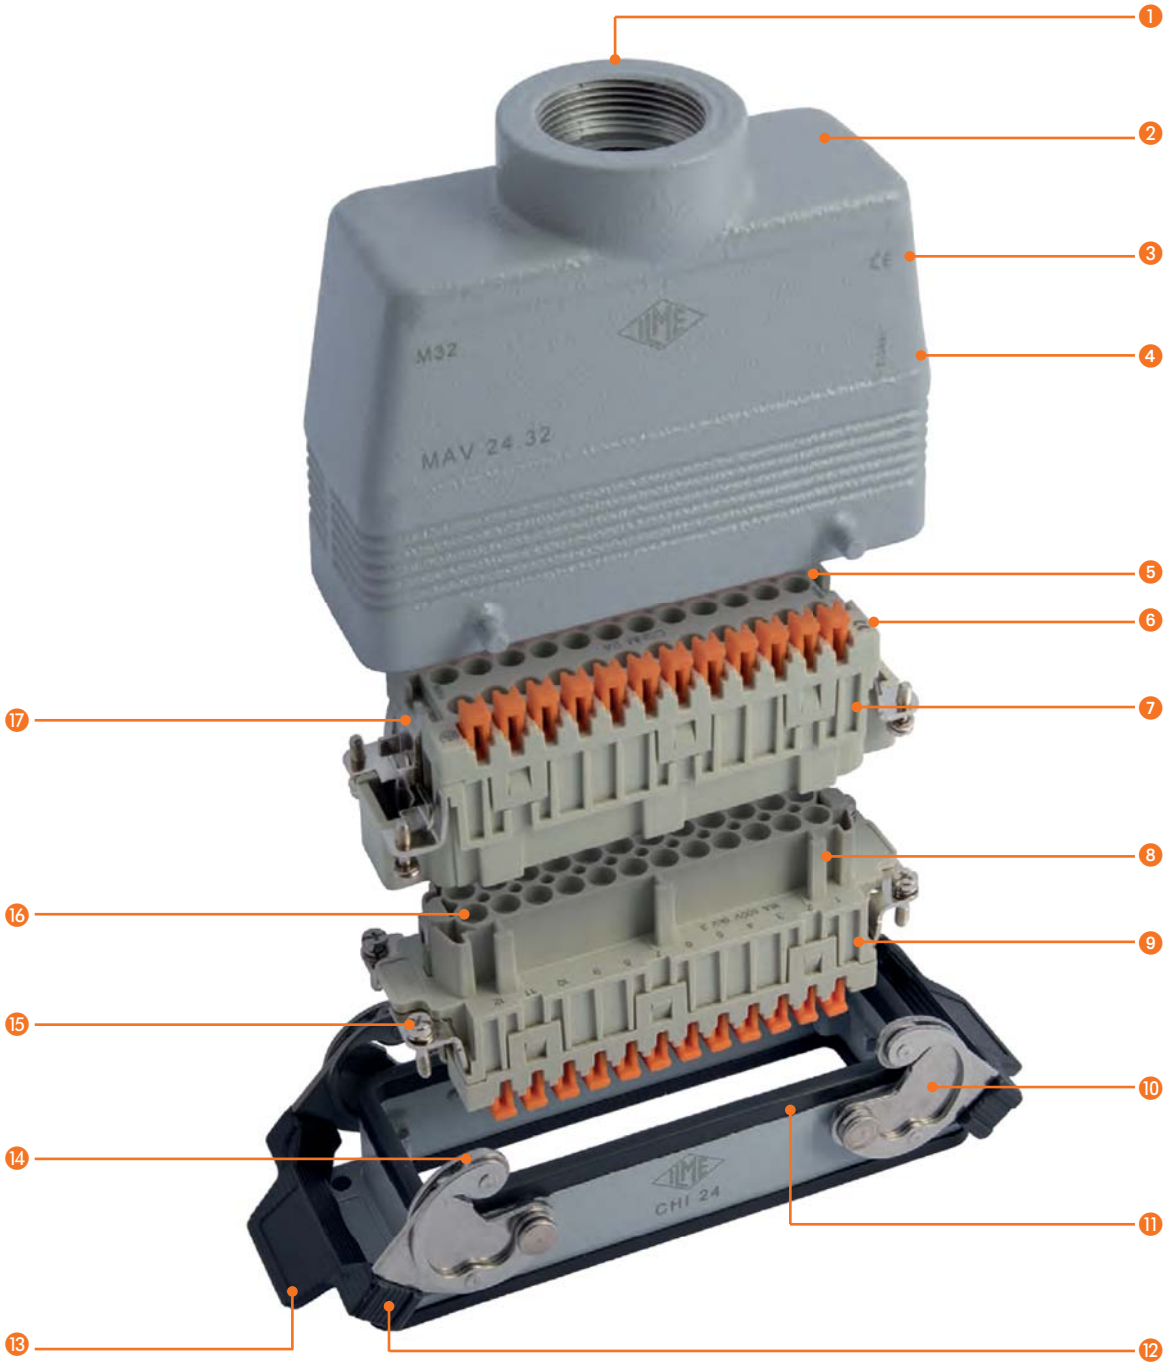

1. **Threaded cable entry** in various Pg diameters (types with pre-code “C”) or metric cable entry (types with pre-code “M”) in accordance with EN 60423, for cable entry devices in accordance with EN 62444 (NPT threading on request), may be located vertically, horizontally or frontally.
2. Rugged die-cast **aluminium alloy** or **zinc alloy** (most of CKA, MKA) or **self-extinguishing thermoplastic** enclosures (types CK, MK, CQ 08 and T-TYPE), c UL us approved.
   Surface-mounting, bulkhead, and hood versions available, with or without hinged cover, or with free protection covers. Enclosure types CH-CA (w/ Pg cable entries) and MH-MA (w/ metric cable entries) have an internal tab that prevents the insertion of higher voltage inserts series CME (all) and CMCE (only 16+2 poles), while CM (Pg) enclosures series and MM (metric) dedicated to those 830 V inserts have no tab and contain supplementary insulating strips inside.
3. **CE marking** attesting conformity to the requirements of the Low Voltage directive (2014/35/EU).
4. Metallic enclosures with a coated **finish** of thermosetting epoxy-polyester (epoxy for W-Type, IP68 CG/MG and E-Xtreme®) with high resistance to mechanical stress and external agents. Enclosures for use at temperatures up to 180 °C are treated with special coatings.
   Where improved electromagnetic shielding is necessary, EMC enclosures treated by highly conductive and corrosion resistant RoHS 2 conform surface treatment.
5. **Contact position** identified with numbers or codes on both sides of each insert and printed with a laser system or by mould.
6. **CE marking** attesting conformity to the requirements of the Low Voltage directive (2014/35/EU).
7. **Inserts** are made of UL certified self-extinguishing fibreglass reinforced thermoplastics, and feature an operating temperature range between -40 °C and +125 °C. The inserts CME (all) and CMCE (only 16+2 poles) for 830V have a key that prevents the insertion of inserts for use other than that prescribed (types CM - Pg and MM - metric). For some series, inserts in PPS (polyphenylene sulphide) may be requested for special uses with temperatures of up to 180 °C.
8. Insert **polarised profiles** with asymmetrical guides to avoid incorrect matings. Inserts have a mechanical life equal to or higher than 500 mating cycles.
9. Inserts and enclosures are manufactured in compliance with European standard **EN 61984** (DIN VDE 0627), certified and identified with **UL** (c UL us or UL) and **CSA** marks.
10. Stainless steel **locking levers and springs** guarantee a perfect closure and a tight sealing.
11. Special **sealing gaskets** in vinyl nitrile elastomer, polyurethane or fluoroelastomer (on R-Type enclosures for use with maximum temperatures of 180 °C, on W-Type enclosures for aggressive environments and on E-Xtreme® enclosures for ultimate resistance to corrosion and erosion), anti-aging, oil-resistant, fuel-resistant, together with the cable entry devices (not supplied) provide a degree of protection (IP code per EN IEC 60529 and Enclosure Type Rating per ANSI/UL 50E) for coupled connectors. Special conductive sealing gaskets for S-Type EMC enclosures.
12. **Locking device** available in two versions, simple (with one locking lever), or double (with two locking levers). In metallic enclosures, ILME offers different types of locking levers: vertical (V-Type) or classic (C-Type) rotational closure.
13. Various **handle** solutions are available:
    in self-extinguishing thermoplastic material; in die-cast aluminium, or by stainless steel (either integral or built-in with the lever).
14. **Pins and locking levers** (C-Type as shown in picture) supplied with anti-friction rolls that facilitate closure and limit wear and tear.
15. Captive **insert fastening screws,** with anti-slackening spring washer or under-head knurling.
16. **Silver or gold plated brass contacts** connected to the wires by means of captive screws supplied already slackened (screw-type connectors), with spring-clamp terminal (spring connectors), spring-clamp terminals already open with actuator button (Squich®, as shown in picture), by means of crimping (contacts available separately), or with a built-in 45° terminal block (in turn with screw-type or spring-clamp terminals).
17. Protective **earth terminal** with a wide contact surface.

Find more information on our products at www.ilme.com

STANDARD INSERTS

Inserts are made of UL 94V-0 self-extinguishing thermoplastic resin, normally for use with a maximum ambient temperature of 125 °C; special versions made of >PPS< for use with a maximum ambient temperature of 180 °C.
Screw, crimp or spring connections are available. Contacts are in silver or gold plated brass. Inserts are numbered on both sides by laser marking or moulded.

The large number of inserts versions is selected on the basis of rated voltage (50V - 5000V), rated current (5A - 200A max), number of poles and different load combinations required (power and signal poles within the same insert). Inserts are approved in accordance with the applicable safety standards by several third party agencies like UL, CSA, DNV-GL, Bureau Veritas, CQC and EAC. For certifications refer to the summary statement in this catalogue.

SCREW

CNE

CRIMP

CD - CDD

SQUICH® - SPRING

CSH

CDSH

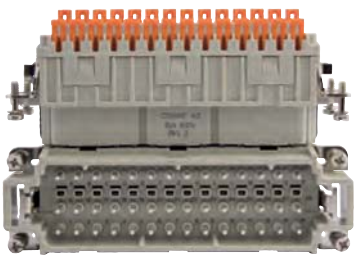

MIXO MODULAR UNITS

The MIXO series is a system composed of modular connector inserts and ancillary parts, able to create a wide diversity of tailored connector solutions, and to satisfy the most specific application needs using the traditional rectangular heavy-duty connector enclosures.

Inside a single enclosure it is possible to house various connections of different nature, for example lines for electrical signals (analogue or high-speed digital), electric power lines, quick coupling contacts for conducting compressed air with pressures of up to 8 bar, fibre optic contacts, Ethernet, USB and coaxial networks.

Insert compartments are composed by placing multiple MIXO modules side by side by locking them each other through specific dovetail shaped keys and keyways, to form a single compact block, much easier to handle and fix to the frame than individual “floating” modules; this block is then inserted in a suitably sized MIXO metal frame with predetermined locking slots. Once the single block of modules has been inserted in the frame and locked with the two special locking keys accompanying each MIXO frame, the connector composed in this manner can be inserted and fixed into the chosen enclosure.

CRIMP, SPRING, SCREW

MIXO 4A - 5A
10A - 16A - 40A

CRIMP

MIXO 70A
100A - 200A

CRIMP

MIXO BUS

MIXO POF/MOST®

MIXO COAX, HV, RJ45
D-SUB, USB, PNEUMATIC

INSERTS FEATURES

Inserts	No. of poles [1]	Aux. contacts	Rated current [2]	EN 61984 (2009-06) pollution degree 3			EN 61984 (2009-06) pollution degree 2			UL/CSA certification
Series	Main contacts + PE			Rated voltage	Rated impulse voltage	Pollution degree	Rated voltage	Rated impulse voltage	Pollution degree	Rated voltage AC or DC
CK	3, 4	---	10A	230/400V	4kV	3	400/690V	4kV	2	600V
CKS ▲	3, 4	---	10A	400V	4kV	3	690V	4kV	2	600V
CKSH	3, 4	---	10A	400V	4kV	3	690V	4kV	2	600V
CD	8 (without PE)	---	10A	50V	0,8kV	3	---	---	---	50V
CD ◈	7, 15, 25, (50), 40, (80), 64, (128)	---	10A	250V ◐	4kV	3	230/400V [**]	4kV	2	600V
RD (HNM)	40, 64	---	10A	250V	4kV	3	230/400V	4kV	2	600V
CT	40, 64	---	10A	250V	4kV	3	230/400V	4kV	2	600V
CTS	40, 64	---	10A	250V	4kV	3	230/400V	4kV	2	600V
CDD	24, 38, (76), 42, 72, (144), 108, (216)	---	10A	---	---	---	250V	4kV	2	600V
RDD (HNM)	24, 42, 72, 108	---	10A	---	---	---	250V	4kV	2	600V
CDS ▲	9, 18, 27, (54), 42, (84)	---	16A	400V	6kV	3	400/690V	6kV	2	600V
CDSH	9, 18, 27, (54), 42, (84)	---	16A	400V	6kV	3	400/690V	6kV	2	600V
CDSH NC	6 (AutoShort NC 6A)	---	6A	250V	4kV	3	500V	4kV	2	600V
CDA	10, 16, (32)	---	16A	250V	4kV	3	230/400V	4kV	2	600V
CDC	10, 16, (32)	---	16A	250V	4kV	3	230/400V	4kV	2	600V
CSAH	10, 16, (32)	---	16A	250V	4kV	3	400V	4kV	2	600V
CQE	10, 18, (20), 32, 46, (64), (92)	---	16A	500V [**]	6kV	3	830V [**]	8kV	2	600V
CQEE	40, 64	---	16A	500V	6kV	3	---	---	---	600V
RQEE (HNM)	40, 64	---	16A	500V	6kV	3	---	---	---	600V
CCE	6, 10, (12), 16, 24, (32), (48)	---	16A	500V	6kV	3	400/690V	6kV	2	600V
RCE (HNM)	6, 10, 16, 24	---	16A	500V	6kV	3	400/690V	6kV	2	600V
CNE	6, (12), 10, 16, (32), 24, (48)	---	16A	500V	6kV	3	400/690V	6kV	2	600V
CSE ▲	6, (12), 10, 16, (32), 24, (48)	---	16A	500V	6kV	3	400/690V	6kV	2	600V
CSH	6, (12), 10, 16, (32), 24, (48)	---	16A	500V	6kV	3	400/690V	6kV	2	600V
CSH ... S	6, (12), 10, 16, (32), 24, (48)	---	16A	500V	6kV	3	400/690V	6kV	2	600V
CSS	6, (12), 10, 16, (32), 24, (48)	---	16A	500V	6kV	3	400/690V	6kV	2	600V
CT	6, (12), 10, 16, 24	---	16A	230/400V	4kV	3	400V	4kV	2	600V
CTSE	6, (12), 10, 16, 24	---	16A	500V	6kV	3	400/690	6kV	2	600V
CME ▲ ●	3, 6, 10, (12), (20), (32)	---	16A	830V	8kV	3	1000V	8kV	2	600V
						---	720/1250V	8kV	2	
	16			400/690V	6kV	3	---	---	---	
	---	2, (4)		500V	6kV	3	---	---	---	
CMSE ▲	3, 6, (12), 10, (20)	---	16A	830V	8kV	3	1000V	8kV	2	600V
							720/1250V	8kV	2	
	---	2, (4)		500V	6kV	3	---	---	---	
CMSH	3, 6, (12), 10, (20)	---	16A	830V	8kV	3	1000V	8kV	2	600V
							720/1250V	8kV	2	
	---	2, (4)		500V	6kV	3	---	---	---	
CMCE	3, 6, (12), 10, (20)	---	16A	830V	8kV	3	1000V	8kV	2	600V
							720/1250V	8kV	2	
	16 ▲ , (32) ▲			400/690V	6kV	3	---	---	---	
	---	2, (4)		500V	6kV	3	---	---	---	

▲ Available upon request.

● CME series requires the CM-MM enclosures with additional insulation (available upon request) or T-TYPE insulated enclosures.

All inserts with built-in contacts are provided with silver plated contacts, unless otherwise specified.

Inserts Series	Certifications [3]	Contact resistance	Insulation resistance	Ambient temperature limit (°C) [4]		Degree of protection without enclosures	Conductor connection technology						From page
							Axial screw	Screw	Spring	Squich®	45° terminal block	Crimp	
CK	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 2 mΩ	≥10 GΩ	-40	+100	IP20							58
CKS ▲	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20			●				-
CKSH	cUL, (CSA), (CQC), DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20				●			63
CD	cUL, CSAc, CQC, DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20						●	67
CD *)	cUL, CSAc, CQC, DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20						●	66
RD (HNM)	(UL), (CSA), (CQC), DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20						●	208
CT	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 4 mΩ	≥10 GΩ	-40	+125	IP20		●			●		156
CTS	UL, CSAc, CQC, DNV-GL, BV, EAC	≤ 4 mΩ	≥10 GΩ	-40	+125	IP20			●		●		156
CDD	cUL, CSAc, CQC, DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20						●	76
RDD (HNM)	(UL), (CSA), (CQC), DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20						●	210
CDS ▲	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20			●				-
CDSH	UL, (CSA), (CQC), DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20				●			86
CDSH NC	UL, (CSA), (CQC), DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20				●			95
CDA	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 1 mΩ	≥10 GΩ	-40	+125	IP20		●					98
CDC	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 1 mΩ	≥10 GΩ	-40	+125	IP20						●	104
CSAH	cUL, CSA, (CQC), DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20				●			99
CQE	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 1 mΩ	≥10 GΩ	-40	+125	IP20						●	168
CQEE	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 1 mΩ	≥10 GΩ	-40	+125	IP20						●	176
RQEE (HNM)	(UL), (CSA), (CQC), DNV-GL, BV, EAC	≤ 1 mΩ	≥10 GΩ	-40	+125	IP20						●	218
CCE	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 1 mΩ	≥10 GΩ	-40	+125	IP20						●	130
RCE (HNM)	(UL), (CSA), (CQC), DNV-GL, BV, EAC	≤ 1 mΩ	≥10 GΩ	-40	+125	IP20						●	214
CNE	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 1 mΩ	≥10 GΩ	-40	+125	IP20		●					110
CSE ▲	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20			●				-
CSH	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20				●			110
CSH ... S	(cUL), (CSA), (CQC), (DNV-GL), (BV), (EAC)	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20				●			122
CSS	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20			●				148
CT	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 4 mΩ	≥10 GΩ	-40	+125	IP20		●			●		160
CTSE	UL, CSAc, CQC, DNV-GL, BV, EAC	≤ 4 mΩ	≥10 GΩ	-40	+125	IP20			●		●		160
CME ▲●	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 1 mΩ	≥10 GΩ	-40	+125	IP20		●					-
CMSE ▲	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20			●				-
CMSH	cUL, (CSA), (CQC), DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20				●			136
CMCE	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 1 mΩ	≥10 GΩ	-40	+125	IP20						●	137

[1] Polarities shown in brackets may be achieved by using two inserts.
[2] Please check the insert load curves to establish the actual maximum operating current according to the ambient temperature.
[3] The certifications shown in brackets are being applied for.
[4] It may be used with ambient temperatures up to 180 °C by using the insert special version made of PPS (polyphenylene sulfide).
◈ CD 07: IP67 with thermoplastic enclosures (cannot be used with metal enclosures).
◐ Contacts partially fitted inside an insert allow inserts to be used for applications requiring rated voltages higher than those shown. See CD, CDD, CQE inserts relevant tables.

INSERTS FEATURES

Inserts	No. of poles [1]	Aux. contacts	Rated current [2]	EN 61984 (2009-06) pollution degree 3			EN 61984 (2009-06) pollution degree 2			UL/CSA certification
Series	Main contacts + PE			Rated voltage	Rated impulse voltage	Pollution degree	Rated voltage	Rated impulse voltage	Pollution degree	Rated voltage AC or DC
CP	6, (12)	---	35A	400/690V	6kV	3	---	---	---	600V
CQ 21	21 (without PE)	---	6,5A	$50V_{AC}/120V_{DC}$	0,8kV	3	---	---	---	$50V_{AC}/120V_{DC}$
CQ 07	7	---	10A	400V	6kV	3	---	---	---	600V
CQ 12	12	---	10A	400V	6kV	3	400/690V	6kV	2	600V
CQ 05	5	---	16A	230/400V	4kV	3	320/500V	4kV	2	600V
CQ4 02	2	---	40A	400V	6kV	3	---	---	---	600V
CQ4 02 H	2	---	40A	830V	6kV	3	---	---	---	600V
CQ4 03	3	---	40A	400V	6kV	3	---	---	---	600V
CQ 17	17	---	10A	160V	2,5kV	3	250V	4kV	2	250V
CQ 08	8	---	16A	500V	6kV	3	400/690V	6kV	2	600V
CQ 04/2	4 + PE	---	40A	400/690V	6kV	3	---	---	---	600V
	---	2	10A	250V	4kV	3	---	---	---	
CX 8/24	8	---	16A	230/400V	4kV	3	400V	4kV	2	600V
	---	24	10A	160V	2,5kV	3	250V	4kV	2	
CX 6/12	6 + PE	---	40A	690V	8kV	3	---	---	---	600V
	---	12	10A	230/400V	6kV	3	---	---	---	
CX 6/36	6	---	40A	690V	8kV	3	---	---	---	600V
	---	36	10A	160V	2,5kV	3	250V	4kV	2	
CX 12/2	12	---	40A	690V	8kV	3	---	---	---	600V
	---	2	10A	160V	2,5kV	3	250V	4kV	2	
RX 12/2 (HNM)	12	---	40A	690V	8kV	3	---	---	---	600V
	---	2	10A	---	---		250V	4kV	2	
CX 6/6	6 + PE	---	100A	690V	8kV	3	---	---	---	600V
	---	6	16A	400V	6kV	3	---	---	---	
CX 4/0	4	0	80A	830V	8kV	3	---	---	---	600V
CX 4/2	4	---	80A	830V	8kV	3	---	---	---	600V
	---	2	16A	400V	6kV	3	400/690V	6kV	2	
CX 4/8	4	---	80A	400V	6kV	3	400/690V	6kV	2	600V
	---	8	16A	230/400V	4kV	3	400V	4kV	2	
CXL 2/4	2	---	---	---	---	---	---	---	---	600V
	---	4	10A	25V	0,8kV	3	---	---	---	
CLK 04	4 (seats/poles)	---	---	Contacts for glass fibre 50 / 125 µm or 62,5 / 125 µm or for 1 mm ∅ POF						
CX 1/2 BD	1 CX 01 B /BC, CX 04 B, CX 08 B ◈		16/10/4A	50V	0,8kV	3	---	---	---	50V
	---	2	10A	50V	0,8kV	3	---	---	---	50V

[1] Polarities shown in brackets may be achieved by using two inserts.
[2] Please check the insert load curves to establish the actual maximum operating current according to the ambient temperature.
[3] The certifications shown in brackets are being applied for.
[4] It may be used with ambient temperatures up to 180 °C by using the insert special version made of PPS (polyphenylene sulfide).
◈ Multi-axial shielded connectors CX 04 B (4P, 10A) or CX 08 B (8P, 5A) or coaxial connectors CX 01 B (10A) or CX 01 BC (16A).

All inserts with built-in contacts are provided with silver plated contacts, unless otherwise specified.

Inserts Series	Certifications [3]	Contact resistance	Insulation resistance	Ambient temperature limit (°C) [4]		Degree of protection without enclosures	Conductor connection technology						From page
							Axial screw	Screw	Spring	Squich®	45° terminal block	Crimp	
CP	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 0,5 mΩ	≥10 GΩ	-40	+125	IP20		●					178
CQ 21	cUL, (CSA), DNV-GL, BV	≤ 4 mΩ	≥10 GΩ	-40	+125	IP20						●	190
CQ 07	cUL, (CSA), (CQC), DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20						●	187
CQ 12	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20						●	189
CQ 05	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 1 mΩ	≥10 GΩ	-40	+125	IP20						●	186
CQ4 02	cUL, (CSA), (CQC), DNV-GL, BV, EAC	≤ 0,3 mΩ	≥10 GΩ	-40	+125	IP20						●	182
CQ4 02 H	cUL, (CSA), (CQC), DNV-GL, BV, EAC	≤ 0,3 mΩ	≥10 GΩ	-40	+125	IP20						●	183
CQ4 03	cUL, (CSA), (CQC), DNV-GL, BV, EAC	≤ 0,3 mΩ	≥10 GΩ	-40	+125	IP20						●	184
CQ 17	cUL, (CSA), (CQC), DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20						●	193
CQ 08	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 3 mΩ	≥10 GΩ	-40	+125	IP20						●	192
CQ 04/2	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 0,3 mΩ ≤ 3 mΩ	≥10 GΩ	-40	+125	IP20						● ●	191
CX 8/24	UL, CSAc, CQC, DNV-GL, BV, EAC	≤ 1 mΩ ≤ 3 mΩ	≥10 GΩ	-40	+125	IP20						● ●	194
CX 6/12	UL, (CSA), (CQC), DNV-GL, BV, EAC	≤ 0,3 mΩ ≤ 1 mΩ	≥10 GΩ	-40	+125	IP20						●	197
CX 6/36	UL, CSAc, CQC, DNV-GL, BV, EAC	≤ 0,3 mΩ ≤ 3 mΩ	≥10 GΩ	-40	+125	IP20						●	198
CX 12/2	UL, CSAc, CQC, DNV-GL, BV, EAC	≤ 0,3 mΩ ≤ 1 mΩ	≥10 GΩ	-40	+125	IP20						●	199
RX 12/2 (HNM)	(cUL), (CSA), (CQC), (DNV-GL), (BV), (EAC)	≤ 0,3 mΩ ≤ 1 mΩ	≥10 GΩ	-40	+125	IP20						●	221
CX 6/6	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 0,3 mΩ ≤ 1 mΩ	≥10 GΩ	-40	+125	IP20						●	206
CX 4/0	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 0,3 mΩ	≥10 GΩ	-40	+125	IP20		●					200, 202
CX 4/2	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 0,3 mΩ ≤ 1 mΩ	≥10 GΩ	-40	+125	IP20		●					201, 203
CX 4/8	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 0,3 mΩ ≤ 1 mΩ	≥10 GΩ	-40	+125	IP20		●					204
CXL 2/4	UL, CSA, DNV-GL, BV	≤ 3 mΩ	≥10 GΩ	-40	+70	IP20			● ●				250, 251
CLK 04	cUL, CSA, DNV-GL, BV	---	≥10 GΩ	-40	+70	IP20						●	239
CX 1/2 BD	cUL, CSA, (CQC), DNV-GL, BV	≤ 1 mΩ (CC) ≤ 3 mΩ (CD) ≤ 4 mΩ (CI) ≤ 3 mΩ	≥10 GΩ ≥10 GΩ	-40	+70	IP20						●	243

MIXO INSERTS FEATURES

Inserts	No. of poles [1]	Aux. contacts	Rated current [2]	EN 61984 (2009-06) pollution degree 3			EN 61984 (2009-06) pollution degree 2			UL/CSA certification
Series	Main contacts + PE			Rated voltage	Rated impulse voltage	Pollution degree	Rated voltage	Rated impulse voltage	Pollution degree	Rated voltage AC or DC
CX 01 Y	1 (without PE)	---	200A	1000V	8kV	3	920/1600V	8kV	2	600V
CX 01 YPE	PE	---	200A	---	---	3	---	---	---	600V
CX 02 G	2 (without PE)	---	100A	1000V	8kV	3	920/1600V	8kV	2	600V
CX 01 G	1 (without PE)	---	100A	830V	8kV	3	---	---	---	600V
CX 02 7	2 (without PE)	---	70A	1000V	8kV	3	1600V	12kV	2	600V
CX 02 4A	2 (2,5 - 8 mm^2) (without PE)	---	40A	1000V	8kV	3	1600V	12kV	2	600V
CX 02 4B	2 (6 - 10 mm^2) (without PE)	---	40A	1000V	8kV	3	1600V	12kV	2	600V
CX 02 4	2 (without PE)	---	40A	1000V	8kV	3	---	---	---	600V
CX 03 4	3 (without PE)	---	40A	400/690V ◈	6kV	3	---	---	---	600V
CX 03 4B	3 (without PE)	---	40A	500V ◈	6kV	3	---	---	---	600V
CX 3/4 XD	3 (without PE)	---	40A	830V	8kV	3	---	---	---	600V
	---	4	10A							
CX 04 X	4 (without PE)	---	40A	830V	8kV	3	1000V	8kV	2	600V
CX 05 S ▲	5 (without PE)	---	16A	400V	6kV	3	500V	6kV	2	600V
CX 05 SH	5 (without PE)	---	16A	400V	6kV	3	500V	6kV	2	600V
CX 06 C	6 (without PE)	---	16A	500V	6kV	3	400/690V	6kV	2	600V
CX 06P C	6 protected (without PE)	---	16A	830V	8kV	3	---	---	---	600V
CX 08 C	8 (without PE)	---	16A	400V	6kV	3	400/690V	6kV	2	600V
CX 20 C	20 (without PE)	---	16A	500V	6kV	3	830V	8kV	2	600V
CX 12 D	12 (without PE)	---	10A	160V	2,5kV	3	250V	4kV	2	600V
CX 17 D	17 (without PE)	---	10A	160V	2,5kV	3	250V	4kV	2	250V
CX 42 D	42 (without PE)	---	10A	150V	2,5kV	3	---	---	---	250V
CX 02 H	2 (without PE)	---	16A	2900/5000V	15kV	3	---	---	---	---
CX 02 CH	2 (without PE)	---	16A	2500V	15kV	3	---	---	---	---
CX 25 I ▲ ⦿	25 (without PE)	---	4A	50V	0,8kV	3	160V	2,5kV	2	600V
CX 25 IB	25 (without PE)	---	4A	50V	0,8kV	3	160V	2,5kV	2	600V
CX 03 P	3	---	---	pneumatic contacts for compress air up to 8 bar						
CX 02 P	2	---	---	---	---	---	---	---	---	---
CX 02 B	2 ◐ (without PE)	---	---	50V	0,8kV	3	---	---	---	50V
CX 01 B	1 (+ shield) (75 W coax)	---	10A	50V	0,8kV	3	---	---	---	50V
CX 01 BC	1 (+ shield) (50 W coax)	---	16A	50V	0,8kV	3	---	---	---	50V
CX 04 B	4 (+ shield)	---	10A	50V	0,8kV	3	---	---	---	50V
CX 08 B	8 (+ shield)	---	5A	50V	0,8kV	3	---	---	---	50V
CX 08 I6	8 (+ shield)	---	5A	50V	0,8kV	3	---	---	---	50V
CX 01 J	1 RJ-45 insert Cat. 5	---	---	---	---	---	---	---	---	50V
	---	4	10A	250V	4kV	3	---	---	---	600V
CX 02 J	2 RJ-45 inserts Cat. 5	---	---	---	---	---	---	---	---	50V
	---	8	10A	250V	4kV	3	---	---	---	600V
CX 01 J8	1 RJ45 insert Cat. 6	---	1A	50V	0,8kV	3	---	---	---	50V
CX 01 U	1 USB insert	---	1A	50V	0,8kV	3	---	---	---	(50V)
CX 01 9V	9 (+ shield)	---	5A	50V	0,8kV	3	---	---	---	(50V)
CX 01 9VTF	2 (+ shield) for RS-485 bus T-connections	---	5A	50V	0,8kV	3	---	---	---	(50V)
CX 04 L	4	---	---	contacts for POF or MOST® (POF) fibre optic contacts E DIN 41626-3						
CX 04 R	4	---	1,5A	50V	0,8kV	3	crimp coaxial contacts DIN 41626-2			---
CX 04 SC	4 (seats/poles)	---	---	contacts for ∅ 1 mm plastic POF or MOST® fibre optic, coaxial contacts DIN 41626						

▲ Available upon request.

[1] Polarities shown in brackets may be achieved by using two inserts.

[2] Please check the insert load curves to establish the actual maximum operating current according to the ambient temperature.

[3] The certifications shown in brackets are being applied for.

[4] It may be used with ambient temperatures up to 180 °C by using the insert special version made of PPS (polyphenylene sulfide).

Inserts Series	Certifications [3]	Contact resistance	Insulation resistance	Ambient temperature limit (°C) [4]		Degree of protection without enclosures	Conductor connection technology						From page
							Axial screw	Screw	Spring	Squich®	45° terminal block	Crimp	
CX 01 Y	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 0,2 mΩ	≥ 10 GΩ	-40	+125	IP20						●	262
CX 01 YPE	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 0,2 mΩ	≥ 10 GΩ	-40	+125	IP20						●	263
CX 02 G	UL, CSA, CQC, DNV-GL, EAC	≤ 0,3 mΩ	≥ 10 GΩ	-40	+125	IP20						●	265
CX 01 G	(UL), (CSA), (CQC), DNV-GL, BV, EAC	≤ 0,3 mΩ	≥ 10 GΩ	-40	+125	IP20						●	264
CX 02 7	cUL, CSAc, CQC, DNV-GL, BV, EAC	≤ 0,5 mΩ	≥ 10 GΩ	-40	+125	IP20							266
CX 02 4A	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 0,5 mΩ	≥ 10 GΩ	-40	+125	IP20	●						267
CX 02 4B	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 0,5 mΩ	≥ 10 GΩ	-40	+125	IP20	●						268
CX 02 4	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 0,3 mΩ	≥ 10 GΩ	-40	+125	IP20						●	268, 321
CX 03 4	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 0,3 mΩ	≥ 10 GΩ	-40	+125	IP20						●	269, 322
CX 03 4B	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 0,3 mΩ	≥ 10 GΩ	-40	+125	IP20						●	270, 323
CX 3/4 XD	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 0,3 mΩ ≤ 3 mΩ	≥ 10 GΩ	-40	+125	IP20						●	271, 324
CX 04 X	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 3 mΩ	≥ 10 GΩ	-40	+125	IP20			●				272, 325
CX 05 S ▲	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 3 mΩ	≥ 10 GΩ	-40	+125	IP20			●				-
CX 05 SH	(cUL), (CSA), (CQC), (DNV-GL), (BV), (EAC)	≤ 3 mΩ	≥ 10 GΩ	-40	+125	IP20				●			274
CX 06 C	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 1 mΩ	≥ 10 GΩ	-40	+125	IP20						●	275, 327
CX 06P C	(UL), (CSA), (CQC), DNV-GL, BV, EAC	≤ 1 mΩ	≥ 10 GΩ	-40	+125	IP20						●	276, 326
CX 08 C	UL, CSA, CQC, DNV-GL, BV, EAC	≤ 1 mΩ	≥ 10 GΩ	-40	+125	IP20						●	277, 328
CX 20 C	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 1 mΩ	≥ 10 GΩ	-40	+125	IP20						●	278, 329
CX 12 D	UL, CSAc, CQC, DNV-GL, BV, EAC	≤ 3 mΩ	≥ 10 GΩ	-40	+125	IP20						●	281, 330
CX 17 D	cUL, CSAc, CQC, DNV-GL, BV, EAC	≤ 3 mΩ	≥ 10 GΩ	-40	+125	IP20						●	282, 331
CX 42 D	(cUL), (CSA), (CQC), (DNV-GL), (BV), (EAC)	≤ 3 mΩ	≥ 10 GΩ	-40	+125	IP20						●	283, 332
CX 02 H	(cUL), (CSA), (CQC), (DNV-GL), (BV), (EAC)	≤ 1 mΩ	≥ 10 GΩ	-40	+125	IP20						●	280
CX 02 CH	(cUL), (CSA), (CQC), (DNV-GL), (BV), (EAC)	≤ 1 mΩ	≥ 10 GΩ	-40	+125	IP20						●	279
CX 25 I ▲	cUL, CSA, DNV-GL, BV	≤ 4 mΩ	≥ 10 GΩ	-40	+125	IP20						●	-
CX 25 IB	(UL), (CSA), DNV-GL, BV	≤ 4 mΩ	≥ 10 GΩ	-40	+125	IP20						●	284
CX 03 P	UL, CSA, DNV-GL, BV	---	≥ 10 GΩ	-40	+80	IP20	snap-in						312
CX 02 P	UL, CSA, DNV-GL, BV	---	≥ 10 GΩ	-40	+80	IP20	snap-in						312
CX 02 B	UL, CSA, CQC, DNV-GL, BV	---	≥ 10 GΩ	-40	+125	IP20	snap-in						288 - 292
CX 01 B	UL, CSA, CQC, DNV-GL, BV	≤ 3 mΩ	≥ 10 GΩ	-40	+85	IP20						●	291
CX 01 BC	UL, CSA, CQC, DNV-GL, BV	≤ 1 mΩ	≥ 10 GΩ	-40	+85	IP20						●	289
CX 04 B	UL, CSA, CQC, DNV-GL, BV	≤ 3 mΩ	≥ 10 GΩ	-40	+85	IP20						●	291
CX 08 B	UL, CSA, (CQC), DNV-GL, BV	≤ 4 mΩ	≥ 10 GΩ	-40	+85	IP20						●	293
CX 08 I6	(UL), (CSA), (CQC), (DNV-GL), (BV)	≤ 4 mΩ	≥ 10 GΩ	-40	+85	IP20						●	286
CX 01 J	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 3 mΩ ≤ 3 mΩ	≥ 10 GΩ ≥ 10 GΩ	-40 -40	+120 +120	IP20 IP20						● ●	304
CX 02 J	cUL, CSA, CQC, DNV-GL, BV, EAC	≤ 3 mΩ ≤ 3 mΩ	≥ 10 GΩ ≥ 10 GΩ	-40 -40	+120 +120	IP20 IP20						● ●	306
CX 01 J8	cUL, (CSA), DNV-GL, BV, EAC	≤ 3 mΩ	≥ 10 GΩ	-40	+70	IP20						●	302
CX 01 U	cUL, CSA, DNV-GL, BV, EAC	≤ 3 mΩ	≥ 10 GΩ	-25	+80	IP20						●	294
CX 01 9V	---	---	≥ 10 GΩ	-40	+70	IP20						●	296
CX 01 9VTF	---	---	≥ 10 GΩ	-40	+70	IP20		●					298
CX 04 L	cUL, CSA, (CQC), DNV-GL, BV, EAC	≤ 30 mΩ	≥ 1 GΩ	-40	+85	IP20							299
CX 04 R	(UL), (CSA), DNV-GL, BV	◧	≥ 5 GΩ	-40	+125	IP20						●	300
CX 04 SC	(UL), (CSA), DNV-GL, BV	---	≥ 10 GΩ	-40	+85	IP20						●	301

◈ With cable ∅ up to 5 mm (CX 03 4), with cable ∅ up to 7,5 mm (CX 03 4B).
◐ Multi-axial shielded connectors CX 04 B (4P, 10A) or CX 08 B (8P, 5A) or coaxial connectors CX 01 B (10A) or CX 01 BC (16A).
◧ Centre contact resistance ≤ 10 mΩ; outer contact resistance ≤ 3 mΩ.
⦿ Suitable for CI crimp contacts up to size 0.5.
All inserts with built-in contacts are provided with silver plated contacts, unless otherwise specified.

RECOMMENDED TIGHTENING TORQUE

- insert terminal screws, including PE terminal and fixing screws
- axial screw insert, MIXO series CX 02 4A / CX 02 4B
- enclosures assembly screws

Insert terminal screws, including PE terminal and fixing screws

Increasing the tightening torque of terminal screws does not considerably improve the contact resistance. The screw torques are selected according to standard EN 60999-1, to provide excellent mechanical, thermal and electric behaviour. The conductor or terminal may be damaged if the recommended values are significantly exceeded.

Screw size	Connector type	Recommended tightening torque		Recommended size of screwdriver
		(Nm)	(lb.in)	
	LINE TERMINALS			
M2,5	CT 40, 64	0,4	3,5	0,5 x 3
M2,6	CT 06..24	0,4	3,5	0,5 x 3
M3	CK	0,5	4,4	0,5 x 3
M3	CDA	0,5	4,4	Ph0 or 0,6 x 3,5
M3	CNE, CME	0,5	4,4	Ph0 or 0,8 x 4
M3	CX 4/2, CX 4/8 (16A)	0,5	4,4	0,6 x 3,5
M3	CX 4/8 Q (16A)	0,5	4,4	Ph0
M4	CP	1,2	10,6	Ph1 or 0,8 x 4
M6	CX 4/.. (80A)	2,5	22,1	1,0 x 5,5
	PE TERMINAL			
M3	CK, CQ 05, CQ 07, CQ 12	0,5	4,4	0,5x3
M4	all series except CD 15, CD 25, CDA, CDC, CSAH, MIXO	1,2	10,6	Ph2 or 1,0 x 5,5
M3,5	series CD 15, CD 25, CDA, CDC, CSAH	0,8	7,1	Ph1 or 0,8 x 5,5
M3	small PE terminal, MIXO frames series	0,5	4,4	Ph1 or 1,0 x 4,5
M4	large PE terminal, MIXO frames series	1,2	10,6	Ph1 or 1,0 x 5,5
M4	PE terminal, MIXO ONE enclosures	1,2	10,6	Ph1 or 1,0 x 5,5
	FASTENING SCREWS			
M3	CK, CKS, CKSH, CD 07, CD 08, CQ 05, CQ 07, CQ 12, CQ 21, CQ4 02 /02 H, CQ4 03, CX 1/2 BD	0,5	4,4	Ph1 or 0,8 x 5,5
M3	screw for fastening inserts to enclosures of all series except T-Type, CQ-MQ 08 and MIXO ONE	0,8	7,1	Ph1 or 0,8 x 4
Ø 2,9	screws for fastening "32.13" inserts CQ 04/2, CQ 08, CQ 17 to CQ-MQ 08 enclosures	0,7	6,2	Ph1
M3	screw for fastening inserts to T-Type enclosures	0,5	4,4	Ph1 or 0,8 x 4
Ø 2,9	series MIXO ONE enclosures, assembly of top and bottom parts	0,8	7,1	Ph1
M4	CYR 16.3, CYR 24.4 cable pass-through hoods, assembly of two halves	1,2	10,6	Ph2 or 1,0 x 5,5
M4	CYG 16 in-line joint, assembly of two halves and mounting of two bulkhead mounting housings size "77.27"	1,2	10,6	Ph2 or 1,0 x 5,5
M5	series BIG enclosures, assembly of top and bottom parts	1,0	8,8	Ph2

Axial screw insert, MIXO series CX 02 4A / CX 02 4B

The connections of the conductors to the female and male inserts are made via axial screw. Fully insert the stripped wire in the back of the contact (axial screw terminals are supplied fully opened); while holding the wire down, insert a 2 mm hexagonal key in the front of the contact and tighten to recommended torque. After assembling the complete connector periodically check that the contact is screwed tight by re-applying the proper tightening torque.

— Usable conductor cross-sections (EN 60228 Class 5):
  from 2,5 to 8 mm^2 (14 AWG to 10 AWG) (CX 02 4AF/M)
  from 6 to 10 mm^2 (10 AWG to 8 AWG) (CX 02 4BF/M)
  (extra-flexible EN 60228 class 6: 2.5... 6 mm^2 (14 AWG to 10 AWG)
— Use only stranded flexible copper conductors
— Do not twist the strands!
— Tightening torque with 2 mm hexagonal Allen key:
  1,5 Nm (13,3 lb.in) max for conductors with section 2,5 ... 4 mm^2 (14 AWG to 12 AWG)
  2 Nm (17,7 lb.in) max for conductors with section 6 ... 10 mm^2 (10 AWG to 8 AWG)
— Stripping length: 8^{+1} mm

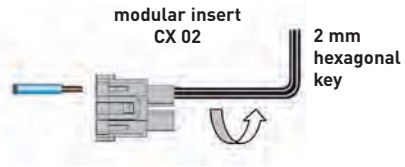

Enclosures assembly screws

In the table below, the recommended minimum and maximum tightening torque to apply to the fixing screws of ILME bulkhead mounting housings are shown, assuming the use of steel screws (bolts) with 8.8 resistance class and a good fixing panel surface according to the requirements mentioned therein.

Series	Number of screws	Screw size	Recommended torque		Flange sealing element
			(Nm)	(lb.in)	
CK/MK, CKX, CKA/MKA, CQ	2	M3	0,8 – 1,0	7,1 – 8,9	Gasket
MIXO ONE	4	M3	TBA	TBA	Gasket
CZI 15 /25	4	M3	0,8 – 1,0	7,1 – 8,9	Gasket
CHI 50	4	M4	1,2 – 1,8	10,6 – 15,9	Gasket
CHI 06 /10 /16 /24	4	M4	0,8 – 1,2	7,1 – 8,9	Gasket
CHI 32	4	M4	1,2 – 1,8	10,6 – 15,9	Gasket
CHI 48	4	M6	3,0 – 3,6	26,6 – 31,9	Gasket
CGK/MGK (IP68)	2	M4	0,8 – 1,2	7,1 – 8,9	O-ring
CGI/ MGI 06/ 10/ 16/ 24 (IP68)	2	M6	3,0 – 3,6	26,6 – 31,9	O-ring
T-Type, T-Type/H, T-Type/C, T-Type/W	4	M4	0,8 – 1,2	7,1 – 8,9	Gasket

To guarantee the declared IP degree of protection of the housings reported in this catalogue, according to EN IEC 60529 or to the relevant Type rating per ANSI/UL 50 and 50E (for those products bearing approval to those ratings), the surface of the mounting panel must meet the following requirements (definitions are provided in ISO 4287 standard):

– Waviness Wt ≤ 0,2 mm over a distance of 200 mm (measured on the panel without load)

– Roughness Ra ≤ 16 µm

NOTE: The values of tightening torque indicated in the above table are just recommended values, that must be related – by the designer of the final application – to the resistance class of the screws (not included in the delivery), with the assumption that the mounting panel is sufficiently rigid (stiff). If the deflection of the panel, under the effect of tightening the screws, is greater than 0,7 mm over a distance of 100 mm, it is necessary to use the counter-flanges mentioned in our catalogue or the special flange gaskets available upon request (please contact our Sales Department). For the CGI/MGI IP68 enclosures the specific counter-flanges mentioned in our catalogue are always recommended.

RANGE OF CONDUCTOR CROSS-SECTIONAL AREA AND STRIPPING LENGTH

Connector inserts connection technique	Range of conductor cross-sectional area		Stripping length
Screw	(mm^2)	AWG	(mm)
CK	0,75 – 2,5	18 – 14	6
CX 4/2, CX 4/8 (poles 16A) [1]	0,75 – 4	18 – 12	7
	0,75 – 2,5	18 – 14	7
CNE [1]	0,5 – 4	20 – 12	7
CNE..X	0,25 – 2,5	24 – 14	7
CDA [1]	0,5 – 4	20 – 12	7
CDA..X	0,25 – 2,5	24 – 14	7
CT 06..24	0,75 – 2,5	18 – 14	12
CT 40 and 64	0,75 – 2,5	18 – 14	12
CME [1]	0,5 – 4	20 – 12	7
CME..X	0,5 – 2,5	20 – 14	7
CP [1]	0,75 – 6	18 – 10	10,5
CX 4/.. (80A poles)	4 – 16	12 – 5	14
Crimp			
MIXO (5A), CX 25 IB	0,08 – 0,75	28 – 18	4
CQ 21	0,08 – 0,5	28 – 20	4
CDD, CD, MIXO (10A), CQ 12, CQ 07	0,14 – [2,5]*	26 – 14	8 – *[6 for 2,5 mm^2]
CCE, CDC, CMCE, CQ, CQE, CQEE, MIXO (16A)	0,14 – 4	26 – 12	7,5
CX, MIXO (40A), CQ4 03	1,5 – 2,5	16 – 14	9
	4 – 6	12 – 10	9.6
MIXO (70A)	10 – 25	7 – 4	15
MIXO (100A), CX 6/6	10 – 35	7 - 2	15
MIXO (200A)	16 – 70	6 - 2/0	15
Spring			
CSE, CSH, CTSE 06..24, CMSH, MIXO [CX 05 S [2], CX 05 SH], CSS	0,14 – 2,5	26 – 14	9 - 11
CTS 40/64	0,14 – 2,5 unprepared 0,14 – 1 prepared	26 – 14 unprepared 26 – 18 prepared	9 - 11
CKS, CKSH, CDS, CDSH, CSAH	0,14 – 2,5 unprepared 0,14 – 1,5 prepared	26 – 14 unprepared 26 – 16 prepared	9 - 11

[1] For CNE, CDA, CP, CME, "CX 4/8 – pole 16A" series connectors with screw terminal and conductor protection plate, the use of ferrules is not necessary (= unprepared conductor). The use of ferrules (= prepared conductor) causes a reduction in maximum useful cross-section to the lower size (e.g. 4 mm^2 unprepared - 2,5 mm^2 prepared).

[2] Available upon request.

CONDUCTOR CONNECTION TECHNOLOGY

SCREW

For all inserts with screw terminals it is important that the right torsional torque is applied to the screws in order to prevent wrong contacts or damage to the conductor, the screw or the terminal.

The **10A and 16A crimp contacts** are available either silver or gold-plated.

The **gold-plated crimp contacts** are recommended for applications with very low rated currents and rated voltages. Thanks to the conduction characteristics of gold, the deterioration of signals is prevented and an excellent resistance to the surface oxidation of the contacts is obtained. In particular, gold-plated contacts are recommended with signals with ≤ 5 mA current and ≤ 5V voltage.

With screw terminal connections with or without wire protection

CK - CDA - CNE - CME - CP - CX

The connections of the conductors to the female and male inserts are made via screws (in accordance with standard EN 60999-1).

Two different types of clamping are possible:
- with pressure plate for unprepared conductors;
- without wire protection that requires the conductors to be prepared with bush terminals.

Clamping types



CX..A / CX..B

The connections of the conductors to the female and male inserts is made via screws in accordance with standard.

Fully insert the wire in the back of the contact; insert a 2 mm hexagonal key in the front of the contact and tighten by holding down the cable (page 20).

Screw connected in built-in terminal block

CT

In this layout the wires are connected to the socket and plug insert contacts by means of a screw for all CT inserts (in compliance with EN 60999-1).

The inserts contain:
- a terminal block at 45° for fixed installation on electrical panels or on built-in DIN EN 60715 rail, for easier wire cabling and identification operations
- screw connection with pressure plate which does not require the wires to be prepared (CT inserts).

CT connection technology

INCORPORATED TERMINAL BLOCK

Connection technology

step 1
Insert the flat blade screwdriver tip in the dedicated square-shaped cavity provided outside the terminal and push it down perpendicularly to the access surface, up to the bottom. Acting as a wedge, the screwdriver tip pushes forward the spring, to open the wire clamping window.



step 2
Insert the wire previously stripped at the right length all the way down in the round terminal cavity.

step 3
Remove the screwdriver tip. The spring clamps now the wire in the terminal.

step 4
Pull gently on the wire to ensure that it is firmly clamped in the spring terminal.

Built-in terminal block

CTSE - CTS

With terminal block at 45° built-in for fixed installation on electrical panels or on built-in DIN EN 60715 rail, for easier wire cabling and identification operations.

Spring terminal connection which does not require wire preparation (CTSE inserts).

CTSE connection technology

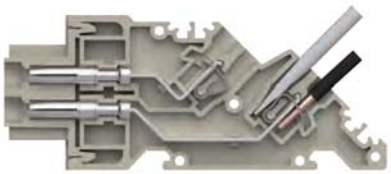

Dual spring terminal

CSS

Equipped with two terminals per contact.

This type of connection allows a circuit to be branched off.

CSS connection technology

0,5 x 3,5 mm blade

SQUICH® - SPRING

Connection without tools

The wires are connected to the insert contacts by a spring terminal with patented actuator button.

Key advantages:

- No special wire preparation, other than stripping
- No need for wiring tools
- Excellent fastening solution and great resistance to strong vibrations
- Suitable for solid and flexible wires, both ferruled and unferruled, with a cross sectional area range of 0,14 mm^2 to 2,5 mm^2
- Reduced wiring time, up to 50%
- Correct wiring can be checked by inserting a test probe into the perforated shape of the actuator buttons

SQUICH® - spring

Connection technology

WIRING

1



Deeply insert a stripped conductor into a round seat.

2

Push the actuator button to close the terminal.

RE-OPENING

3



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

Spring connected contacts with actuator button

SQUICH®

CKSH

All the advantages of SQUICH® connection technology in size “21.21”. Vertical and straight termination and dedicated coding pins.

Watch our SQUICH® video

Spring connected contacts with actuator button

SQUICH®

CSH

Parent insert of the connection technology. Quick, simple and safe wiring for a practically error-free installation.

CMSH

Specific version for voltages up to 830 V.
The CMSH inserts can be used with all types of enclosures.

Spring connected contacts with actuator button

SQUICH®



CDSH

High density without tools.
The CDSH insert is the answer to the continuous demand for greater number of poles and smaller dimensions. It offers a maximum number of 84 poles in the same space of standard series. Inserts can be coded by CR CDS pin to avoid incorrect coupling.

Spring clamp contacts with actuator button, with NC shorting contacts

SQUICH®



CDSH NC

The AutoShort connector, suitable for interfacing measuring current transformers. 3 pairs of contacts with AutoShort NC (normally closed) element to protect the measuring current transformer's secondary windings. It can be used either with metal or thermoplastics enclosures, size "44.27".

Spring connected contacts with actuator button

SQUICH®

CSAH

This version implements the SQUICH® concept in a miniaturized version with a high contact density. Slim design for 400V needs.
Inserts can be mated with CDA/CDC series.

CRIMP

Removable crimp contacts (with retention device)

MIXO 70A - 100A - 200A

This layout enables the wires to be connected to the insert removable contacts by crimping them with a crimp tool and its locating turret. Connection is ensured and is **extremely resistant** even to the most insidious strains, such as vibrations.

MIXO 70A/100A max contacts

Conductor section		Identification
(mm^2)	AWG	hole Ø (mm)
8 - 10	8 - 7	4,3
16	6 - 5	5,5
25	4 - 3	7,0
35	2	7,9 / 8,2

MIXO 200A max contacts

Conductor section		Identification
(mm^2)	AWG	
16	6	
25	4	
35	2	
50	1	
70	2/0	

Contacts supplied in silver plated version only

Removable crimp contacts (with retention device on contacts)



MIXO CD - CDD - CX

This layout enables the wires to be connected to the insert removable contacts by crimping them with a crimp tool and its locating turret.

The crimped connections are then inserted (with a fitting tool for sizes 1 and 2, without any tools for sizes ②, 3, 4 and 5) in the above mentioned sizes and are kept firmly in place by means of the flexible device fitted on the contacts.
The wire housing entry on the contact is tapered to facilitate wire insertion and to avoid any damages occurring after the crimping operation. To remove connections, a special **extractor tool** must be used.

4A/5A/6,5A max contacts

Conductor section		Identification
(mm^2)	AWG	hole Ø (mm)
0,08 - 0,21	28 - 24	0,64 mm
0,13 - 0,33	26 - 22	0,90 mm
0,33 - 0,52	22 - 20	1,12 mm
0,52 - 0,75	20 - 18	1,12 mm

10A max contacts

Conductor section		Number Identification
(mm^2)	AWG	
0.14 - 0.37	26 - 22	
0.5	20	
0.75	18	
1	18	
1.5	16	
2.5	14	

Contacts supplied in both silver/gold plated versions

Removable crimp contacts (with retention device inside insert)

MIXO CQ - CQE - CCE - CDC - CMCE - CX

The connections of the conductors to the removable contacts of the male and female inserts are made via crimping with a crimping tool and locator. The crimped connections are then introduced in the inserts of the above mentioned series and are **firmly held in place** by means of a retainer device fitted on the insert which holds down the contact. The contact can be removed by simply using a flat head 3 mm screwdriver through the openings provided in the inserts (CMCE 16+2, CX 8/24 series) or by means of special extractor tools, to unlock the retainer device and release the contact (CQ, CCE, CMCE, CQE, CX, CDC, MIXO series).
The wire housing entry on the contact is tapered to facilitate wire insertion and to avoid any damages occurring after the crimping operation.

16A max contacts

Conductor section		Throat Identification
(mm^2)	AWG	
0.14 - 0.37	26 - 22	
0.5	20	
0.75	18	
1	18	
1.5	16	
2.5	14	
3	12	
4	12	

Contacts supplied in both silver /gold plated versions. Male contacts can also be supplied in the "advanced" version and iron/constantan contacts for thermocouples J type.

40A max contacts

Conductor section		Identification
(mm^2)	AWG	hole Ø (mm)
1,5	16	1,75
2,5	14	2,25
4	12	2,85
6	10	3,5

MIXO above contacts are supplied in the silver plated version only

CRIMP CONTACTS OVERVIEW

The 4/6,5A, 10A and 16A crimp contacts are available either **silver or gold-plated.** The gold-plated crimp contacts are recommended for applications with very low rated currents and rated voltages.
Thanks to the conduction characteristics of gold, the deterioration of signals is prevented and an excellent resistance to the surface oxidation of the contacts is achieved. In particular, gold-plated contacts are recommended with signals with less then ±5 mA current and ±5V voltage.

Standard ILME **gold treatment** is carried out in accordance with MIL-G-45204C Class 00, Type II, Grade C and ASTM B428-01 Class 0.5, Type II, Grade C.
The new basic or high thickness gold-plated contacts are in compliance with EN 61984: 2009, IEC 60512 and EN 60352-2:1994 (such as the standard version)

CRIMP SILVER PLATED

4-6,5A

10A

16A
Normal and for advanced opening

10-40-70-100-200A

CRIMP GOLD PLATED

10-16A
Standard

10-16-40A
HNM (High Number of Matings)

10-16A
High thickness

CI 4-6,5A
For very high density inserts

CRIMP IRON/CONSTANTAN THERMOCOUPLE

Constantan (Cu Ni) and Iron (Fe)
According to IEC 60584-1 type J

CRIMP POF/MOST

For POF/MOST Optic Fibres
POF 1,0 mm
and MOST 1/1,5 mm

COAXIAL TO CRIMP

50Ω - 75Ω
according to DIN 41626-2

LOAD CURVES

The permitted current carrying capacity for connectors is variable: it becomes lower with the increase of the number of poles and of the ambient temperature in which the connector is installed and it depends upon the thermal properties of the material used for the contacts and the insulating parts including those of the type of conductor used. The current carrying capacity is obtained from the load curves which are constructed according to standard IEC 60512-5-2 for currents circulating simultaneously in all poles.

The limit current curves express current values that determine the achievement of the upper limit temperature of the materials. The choice of the permanent load applicable on the contacts **must be made within the field of operation possible delimited by the above mentioned curves.**

Since use of connectors at the limit values of their characteristics is not recommended, the **base curve** is de-rated. The reduction of the load currents to 80% defines the correction curve where both the maximum permissible contact resistances and the inaccuracy of the temperature measurements are sufficiently taken into consideration.

The correction curve represents the final **limit current curve (load curve)** as defined by standard IEC 60512-5-2. It therefore bears in consideration the differences between the various connector inserts, as well as errors in the temperature measurements.

All the load curves presented in this catalogue include the correction. See figure below.

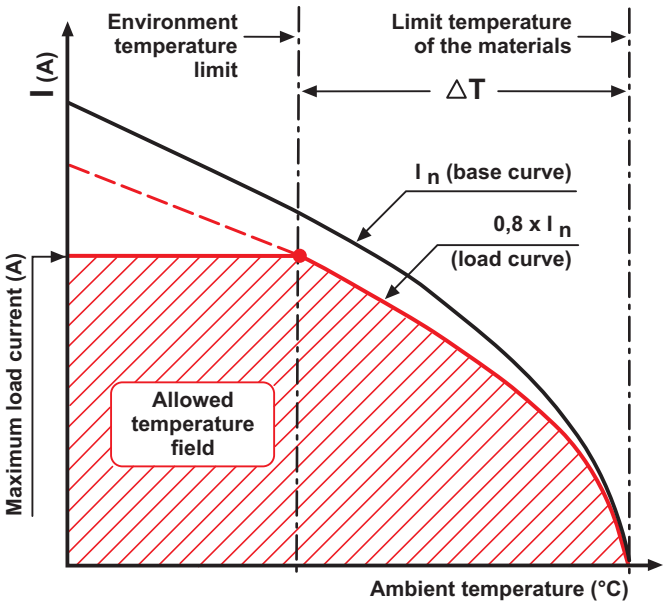

Legend

Maximum load current (A)
Value for which the connector reaches the upper limit temperature of the material at the corresponding ambient temperature intersected on the load curve.

Limit temperature of the materials
Value determined by the characteristics of the material used. The sum of the environmental temperature and the increase of the ΔT (temperature rise) caused by the current flow must not exceed the limit temperature of the materials.

Environment temperature limit
The environmental conditions must not exceed this value. It may be known and determines the maximum load current, or it may be directly obtained from the load curve.

Base curve
Set of current and temperature values obtained from laboratory tests and influenced by the connector's characteristics (number of poles, construction shape, thermal conductivity of the materials, etc.) and the cross-section of the conductor used.

Load curve (limit current curve)
Obtained from the base curve via the safety coefficient.

ΔT (temperature rise)
Temperature rise produced by a permanent current circulating through all the poles of a connector coupling; difference between the upper limit temperature of the material and the ambient temperature obtained on the limit current curve.

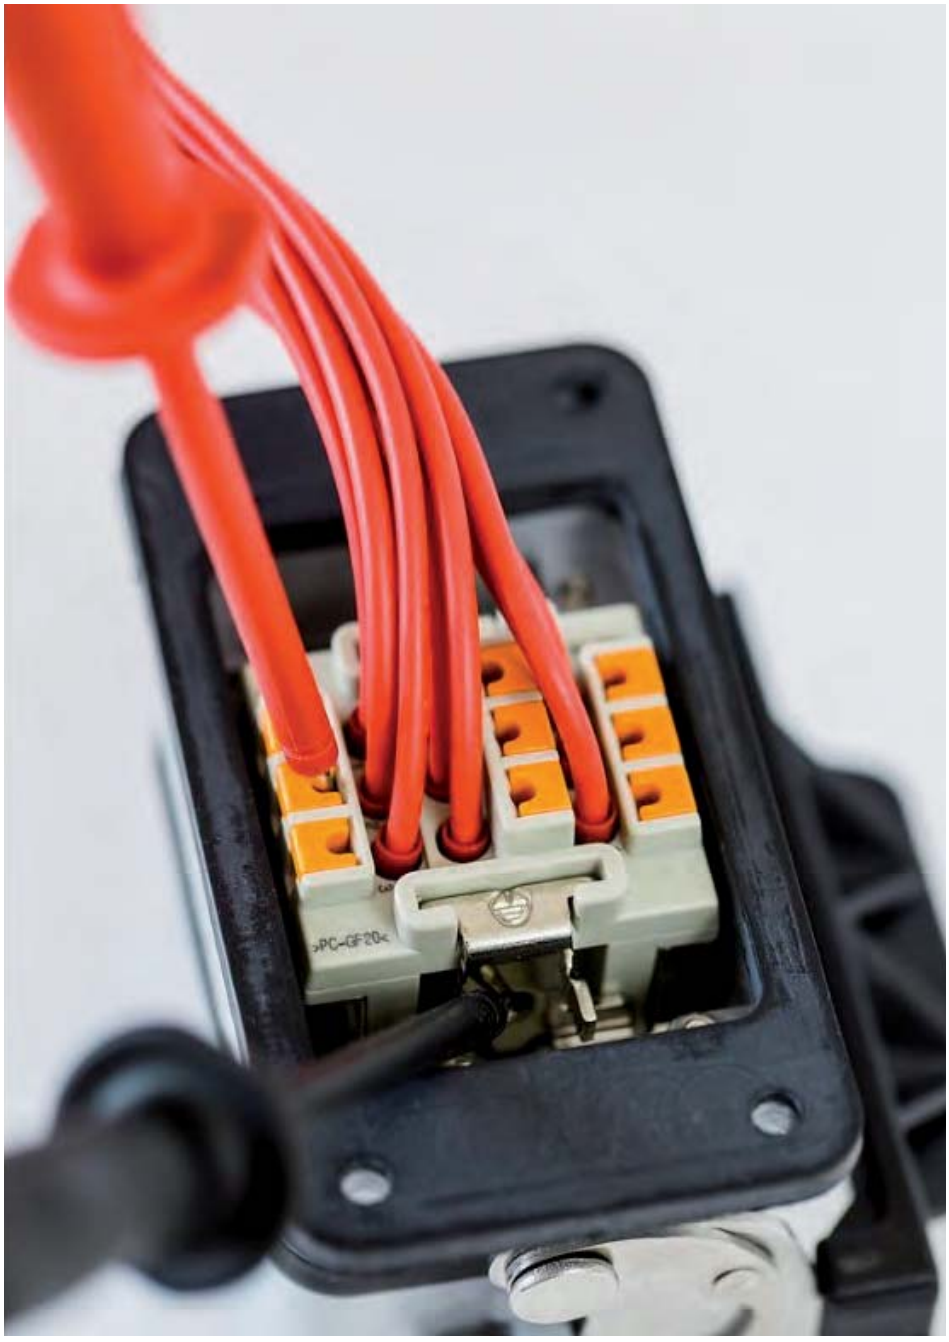
>PC-GF20<

TYPE OF ENCLOSURES

A large number of enclosure versions is available with different combinations of component materials, each one suitable for specific environmental installation conditions: standard, high temperature, aggressive, extremely aggressive, and electromagnetic compatibility. The principal parts are made in die cast aluminium (or zinc) alloy with a thermosetting powder coating or in self-extinguishing insulating thermoplastic material. They are resistant to impacts and strong mechanical stress.

The coupling's stability and protection against accidental openings are ensured by single or double locking devices comprising levers, springs and pegs – or screws or bayonets – in stainless steel, or entirely in plastic, or in a combination of both. Sealing is ensured by special gaskets that protect the connectors inside the enclosures against dust and aggressive agents. In general, the coupled enclosures with the appropriate user-selected connections guarantee IP44, IP65, IP66 and IP69 (IEC/EN 60529) degrees of protection and some series can reach IP67 and IP68 degree of protection. This catalogue provides for each enclosure the degree of protection and the conditions upon which it applies. The IP degree of protection of the complete connector coupling is the lowest of those assigned to each of the composing parts and is valid only when any cable entry is fitted with suitably rated cable entry device (not included) and upon connectors mated and locked.

STANDARD USE

C-TYPE
The classic choice

IL-BRID
Soft closing, strong hold

T-TYPE
The high-end plastic solution

CK - MK - CKA - MKA
The most compact

CQ - MQ
Insulating

MIXO ONE
Modular by definition

WATERTIGHT IP67

V-TYPE IP66/IP67
Extra tough

C7 IP66/IP67
Vertical closing

CZ7 IP66/IP67
Rigid coupling

WATERTIGHT IP68

CGK - MGK IP68
High protection

IP68
The diving master

AGGRESSIVE ENVIRONMENTS

T-TYPE W
For aggressive environments

W-TYPE
A cornerstone against corrosion

E-Xtreme®
Protection and beyond

SPECIFIC USE

HYGIENIC
Safe for food

LS-TYPE
For Light and Sound

BIG HOODS
The space you have always needed

180 °C
The heat shield

EMC
No interferences

CENTRAL LEVER
Easy access for robotics



COB
Functionality counts

HNM
High number of matings

830V*
High voltage version

* available upon request

APPLICATION SECTORS

ILME products apply in many different sectors, they are engineered and tested to provide specific solutions for different environments.

Safety systems

Electrical panels

Salt sprayers

Naval

Offshore

Robotics

Wind

Transportation

Remote controls

Stage equipments

Automation

Moulding

Food and beverage

LOCKING SYSTEMS

C-TYPE
Classic and flexible

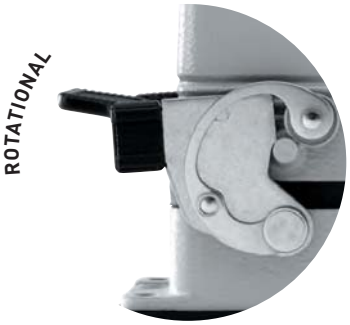

USED FOR ENCLOSURES:
- C-TYPE (IP65 or IP66)
- W-TYPE (IP65 or IP66) for aggressive environments
- 180 °C (IP65) for high temperatures with a completely metallic lever
- EMC (IP65 or IP66) for electromagnetic compatibility
- INSULATED 830V (IP65 or IP66) for CME 830V inserts

C7
Vertical closing up to IP67

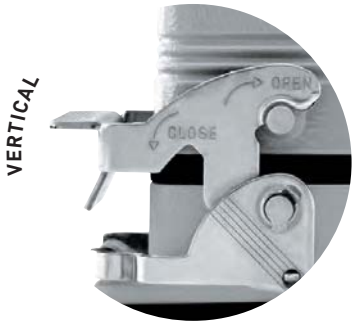

USED FOR ENCLOSURES:
- C7 (IP66/IP67) stainless steel levers
- CV (IP65 or IP66) stainless steel levers

T-TYPE
Thermoplastic lever

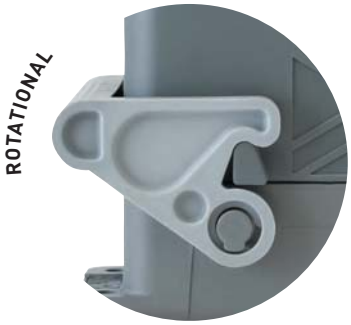

USED FOR ENCLOSURES:
- T-TYPE (IP65)
- T-TYPE/W (IP66/IP69)
- HYGIENIC: T-TYPE/H, T-TYPE/C (IP66/IP69)
- LS-TYPE (IP65)

IL-BRID
The coordinated effect of two works

USED FOR ENCLOSURES:
- IL-BRID (IP66)

CZ7
Rigid locking lever in stainless steel



USED FOR ENCLOSURES:
- IL-BRID (IP67)

TYPE OF COVERS

2-POSITION OPEN/CLOSED, HINGED

WHITE THERMOPLASTIC
LP / CP

USED FOR ENCLOSURES:
- C-TYPE (housings with levers)
- CV (housings with lever)

METAL VERSION
LS / CS

USED FOR ENCLOSURES:
- C-TYPE (housings with levers)
- CV (housings with lever)

METAL VERSION
LS / CS

USED FOR ENCLOSURES:
- C7 housings with levers

SIMPLEX SELF-CLOSING, HINGED

BLACK THERMOPLASTIC
LSP

USED FOR ENCLOSURES:
- CV (housings with lever)

BLACK THERMOPLASTIC
LSP

USED FOR ENCLOSURES:
- CZ (housings with lever)

METAL VERSION
LS

USED FOR ENCLOSURES:
- CKA (housings with lever)

TYPE OF HOODS / HOUSINGS

C-TYPE

This series has been developed for application in electrical and electronic machinery, control units, electrical panels, control equipment, in industrial environments and in general, wherever a reliable and easily disconnectable connection is required for power and signal circuits.

Functional characteristics

- Wear of pins greatly reduced by the presence of rolls, that provide a smooth closure;
- resilience of double spring mechanism for automatic compensation of any coupling tolerance;
- the inserts of the CMCE series (except the 16+2 poles) and of the CMSH series may use standard enclosures also for uses of up to 830V.

✔ UL certified for USA and Canada for Type 4, 4X (outdoor use) and 12 (indoor use) degrees of protection (enclosure type rating), marked on the packaging.
IP65 or IP66/IP69 degrees of protection according to model.

Characteristics of materials for CH, CA and MH, MA, MF series

- Made of die cast aluminium alloy;
- with epoxy-polyester thermosetting powder coating;
- gaskets in anti-aging, oil-resistant, grease-resistant and fuel-resistant vinyl nitrile elastomer;
- locking device with levers, springs, rolls and pins in stainless steel;
- lever handles in self-extinguishing thermoplastic material reinforced with glass fibres, UL approved (for CH, CA and MH, MA enclosures);
- ambient temperature range: -40 °C / +125 °C.

V-TYPE IP67

This original design locking lever, due to the vertical closing movement, offers an IP66/IP67/IP69 degree of protection according to EN 60529 when fitted with a complete and coupled connector using ILME standard aluminium hoods (without adaptor) with die cast pegs.

Functional characteristics

- The friction on the pin is virtually zero as the locking lever exerts its pressure vertically, thus significantly reducing wear in case of frequent use;
- this locking lever can be used for applications with vibrations because it has no springs, hence resulting more rigid;
- this locking lever occupies a very small space during the closing phase;
- it is recommended in cases in which the weight of the cable tends to open elastic locking levers, like with vertically installed connectors and downwards cable exit;
- the absence of plastic parts provides better resistance in case of shocks and exposure to chemical contamination or risk of fire.

✔ UL certified for USA and Canada for Type 4, 4X (outdoor use) and 12 (indoor use) degrees of protection (enclosure type ratings), marked on the packaging.
IP66/IP67/IP69 degree of protection.

Characteristics of materials for C7, C7A and M7, M7A series

- Made of die cast aluminium alloy;
- with epoxy-polyester thermosetting powder coating;
- gaskets in anti-aging, oil-resistant, grease-resistant and fuel-resistant vinyl nitrile elastomer;
- locking device fully in stainless steel;
- ambient temperature range: -40 °C / +125 °C

T-TYPE AND T-TYPE/W

Alongside the wide range of traditional metallic enclosures for multipole connectors, ILME was a pioneer in offering a new series of enclosures in self- extinguishing thermoplastic material in the most common sizes of "44.27", "57.27", "77.27" and "104.27".

Functional characteristics

- Pre-fastened gaskets for easier installation;
- external dimensions of the bulkhead housing are similar to those of the corresponding metal enclosures and hole fixing centres are unchanged;
- ample space inside enclosures for cables, with mounted connectors, similar to the corresponding metal high construction versions;
- possibility of making completely insulated constructions (equivalent to Class II);
- absence of powder paint for environments in which these are not recommended;
- manufactured from insulating material, do not require special reinforced insulation as the metal versions do, for use with series CME 830V higher voltage connector inserts (screw-type terminals).

✔ UL Type 12 degree of protection (enclosure type rating) according to ANSI/UL 50E.
IP65 (T-Type standard),
IP66/IP69 (T-Type/W) degree of protection.

Characteristics of materials for T-TYPE and T-TYPE/W series

- Enclosures in thermoplastic material, dark grey RAL 7012 colour, with high thicknesses providing structural solidity and durability;
- T-TYPE series: built-in polyurethane gaskets;
- T-TYPE/W series: built-in FKM fluoroelastomer sealing gaskets;
- locking levers in thermoplastic material colour grey RAL 7001;
- M25, M32 and M40 threaded cable entries;
- each enclosure carries its own part number, thread/ size, conformity markings and UL type rating;
- ambient temperature range: -40 °C / +90 °C.

T-TYPE/W series have been developed for industrial applications with particularly aggressive external agents (e.g. salt atmospheres or environments).

As the characterizing element of the T-TYPE/W series is the different sealing gasket material, hoods and covers without sealing gaskets for these series are the same of T-TYPE Standard.

COB

The COB system makes it possible to use multipole connectors within electrical panels without the traditional metallic enclosure, as environmental protection is assured by the electrical panel itself or other container.

Q Connectors must not be operated live.

Functional characteristics

- The system may be assembled on panels with window snap fastening device; on DIN EN 60715 rails, both lengthways and crossways to the support; on fixed panels using screws;
- reduction in cost and space with respect to metallic enclosures and traditional terminal boards;
- possibility of rewiring at the connector bench with connected devices;
- easy wiring inspection and tests with coupled connectors, thanks to rear access to the inserts via the turnover device;
- fast mounting in panels thanks to the snap fastening device on the DIN EN 60715 rails;
- sturdy support structure, specific to the size of each insert and does not require any preparation;
- broad passage for housing of conductor cables;
- mobile parts prearranged for the clamping of bundles of conductors of multipolar cables to prevent contact with the connector contacts

✔✔ IP20 degree of protection.

Characteristics of materials for COB system supports

- Self-extinguishing thermoplastic insulating materials, UL certified (COB supports, locking levers, hoods), compatible with the -40 °C / +125 °C operating temperature range of connector inserts;

IL-BRID

Through its original design, the IL-BRID locking lever combines the smoothness of the thermoplastic material with the sturdiness of the stainless steel spring; it has also a linear design which favours a quick wash without retaining external elements.

Functional characteristics

- Soft closing: in the first phase, the thermoplastic locking lever component comes into play: sliding the new locking lever on the pin reduces friction and wear. It is suitable in all applications with frequent opening and closing.
- Strong hold: after the first closing phase involving the plastic component, the stainless steel hook intervenes to guarantee higher resistance to mechanical stress.

✔✔ IP66/IP69 degree of protection.
✔✔ IP65 degree of protection versions with hinged cover.

Characteristics of materials for CZ and MZ series

- Made of die cast aluminium alloy;
- with epoxy-polyester powder coating;
- gaskets in anti-aging, oil-resistant, grease-resistant and fuel-resistant vinyl nitrile elastomer;
- locking device with levers and springs in stainless steel;
- lever handles in self-extinguishing thermoplastic material reinforced with glass fibres, UL approved (for CZ and MZ enclosures)

C7/CZ7 IP67

Enclosures with rigid stainless steel lever to assure an IP66/IP67/IP69 dust and watertight seal.

Functional characteristics

- C7 series: V-TYPE stainless steel locking lever, vertical closing
- sizes 44.27, 57.27, 77.27, 104.27
- with and without hinged cover (except size 57.27)
- bulkhead or surface mounting
- recommended in case of vibrations or heavy weight of cables

- CZ7 series: stainless steel locking lever, rigid
- sizes 49.16, 66.16
- with and without hinged cover
- bulkhead or surface mounting
- recommended in case of vibrations or heavy weight of cables.

✔✔ IP66/IP69, IP66/IP67/IP69 degrees of protection according to model.

Characteristics of materials for C7, CZ7 series

- Made of die cast aluminium alloy;
- with epoxy-polyester thermosetting powder coating;
- gaskets in anti-aging, oil-resistant, grease-resistant and fuel-resistant vinyl nitrile elastomer;
- locking device integrally in stainless steel;
- ambient temperature range: -40 °C / +125 °C.

IP68

For applications in the railway sector and whenever the following characteristics are demanded: high pressure, impact and corrosion resistance, with degree of protection IP68. They also guarantee a good shielding for electromagnetic compatibility.

Functional characteristics

- The IP66/IP68/IP69 degree of protection is ensured if the enclosures are correctly installed and the cable entry devices have equal or higher rating.

✔ UL certified for USA and Canada for Type 4, 4X (outdoor use) and Type 12 (indoor use) ratings, marked on the packaging.
IP69 degree of protection for tightness to pressurized water jets.

Characteristics of materials for CG and MG series

- Made of die cast aluminium alloy;
- with thermosetting epoxy powder coating;
- locking device with either screws or bayonets (types with suffix B).

180 °C

Series specifically developed for industrial applications where the ambient temperatures are particularly harsh (from -40 °C to +180 °C).

Functional characteristics

- For use with inserts in self-extinguishing thermoplastic material suitable for high temperatures (>PPS< polyphenylene sulphide);
- this version is distinguished by the red colour of the enclosures.

✔ UL certified for USA and Canada for Type 4, 4X (outdoor use) and Type 12 (indoor use) ratings, marked on the packaging.
IP65/IP69 degree of protection.

Characteristics of materials for CK..R, CZ..R, CH..R, CA..R and MK..R, MZ..R, MH..R, MA..R series

- Made of die cast aluminium alloy;
- chromate treated die cast;
- coated with special thermosetting powder with high resistant to high temperatures;
- gaskets in anti-aging FKM fluoroelastomer;
- locking device with levers, springs and pins in stainless steel;
- single-block locking levers in stainless steel (for CZ..R, CH..R 48 and MZ..R, MH..R 48 versions);
- lever handles in die-cast aluminium with same special coating of enclosures (for CH..R 10, 16, 24 and MH..R 10, 16, 24 versions);
- supplementary insulation inside enclosures.

E-Xtreme®

ILME patented titanium plasma protection. Corrosion proof enclosures, resistant up to 3.000 hours in salt spray tests.

Functional characteristics

- Metal hoods and housings intended for extremely demanding environments, with special protective treatment under painting.
  Their special patented protective coating assures a high level of protection against the corrosion and erosion even in case of long-term exposure to salt mist;
- corrosion-proof aluminium with a special coating under the thermosetting powder coating colour RAL 7016 dark grey;
- FKM gasket (-40 °C...+180 °C) or silicone gasket (-60 °C...+180 °C);
- V-TYPE lever or C-TYPE lever, hoods with moulded pegs or riveted stainless steel bolts;
- durable protection against damage caused by stone chip, icing, salt mist, UV radiations and harsh gases

✔ IP65, IP66/IP69, IP66/IP67/IP69, IP66/IP68/IP69 (CG-MG) degrees of protection according to EN IEC 60529 (in mated and locked condition), according to model.

Characteristics of materials for E-Xtreme® series

- Material: aluminium die-cast
- Painting: thermosetting epoxy powder coating
- Colour: RAL 7016 (dark grey)
- Locking lever, springs and pegs: stainless steel
- Lever handle: C-Type polyamide; V-Type stainless steel
- Gasket: FKM
- Silicone-based compounds: free (except version for -60 °C... +180 °C)
- EN ISO 9227: 3.000 hours (V-Type lever and hood with moulded pegs); 2.000 hours (C-Type lever and hood with riveted stainless steel bolts)

BIG

The large dimensions of these innovative enclosures series have been chosen to offer customers an adequate space to store conductors.

Functional characteristics

- The width of the new enclosures is greater than that of previous versions: 66 mm compared to the 43 mm for standard enclosures.
- The height of BIG enclosures has also been increased to 100 mm for sizes “44.27” and “57.27” (standard versions for high models: 70 and 72 mm), and to 110 mm for sizes “77.27” and “104.27” (standard versions for high models: 76 mm).
- The cable compartment is now fully accessible during assembly (the connector insert is fully inserted in the lower half of the enclosure), offering three times the space compared to standard enclosures. This means it is possible to bend cables and pipes with greater bending radii.

Due to this important feature, the BIG enclosures are particularly suitable for MIXO modular inserts, being versatile and customizable, for multiple cable entries. Each insert, differentiated according to electric power or signal, pneumatic, optical fibre or Ethernet network current, may thus have the specific branching. One single large connector can replace what previously required two connectors.

IP66/IP69 degree of protection.

Characteristics of materials

for CB and MB series

- Made of die cast aluminium alloy;
- with epoxy-polyester thermosetting powder coating;
- die cast integral pegs.

EMC

This series has been developed for industrial applications that require electromagnetic compatibility (EMC, Electromagnetic Compatibility) in accordance with the European standards that regulate the emission and immunity of the equipment.

Functional characteristics

- For use with inserts in self-extinguishing thermoplastic material (PPS polyphenylene sulphide).

UL certified for USA and Canada for NEMA 4, NEMA 4X and NEMA 12 degrees of protection (enclosure type ratings) printed on the packaging. IP65/IP69 or IP66/IP69 degree of protection according to model.

Characteristics of materials

for CK..S and MK..S series

- Chromate coating treatment, RoHS 2 conform of die casts with high surface conductivity;
- special gaskets in highly conductive material;
- single-block locking lever in stainless steel.

for CZ..S, CH..S, CA..S and MZ..S, MH..S, MA..S series

- Made of die cast aluminium alloy;
- chromate conversion coating treatment of die cast, RoHS 2 conform, with high surface conductivity;
- special gaskets in highly conductive material;
- locking device with levers, springs and pins in stainless steel;
- lever handles in self-extinguishing thermoplastic material reinforced with glass fibres, UL approved.

W-TYPE

This series has been developed for industrial applications with particularly aggressive external agents (e.g. salt atmospheres or environments).

Functional characteristics

- The enclosures do not have any internal tabs (with polarization function) thus they allow also the insertion of the CME inserts;
- enclosures have supplementary insulating strips inside for use with CME 830 V inserts;
- the inserts of CME series connectors (screw-type) have a lateral key coding that prevents installation in metal housings without such additional insulation.
- this version is distinguished by the black colour of the enclosures

UL certified for USA and Canada for NEMA 4, NEMA 4X and NEMA 12 degrees of protection (enclosure type ratings) printed on the packaging. IP65/IP69 or IP66/IP69 degree of protection according to model.

Characteristics of materials

for CK..W and MK..W series

- Chromate treated die cast;
- with epoxy thermosetting powder coating;
- gaskets in anti-aging FKM fluoroelastomer;
- single-block locking device in stainless steel

CZ..W, CH..W, CA..W series and MZ..W, MH..W, MA..W series

- Made of die cast aluminium alloy;
- Chromate conversion coating, RoHS 2 conform treatment of die casts;
- with epoxy thermosetting powder coating;
- gaskets in anti-aging FKM fluoroelastomer;
- locking device with levers, springs and pins in stainless steel;
- pegs with stainless steel coating;
- single-block lever handles in stainless steel (for CZ…W and MZ…W enclosures);
- lever handles in self-extinguishing thermoplastic material reinforced with glass fibres, UL approved (CH..W, CA..W and MH…W, MA..W versions);
- supplementary insulation inside enclosures

HYGIENIC

The Hygienic multipole connector enclosures version (series T-TYPE/H and T-TYPE/C) has been designed for installation on food industry machines and systems.

Functional characteristics

- The following improvements to the T-TYPE series have been made in order to satisfy the requirements laid down by chapter 2.1 of Machinery Directive 2006/42/EC for the machines on which they are installed:
- material cleanability and resistance to the cleaning and sanitising agents normally used in the food industry;
- materials in terms of the requirements for accidental contact with food products.

As the characterizing elements of the Hygienic Series are the different sealing gasket material and the different locking lever, hoods and covers without sealing gaskets and locking levers are the same of series T-TYPE Standard.

Characteristics of materials for T-TYPE/H series

- Enclosures in thermoplastic material, dark grey RAL 7012 colour, with high thicknesses providing structural solidity and durability.
- Sealing gaskets made by HNBR rubber formulated in accordance with FDA Guideline 21 CFR §177.2600.
- Locking levers in thermoplastic material, blue RAL 5015 colour.
- M25, M32 and M40 threaded cable entries.
- IP66/IP69 degree of protection according to EN 60529.
- Each enclosure carries its own part number, thread/size and conformity markings.
- Ambient temperature range: -40 °C / +70 °C.

T-TYPE/C series

- The Hygienic T-TYPE/C Series enclosures have been specifically designed for food and beverage ambient temperature as low as -50 °C (range: -50 °C / +70 °C);
- enclosures in thermoplastic material, dark grey RAL 7012 colour, with high thicknesses providing structural solidity and durability;
- T-TYPE/C differs from T-TYPE/H for the sealing gaskets made by in accordance with FDA Guideline 21 CFR §177.2600;
- ILME T-TYPE/C series enclosure materials have been selected according to EU n. 10/2011 regulation requirements and each component has been tested according to EU regulation n. 10/2011 and EC regulation n. 1935/2004.
- IP66/IP69 degree of protection according to EN 60529.

LS-TYPE

Series specifically developed for industrial applications where the ambient temperatures are particularly harsh (from -40 °C to +180 °C).

Functional characteristics

- For use with inserts in self-extinguishing thermoplastic material (PPS polyphenylene sulphide).

UL certified for USA and Canada for NEMA 4, NEMA 4X and NEMA 12 degrees of protection (enclosure type ratings) printed on the packaging. IP65/IP69 degree of protection.

Characteristics of materials for CK..R, CZ..R, CH..R, CA..R and MK..R, MZ..R, MH..R, MA..R series

- Made of die cast aluminium alloy;
- chromate conversion coating, RoHS 2 conform treatment of die cast;
- coated with special thermosetting powder coating with high resistant to high temperatures;
- gaskets in anti-aging FKM fluoroelastomer;
- locking device with levers, springs and pins in stainless steel;
- single-block locking levers in stainless steel (for CZ..R, CH..R 48 and MZ..R, MH..R 48 versions);
- lever handles in aluminium with special die-cast coating (for CH..R 10, 16, 24 and MH..R 10, 16, 24 versions);
- supplementary insulation inside enclosures.

HNM

Connector enclosures designed to endure high number of matings, to be used in combination with HNM connector inserts and relevant HNM removable crimp contacts, extending the guaranteed number of matings up to 10 000.

Functional characteristics

- HNM Housing (bulkhead or surface mounting) equipped with ILME proprietary design V-Type locking lever, further improved with special treatment to reduce the wear due to friction at minimum.
- HNM Hoods equipped with riveted rolling pegs and special anti-friction lubrication treatment.
- Ensuring long life span in those applications where frequent connections and disconnections are expected exceeding the standard 500 mating cycles.

Characteristics of materials for RV, RH, RF, RAC HNM series

- Made of die cast aluminium alloy;
- coated with thermosetting powder coating, epoxy-polyester;
- gaskets in anti-aging, oil resistant, grease resistant and fuel resistant vinyl nitrite elastomer;
- V-Type single locking lever, stainless steel;
- ambient temperature range -40 °C / +125 °C

CENTRAL LEVER

Series specifically designed for industrial applications with limited installation space.

Functional characteristics

- These enclosures can be installed, placed side-by-side and handled in a single operation. Furthermore, the lever's shape reduces the effort required to uncouple the inner fittings.

✔✔ IP65 degree of protection.

Characteristics of materials

for CH..YC, CA..YC and MA..YC, CA..YX and MF..YX series

- Made of die cast aluminium alloy;
- with epoxy-polyester thermosetting powder coating;
- gaskets in anti-aging, oil-resistant, grease-resistant and fuel-resistant NBR vinyl nitrile elastomer;
- locking device with single stainless steel lever;
- stainless steel locking pegs with rollers, to reduce wear.

MIXO ONE

MIXO ONE is the aluminium housings system designed by ILME to accept the wide range of MIXO series single-sized modules.

Functional characteristics

- These robust connector enclosures (3 hood variants and 1 bulkhead mounting housing) transform each single MIXO module into a completely independent connector;
- the enclosures allow mounting of single MIXO module only in one guided way, to avoid incorrect match with the mating connector;
- the enclosures incorporate a pre-leading (first-make, last-break) PE connection terminal and contact, for the safest connector operation;
- the pins protruding from the bulkhead mounting housing act also as key guide, in cooperation with the corresponding keyway sockets in the hoods, to avoid incorrect 180° reversed mating with corresponding connector;
- the rigid locking lever is releasably mounted on moulded pegs that include a stopping teeth;
- the hoods are split in two parts (front, rear), to allow MIXO module mounting and simplify the enclosure's PE connection. Supplied with four self-threading screws and self-retaining sealing gasket;
- the bulkhead mounting housing is supplied with the module locking frame and self-retaining flange gasket;
- four optional coding pins available;
- protection covers for hoods and housings available.

✔✔ cURus Type 4/4X/12 pending
IP65 degree of protection

Characteristics of materials

for CXA 01..., MXA 01... series

- Die cast aluminium alloy, nickel plated;
- gaskets in anti-aging, oil resistant, grease resistant and fuel resistant NBR vinyl nitrile elastomer;
- locking device with stainless steel single lever;
- module locking frame in stainless steel;
- self-threading assembly screws in stainless steel;
- optional coding pins CR CX... in self-extinguishing thermoplastic insulating material (UL 94V-0).

For CXP 01... covers

- Shock-proof self-extinguishing thermoplastic material (UL 94 V-0) suitable for outdoor exposure, either with pegs (for enclosures with locking lever and sealing gasket) or with locking lever and sealing gasket (for enclosures with pegs) both with eyelet-terminated string (for fastening to housings) or with loop-terminated cord (for fastening to hoods, around the incoming cable);
- locking device – if any – made by the same material of the cover.

CK - MK - CKA - MKA
CQ - MQ

Thermoplastic and metallic enclosures size "21.21" for standard or aggressive environments and insulated version size "32.13"

Functional characteristics

- For use with all size "21.21" connector inserts;
- Connector inserts for use at SELV are prevented to be installed in metallic enclosures CKA-MKA, CGK-MGK (as they would not provide protective earth connection for the enclosure) thanks to a special key and keyway system in all "21.21" metallic enclosure. Insulating "21.21" enclosures accept all "21.21" inserts.
- CGK-MGK IP68 enclosures (actually IP66/IP68/IP69) available both with 2-screw locking or by 2-bayonet locking (types with suffix B).

✔✔ UL certified for USA and Canada for Type 4, 4X and 12 degrees of protection (enclosure type ratings, equivalent to NEMA rating), printed on the packaging.
IP44 degree of protection, IP66/IP67/IP69 by using the special fixing screw + gasket kit CKR 65(D) separately available, and suitable cable outlet device.
IP66/IP68/IP69 degree of protection for CGK-MGK enclosures equipped with CKR 65(D) kit.

Characteristics of materials

for CK, MK and CQ series

- In self-extinguishing light grey RAL 7035 or jet black RAL 9005 thermoplastic material for insulating (CQ series only available black) or metallic enclosures;
- metal enclosures in die cast zinc or aluminium alloy, according to model;
- metal enclosures with epoxy-polyester thermosetting powder coating;
- gaskets in anti-aging, oil-resistant, grease-resistant and fuel-resistant NBR vinyl nitrile elastomer;
- metallic enclosures with single-block locking lever in stainless or galvanized steel;
- insulating enclosures with single-block locking lever in self-extinguishing thermoplastic material.

ENCLOSURES FEATURES

Series	Version	Material	Size	Size ID	Cable entry		Locking device
CK / MK, CKX	Standard	Insulating	21.21	03	M20 - M25	Pg 11	single
CKA / MKA CKAX / MKAX CKAXX / MKAXX	Standard W (Aggressive environments) S (EMC) E (E-Xtreme®)	Metallic	21.21	03	M20 - M25	Pg 11	single
CKG / MKG	Standard	Insulating	21.21	03	M20 - M25	Pg 11	single
CKAG / MKAG		Metallic			M20		
IP68 (CGK / MGK)	IP68	Metallic	21.21	03	M20 - M25	Pg 13,5	dual screw / bayonet
CQ / MQ	Standard	Insulating	32.13	08	M25x2	Pg 16 - Pg 21	single
	S (EMC)	Insulating metallized					
MIXO ONE (CXA, MXA)	EMC as standard	Metallic	—	—	M25 - M32	—	single
IL-BRID	Standard	Metallic	49.16 66.16	15 25	M20 - M25	Pg 13,5 - Pg 21	single
			49.16 66.16	15 25	M20 - M25	Pg 16 - Pg 21	
			49.16 66.16	15 25	M20 - M25	Pg 16 - Pg 21	
CZ7 / MZ7	Standard W (Aggressive environments) S (EMC) R (High temperatures) E (E-Xtreme®)		49.16 66.16	15 25	M20 - M25	Pg 13,5 - Pg 21	
C-TYPE (CH / CA / MH / MA)	Standard C-TYPE W (Aggressive environments) S (EMC) R (High temperatures) 830V (Insulated) E (E-Xtreme®)	Metallic	66.40	50	M25 - M40	Pg 21 - Pg 29	dual
			44.27	06	M20 - M40	Pg 13,5 - Pg 29	single
			57.27	10		Pg 16 - Pg 29	dual
			77.27	16	M25 - M50	Pg 21 - Pg 36	
			104.27	24			
			77.62	32	M32 - M50	Pg 29 - Pg 42	single / dual
			104.62	48			single

CM/MM enclosures for 830V screw type connector inserts CME series available only upon request (as well as the CME series inserts)

[1] Enclosures ensure IP degree of protection when coupled and locked with the locking lever. The cover (CS, CP) only provides mechanical protection without ensuring the IP degree of protection.

[2] Versions with plastic cover are not UL approved except version with SIMPLEX cover.

Series	IP (EN 60529) [1]	UL 50 Type (NEMA 250 type)	Notes	Ambient temperature limit (°C)		From page
CK / MK, CKX	IP44	12		-40	+125	339, 344
	IP66/IP67/IP69	12, 4, 4X	with CKR 65 (D)			
CKA / MKA	IP44/ IP66/IP67/IP69	12		-40	+125	349
CKAX / MKAX CKAXX / MKAXX	IP66/IP67/IP69	12, 4, 4X	with CKR 65 (D)			350
CKG / MKG	IP66/IP67/IP69	12, 4, 4X	for CXL, CJK and CX 1/2 BD inserts	-40	+125	347
CKAG / MKAG						354
IP68 (CGK / MGK)	IP66/IP68/IP69	12, 4, 4X		-40	+125	628
CQ / MQ	IP66/IP67/IP69	12, 4, 4X	with conductive gasket CR 08 EMC	-40	+125	366, 573
MIXO ONE (CXA, MXA)	IP65	12, 4, 4X	for single size MIXO modules	-40	+125	369
IL-BRID	IP66/IP69	12, 4, 4X		-40 [R = -40]	+125 [R = +180]	374
	IP65		with hinged cover			374, 378
	IP44 (SIMPLEX) IP65 (SIMPLEX)		when not mated and locked with lever when mated and locked with the closing lever			375, 379
CZ7 / MZ7	IP66/IP67/IP69		enclosures ensure IP67 degree of protection when coupled with hoods or covers with moulded pegs			384, 385 519, 520 576, 577 586 540, 541
C-TYPE (CH / CA / MH / MA)	IP44 IP66/IP69 [IP65]	12 12, 4, 4X [2] [12, 4, 4X [2]]		-40 [R = -40]	+125 [R = +180]	387

ENCLOSURES FEATURES

Series	Version	Material	Size	Size ID	Cable entry		Locking device
T-TYPE (TCH / TH / TMA / TA)	Standard (RAL 7012 grey) W (Aggressive environments) HYGIENIC (H) HYGIENIC (C)	Insulating	44.27	06	M25 - 32	—	single
			57.27	10			dual
			77.27	16	M32 - 40		
			104.27	24			
V-TYPE IP67 (C7I, C7P / M7P, ...)	IP67 stainless steel levers E (E-Xtreme®)	Metallic	44.27	06	M20 - 40	Pg 16 - 29	single
			57.27	10			dual
			77.27	16	M25 - 40	Pg 21 - 29	
			104.27	24			
V-TYPE (CVIL, CVP / MVP L, ...)	IP65/IP66 stainless steel levers	Metallic	44.27	06	M20 - 40	Pg 16 - 29	single
			57.27	10			
			77.27	16	M25 - 40	Pg 21 - 29	
			104.27	24			
BIG (CB / MB)	Standard W (Aggressive environments) E (E-Xtreme®)	Metallic	44.27	06	M20 - 50	—	single
			57.27	10			dual
			77.27	16			
			104.27	24			
IP68 (CG / MG)	Standard (inherently EMC) E (E-Xtreme®)	Metallic	44.27	06	M25 - 32	Pg 16 - 29	screw / bayonet
			57.27	10			
			77.27	16	M32 - 50	Pg 21 - 29	
			104.27	24			
Central lever (...YX / ...YC)	Standard	Metallic	44.27	06	M25 - 32	Pg 16 - 29	single central lever
			57.27	10			
			77.27	16	M32 - 40	Pg 21 - 29	
			104.27	24			
COB	Standard	Insulating	44.27	06	—	—	dual
			57.27	10			
			77.27	16 ◈			
			104.27	24			
LS-TYPE (CHIN, CHPN / MHPN, ...)	Light and sound applications (Black colour)	Metallic Thermoplastic lever	44.27	06	M20 - 40	Pg 16 - 29	single
			57.27	10			dual
			77.27	16	M25 - 40	Pg 21 - 29	
			104.27	24			

CM/MM enclosures for 830V screw type connector inserts CME series available only upon request (as well as the CME series inserts)

[1] Enclosures ensure IP degree of protection when coupled and locked with the locking lever. The cover (CS, CP) only provides mechanical protection without ensuring the IP degree of protection.

[2] Versions with plastic cover are not approved.

◈ 49.16 (15) and 66.15 (25) with adapter CR xx/16.

Series	IP (EN 60529) [1]	UL 50 Type (NEMA 250 type)	Notes	Ambient temperature limit (°C)		From page
T-TYPE (TCH / TH / TMA / TA)	STD - IP65 W - IP66/IP69 T-TYPE/H - IP66/IP69 T-TYPE/C - IP66/IP69	12 (Standard version only)		STD -40 W -40 T-TYPE/H -40 T-TYPE/C -50	STD +90 W +90 T-TYPE/H +70 T-TYPE/C +70	480
V-TYPE IP67 (C7I, C7P / M7P, ...)	IP66/IP67/IP69	12, 4, 4X [2]		-40	+125	436
V-TYPE (CVIL, CVP / MVP L, ...)	IP65 IP66/IP69	12, 4, 4X [2]	SIMPLEX with self-closing cover	-40	+125	444
BIG (CB / MB)	IP66/IP69	12, 4, 4X		-40	+125	466
IP68 (CG / MG)	IP66/IP68/IP69	12, 4, 4X		-40	+125	632
Central lever (...YX / ...YC)	IP65	12, 4, 4X		-40	+125	603
COB	IP20			-40	+125	652
LS-TYPE (CHIN, CHPN / MHPN, ...)	IP65	12, 4, 4X [2]		-40	+125	618

THE DEGREE OF PROTECTION

The connector's housing, sealing and locking mechanism protect the connection from external influences such as mechanical shocks, foreign bodies, humidity, dust, water or other fluids such as cleansing and cooling agents, oils, etc. The degree of protection the housing offers is explained in the IEC 60 529, DIN EN 60 529, standards that categorize enclosures according to foreign body and water protection.
The following table shows the **IP (Ingress Protection) Ratings Guide**.

FIRST Index figure	Degree of protection **SOLIDS**		**SECOND Index figure**	Degree of protection **WATER**	
0		No protection	**0**		No protection
1		Protected against access to hazardous parts with the back of a hand and protected against solid foreign objects of Ø 50 mm and greater	**1**		Protected against vertically falling water drops
2		Protected against access to hazardous parts with a finger - protected against solid foreign objects of Ø 12,5 mm and greater	**2**		Protected against vertically falling water drops when enclosure tilted up to 15° (on either side of the vertical)
3		Protected against access to hazardous parts with a tool - protected againstsolid foreign objects of Ø 2,5 mm and greater	**3**		Protected against spraying water (at an angle up to 60° on either side of the vertical)
4		Protected against access to hazardous parts with a wire - protected against solid foreign objects of Ø 1,0 mm and greater	**4**		Protected against splashing water from any direction
5		Protected against access to hazardous parts with a wire dust-protected (no harmful dust deposit)	**5**		Protected against water jets from any direction
6		Protected against access to hazardous parts with a wire dust-tight (total protection against dust)	**6**		Protected against powerful water jets from any direction (similar to sea waves)
			7		Protected against the effects of temporary immersion in water at a maximum depth of 1 metre for 30 min
			8		Protected against the effects of continuous immersion in water at depth and/or duration upon agreement, more severe than for numeral 7
			9		Protected against high pressure and temperature water jets from any direction

RATING EXAMPLE

IP 6 5

Description according to IEC 60529

CHANGEOVER FROM PG THREADS TO METRIC

After 31st December 1999, the German safety standard DIN VDE 0619 (1987-09) and the standards it refers to - DIN 46319 for dimensions with metric threads and DIN 46320 (T1-T4), DIN 46255 and DIN 46259 for dimensions with Pg threads (Pg= Panzerrohr-Gewinde: literally “threads for armoured pipes”) - were withdrawn and European standard EN 50262 “Metric cable grippers for electrical installations” has been in force since 1st January 2000.

This standard defines the new sizes with metric threads for cable grippers according to EN 60423 and establishes the safety prescriptions.

Conversely, it does not specify the dimensions, such as the size of the tightening wrench, the diagonal dimension, or the dimensions of the tightness seals, as was the case in the withdrawn DIN for Pg cable grippers.

The standard came definitively into force on 1st April 2001, when the contrasting national standards were withdrawn.

It is valid in all member countries of CENELEC (European Electrical Standardisation Committee) and its publication has led to a broadening of the supply of enclosures for multi-pole connectors for industrial use, to include new enclosure versions with cable entry suitable for metric cable grippers.

Cable gripper producers have introduced the new metric series to add to the Pg size series, to gradually replace the latter type. The transition period indicated in the new standard should have ended on 1st March 2001, after which date the use of entry devices for Pg cables and, as a result, enclosures with Pg thread, should have ended in new installations. Nevertheless, both the cable entry devices and the relevant enclosures with Pg thread, may continue to be used as spare parts. For the CE marking of these items, observance of the safety conditions specified by the Low Voltage Directive is sufficient.

To distinguish hoods and surface-mounting housings with metric entries from the relevant Pg versions (marked with a C pre-code), the ILME metric types are marked with an M pre-code. The transposition table below indicates the correspondence rule adopted in most cases by ILME for creating the new metric versions.

Pg → metric transposition table

Pg	Metric
Pg 11	M20
Pg 13.5	M20
Pg 16	M20
Pg 21	M25
Pg 29	M32
Pg 36	M40
Pg 42	M50

Cable diameter for use with ILME cable glands

∅ in mm	Metric thread				
Series	**20**	**25**	**32**	**40**	**50**
AS M..P	6 - 12,5	10 - 18	14 - 24	15 - 24	23 - 30
AS M..E	8 - 12,5	13,5 - 18	17 - 24	—	—
AG M..T	6 - 8 -10	11 - 14 - 17	19 - 21 -24	26 - 29 - 32	35 - 38 - 41
AG M..I	5 - 12,5	9 - 18	14 - 25	18 - 32	24 - 38,5
AG M..R	6 - 8 -10	11 - 14 - 17	19 - 21 - 24	—	—

For more information, please refer to the technical catalogue on www.ilme.com

COMBINATIONS BETWEEN ENCLOSURES AND INSERTS

Identification of enclosures

Connector inserts and their enclosures are numerous and therefore the search for the correct pairing of one with another may be complex.

To facilitate this operation (in addition to the normal part number) the definition of **"size"** has been introduced in this catalogue.

As indicated in the illustration on the left and in the table below, the size value refers to the **"x - y" fixing screw centre distance** which constitute a unique and shared element, since they are common to both the inserts and the enclosures.

The following table shows all the sizes of the enclosures and the dimensions of the housings where the inserts will be fastened.

Enclosures size	Insert housing with x - y fixing screw centre distance
21.21	(21 x 21 mm) **
32.13	32 x 13 mm
49.16	49,5 x 16 mm
66.16	66 x 16 mm
66.40	66 x 16 mm (2 inserts)
44.27	44 x 27 mm
57.27	57 x 27 mm
77.27	77,5 x 27 mm
104.27	104 x 27 mm
77.62	77,5 x 27 mm (2 inserts)
104.62	104 x 27 mm (2 inserts)

** Dimensions relating to the insert cross-section size, not being able to identify a fixing screw centre distance, since all "21.21" sized inserts are provided with a single fixing screw.

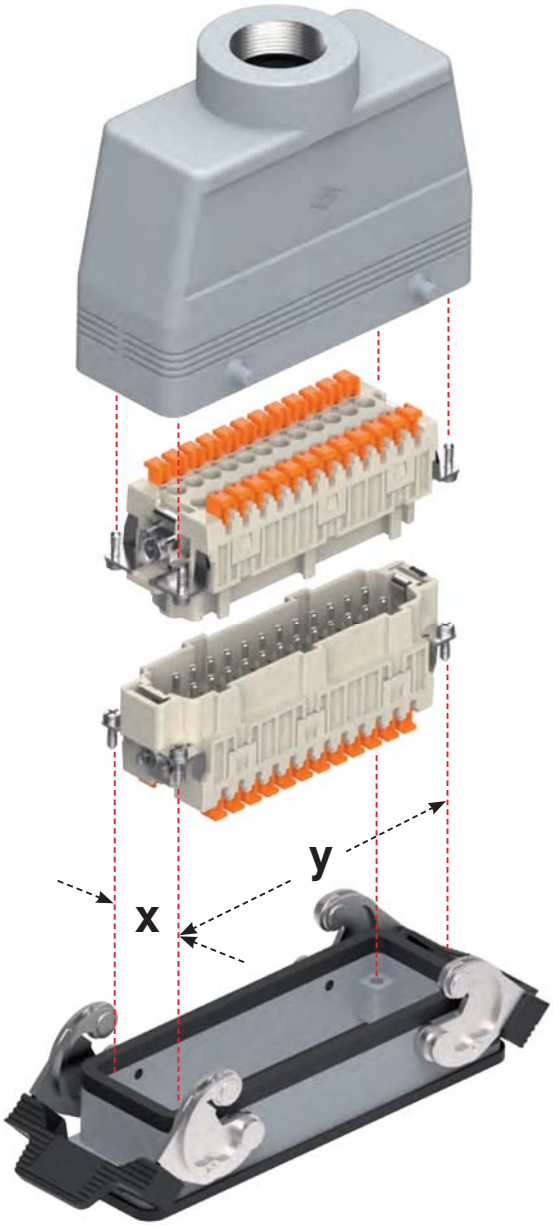

All pages that illustrate combinable articles (inserts and enclosures) carry references as per the examples illustrated on the opposite page.

Enclosures size x • y	Rated current																		
	6A	10A	10A	10A	10A	10A	16A	16A	16A	16A	16A	16A	16A	35A	40A 16A 10A 6,5A	16A 10A	100A 40A 10A	80A 16A	200A 100A 70A 40A 16A 10A 5A 4A
	Inserts Series																		
	CDSH NC	CK - CKS ◀ CKSH	CD - RD (HNM)	CT - CTS	CDD - RDD (HNM)	CDS ◀ CDSH	CDA - CDC - CSAH	CCE - RCE (HNM)	CNE	CSE ◀ CSS - CSH	CT - CTS - CTSE	CME ◀	CMSE ◀ CMSH - CMCE	CP	CQ - CQE - CQEE RQEE (HNM)	CX	CX	CX	MIXO
	Inserts polarity + ⏚																		
21.21		3 4	7 8 ⌘												2 3 5 7 12 21				
32.13															7 8 4/2				
49.16			15				10												❶*
66.16			25		38		16												
66.40			50		76		32												
44.27	6				24 (HNM)	9		6 (HNM)	6	6	6 ■				10				❷*
55.27					42 (HNM)	18		10 (HNM)	10	10	10 ■	3^{+2}	3^{+2}		18	8/24			❸*
77.27			40 (HNM)	40 ■	72 (HNM)	27		16 (HNM)	16	16	16 ■	6^{+2}	6^{+2}	6	32 40 (HNM)		6/12 6/36 12/2	4/0 4/2	❹*
104.27			64 (HNM)	64 ■	108 (HNM)	42		24 (HNM)	24	24	24 ■	10^{+2} 16^{+2} •	10^{+2}		46 64 (HNM)		6/6	4/8	❻*
77.62			80		144	54		32	32	32	32 ■	12^{+4}	12^{+4}	12	64				❽*
104.62			128		216	84		48	48	48	48 ■	20^{+4} 32^{+4} •	20^{+4} 32^{+4}		92				⓬*

Legend

⌘ Polarity without earth ⏚ contact.

■ Can only be mounted in bulkhead housings (6/10/16/24 polarity, also usable with BIG series hoods).

• Polarity not available in CMSH version.

●* Number of modular inserts that may be inserted in the enclosures.

Polarity values in **LIGHT GREY** background are obtained using double inserts.

Polarity values in **LIGHT BLUE** background must be mounted exclusively in insulated enclosures (CM - CMA and MM - MMA versions) or T-TYPE series.

Polarity values indicated as exponentials in the CME, CMSH - CMCE inserts identify the pilot contacts for advanced opening.

▲ **Available upon request**

ACCESSORIES AND TOOLS FOR INSERTS AND ENCLOSURES

SUPPORTS AND ADAPTORS

Provide the solution to the most various installation needs. The extensive range of articles comprises: panel supports for inserts, special enclosures (housing with double outlet, wide housings, housings without outlets, to be punched out, housings for round cables, hoods), insert combination blocks, accessories for CT inserts, interface for printed circuits, kits for control equipment, plates for mounting D-Sub inserts onto enclosures, reducing plates and closure plates, protection lid for transportation, coding pins.

TOOLS

To guarantee the efficiency and safety of the connections a complete series of specific tools are available for contact crimping that assure the maximum quality required by the standards.
Manual or pneumatic or electric (battery operated) semi-automatic tools for light production or automatic electro-pneumatic tools for large-scale production are available, together with a complete series of complimentary tools for mounting and dismounting of the crimped contacts.

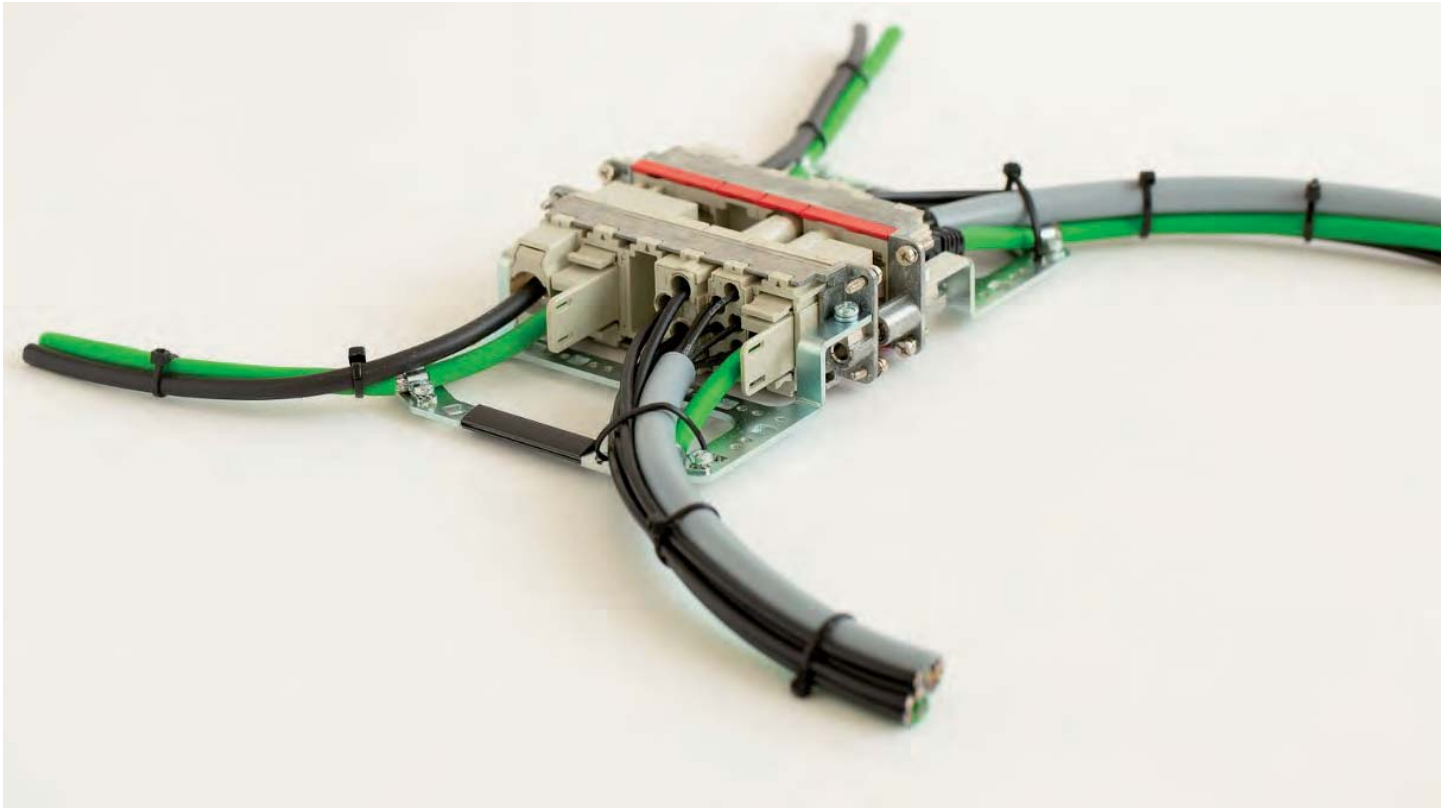

INSERTS

CK - CKD - CK...RY - CKSH-SQUICH®

- Screw terminal
  10A - 230/400V
- Without tools (SQUICH®)
  10A - 400V

From page 58



CD

- Crimp
  10A - 250V
- Crimp (CD 8 poles)
  10A - 50V ac/120V dc

From page 66

CDD

- Crimp
  10A - 250V

From page 76



CDSH-SQUICH® - CDSH NC-SQUICH®

- Without tools
  10A - 400V
  6A - 250V

From page 86

CDA

- Screw terminal
  16A - 250V

From page 98

CSAH-SQUICH®

- Without tools
  16A - 250V

From page 99

CDC

- Crimp
  16A - 250V

From page..... 104

CNE - CNE...RY

- Screw terminal
  16A - 500V

From page..... 110



CSH-SQUICH®

- Without tools
  16A - 500V

From page..... 110, 116



CSH S-SQUICH®

- Without tools
  16A - 500V

From page..... 122

CCE

- Crimp
  16A - 500V

From page..... 130



CMSH-SQUICH® - CMCE

- Without tools (SQUICH®)
  16A - 830V

From page..... 136

- Crimp
  16A - 830V

From page..... 137

CSS

- Dual spring
  16A - 500V

From page..... 148



CT - CTS - CTSE

- Screw terminal
  10A - 250V
  16A - 400V

From page..... 156, 160

- Spring
  10A - 250V
  16A - 500V

From page..... 156, 160

CQE - CQEE

- Crimp
  16A - 500V

From page..... 168, 176



CP - CP...RY

- Screw terminal
  35A - 400/690V

From page..... 178

CQ

- Crimp
  6,5A/10A/16A/40A

From page..... 182

CX COMBINED INSERTS

- Crimp
  10A/16A/40A/100A

From page..... 194

- Screw terminal
  16A/80A

From page..... 200

HNM

- RD - RDD
  Crimp
  10A - 250V

From page..... 208

- RCE - RQEE
  Crimp
  16A - 500V

From page..... 214

- RX
  Crimp
  12 poles (40A-690V) + 2 poles (10A-250V + PE)

From page..... 221

DATA CONNECTORS

From page..... 222

DESINA®

From page..... 244

CK series with optional coding pins: avoid incorrect connections

The renewed CK series of inserts addresses the need for connector coding with the addition of coding pins CR K03, CR K04R and CR K04G.

Each connector is made to make coupling of inserts from different series impossible, by suitable key and key way. Inserts are also polarized against inadverted 180° mating. When a number of identical connectors with different functions are mounted close together, the coupling of a free part onto a non-corresponding fixed part must be be prevented in order to avoid possible damage and breakdown.

The coding pins added to the renewed CK series **allow the user to safely configure the male and female inserts** to prevent the incorrect connection of identical connectors.

With various combinations of coding pins available, it is possible to safely install up to 4 connectors of the same type but with different functions side-by-side.

SUM UP

- **Connection up to 2,5 mm²**
- **New RAL 7032 colour**
- **Bult-in silver or gold plated contacts**

CR K03 version, for connectors 3P + ⏚

Inserting the pin in the 4 possible positions by rotating through 90° allows 4 different insert codings to be obtained.

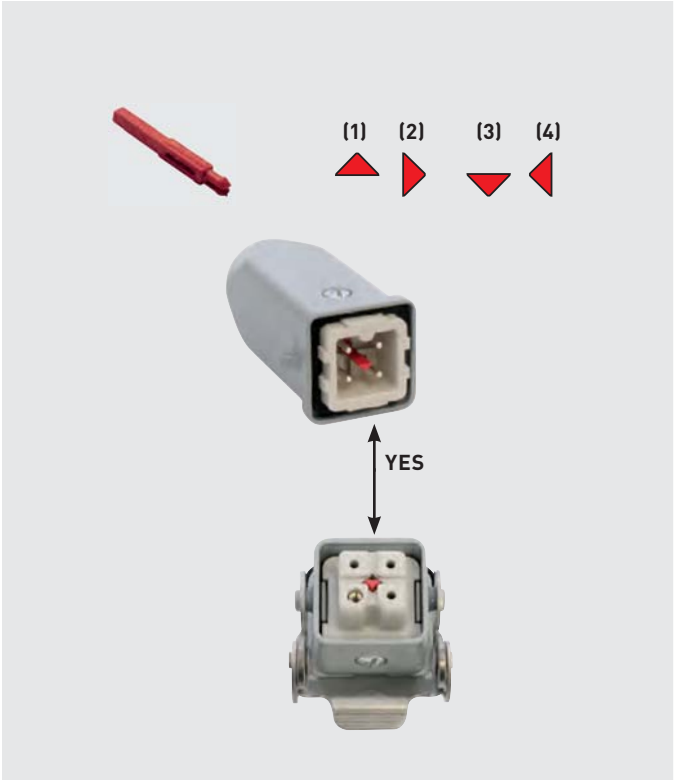

CR K04 version, for connectors 4P + ⏚

2 pin versions available: yellow - red
Each pin has 2 possible specular insertion positions.
Alternate use of the pins allows 4 coding combinations to be achieved.

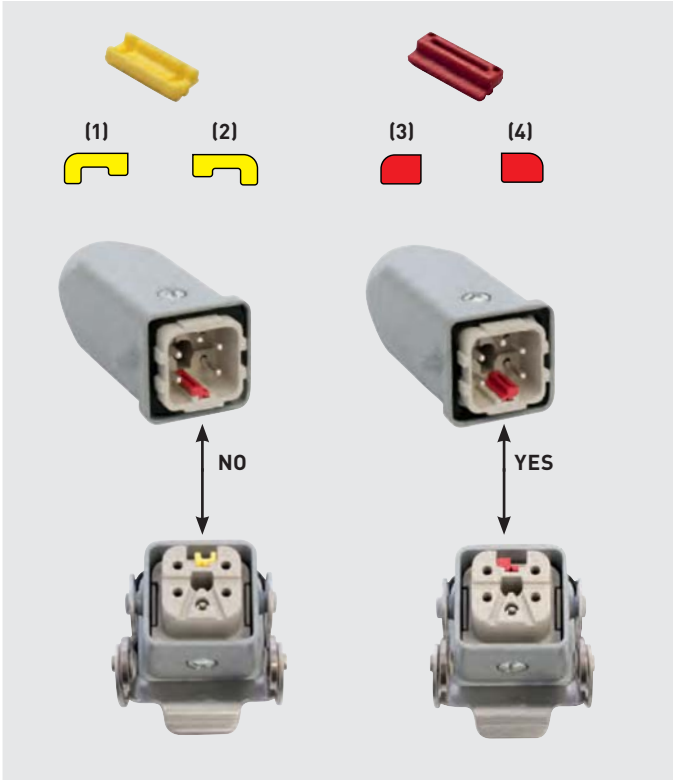

CK 3 and 4 poles + 10A - 230/400V

enclosures: size “21.21”	page:
Insulating type	339 - 348
Metallic type	349 - 363
W-TYPE for aggressive environments	512 - 518
E-Xtreme® corrosion proof	538 - 539
EMC	564 - 572
IP68	628 - 631

- can be mated with CKSH inserts

inserts, 3 poles + ⏚
screw terminal connections

SILVER PLATED CONTACTS

inserts, 4 poles + ⏚
screw terminal connections

SILVER PLATED CONTACTS

description	part No.	part No.	part No.	part No.
distinctive colour	white	black		
female inserts with female contacts 1)	**CKF 03**	**CKF 03 N**		
male inserts with male contacts	**CKM 03**	**CKM 03 N**		
distinctive colour			white	black
female inserts with female contacts 1)			**CKF 04**	**CKF 04 N**
male inserts with male contacts			**CKM 04**	**CKM 04 N**

1) the female inserts can be mounted into the straight bulkhead housings CK I from the rear

- characteristics according to EN 61984:
  10A 230/400V 4kV 3
  10A 400/690V 4kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +100 °C
- made of self-extinguishing thermoplastic resin UL 94V-1
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 2 mΩ
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

CK 03 poles connector inserts
Maximum current load derating diagram

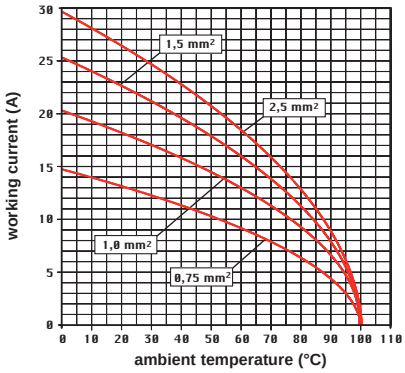

CK 04 poles connector inserts
Maximum current load derating diagram

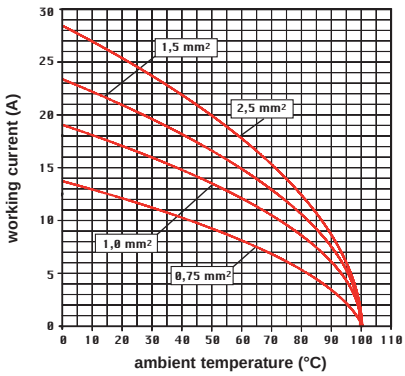



contacts side (front view)



- inserts for wires with the following cross-sectional areas:
  0,75 - 2,5 mm² - AWG 18 - 14
- conductor stripping length: 6 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

CR K03 coding pins (page 688)



M = male insert
F = female insert



contacts side (front view)



- inserts for wires with the following cross-sectional areas:
  0,75 - 2,5 mm² - AWG 18 - 14
- conductor stripping length: 6 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

CR K04R and CR K04G coding pins (page 688)



M = male insert
F = female insert

dimensions shown in mm are not binding and may be changed without notice

CKD 3 and 4 poles + ⏚ 10A - 230/400V

enclosures:
size “21.21” page:

Insulating type	339 - 348
Metallic type	349 - 363
W-TYPE for aggressive environments	512 - 518
E-Xtreme® corrosion proof	538 - 539
EMC	564 - 572
IP68	628 - 631

inserts, 3 poles + ⏚ screw terminal connections

Q GOLD PLATED CONTACTS

inserts, 4 poles + ⏚ screw terminal connections

Q GOLD PLATED CONTACTS

description	part No.	part No.
female inserts with female contacts 1) male inserts with male contacts	**CKFD 03** **CKMD 03**	
female inserts with female contacts 1) male inserts with male contacts		**CKFD 04** **CKMD 04**

1) the female inserts can be mounted into the straight bulkhead housings CK I from the rear

- characteristics according to EN 61984:
  10A 230/400V 4kV 3
  10A 400/690V 4kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +100 °C
- made of self-extinguishing thermoplastic resin UL 94V-1
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 2 mΩ
- for max. current load see the connector inserts derating diagrams below; for more information see page 28





contacts side (front view)



- inserts for wires with the following cross-sectional areas:
  0,75 - 2,5 mm² - AWG 18 - 14
- conductor stripping length: 6 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

- inserts for wires with the following cross-sectional areas:
  0,75 - 2,5 mm² - AWG 18 - 14
- conductor stripping length: 6 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

CKD 03 poles connector inserts
Maximum current load derating diagram

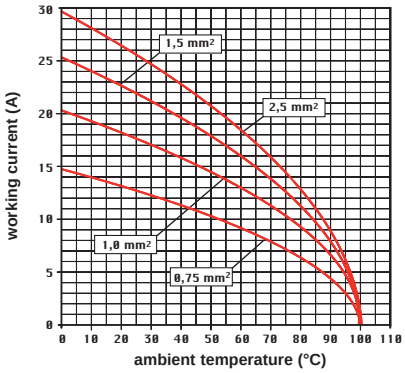

CKD 04 poles connector inserts
Maximum current load derating diagram

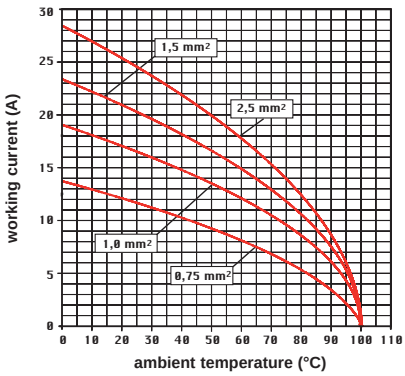

CR K03 coding pins (page 688)



M = male insert
F = female insert

CR K04R and CR K04G coding pins (page 688)



M = male insert
F = female insert

CK...RY 3 and 4 poles + 10A - 230/400V

enclosures:
size “21.21” **page:**

For 180 °C **583 - 586**

inserts, 3 poles + ⏚
screw terminal connections

180 °C
SILVER PLATED CONTACTS

inserts, 4 poles + ⏚
screw terminal connections

180 °C
SILVER PLATED CONTACTS

description	part No.	part No.
use at temperatures up to 180 °C female inserts with female contacts [1], brown male inserts with male contacts, brown	**CKF 03 RY** **CKM 03 RY**	
use at temperatures up to 180 °C female inserts with female contacts [1], brown male inserts with male contacts, brown		**CKF 04 RY** **CKM 04 RY**

1) the female inserts can be mounted into the straight bulkhead housings CK I from the rear

- characteristics according to EN 61984:
  10A 230/400V 4kV 3
  10A 400/690V 4kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +180 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 2 mΩ
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

CK...RY 03 poles connector inserts
Maximum current load derating diagram

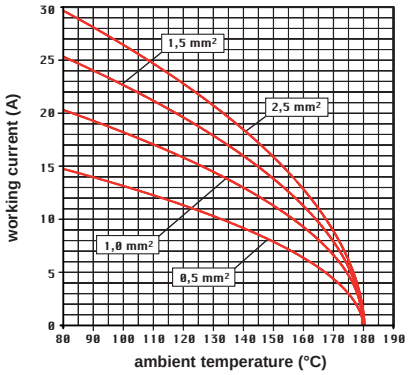

CK...RY 04 poles connector inserts
Maximum current load derating diagram

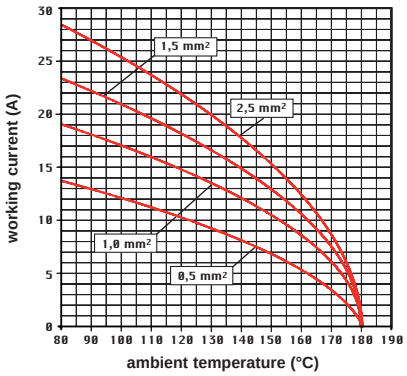



contacts side (front view)



- inserts for wires with the following cross-sectional areas:
  0,75 - 2,5 mm² - AWG 18 - 14
- conductor stripping length: 6 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21



contacts side (front view)

- inserts for wires with the following cross-sectional areas:
  0,75 - 2,5 mm² - AWG 18 - 14
- conductor stripping length: 6 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

dimensions shown in mm are not binding and may be changed without notice

CKSH-SQUICH® series

Easy wiring in a compact space

These small but very capable connector inserts sized “21.21” are the evolution of former patented CKS series, still available upon request: thanks to a further step ahead in ILME proprietary solutions, they implement the fast, tool-less and skill-independent SQUICH® technology even in such a narrow space.

Reliable spring clamp contacts are now faster to wire thanks to the presence – also on the protective earth terminal – of the actuator pushbuttons, whose colour coding provides further visual help in identifying their function. Each pushbutton safely allows the insertion of a measuring probe even upon connector wired and under load, and is featured with a side slot for the possible spring terminal re-opening, by using a simple 0,5x3 mm flat blade screwdriver.

The conductor entries are on the top rear of the connector insert, as in former CKS inserts, providing **vertical straight terminations,** whereas screw-type CK inserts have lateral conductor entries and terminal screws on the top rear.
CKSH connector inserts are available in the traditional two polarities: 3P+ ⏚ and 4P+ ⏚, for applications with rated voltage up to 400V AC or DC and continuous rated current per pole up to 10A.

These connector inserts inherit the proprietary optional coding system introduced in the recently renewed series CK and CKS, to prevent mismating in case of multiple connectors installed close to each other. This coding system does not alter the mating face, so connectors not making use of it are fully backwards mating compatible with former products. They are fully interchangeable, with even improved performances, to the legacy much appreciated screw-type series CK (230/400V) and CKS (spring terminals), which they replace.

SUM UP

- **Easy wiring in compact size**
- **All the advantages of ILME SQUICH® connection in size 21.21**
- **Vertical and straight termination**
- **Full 400V voltage rating compared to 230/400V of series CK**
- **Bult-in silver plated contacts**

Requiring no wiring tool and no special wire preparation, they provide **excellent conductor fastening** with great resistance to strong vibrations.
Connecting capacity of terminals is from 0,14 mm² to 2,5 mm² (26 to 14 AWG) for unprepared conductors. Use of prepared conductors (terminated with crimped ferrule) is up to 1,5 mm² /16 AWG, suitable to rated current up to 10A per pole, due to the relatively limited number of poles.

no need of wiring tools

already open terminals

reduced wiring time

quick identification of wired terminals

Easy wiring in compact size

With coding pins

Rear top entry for easier wiring

For solid or flexible wires and for crimped ferrules

CKSH-SQUICH® series
TECHNICAL FEATURES

Insert series		CKSH-SQUICH®
No. of poles	Main contacts	3, 4
	auxiliary contacts	—
Rated current [1]		10A
EN IEC 61984	rated voltage	400V
	rated impulse withstand voltage	4kV
	pollution degree	**3**
EN IEC 61984	rated voltage	690V
	rated impulse withstand voltage	4kW
	pollution degree	**2**
UL / CSA certification	rated voltage (a.c./d.c.)	600V
Contact resistance		≤ 3 mΩ
Insulation resistance		≥ 10 GΩ
Ambient temperature limit (°C)	min	-40
	max	70
Degree of protection	with enclosures (according to type)	**IP44**, IP66/**IP67**/IP69, IP66/**IP68**/IP69, (according to type and model)
	without enclosures - termination side on male and female inserts - mating side on female inserts	**IP20** (IPXXB)
Conductor connections		spring type with actuator button
Conductor cross-sectional area	mm^2	0,14 - 2,5 unprepared
		0,14 - 1,5 prepared with crimped ferrule
	AWG	26 - 14 unprepared
		26 - 16 prepared with crimped ferrule
Mechanical endurance (mating cycles)		≥ 500

1) Please check the inserts derating diagrams to establish the actual maximum operating current according to the ambient temperature, the conductor cross-sectional area, the polarity of the connector, and any external constraint may derive e.g. by the continuous operating temperature sustained by the chosen conductor sheathing or by end-product safety standards fixing max allowed temperature rise on terminals (e.g. 30 K, 45 K or 50 K)

CKSH-SQUICH® 3 and 4 poles + 10A - 400V SQUICH®

enclosures:
size "21.21" **page:**

Insulating type	**339 - 348**
Metallic type	**349 - 363**
W-TYPE for aggressive environments	**512 - 518**
E-Xtreme® corrosion proof	**538 - 539**
EMC	**564 - 572**
IP68	**628 - 631**

- can be mated with CK inserts

inserts, 3 poles +
spring terminal connection without tools

inserts, 4 poles +
spring terminal connection without tools

description	part No.	part No.
female inserts with female contacts male inserts with male contacts	**CKSHF 03** **CKSHM 03**	
female inserts with female contacts male inserts with male contacts		**CKSHF 04** **CKSHM 04**

- characteristics according to EN 61984:
  10A 400V 4kV 3
  10A 690V 4kV 2
- c UL us (UL for USA and Canada), DNV-GL, BUREAU VERITAS
  EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limits: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

CKSH 03 poles connector inserts
Maximum current load derating diagram

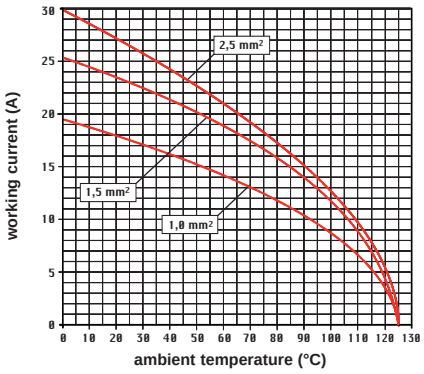

CKSH 04 poles connector inserts
Maximum current load derating diagram

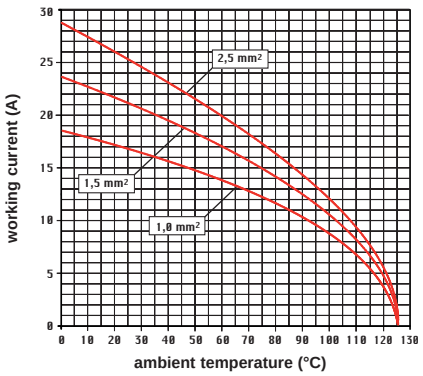



contacts side (front view)



- inserts for wires with the following cross-sectional areas: 0,14 - 2,5 mm² - AWG 26 - 14
  for prepared wires useable section:
  up to 1,5 mm² (AWG 16)
- conductor stripping length: 9...11 mm

CR K03
coding pins
(page 688)

SQUICH®-spring connection technology
WIRING

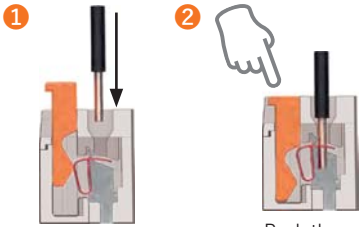

Deeply insert a stripped conductor into a round terminal.

Push the actuator button to close the terminal.

RE-OPENING



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.



contacts side (front view)



- inserts for wires with the following cross-sectional areas: 0,14 - 2,5 mm² - AWG 26 - 14
  for prepared wires useable section:
  up to 1,5 mm² (AWG 16)
- conductor stripping length: 9...11 mm

CR K04R
and CR K04G coding
pins (page 688)

Rear top entry of wires for a more easier wiring

CD - CDD series

CD series

It is a multipole connector series for crimped connections made with removable crimp contacts **CD** series.
There are 5 different sizes available (6 polarities):
- "21.21" with two inserts, respectively **CD 07** (7 P + ⏚) and **CD 08** (8 P) for SELV applications;
  NOTE – These two polarities are coded to avoid their incorrect cross-mating. **CD 07**, being equipped with a pass-through PE connection that does not serve as equipotential bonding of a metal enclosure, is suitably safetly-coded to avoid mismatch with a metal enclosure of this size.
- "49.16" with **CD 15** (15 P + ⏚) provided by 3 rows of 5 contact seats each;
- "66.16" with **CD 25** (25 P + ⏚) provided by 2 outer rows of 9 contact seats each and 1 inner row with 7 contact seats;
- "77.27" with **CD 40** (40 P + ⏚) provided by 4 rows of 10 contact seats each;
- "104.27" with **CD 64** (64 P + ⏚) provided by 4 rows of 16 contact seats each.

It is also possible to mount **two inserts side-by-side in a connector enclosure** is also given:
- for inserts size "66.16" (**CD 25** + **CD 25 Z)** to get a **50 P** + ⏚ connector with connector enclosures size "66.40";
- for inserts size "77.27" (**CD 40** + **CD 40**) to get an **80 P** + ⏚ connector with connector enclosures size "77.62";
- for inserts size "104.27" (**CD 64** + **CD 64**) to get a **128 P** + ⏚ connector with connector enclosures size "104.62".

The last four sizes of the first list are described in **EN 175 301-801:2006** European standard, which derives from the old German standard **DIN 43 652**, whose first edition dates back to the Seventies of last century. This standard provides dimensional standardization for these four sizes of connector inserts as well as for **CD series crimp contacts,** solid, machined, used by these connectors, and of the main types (and sizes) of relevant **connector enclosures,** including interface dimensions between the connector inserts and the relevant connector hood or housing, overall dimensions of locking levers and pegs, etc. This standard provides ground for the dimensional standardization of the other connector sizes (e.g. "44.27", "57.27") for all series of connector inserts with the same size and for all connector enclosure series with these sizes.
As for any series of connector inserts for crimped connections, the polarity is to be intended as "*up to*", being always possible to fit a connector insert with a reduced number of crimped connections, suiting the specific application. In this regard, see e.g. next page for use of **CD** series connector inserts at special (higher) voltages.

These connectors cover applications for rated voltage up to **250V AC/DC in pollution degree 3** (industrial environment) when connectors are fully equipped with contacts, and for rated currents up to **10A** per pole (derating diagram show actual current carrying capacity as a function of number of poles, conductor size and ambient temperature).

The PE connection for size "21.21" **CD 07** is a pass-through (crimp) connection that does not provide equipotential bonding to earth to a possible metal connector enclosure, hence the safety coding implemented in inserts **CDM 07** and **CDF 07** to avoid mismatch with metal enclosures.

The PE connection for the other sizes is provided by a screw terminal on the side of pole #1, and by lateral mating contacts. The PE terminal of the inserts provide earthing to the metal enclosures.

CDD series

It is the high density evolution of **CD** series. It provides choice of **5 different sizes** (5 polarities) of multipole connector inserts for crimped connections made with removable crimp contacts **CD** series:
- "44.27" with **CDD 24** (24 P + ⏚) provided by 6 rows of 4 contact seats each;
- "66.16" with **CDD 38** (38 P + ⏚) provided by 2 outer rows of 10 contact seats each and 2 inner rows with 9 contact seats each;
- "57.27" with **CDD 42** (42 P + ⏚) provided by 6 rows of 7 contact seats each;
- "77.27" with **CD 72** (40 P + ⏚) provided by 6 rows of 12 contact seats each;
- "104.27" with **CDD 108** (64 P + ⏚) provided by 6 rows of 18 contact seats each.

It is also possible to mount two inserts side-by-side in a connector enclosure is also provided:
- for inserts size "66.16" (**CDD 38** + **CDD 38**) to get a **76 P** + ⏚ connector with connector enclosures size "66.40";
- for inserts size "77.27" (**CD 72** + **CDD 72**) to get a **144 P** + ⏚ connector with connector enclosures size "77.62";
- for inserts size "104.27" (**CDD 108** + **CDD 108**) to get a **216 P** + ⏚ connector with connector enclosures size "104.62".

These connectors cover applications for rated voltage up to **250 VAC/DC in pollution degree 2** (suitable for industrial environment once used inside enclosures >IP54) when connectors are fully equipped with contacts, and for rated currents up to 10A per pole (derating diagram show actual current carrying capacity as a function of number of poles, conductor size and ambient temperature).
The PE connection for all sizes is provided by a screw terminal on the side of pole #1, and lateral mating contacts. The PE terminal of the inserts provide earthing to the metal enclosures.

Even when the coding function is not required, **it is highly recommended to use CRM and CRF coding pins** (see pages 685, 686 in this catalogue) **with CD and CDD connector inserts**, to reduce movements when mating and unmating the connectors, to avoid contact damage. To this aim, standard EN 175 301-801:2006 specifies a max allowed angular longitudinal fluctuation of ± 5%.

Special voltages for CD series

If all the contacts are used, CD connector inserts may be used with voltage up to 250V (first column) pollution degree 3 in accordance with standard EN 61984.
If the number of contacts is reduced and the contacts assigned accordingly, these connectors may be used at higher voltages. This is possible because the decrease in the number of contacts leads to an increase in clearences (insulating distances in air) and creepage distances (insulating distances along the surface).

When the contacts are arranged as shown below, the inserts may be used at rated voltage of 500V (second column) pollution degree 3 in accordance with standard EN 61984.

For use up to 250V pollution degree 3

diagrams
contacts side (front view)

CD 07 - 7 +

F M



CD 15 - 15 + ⏚

F M



CD 25 - 25 + ⏚

F M



CD 40 - 40 + ⏚

F M



CD 64 - 64 + ⏚

F M



For use up to 500V pollution degree 3

diagrams
contacts side (front view)

CD 07 - 3 + ⏚

F M



CD 15 - 7 + ⏚

F M



CD 25 - 11 + ⏚

F M



CD 40 - 20 + ⏚

F M



CD 64 - 32 + ⏚

F M



Legend:

- ● working contact
- ○ without contact

M = male insert
F = female insert

CD 7 poles + ⏚ 10A - 250V

enclosures:
size "21.21" **page:**

Insulating type **339 - 348**

inserts, crimp connections

10A crimp contacts
silver and gold plated

description	part No.	part No.	part No.	part No.
without contacts (to be ordered separately)	grey	black		
female inserts for female contacts, grey and black [1]	**CDF 07**	**CDF 07 N**		
male inserts for male contacts, grey and black	**CDM 07**	**CDM 07 N**		
10A female contacts				
0,14-0,37 mm² AWG 26-22 identification No. 1			**CDFA 0.3**	**CDFD 0.3**
0,5 mm² AWG 20 identification No. 2			**CDFA 0.5**	**CDFD 0.5**
0,75 mm² AWG 18 identification No. ②			**CDFA 0.7**	**CDFD 0.7**
1 mm² AWG 18 identification No. 3			**CDFA 1.0**	**CDFD 1.0**
1,5 mm² AWG 16 identification No. 4			**CDFA 1.5**	**CDFD 1.5**
2,5 mm² AWG 14 identification No. 5			**CDFA 2.5**	**CDFD 2.5**
10A male contacts				
0,14-0,37 mm² AWG 26-22 identification No. 1			**CDMA 0.3**	**CDMD 0.3**
0,5 mm² AWG 20 identification No. 2			**CDMA 0.5**	**CDMD 0.5**
0,75 mm² AWG 18 identification No. ②			**CDMA 0.7**	**CDMD 0.7**
1 mm² AWG 18 identification No. 3			**CDMA 1.0**	**CDMD 1.0**
1,5 mm² AWG 16 identification No. 4			**CDMA 1.5**	**CDMD 1.5**
2,5 mm² AWG 14 identification No. 5			**CDMA 2.5**	**CDMD 2.5**

silver plated

gold plated ✢

[1] the female inserts can be mounted into the straight bulkhead housings CK I from the rear

- characteristics according to EN 61984:
  10A 250V 4kV 3
  10A 230/400V 4kV 2
- c UL us (UL for USA and Canada), SP, CQC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 65
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CD 07 poles connector inserts
Maximum current load derating diagram

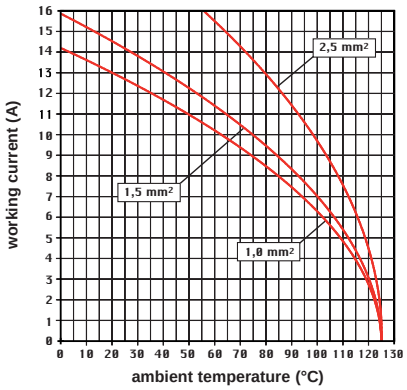



contacts side (front view)



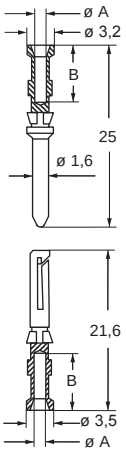

CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CR CP coding pin with loss of one contact (page 689)

✢ for basic or high thickness gold plating, please refer to page 674

dimensions shown in mm are not binding and may be changed without notice

CD 8 poles 10A - 50V ac / 120V dc

enclosures:
size "21.21" **page:**

Insulating type	**339 - 348**
Metallic type	**349 - 363**
W-TYPE for aggressive environments	**512 - 518**
E-Xtreme® corrosion proof	**538 - 539**
EMC	**564 - 572**
IP68	**628 - 631**

inserts, crimp connections



10A crimp contacts silver and gold plated

description	part No.	part No.	part No.
without contacts (to be ordered separately)			
female inserts for female contacts [1]	**CDF 08**		
male inserts for male contacts	**CDM 08**		
10A female contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3**	**CDFD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5**	**CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7**	**CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0**	**CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5**	**CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5**	**CDFD 2.5**
10A male contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3**	**CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5**	**CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7**	**CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0**	**CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5**	**CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5**	**CDMD 2.5**

silver plated

gold plated✢

1) the female inserts can be mounted into the straight bulkhead housings CK I from the rear

- characteristics according to EN 61984:
  10A 50V ac / 120V dc 0,8kV 3
- c UL us (UL for USA and Canada), SP, CQC, DNV-GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 50V ac / 120V dc
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 65
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CD 08 poles connector inserts
Maximum current load derating diagram

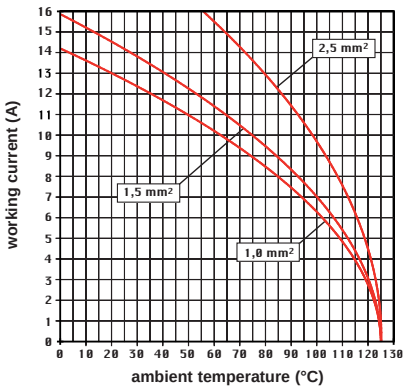



contacts side (front view)



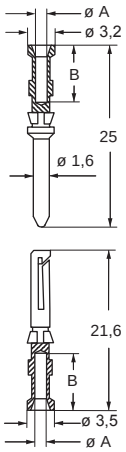

CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CR CP coding pin with loss of one contact (page 689)

✢ for basic or high thickness gold plating, please refer to page 674

CD 15 poles + ⏚ 10A - 250V

enclosures:
size "49.16" **page:**

IL-BRID	**374 - 377, 382**
CZ7 IP67, single lever	**384**
W-TYPE for aggressive environments	**519**
E-Xtreme® corrosion proof	**540**
EMC	**576**

panel supports: **page:**

COB + adaptor	**652 - 654**

inserts, crimp connections



10A crimp contacts
silver and gold plated

description	part No.	part No.	part No.
without contacts (to be ordered separately)			
female inserts for female contacts	**CDF 15**		
male inserts for male contacts	**CDM 15**		
10A female contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3**	**CDFD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5**	**CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7**	**CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0**	**CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5**	**CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5**	**CDFD 2.5**
10A male contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3**	**CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5**	**CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7**	**CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0**	**CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5**	**CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5**	**CDMD 2.5**

silver plated | **gold plated✢**

- characteristics according to EN 61984:
  10A 250V 4kV 3
  10A 230/400V 4kV 2
- c UL us (UL for USA and Canada), CSA, CEC, DNV-GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 65
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



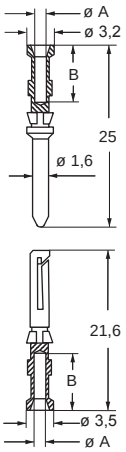

CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CD 15 poles connector inserts
Maximum current load derating diagram

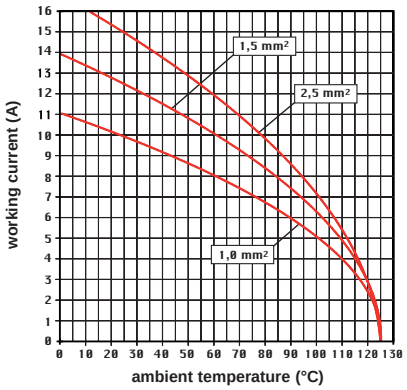

CR CP coding pin
with loss of one contact
(page 689)

✢ for basic or high thickness gold plating, please refer to page 674

dimensions shown in mm are not binding and may be changed without notice

CD 25 poles + ⏚ 10A - 250V

enclosures:
size “66.16” **page:**

IL-BRID	**378 - 382**
CZ7 IP67, single lever	**385**
W-TYPE for aggressive environments	**520**
E-Xtreme® corrosion proof	**541**
EMC	**577**

panel supports: **page:**

COB + adaptor	**652 - 654**

inserts, crimp connections



10A crimp contacts
silver and gold plated

description	part No.	part No.	part No.
without contacts (to be ordered separately)			
female inserts for female contacts	**CDF 25**		
male inserts for male contacts	**CDM 25**		
10A female contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3**	**CDFD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5**	**CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7**	**CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0**	**CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5**	**CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5**	**CDFD 2.5**
10A male contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3**	**CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5**	**CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7**	**CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0**	**CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5**	**CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5**	**CDMD 2.5**

silver plated

gold plated✢

- characteristics according to EN 61984:
  10A 250V 4kV 3
  10A 230/400V 4kV 2
- cULus (UL for USA and Canada), CSA, CEC, DNV-GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 65
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



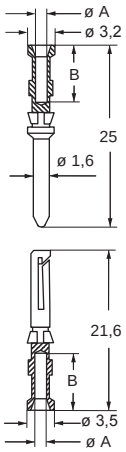

CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CD 25 poles connector inserts
Maximum current load derating diagram

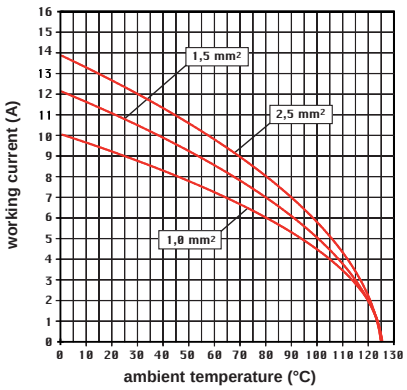

CR CP coding pin
with loss of one contact
(page 689)

✢ for basic or high thickness gold plating, please refer to page 674

CD 40 poles + ⏚ 10A - 250V

enclosures:
size "77.27" **page:**

C-TYPE IP65/IP66	402 - 411
C7 IP67, two levers	439 - 440
V-TYPE IP65/IP66, single lever	454 - 458
BIG hoods	470 - 471
T-TYPE IP65 insulating	484 - 485
T-TYPE / W IP66/IP69 insulating	491
HYGIENIC T-TYPE / H IP66/IP69	503
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	508
W-TYPE for aggressive environments	523
E-Xtreme® corrosion proof 534 - 535, 544, 554 - 555	
EMC	580
Central lever	609 - 611
LS-TYPE	622 - 623
IP68	640 - 643

panel supports: **page:**
COB 652 - 653

inserts, crimp connections

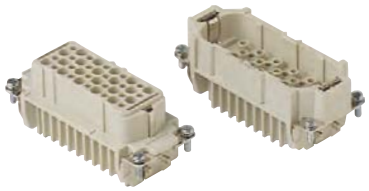

10A crimp contacts silver and gold plated

description	part No.	part No.	part No.
without contacts (to be ordered separately)			
female inserts for female contacts	**CDF 40**		
male inserts for male contacts	**CDM 40**		
10A female contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3**	**CDFD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5**	**CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7**	**CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0**	**CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5**	**CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5**	**CDFD 2.5**
10A male contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3**	**CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5**	**CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7**	**CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0**	**CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5**	**CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5**	**CDMD 2.5**

silver plated | **gold plated✢**

- characteristics according to EN 61984:
  10A 250V 4kV 3
  10A 230/400V 4kV 2
- cULus (UL for USA and Canada), CSA, CQC, DNV-GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 65
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)





CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CD 40 poles connector inserts
Maximum current load derating diagram

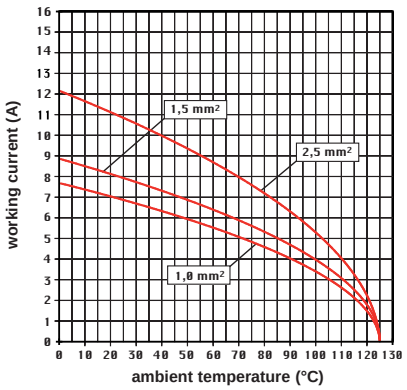

CR CP coding pin with loss of one contact (page 689)

✢ for basic or high thickness gold plating, please refer to page 674

dimensions shown in mm are not binding and may be changed without notice

CD 50 poles + ⏚ 10A - 250V

enclosures:
size “66.40” **page:**

C-TYPE IP65/IP66	**431 - 434**
W-TYPE for aggressive environments	**527**
E-Xtreme® corrosion proof	**548**

inserts, crimp connections

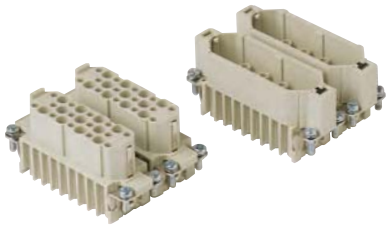

10A crimp contacts
silver and gold plated

description	part No.	part No.	part No.	part No.
without contacts (to be ordered separately)				
female inserts, No. (A1÷C9) and (ZA1÷ZC9) *	**CDF 25**	**CDF 25 Z**		
male inserts, No. (A1÷C9) and (ZA1÷ZC9) *	**CDM 25**	**CDM 25 Z**		
10A female contacts				
0,14-0,37 mm² AWG 26-22 identification No. 1			**CDFA 0.3**	**CDFD 0.3**
0,5 mm² AWG 20 identification No. 2			**CDFA 0.5**	**CDFD 0.5**
0,75 mm² AWG 18 identification No. ②			**CDFA 0.7**	**CDFD 0.7**
1 mm² AWG 18 identification No. 3			**CDFA 1.0**	**CDFD 1.0**
1,5 mm² AWG 16 identification No. 4			**CDFA 1.5**	**CDFD 1.5**
2,5 mm² AWG 14 identification No. 5			**CDFA 2.5**	**CDFD 2.5**
10A male contacts				
0,14-0,37 mm² AWG 26-22 identification No. 1			**CDMA 0.3**	**CDMD 0.3**
0,5 mm² AWG 20 identification No. 2			**CDMA 0.5**	**CDMD 0.5**
0,75 mm² AWG 18 identification No. ②			**CDMA 0.7**	**CDMD 0.7**
1 mm² AWG 18 identification No. 3			**CDMA 1.0**	**CDMD 1.0**
1,5 mm² AWG 16 identification No. 4			**CDMA 1.5**	**CDMD 1.5**
2,5 mm² AWG 14 identification No. 5			**CDMA 2.5**	**CDMD 2.5**

silver plated

gold plated+

* coding compliant with EUROMAP recommendations

- characteristics according to EN 61984:
  10A 250V 4kV 3
  10A 230/400V 4kV 2
- c UL us (UL for USA and Canada), CSA, CEC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 65
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CD 50 poles connector inserts
Maximum current load derating diagram

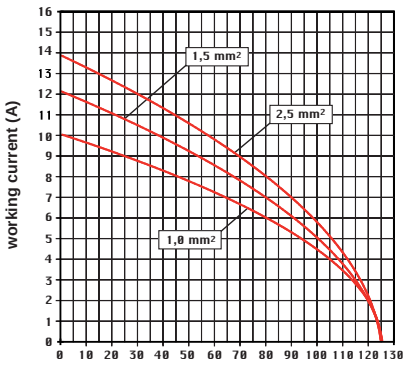



contacts side (front view)

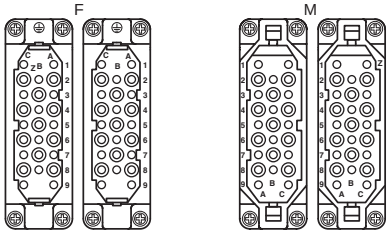

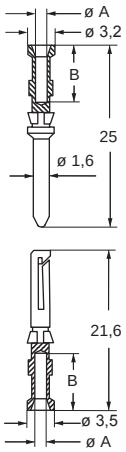

CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CR CP coding pin
with loss of one contact
(page 689)

+ for basic or high thickness gold plating, please refer to page 674

CD 64 poles + ⏚ 10A - 250V

enclosures:
size "104.27" **page:**

C-TYPE IP65/IP66	412 - 423
C7 IP67, two levers	441 - 442
V-TYPE IP65/IP66, single lever	459 - 463
BIG hoods	472 - 473
T-TYPE IP65 insulating	486 - 487
T-TYPE / W IP66/IP69 insulating	492
HYGIENIC T-TYPE / H IP66/IP69	504
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	509
W-TYPE for aggressive environments	524
E-Xtreme® corrosion proof 536 - 537, 545, 556 - 557	
EMC	581
Central lever	612 - 614
LS-TYPE	624 - 625
IP68	644 - 647

panel supports: **page:**

COB	652 - 653

inserts, crimp connections

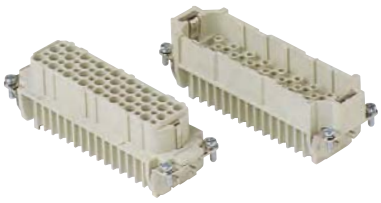

10A crimp contacts silver and gold plated

description	part No.	part No.	part No.
without contacts (to be ordered separately)			
female inserts for female contacts	**CDF 64**		
male inserts for male contacts	**CDM 64**		
10A female contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3**	**CDFD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5**	**CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7**	**CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0**	**CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5**	**CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5**	**CDFD 2.5**
10A male contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3**	**CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5**	**CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7**	**CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0**	**CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5**	**CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5**	**CDMD 2.5**

silver plated

gold plated✢

- characteristics according to EN 61984:
  10A 250V 4kV 3
  10A 230/400V 4kV 2
- cULus (UL for USA and Canada), CSA, CQC, DNV-GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 65
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

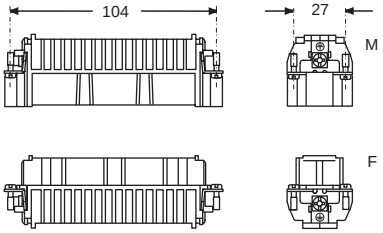

contacts side (front view)



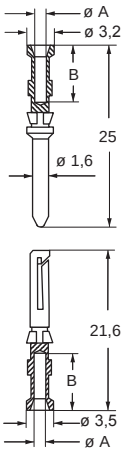

CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CD 64 poles connector inserts
Maximum current load derating diagram

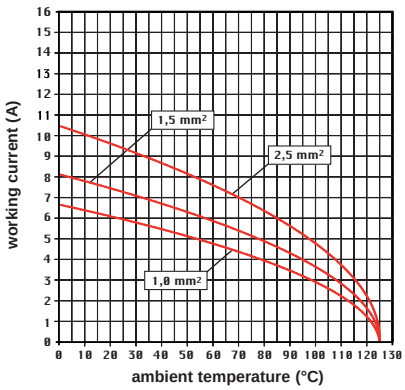

CR CP coding pin with loss of one contact (page 689)

✢ for basic or high thickness gold plating, please refer to page 674

dimensions shown in mm are not binding and may be changed without notice

CD 80 poles + ⏚ 10A - 250V

enclosures:
size "77.62" **page:**

C-TYPE IP65/IP66 **424 - 429**
W-TYPE for aggressive environments **525**
E-Xtreme® corrosion proof **546**

inserts, crimp connections

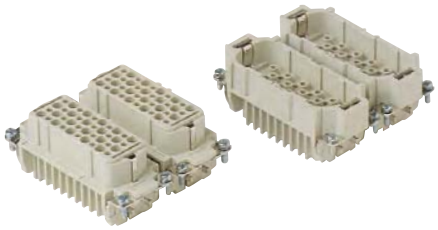

10A crimp contacts silver and gold plated

description	part No.	part No.	part No.	part No.
without contacts (to be ordered separately)				
female inserts	**CDF 40**	**CDF 40**		
male inserts	**CDM 40**	**CDM 40**		
10A female contacts				
0,14-0,37 mm² AWG 26-22 identification No. 1			**CDFA 0.3**	**CDFD 0.3**
0,5 mm² AWG 20 identification No. 2			**CDFA 0.5**	**CDFD 0.5**
0,75 mm² AWG 18 identification No. ②			**CDFA 0.7**	**CDFD 0.7**
1 mm² AWG 18 identification No. 3			**CDFA 1.0**	**CDFD 1.0**
1,5 mm² AWG 16 identification No. 4			**CDFA 1.5**	**CDFD 1.5**
2,5 mm² AWG 14 identification No. 5			**CDFA 2.5**	**CDFD 2.5**
			silver plated	**gold plated✢**
10A male contacts				
0,14-0,37 mm² AWG 26-22 identification No. 1			**CDMA 0.3**	**CDMD 0.3**
0,5 mm² AWG 20 identification No. 2			**CDMA 0.5**	**CDMD 0.5**
0,75 mm² AWG 18 identification No. ②			**CDMA 0.7**	**CDMD 0.7**
1 mm² AWG 18 identification No. 3			**CDMA 1.0**	**CDMD 1.0**
1,5 mm² AWG 16 identification No. 4			**CDMA 1.5**	**CDMD 1.5**
2,5 mm² AWG 14 identification No. 5			**CDMA 2.5**	**CDMD 2.5**

- characteristics according to EN 61984:
  10A 250V 4kV 3
  10A 230/400V 4kV 2
- c UL us (UL for USA and Canada), CSA, CEC, DNV-GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 65
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)

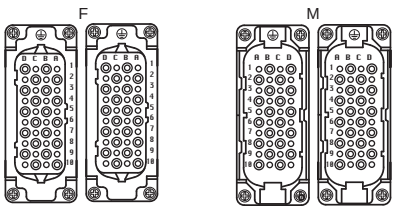

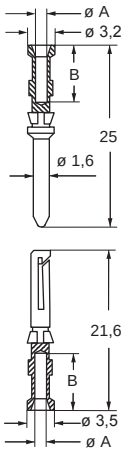

CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CD 80 poles connector inserts
Maximum current load derating diagram

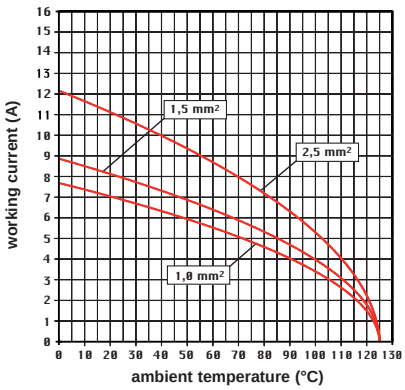

CR CP coding pin with loss of one contact (page 689)

✢ for basic or high thickness gold plating, please refer to page 674

CD 128 poles + ⏚ 10A - 250V

enclosures:
size "104.62" **page:**

C-TYPE IP65/IP66 **430**
W-TYPE for aggressive environments **526**
E-Xtreme® corrosion proof **547**

inserts, crimp connections

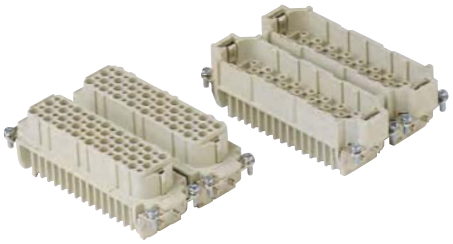

10A crimp contacts
silver and gold plated

description	part No.	part No.	part No.	part No.
without contacts (to be ordered separately)				
female inserts	**CDF 64**	**CDF 64**		
male inserts	**CDM 64**	**CDM 64**		
10A female contacts				
0,14-0,37 mm² AWG 26-22 identification No. 1			**CDFA 0.3**	**CDFD 0.3**
0,5 mm² AWG 20 identification No. 2			**CDFA 0.5**	**CDFD 0.5**
0,75 mm² AWG 18 identification No. ②			**CDFA 0.7**	**CDFD 0.7**
1 mm² AWG 18 identification No. 3			**CDFA 1.0**	**CDFD 1.0**
1,5 mm² AWG 16 identification No. 4			**CDFA 1.5**	**CDFD 1.5**
2,5 mm² AWG 14 identification No. 5			**CDFA 2.5**	**CDFD 2.5**
10A male contacts				
0,14-0,37 mm² AWG 26-22 identification No. 1			**CDMA 0.3**	**CDMD 0.3**
0,5 mm² AWG 20 identification No. 2			**CDMA 0.5**	**CDMD 0.5**
0,75 mm² AWG 18 identification No. ②			**CDMA 0.7**	**CDMD 0.7**
1 mm² AWG 18 identification No. 3			**CDMA 1.0**	**CDMD 1.0**
1,5 mm² AWG 16 identification No. 4			**CDMA 1.5**	**CDMD 1.5**
2,5 mm² AWG 14 identification No. 5			**CDMA 2.5**	**CDMD 2.5**

silver plated | **gold plated÷**

- characteristics according to EN 61984:
  10A 250V 4kV 3
  10A 230/400V 4kV 2
- c UL us (UL for USA and Canada), CSA CQC DNV-GL
  BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 65
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

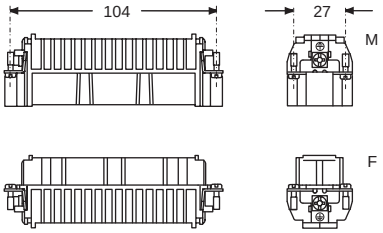

contacts side (front view)

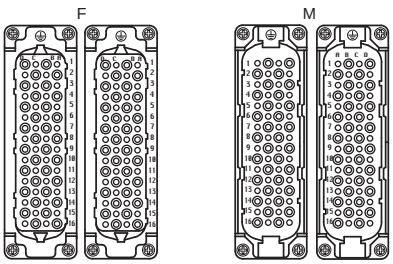

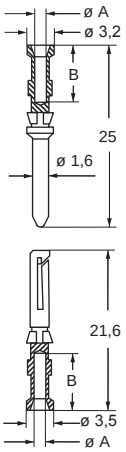

CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CD 128 poles connector inserts
Maximum current load derating diagram

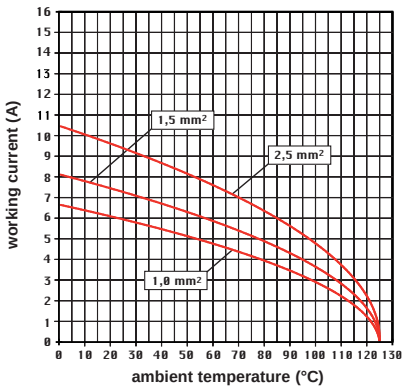

CR CP coding pin with loss of one contact (page 689)

÷ for basic or high thickness gold plating, please refer to page 674

dimensions shown in mm are not binding and may be changed without notice

Special voltages for CDD series

When all the contacts are used, CDD series connector inserts may be used with voltage up to 250V (first column); pollution degree 2, in accordance with the standard EN 61984.
If the number of contacts is reduced and the contacts assigned accordingly, these connectors may be used with higher voltages. This is possible because the decrease in the number of contacts leads to an increase in clearences (insulating distance in air) and creepage distances (insulating distances along the surface).
When the contacts are arranged as shown below, the inserts may be used at rated voltages of 400V (second column) and 500V (third column); pollution degree 2, in accordance with the standard EN 61984.

for use up to 250V pollution degree 2	for use up to 400V pollution degree 2	for use up to 500V pollution degree 2
diagrams contacts side (front view)	diagrams contacts side (front view)	diagrams contacts side (front view)
CDD 24 - 24 + ⏚	**CDD 24 - 12 +** ⏚	**CDD 24 - 5 +** ⏚
F M 	F M 	F M 
CDD 42 - 42 + ⏚	**CDD 42 - 21 +** ⏚	**CDD 42 - 11 +** ⏚
F M 	F M 	F M 
CDD 72 - 72 + ⏚	**CDD 72 - 34 +** ⏚	**CDD 72 - 17 +** ⏚
F M 	F M 	F M 
CDD 108 - 108 + ⏚	**CDD 108 - 52 +** ⏚	**CDD 108 - 26 +** ⏚
F M 	F M 	F M 

Legend:

- ● working contact
- ○ without contact
- M = male insert
- F = female insert

CDD 24 poles + ⏚ 10A - 250V

enclosures:
size "44.27" **page:**

C-TYPE IP65/IP66	387 - 392
C7 IP67, single lever	436 - 437
V-TYPE IP65/IP66, single lever	444 - 447
BIG hoods	466 - 467
T-TYPE IP65 insulating	480 - 481
T-TYPE / W IP66/IP69 insulating	489
HYGIENIC T-TYPE / H IP66/IP69	501
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	506
W-TYPE for aggressive environments	521
E-Xtreme® corrosion proof 530 - 531, 542, 550 - 551	
EMC	578
Central lever	603 - 605
LS-TYPE	618 - 619
IP68	632 - 635

panel supports: **page:**
COB **652 - 653**

PCBs interface, see article CIF 2.4 on page 670

inserts, crimp connections



10A crimp contacts
silver and gold plated

description	part No.	part No.	part No.
without contacts (to be ordered separately)			
female inserts for female contacts	**CDDF 24**		
male inserts for male contacts	**CDDM 24**		
10A female contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3**	**CDFD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5**	**CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7**	**CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0**	**CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5**	**CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5**	**CDFD 2.5**
10A male contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3**	**CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5**	**CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7**	**CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0**	**CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5**	**CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5**	**CDMD 2.5**

silver plated

gold plated✢

- characteristics according to EN 61984:
  10A 250V 4kV 2
- c UL us (UL for USA and Canada), CSA, CQC, DNV-GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 75
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



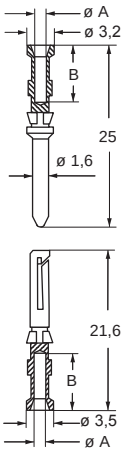

CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CDD 24 poles connector inserts
Maximum current load derating diagram

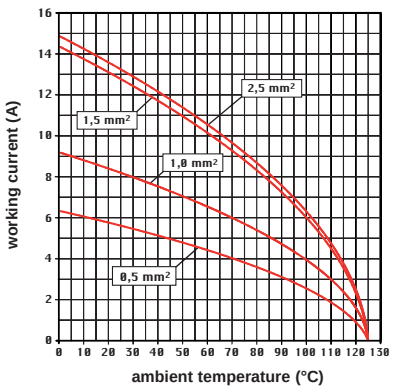

CR CP coding pin with loss of one contact (page 689)

✢ for basic or high thickness gold plating, please refer to page 674

dimensions shown in mm are not binding and may be changed without notice

CDD 38 poles + ⏚ 10A - 250V

enclosures: size “66.16”	page:
IL-BRID	378 - 382
CZ7 IP67, single lever	385
W-TYPE for aggressive environments	520
E-Xtreme® corrosion proof	541
EMC	577

panel supports:	page:
COB	652 - 653

inserts, crimp connections

10A crimp contacts silver and gold plated

description	part No.	part No.	part No.
without contacts (to be ordered separately)			
female inserts for female contacts	**CDDF 38**		
male inserts for male contacts	**CDDM 38**		
10A female contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3**	**CDFD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5**	**CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7**	**CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0**	**CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5**	**CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5**	**CDFD 2.5**
10A male contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3**	**CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5**	**CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7**	**CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0**	**CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5**	**CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5**	**CDMD 2.5**

silver plated

gold plated✢

- characteristics according to EN 61984:
  10A 250V 4kV 2
- c UL us (UL for USA and Canada), CSA, cec, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 75
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



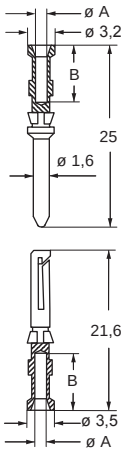

CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CDD 38 poles connector inserts
Maximum current load derating diagram

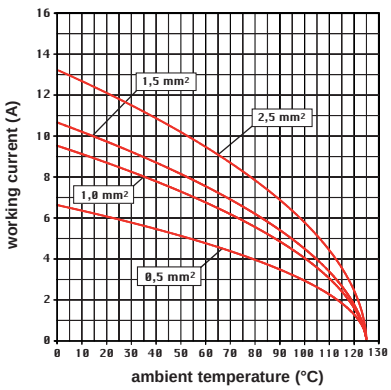

CR CP coding pin with loss of one contact (page 689)

✢ for basic or high thickness gold plating, please refer to page 674

CDD 42 poles + ⏚ 10A - 250V

enclosures:
size "57.27" **page:**

C-TYPE IP65/IP66	**393 - 401**
C7 IP67, two levers	**438**
V-TYPE IP65/IP66, single lever	**448 - 453**
BIG hoods	**468 - 469**
T-TYPE IP65 insulating	**482 - 483**
T-TYPE / W IP66/IP69 insulating	**490**
HYGIENIC T-TYPE / H IP66/IP69	**502**
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	**507**
W-TYPE for aggressive environments	**522**
E-Xtreme® corrosion proof 532 - 533, 543, 552 - 553	
EMC	**579**
Central lever	**606 - 608**
LS-TYPE	**620 - 621**
IP68	**636 - 639**

panel supports: **page:**
COB **652 - 653**

PCBs interface, see article CIF 2.4 on page 670

inserts, crimp connections

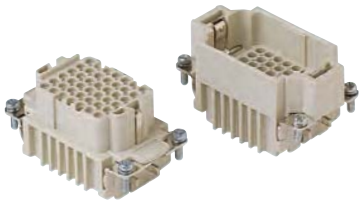

10A crimp contacts
silver and gold plated

description	part No.	part No.	part No.
without contacts (to be ordered separately)			
female inserts for female contacts	**CDDF 42**		
male inserts for male contacts	**CDDM 42**		
10A female contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3**	**CDFD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5**	**CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7**	**CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0**	**CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5**	**CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5**	**CDFD 2.5**
10A male contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3**	**CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5**	**CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7**	**CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0**	**CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5**	**CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5**	**CDMD 2.5**

silver plated

gold plated✢

- characteristics according to EN 61984:
  10A 250V 4kV 2
- c UL us (UL for USA and Canada), CSA, CQC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 75
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



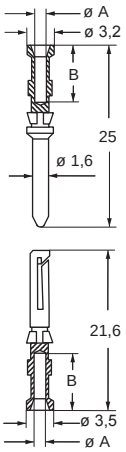

CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CDD 42 poles connector inserts
Maximum current load derating diagram

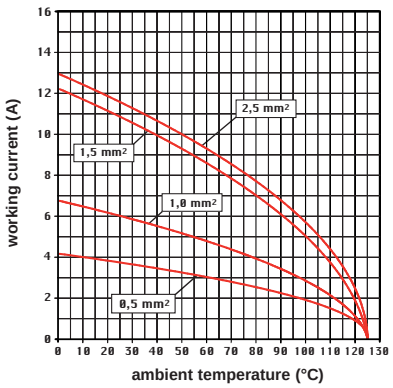

CR CP coding pin with loss of one contact **(page 689)**

✢ for basic or high thickness gold plating, please refer to page 674

dimensions shown in mm are not binding and may be changed without notice

CDD 72 poles + ⏚ 10A - 250V

enclosures: size “77.27”	page:
C-TYPE IP65/IP66	402 - 411
C7 IP67, two levers	439 - 440
V-TYPE IP65/IP66, single lever	454 - 458
BIG hoods	470 - 471
T-TYPE IP65 insulating	484 - 485
T-TYPE / W IP66/IP69 insulating	491
HYGIENIC T-TYPE / H IP66/IP69	503
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	508
W-TYPE for aggressive environments	523
E-Xtreme® corrosion proof 534 - 535, 544, 554 - 555	
EMC	580
Central lever	609 - 611
LS-TYPE	622 - 623
IP68	640 - 643

panel supports:	page:
COB	652 - 653

PCBs interface, see article CIF 2.4 on page 670

inserts, crimp connections

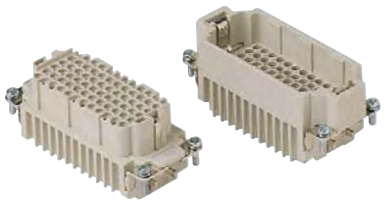

10A crimp contacts silver and gold plated

CDD

description	part No.	part No.	part No.
without contacts (to be ordered separately)			
female inserts for female contacts	**CDDF 72**		
male inserts for male contacts	**CDDM 72**		
10A female contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3**	**CDFD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5**	**CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7**	**CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0**	**CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5**	**CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5**	**CDFD 2.5**
10A male contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3**	**CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5**	**CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7**	**CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0**	**CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5**	**CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5**	**CDMD 2.5**

silver plated

gold plated+

- characteristics according to EN 61984:
  10A 250V 4kV 2
- c UL us (UL for USA and Canada), CSA, cec, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 75
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)





CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CDD 72 poles connector inserts
Maximum current load derating diagram

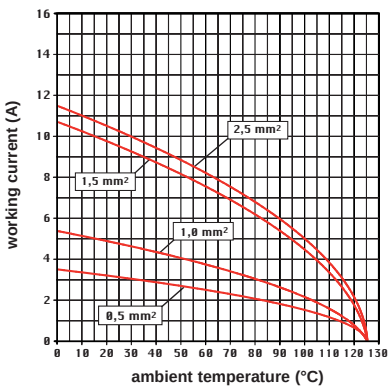

CR CP coding pin with loss of one contact (page 689)

+ for basic or high thickness gold plating, please refer to page 674

CDD 76 poles + ⏚ 10A - 250V

enclosures:
size "66.40" **page:**

C-TYPE IP65/IP66 **431 - 434**
W-TYPE for aggressive environments **527**

inserts, crimp connections

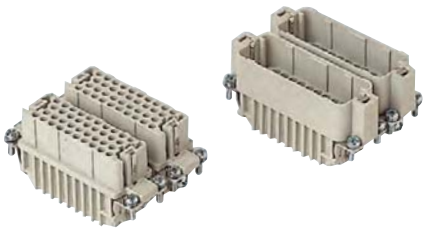

10A crimp contacts
silver and gold plated

description	part No.	part No.	part No.	part No.
without contacts (to be ordered separately)				
female inserts	**CDDF 38**	**CDDF 38**		
male inserts	**CDDM 38**	**CDDM 38**		
10A female contacts				
0,14-0,37 mm² AWG 26-22 identification No. 1			**CDFA 0.3**	**CDFD 0.3**
0,5 mm² AWG 20 identification No. 2			**CDFA 0.5**	**CDFD 0.5**
0,75 mm² AWG 18 identification No. ②			**CDFA 0.7**	**CDFD 0.7**
1 mm² AWG 18 identification No. 3			**CDFA 1.0**	**CDFD 1.0**
1,5 mm² AWG 16 identification No. 4			**CDFA 1.5**	**CDFD 1.5**
2,5 mm² AWG 14 identification No. 5			**CDFA 2.5**	**CDFD 2.5**
10A male contacts				
0,14-0,37 mm² AWG 26-22 identification No. 1			**CDMA 0.3**	**CDMD 0.3**
0,5 mm² AWG 20 identification No. 2			**CDMA 0.5**	**CDMD 0.5**
0,75 mm² AWG 18 identification No. ②			**CDMA 0.7**	**CDMD 0.7**
1 mm² AWG 18 identification No. 3			**CDMA 1.0**	**CDMD 1.0**
1,5 mm² AWG 16 identification No. 4			**CDMA 1.5**	**CDMD 1.5**
2,5 mm² AWG 14 identification No. 5			**CDMA 2.5**	**CDMD 2.5**

silver plated

gold plated✢

- characteristics according to EN 61984:
  10A 250V 4kV 2
- c UL us (UL for USA and Canada), CSA, CEC, DNV-GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 75
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)

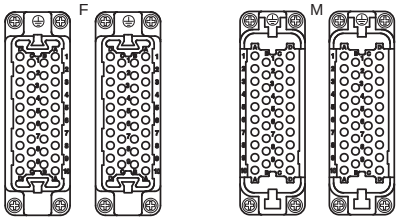

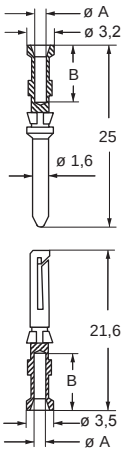

CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CDD 76 poles connector inserts
Maximum current load derating diagram

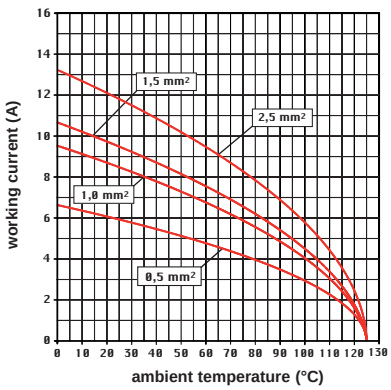

CR CP coding pin with loss of one contact (page 689)

✢ for basic or high thickness gold plating, please refer to page 674

dimensions shown in mm are not binding and may be changed without notice

CDD 108 poles + ⏚ 10A - 250V

enclosures:
size "104.27" **page:**

C-TYPE IP65/IP66	412 - 423
C7 IP67, two levers	441 - 442
V-TYPE IP65/IP66, single lever	459 - 463
BIG hoods	472 - 473
T-TYPE IP65 insulating	486 - 487
T-TYPE / W IP66/IP69 insulating	492
HYGIENIC T-TYPE / H IP66/IP69	504
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	509
W-TYPE for aggressive environments	524
E-Xtreme® corrosion proof 536 - 537, 545, 556 - 557	
EMC	581
Central lever	612 - 614
LS-TYPE	624 - 625
IP68	644 - 647

panel supports: **page:**

COB	652 - 653

PCBs interface, see article CIF 2.4 on page 670

inserts, crimp connections

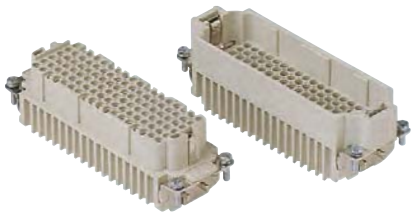

10A crimp contacts silver and gold plated

description	part No.	part No.	part No.
without contacts (to be ordered separately)			
female inserts for female contacts	**CDDF 108**		
male inserts for male contacts	**CDDM 108**		
10A female contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3**	**CDFD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5**	**CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7**	**CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0**	**CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5**	**CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5**	**CDFD 2.5**
10A male contacts			
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3**	**CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5**	**CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7**	**CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0**	**CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5**	**CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5**	**CDMD 2.5**

silver plated

gold plated✢

- characteristics according to EN 61984:
  10A 250V 4kV 2
- c UL us (UL for USA and Canada), CSA, cec, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 75
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

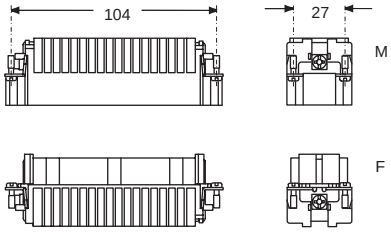

contacts side (front view)





CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CDD 108 poles connector inserts
Maximum current load derating diagram

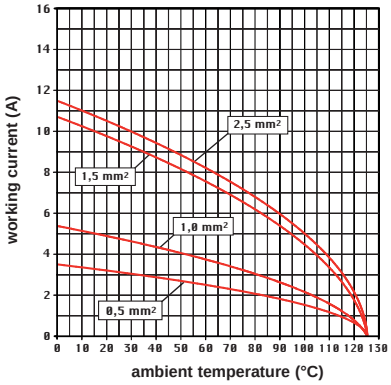

CR CP coding pin with loss of one contact (page 689)

✢ for basic or high thickness gold plating, please refer to page 674

CDD 144 poles + 10A - 250V

enclosures:
size "77.62" **page:**

C-TYPE IP65/IP66 **424 - 429**
W-TYPE for aggressive environments **525**
E-Xtreme® corrosion proof **546**

inserts, crimp connections

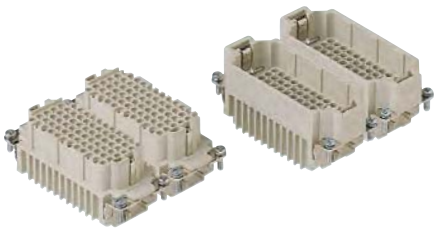

10A crimp contacts
silver and gold plated

PCBs interface, see article CIF 2.4 on page 670

description	part No.	part No.	part No.	part No.
without contacts (to be ordered separately)				
female inserts, No. (1-72) and (73-144)	**CDDF 72**	**CDDF 72 N**		
male inserts, No. (1-72) and (73-144)	**CDDM 72**	**CDDM 72 N**		
10A female contacts				
0,14-0,37 mm² AWG 26-22 identification No. 1			**CDFA 0.3**	**CDFD 0.3**
0,5 mm² AWG 20 identification No. 2			**CDFA 0.5**	**CDFD 0.5**
0,75 mm² AWG 18 identification No. ②			**CDFA 0.7**	**CDFD 0.7**
1 mm² AWG 18 identification No. 3			**CDFA 1.0**	**CDFD 1.0**
1,5 mm² AWG 16 identification No. 4			**CDFA 1.5**	**CDFD 1.5**
2,5 mm² AWG 14 identification No. 5			**CDFA 2.5**	**CDFD 2.5**
10A male contacts				
0,14-0,37 mm² AWG 26-22 identification No. 1			**CDMA 0.3**	**CDMD 0.3**
0,5 mm² AWG 20 identification No. 2			**CDMA 0.5**	**CDMD 0.5**
0,75 mm² AWG 18 identification No. ②			**CDMA 0.7**	**CDMD 0.7**
1 mm² AWG 18 identification No. 3			**CDMA 1.0**	**CDMD 1.0**
1,5 mm² AWG 16 identification No. 4			**CDMA 1.5**	**CDMD 1.5**
2,5 mm² AWG 14 identification No. 5			**CDMA 2.5**	**CDMD 2.5**

silver plated

gold plated✢

- characteristics according to EN 61984:
  10A 250V 4kV 2
- c UL us (UL for USA and Canada), CSA, CEC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 75
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)

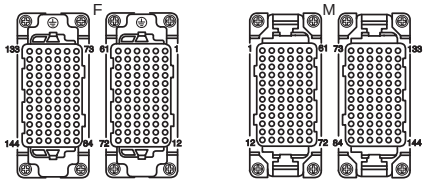

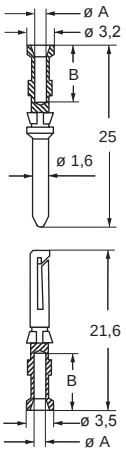

CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CDD 144 poles connector inserts
Maximum current load derating diagram

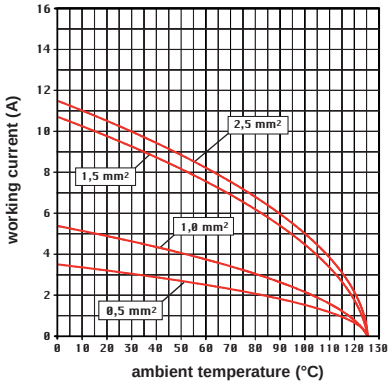

CR CP coding pin
with loss of one contact
(page 689)

✢ for basic or high thickness gold plating, please refer to page 674

dimensions shown in mm are not binding and may be changed without notice

CDD 216 poles + ⏚ 10A - 250V

enclosures:
size "104.62" **page:**

C-TYPE IP65/IP66 **430**
W-TYPE for aggressive environments **526**
E-Xtreme® corrosion proof **547**

inserts, crimp connections

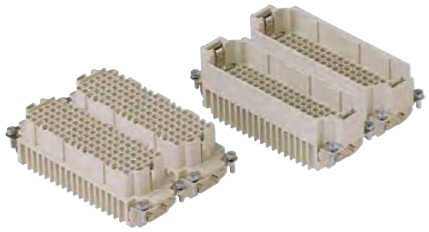

10A crimp contacts
silver and gold plated

PCBs interface, see article CIF 2.4 on page 670

description	part No.	part No.	part No.	part No.
without contacts (to be ordered separately)				
female inserts, No. (1-108) and (109-216)	**CDDF 108**	**CDDF 108 N**		
male inserts, No. (1-108) and (109-216)	**CDDM 108**	**CDDM 108 N**		
10A female contacts				
0,14-0,37 mm² AWG 26-22 identification No. 1			**CDFA 0.3**	**CDFD 0.3**
0,5 mm² AWG 20 identification No. 2			**CDFA 0.5**	**CDFD 0.5**
0,75 mm² AWG 18 identification No. ②			**CDFA 0.7**	**CDFD 0.7**
1 mm² AWG 18 identification No. 3			**CDFA 1.0**	**CDFD 1.0**
1,5 mm² AWG 16 identification No. 4			**CDFA 1.5**	**CDFD 1.5**
2,5 mm² AWG 14 identification No. 5			**CDFA 2.5**	**CDFD 2.5**
10A male contacts				
0,14-0,37 mm² AWG 26-22 identification No. 1			**CDMA 0.3**	**CDMD 0.3**
0,5 mm² AWG 20 identification No. 2			**CDMA 0.5**	**CDMD 0.5**
0,75 mm² AWG 18 identification No. ②			**CDMA 0.7**	**CDMD 0.7**
1 mm² AWG 18 identification No. 3			**CDMA 1.0**	**CDMD 1.0**
1,5 mm² AWG 16 identification No. 4			**CDMA 1.5**	**CDMD 1.5**
2,5 mm² AWG 14 identification No. 5			**CDMA 2.5**	**CDMD 2.5**

silver plated

gold plated✢

- characteristics according to EN 61984:
  10A 250V 4kV 2
- c UL us (UL for USA and Canada), CSA, cec, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 75
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)

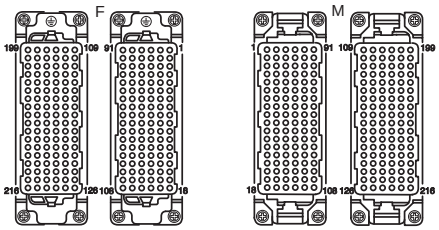



CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CDD 216 poles connector inserts
Maximum current load derating diagram

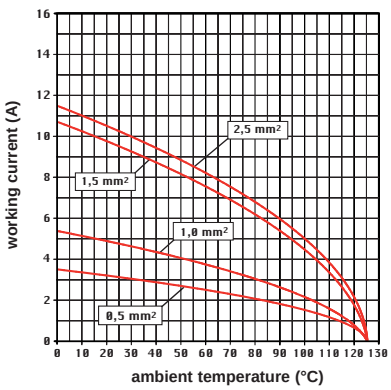

CR CP coding pin
with loss of one contact
(page 689)

✢ for basic or high thickness gold plating, please refer to page 674

CDSH-SQUICH® series

High density without tools (spring connection contacts)

The CDSH-SQUICH® series (with spring and actuator button) are the logical **evolution of the CDS series.**

The continuous demand for a greater number of poles and smaller dimensions has led to the design and manufacture of the new CDSH series, which offers single connectors with a **maximum number of 84 poles** that occupy the **same space of standard connectors** with screw/spring connection.

Each of the spring terminals has an actuator button, suitably shaped and incorporated in the cavity. When this button is pushed, it triggers the closure of the spring device of the corresponding terminal, safely and reliably connecting the conductor to its respective electric contact in the connector.

The actuator buttons are supplied raised, in the "open terminal" position and are **easily distinguisheable by the orange colour** which makes them stand out from the insulating body of the connector.

The advantage of this exclusive solution is that **the actuators disappear completely within the body of the connector,** making it easy to identify terminals not yet closed and **eliminating possible obstacles** to the movement of the conductors during installation and maintenance.

SQUICH® technology requires no tools **to activate the terminal and a simple operation is all you need to make the connection.** Refer to SQUICH® Connection operating principles on page 24.

SUM UP

- **Greater pole density as compared to existing connector with screw terminals.**
  SAVE SPACE +70%
- **Reduced wiring time.**
  SAVE TIME -50%

STANDARD	CDSH - HIGH DENSITY	
16A	10A	
06 poles	09 poles	+50%
10 poles	18 poles	+80%
16 poles	27 poles	+70%
24 poles	42 poles	+75%
32 poles	54 poles	+70%
48 poles	84 poles	+75%

- **Wiring tool is not necessary**
- **Quick identification of wired and non-wired terminals**
- **Terminals already open and ready for conductor clamping**
- **Option to use wires up to 2,5 mm²**
- **Bult-in silver plated contacts**
- **Excellent fastening solution**
- **Great resistance to strong vibration**

CDSH series can be used with the whole range of ILME enclosures

It is possible to insert in the mating area the new **CR CDS plastic coding pin** that enables the polarisation of inserts in a wide range of combinations. This means that it is possible to install side by side identical connectors with different functions.

The CR CDS coding pins **can also be used in combination with CR 20 / CRM / CRF / CR 72 metal pins** instead of insert fixing screws in order to increase the number of possible combinations. Each position of the coding pin used on the female insert must correspond to an unused position on the male insert.

The required number of coding pins, depending on the size of connectors, and the maximum number of possible codings is shown in the table 1.

Table 1. CDSH series - Coding with CR CDS pins

Size of connectors	Slots for coding pins (M) = male insert (F) = female insert	Required coding pins for each coupling	Possible codings
9P + ⏚	3 (M) + 3 (F)	3 2 (M) + 1 (F)	3
18P + ⏚	6 (M) + 6 (F)	6 3 (M) + 3 (F)	20
27P + ⏚	9 (M) + 9 (F)	9 5 (M) + 4 (F)	126
42P + ⏚	14 (M) + 14 (F)	14 7 (M) + 7 (F)	3.432

dimensions shown in mm are not binding and may be changed without notice

CDSH-SQUICH® series

TECHNICAL FEATURES

Insert series		CDSH-SQUICH®
No. of poles 1)	Main contacts +	**9, 18, 27, 42, (54), (84)**
	auxiliary contacts	—
Rated current 2)		10A
EN IEC 61984	rated voltage	400V
	rated impulse voltage	6kV
	pollution degree	**3**
EN IEC 61984	rated voltage	4000V / 690V
	rated impulse voltage	6kW
	pollution degree	**2**
Contact resistance		≤ 1 mΩ
Insulation resistance		≥ 10 GΩ
Ambient temperature limit (°C)	min	-40
	max	+125
Degree of protection	with enclosures (according to type)	IP65, IP66/IP69, IP66/IP67/IP69, IP66/IP68/IP69
	without enclosures	IP20
Conductor connections		spring type with actuator button
Conductor cross-sectional area	mm^2	0,14 - 2,5 (for wires with crimped ferrule, usable section: up to 1,5 mm^2
	AWG	26 - 14 (AWG 16 with crimped ferrule)
		26 - 16 prepared with crimped ferrule
Mechanical endurance (mating cycles)		≥ 500

1) Polarities shown in brackets may be achieved by using two inserts in their own double sized housings.
2) Please check the insert load curves to establish the actual maximum operating current according to the ambient temperature.

SQUICH® Connection technology

In the layout below the wires are connected to the socket and plug insert contacts by means of a spring terminal with actuator button.
This type of connection offers the following advantages:

- no special wire preparation (other than stripping);
- it offers an excellent fastening solution and a great resistance to strong vibrations;
- it allows the use of solid and flexible wires with cross-sections between 0,14 and 2,5 mm^2 (AWG 26 - 14);
- for wires with crimped ferrule, usable section: to 1,5 mm^2 (AWG 16);
- a screwdriver with a 0,5 x 3,5 mm blade is the only tool required to remove the wire from the contact;
- the profile of the actuator button allows the section of a test probe.

WIRING

step 1
Deeply insert a stripped conductor into a round seat

step 2
Push the actuator button to close the terminal.

RE-OPENING

0,5 x 3,5 mm blade

step 3
Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.



CDSH-SQUICH® 9 poles + ⏚ 10A - 400V

enclosures:
size "44.27" **page:**

C-TYPE IP65/IP66	387 - 392
C7 IP67, single lever	436 - 437
V-TYPE IP65/IP66, single lever	444 - 447
BIG hoods	466 - 467
T-TYPE IP65 insulating	480 - 481
T-TYPE / W IP66/IP69 insulating	489
HYGIENIC T-TYPE / H IP66/IP69	501
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	506
W-TYPE for aggressive environments	521
E-Xtreme® corrosion proof 530 - 531, 542,	550 - 551
EMC	578
Central lever	603 - 605
LS-TYPE	618 - 619
IP68	632 - 635

panel supports: **page:**

COB	652 - 653

inserts,
spring terminal connections without tools



coding pins

description	part No.	part No.
spring terminals with actuator button		
female inserts with female contacts	**CDSHF 09**	
male inserts with male contacts	**CDSHM 09**	
plastic coding pins		**CR CDS**

- characteristics according to EN 61984:
  10A 400V 6kV 3
  10A 400V/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



- inserts for conductors cross-sectional areas: 0,14 - 2,5 mm² - AWG 26 - 14
- for wires with crimped ferrule, usable section: up to 1,5 mm² (AWG 16)
- conductors stripping length: 9...11 mm

SQUICH®-spring connection technology
WIRING

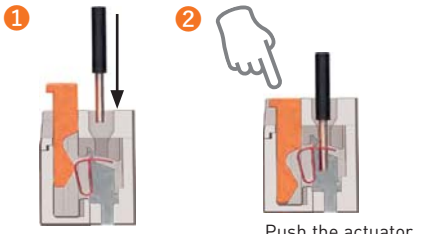

Deeply insert a stripped conductor into a round terminal.

Push the actuator button to close the terminal.

RE-OPENING



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.



CDSH series - Coding with CR CDS pins

Size of connectors	Slots for coding pins (M) = male insert (F) = female insert	Required coding pins for each coupling	Possible codings
9P + ⏚	3 (M) + 3 (F)	3 2 (M) + 1 (F)	3

CDSH 09 poles connector inserts
Maximum current load derating diagram

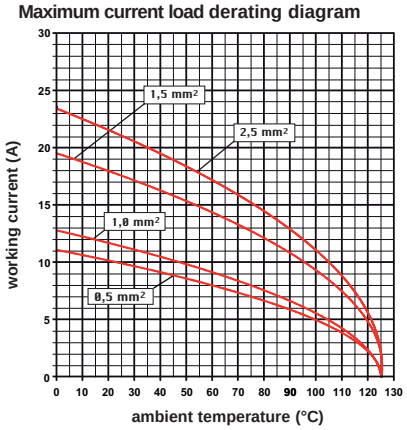

dimensions shown in mm are not binding and may be changed without notice

CDSH-SQUICH® 18 poles + ⏚ 10A - 400V

enclosures:
size "57.27" **page:**

C-TYPE IP65/IP66	393 - 401
C7 IP67, two levers	438
V-TYPE IP65/IP66, single lever	448 - 453
BIG hoods	468 - 469
T-TYPE IP65 insulating	482 - 483
T-TYPE / W IP66/IP69 insulating	490
HYGIENIC T-TYPE / H IP66/IP69	502
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	507
W-TYPE for aggressive environments	522
E-Xtreme® corrosion proof 532 - 533, 543, 552 - 553	
EMC	579
Central lever	606 - 608
LS-TYPE	620 - 621
IP68	636 - 639

panel supports: **page:**
COB **652 - 653**

inserts,
spring terminal connections without tools



coding pins

description	part No.	part No.
spring terminals with actuator button		
female inserts with female contacts	**CDSHF 18**	
male inserts with male contacts	**CDSHM 18**	
plastic coding pins		**CR CDS**

- characteristics according to EN 61984:
  10A 400V 6kV 3
  10A 400V/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



- inserts for conductors cross-sectional areas:
  0,14 - 2,5 mm² - AWG 26 - 14
- for wires with crimped ferrule, usable section:
  up to 1,5 mm² (AWG 16)
- conductors stripping length: 9...11 mm

SQUICH®-spring connection technology
WIRING

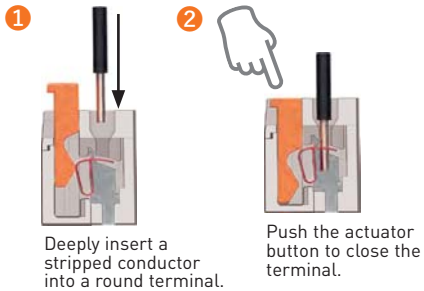

Deeply insert a stripped conductor into a round terminal.

Push the actuator button to close the terminal.

RE-OPENING



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.



CDSH series - Coding with CR CDS pins

Size of connectors	Slots for coding pins (M) = male insert (F) = female insert	Required coding pins for each coupling	Possible codings
18P + ⏚	6 (M) + 6 (F)	6 3 (M) + 3 (F)	20

CDSH 18 poles connector inserts
Maximum current load derating diagram

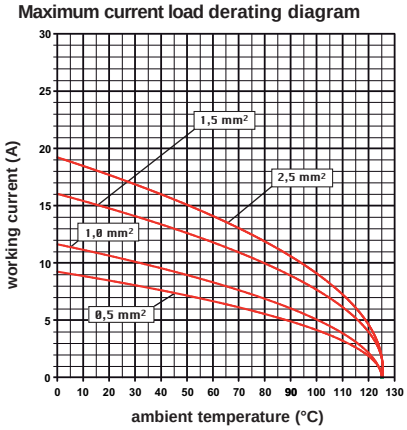

CDSH-SQUICH® 27 poles + ⏚ 10A - 400V

enclosures:
size "77.27" **page:**

C-TYPE IP65/IP66	402 - 411
C7 IP67, two levers	439 - 440
V-TYPE IP65/IP66, single lever	454 - 458
BIG hoods	470 - 471
T-TYPE IP65 insulating	484 - 485
T-TYPE / W IP66/IP69 insulating	491
HYGIENIC T-TYPE / H IP66/IP69	503
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	508
W-TYPE for aggressive environments	523
E-Xtreme® corrosion proof 534 - 535, 544, 554 - 555	
EMC	580
Central lever	609 - 611
LS-TYPE	622 - 623
IP68	640 - 643

panel supports: **page:**
COB **652 - 653**

inserts,
spring terminal connections without tools

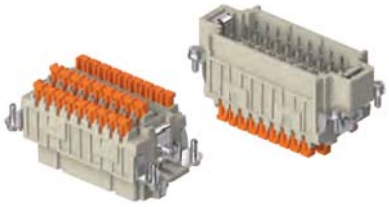

coding pins

description	part No.	part No.
spring terminals with actuator button		
female inserts with female contacts	**CDSHF 27**	
male inserts with male contacts	**CDSHM 27**	
plastic coding pins		**CR CDS**

- characteristics according to EN 61984:
  10A 400V 6kV 3
  10A 400V/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

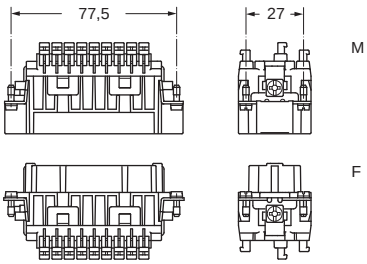

contacts side (front view)



- inserts for conductors cross-sectional areas: 0,14 - 2,5 mm² - AWG 26 - 14
- for wires with crimped ferrule, usable section: up to 1,5 mm² (AWG 16)
- conductors stripping length: 9...11 mm

SQUICH®-spring connection technology

WIRING

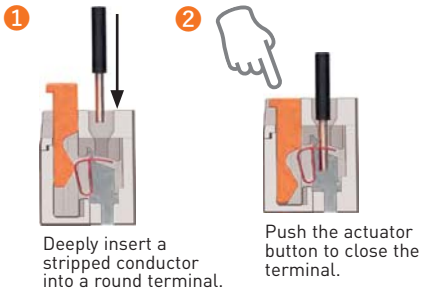

Deeply insert a stripped conductor into a round terminal.

Push the actuator button to close the terminal.

RE-OPENING



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.



CDSH series - Coding with CR CDS pins

Size of connectors	Slots for coding pins (M) = male insert (F) = female insert	Required coding pins for each coupling	Possible codings
27P + ⏚	9 (M) + 9 (F)	9 5 (M) + 4 (F)	126

CDSH 27 poles connector inserts
Maximum current load derating diagram

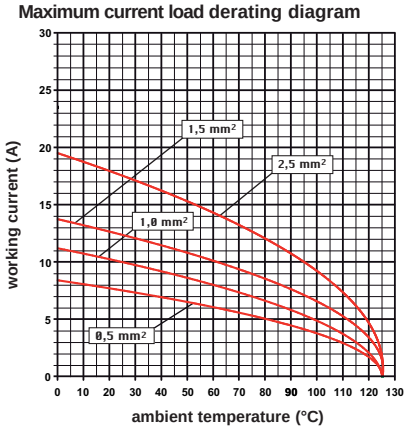

dimensions shown in mm are not binding and may be changed without notice

CDSH-SQUICH® 42 poles + ⏚ 10A - 400V

enclosures: size “104.27”	page:
C-TYPE IP65/IP66	412 - 423
C7 IP67, two levers	441 - 442
V-TYPE IP65/IP66, single lever	459 - 463
BIG hoods	472 - 473
T-TYPE IP65 insulating	486 - 487
T-TYPE / W IP66/IP69 insulating	492
HYGIENIC T-TYPE / H IP66/IP69	504
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	509
W-TYPE for aggressive environments	524
E-Xtreme® corrosion proof 536 - 537, 545, 556 - 557	
EMC	581
Central lever	612 - 614
LS-TYPE	624 - 625
IP68	644 - 647

panel supports:	page:
COB	652 - 653

inserts, spring terminal connections without tools

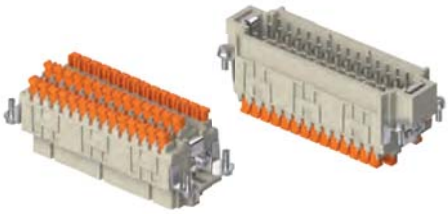

coding pins

description	part No.	part No.
spring terminals with actuator button		
female inserts with female contacts	**CDSHF 42**	
male inserts with male contacts	**CDSHM 42**	
plastic coding pins		**CR CDS**

- characteristics according to EN 61984:
  10A 400V 6kV 3
  10A 400V/690V 6kV 2
- cULus DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

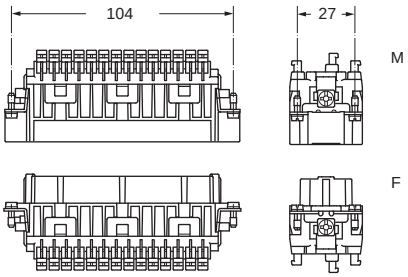

contacts side (front view)



- inserts for conductors cross-sectional areas: 0,14 - 2,5 mm² - AWG 26 - 14
- for wires with crimped ferrule, usable section: up to 1,5 mm² (AWG 16)
- conductors stripping length: 9...11 mm

SQUICH®-spring connection technology

WIRING

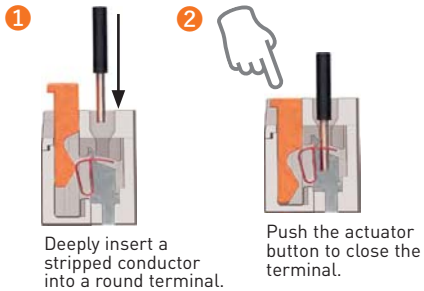

Deeply insert a stripped conductor into a round terminal.

Push the actuator button to close the terminal.

RE-OPENING



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.



CDSH series - Coding with CR CDS pins

Size of connectors	Slots for coding pins (M) = male insert (F) = female insert	Required coding pins for each coupling	Possible codings
42P + ⏚	14 (M) + 14 (F)	14 7 (M) + 7 (F)	3.432

CDSH 42 poles connector inserts
Maximum current load derating diagram

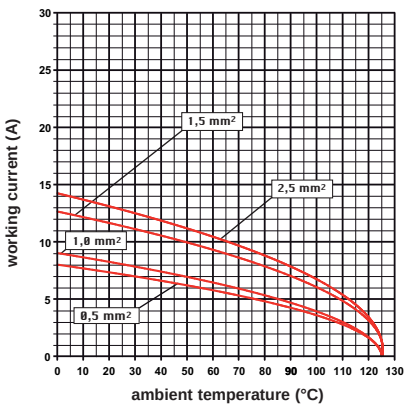

CDSH-SQUICH® 54 poles + ⏚ 10A - 400V

enclosures:
size "77.62" **page:**

C-TYPE IP65/IP66 **424 - 429**
W-TYPE for aggressive environments **525**
E-Xtreme® corrosion proof **546**

inserts,
spring terminal connections without tools

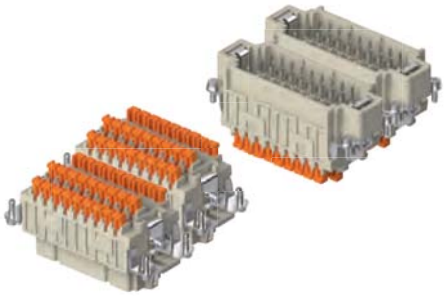

coding pins

description	part No.	part No.	part. No.
spring terminals with actuator button			
female inserts with female contacts, No. (1-27) and (28-54)	**CDSHF 27**	**CDSHF 27 N**	
male inserts with male contacts, No. (1÷27) and (28-54)	**CDSHM 27**	**CDSHM 27 N**	
plastic coding pins			**CR CDS**

- characteristics according to EN 61984:
  10A 400V 6kV 3
  10A 400V/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

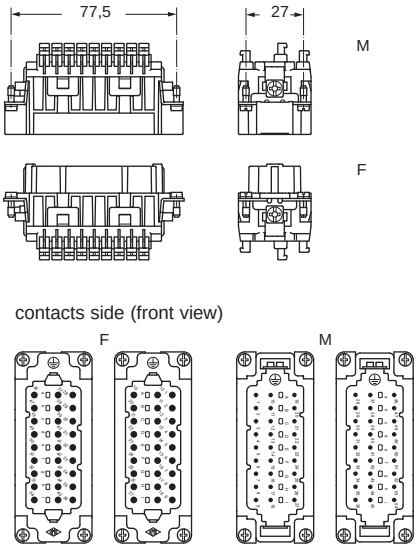

- inserts for conductors cross-sectional areas:
  0,14 - 2,5 mm² - AWG 26 - 14
- for wires with crimped ferrule, usable section:
  up to 1,5 mm² (AWG 16)
- conductors stripping length: 9...11 mm

SQUICH®-spring connection technology

WIRING

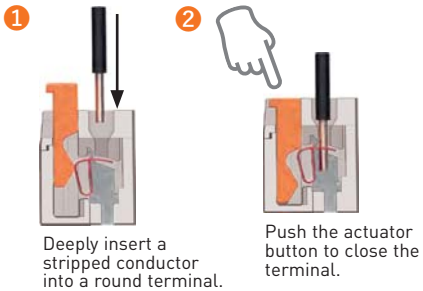

Deeply insert a stripped conductor into a round terminal.

Push the actuator button to close the terminal.

RE-OPENING



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.



CDSH series - Coding with CR CDS pins

Size of connectors	Slots for coding pins (M) = male insert (F) = female insert	Required coding pins for each coupling	Possible codings
54P + ⏚			
27P + ⏚	9 (M) + 9 (F)	9 5 (M) + 4 (F)	126 x
27P + ⏚	9 (M) + 9 (F)	9 5 (M) + 4 (F)	126

CDSH 54 poles connector inserts
Maximum current load derating diagram

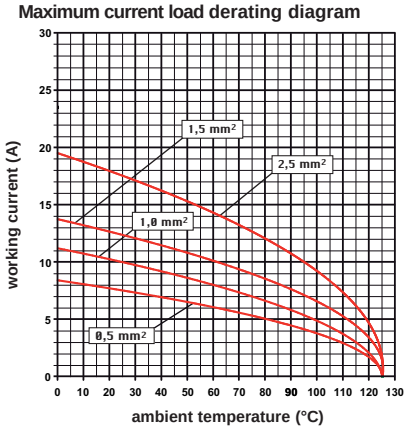

dimensions shown in mm are not binding and may be changed without notice

CDSH-SQUICH® 84 poles + ⏚ 10A - 400V

enclosures:
size "104.62" **page:**

C-TYPE IP65/IP66 **430**
W-TYPE for aggressive environments **526**
E-Xtreme® corrosion proof **547**

inserts,
spring terminal connections without tools

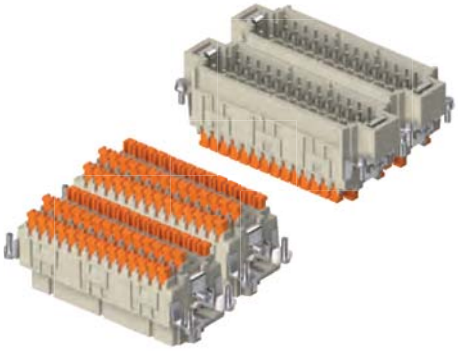

coding pins

description	part No.	part No.	part. No.
spring terminals with actuator button female inserts with female contacts, No. (1-42) and (43-84) male inserts with male contacts, No. (1-42) and (43-84)	**CDSHF 42** **CDSHM 42**	**CDSHF 42 N** **CDSHM 42 N**	
plastic coding pins			**CR CDS**

- characteristics according to EN 61984:
  10A 400V 6kV 3
  10A 400V/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

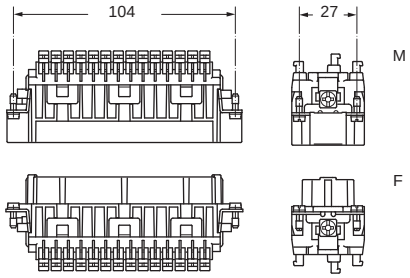

contacts side (front view)

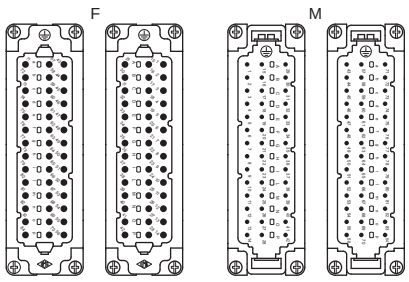

- inserts for conductors cross-sectional areas: 0,14 - 2,5 mm² - AWG 26 - 14
- for wires with crimped ferrule, usable section: up to 1,5 mm² (AWG 16)
- conductors stripping length: 9...11 mm

SQUICH®-spring connection technology

WIRING



Deeply insert a stripped conductor into a round terminal.

Push the actuator button to close the terminal.

RE-OPENING



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.



CDSH series - Coding with CR CDS pins

Size of connectors	Slots for coding pins (M) = male insert (F) = female insert	Required coding pins for each coupling	Possible codings
84P + ⏚			
42P + ⏚	14 (M) + 14 (F)	14 7 (M) + 7 (F)	3.432 x
42P + ⏚	14 (M) + 14 (F)	14 7 (M) + 7 (F)	3.432

CDSH 84 poles connector inserts
Maximum current load derating diagram

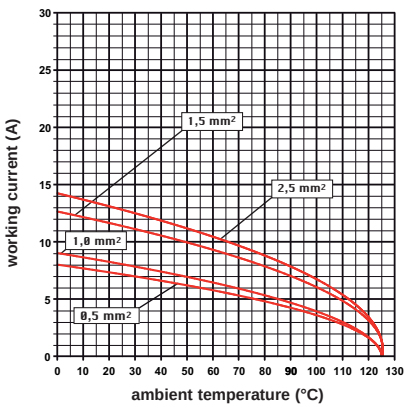

CDSH NC-SQUICH® series

3 contact pairs with an AutoShort NC contact element

ILME developed an **innovative connector suitable for interfacing measuring current transformers (CTs)** with the dedicated electronic measurement processing equipment. Use of such systems is increasing in transformer substations with the diffusion of smart grid concepts due to the growth of self-standing power generation plants (photovoltaic, wind).

The CDSH...NC connector has the **same dimensions of a 6 poles size "44.27" CSH connector,** and it is **easy to wire** thanks to ILME proprietary SQUICH® tool-less quick connection technology.

Inside the female insert, for each of the three contact pairs 1-2, 3-4 and 5-6, a **suitable spring element is foreseen,** providing a NC (normally closed) contact between the female contact pair. The said short-circuit element automatically establishes a short-circuit between the female contact pair while the connector is being unmated, before the complete withdrawal of the corresponding male connector.

This protects the measuring current transformer's secondary windings to which this connector is deemed to be wired, against the high voltage that would arise if the ends of each winding were left open while the primary winding (the power line busbars) are still under load.

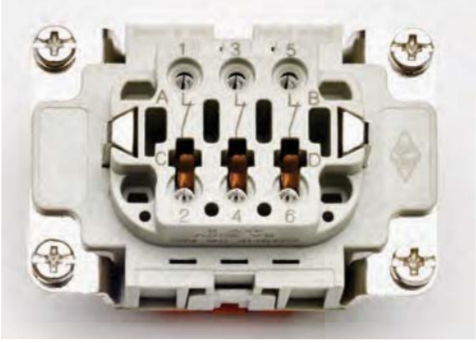

During the mating of these specially designed connector inserts, three corresponding actuator buttons realized on the mating face of the male connector, once the male contacts are already engaged with the corresponding female contacts, push aside the facing end of the AutoShort NC contact element, in order to release the short-circuit previously provided. In mated condition the proper termination of the secondary windings of the CT must be provided by the customer's downstream circuit, e.g. by suitable resistors.

AUTOSHORT NC
Operating principles

CDSH...NC connector can be used only for connecting up to three secondary (output) windings of measuring current transformers to specific measuring circuits; on the female side each contact pair is provided with said AutoShort NC contact element ❶ to keep the secondary winding ends shorted while the female connector is not engaged with the male connector, thus avoiding damages to the insulation of the current transformer and consequent hazardous condition for the personnel operating the unmating of the connector while the power busbars are energized. When the female and male connectors are being mated ❷, the short-circuit is released after proper electrical engagement of the two connector halves, thus allowing again current measurement by the dedicated electronic measurement processing equipment wired on the male connector side.

The new connector inserts can be used in size "44.27" connector enclosures, either metal (conductive) or thermoplastics (insulating), with up to IP68 degree of protection (IP66/IP68 with series CG/MG), within enclosures for aggressive environments (series "W") or with up to IP66/IP69 within series T-TYPE HYGIENIC enclosures for hygienic applications.

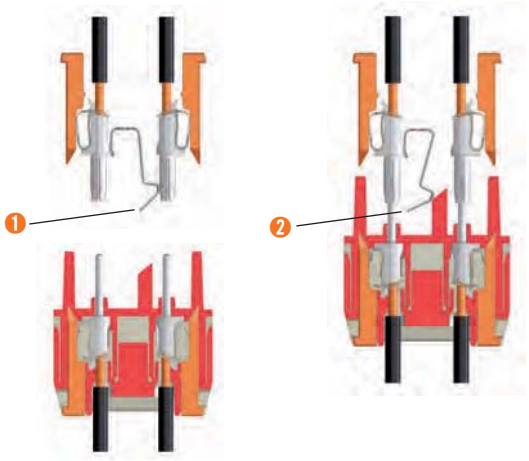

Female inserts Male inserts

AUTOSHORT NC
Coding pins

Optionally, it is possible to add **four special coding pins CR CDS** that allow up to 6 different codings, by installing 2 coding pins on the male connector half and correspondingly 2 on the female connector half, according to the coding scheme provided in the following:

CODING SCHEME

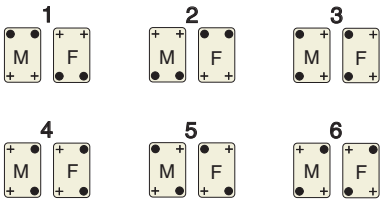

Legend

● = coding pin installed
\+ = no coding pin

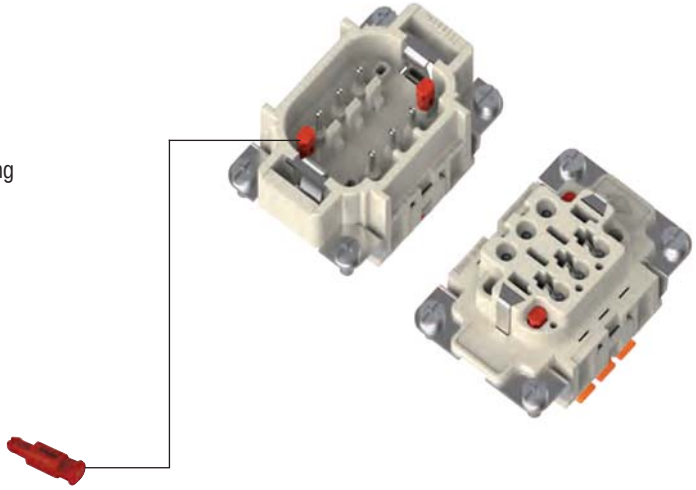

The **CR CDS coding pins can also be used in combination with other CR 20 / CRM / CRF / CR 72 metal pins** instead of insert fixing screws in order to increase the number of possible combinations.

AUTOSHORT NC
PIN Assignment

Female inserts with NC shorting contacts between contacts of pairs 1-2, 3-4, 5-6, opening upon with male inserts.
Pin assignment of contacts for the connector is the following:

Pin	Assignment
1	Winding 1 start
2	Winding 1 end
3	Winding 2 start
4	Winding 2 end
5	Winding 3 start
6	Winding 3 end
PE	⏚ Protective Earth

View from the contact side

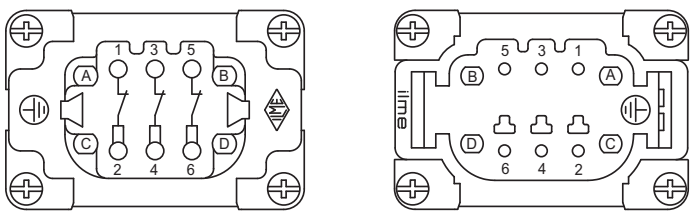

Female **Male**

CDSH NC-SQUICH® series
TECHNICAL FEATURES

Insert series	CDSH NC-SQUICH®
Electrical contacts	6 spring clamp type built-in contacts with actuator (SQUICH®) made by copper alloy, silver plated
Rated current	**6A 250V 4kV 3; 6A 500V 4kV 2** according to EN 61984 Fault condition (rated short time thermal current): 50A for 1 s
Contact resistance (connector mated)	≤ 3 mΩ
Insulation resistance	≥ 10 GΩ
Ambient temperature limit (°C)	min. -40 max. +125
Degree of protection	IP20 (connector without housing), IP65 or IP66 (connectors in T-TYPE housings), IP66 or more (connectors in ILME metal housings)
Conductor connections	3 pairs of contacts (with autoshunt on each pair of female connector), plus protective earth, size 44.27 housings
Conductor cross-sectional area	0,14 - 2,5 mm^2 (AWG 26 - 14) for solid or unprepared stranded copperwires)
	0,14 - 1,5 mm^2 (AWG 26 - 16) for for stranded copper wires prepared with ferrules
Flammability	94V-0 according to UL 94
Mechanical endurance (mating cycles)	≥ 50

CDSH NC-SQUICH® 6 poles + ⏚ 6A - 250V

enclosures:
size "44.27"

	page:
C-TYPE IP65/IP66	387 - 392
C7 IP67, single lever	436 - 437
V-TYPE IP65/IP66, single lever	444 - 447
BIG hoods	466 - 467
T-TYPE IP65 insulating	480 - 481
T-TYPE / W IP66/IP69 insulating	489
HYGIENIC T-TYPE / H IP66/IP69	501
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	506
W-TYPE for aggressive environments	521
E-Xtreme® corrosion proof 530 - 531, 542, 550 - 551	
EMC	578
Central lever	603 - 605
LS-TYPE	618 - 619
IP68	632 - 635

panel supports:

	page:
COB	652 - 653

inserts,
spring clamp connections with actuator button, female inserts with NC shorting contacts

SILVER PLATED CONTACTS

coding pins

description	part No.	part No
spring terminals with actuator button female inserts with female contacts male inserts with male contacts	**CDSHF 06 NC** **CDSHM 06 NC**	
plastic coding pins		**CR CDS**

- characteristics according to EN 61984:
  6A 250V 4kV 3
  6A 500V 4kV 2
  10A with connector mated
- cULus DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin 94V-0 according to UL 94
- mechanical life: ≥ 50 cycles
- contact resistance: ≤ 3 mΩ
- NC = Normally Closed
- the diagram below shows the current carrying capacity of the AutoShort female connector unmated, with the three NC contacts shorting the individual circuits wired in series. In this condition the AutoShort connector may be loaded up to 6A. At this max. current it may be wired 0,75 mm²/18 AWG to 2,5 mm²/14 AWG without significant performance difference.
  For the current-carrying capacity of the mated connector see the relevant diagram (for more information see page 28).



contacts side (front view)



- inserts for conductors section:
  0,14 - 2,5 mm² - AWG 26 - 14
- for wires with crimped ferrule, useful cross-section:
  up to 1,5 mm² (AWG 16)
- conductors stripping length: 9...11 mm



ILME CDSHF/M 06 NC (cross section: 2,5 mm²)	
Load curve	
Limit Ambient temperature (°C)	Working Current (A) 2,5 mm²
97,2	3,2
108,6	2,4
114,4	2
125	0

CDSH F 06 NC poles connector inserts
Maximum current load derating diagram

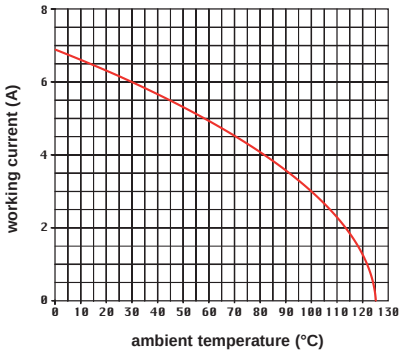

SQUICH®-spring connection technology
WIRING



Deeply insert a stripped conductor into a round terminal.

Push the actuator button to close the terminal.

RE-OPENING



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

CDA-CDC series

The compact inserts

CDA inserts with screw-type termination

The screw-type connector inserts CDA series with 10 and 16 poles + ⏚ are now made using screw-type terminals (CNE series) with a built-in wire protection pressure plate of proven reliability and practicality.

The wire protection pressure plate preserves the conductors in case of wiring with **unprepared conductors** (i.e. without wire end ferrules) up to a maximum wire cross-section of **4 mm²** (12 AWG).

The variant without a wire protection pressure plate (code with suffix X) is also available, for use with **prepared conductors** featuring a wire end ferrule with a maximum usable wire cross-section of **2,5 mm²** (14 AWG).

with 4 mm² for unprepared conductors

with 2,5 mm² for prepared conductors

CDA-CDC INSERTS SUM-UP

- **According to standard EN 61984:**
  16A 250V 4kV 3
  16A 230/400V 4kV 2
- **Insulation resistance: ≥ 10 GΩ**
- **Ambient temperature limit: -40 °C ... +125 °C**
- **Construction material: UL 94 V-0 self-extinguishing thermoplastic resin**
- **Mechanical life: ≥ 500 cycles**
- **Built-in silver plated contacts (only CDA series)**

The applications

Like those of the previous series, CDA and CDC inserts and their enclosures are used in accordance with the recommendations EUROMAP 12, EUROMAP 13, EUROMAP 14-1, EUROMAP 16 and EUROMAP 62 (European industry consortium for moulding machines and plastic processing).

The CDC inserts can also be used with CC series crimp contacts made of iron/constantan (Fe-CuNi) for the cabling of J type thermocouples in accordance with IEC/EN 60584-1 (EUROMAP 14-1 recommendation).

The CDA/CDC series inserts can also be coupled with previous insert versions.

CDC inserts with crimp termination

The crimp termination CDC series of inserts with 10 and 16 poles + ⏚ now adopt the tried and tested contact retention technique of connector series CCE and CQE for removable crimp contacts (series CC, max 16A).

CSAH-SQUICH® series

Connection without tools, slim version

CSAH-SQUICH® inserts

To improve high performance industrial connections, ILME has developed and evolved its own spring clamp connectors to meet the market needs and make installation simpler.

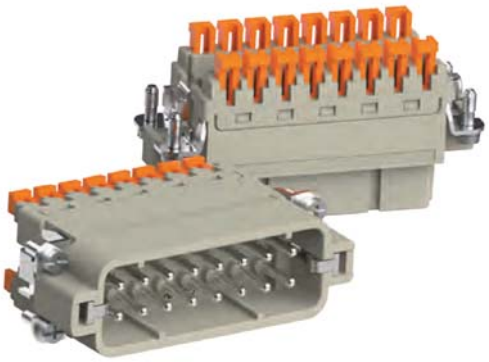

The SQUICH® inserts are adaptable to any type of solid or flexible conductor, including unprepared conductors

Each of the spring terminals has an actuator button, suitably shaped and incorporated in the cavity.
When this button is pressed, it triggers the closure of the spring device of the corresponding terminal, safely and reliably connecting the conductor to its respective electric contact in the connector.
The actuator buttons are supplied raised, in the "open terminal" position and are easily distinguisheable by the **orange colour which makes them stand out from the insulating body of the connector.**
The advantage of such an **exclusive solution** is that the **actuators disappear completely within the body of the connector,** making it easy to identify terminals not yet closed and eliminating possible obstacles to the movement of the conductors during installation and maintenance. In this manner during the cabling phase the **need for a tool to activate the terminal is completely eliminated and a simple operation is all you need to make the connection.**

CSAH-SQUICH® INSERTS SUM-UP

- **Reduced space**
- **Reduced wiring time**
- **No need for tools**
- **Quick identification of wired and non-wired terminals**
- **Terminals already open and ready for conductor clamping**
- **Built-in silver plated contacts**
- **Excellent fastening solution**
- **Great resistance to strong vibration**

Shaped button for measuring instruments

The profile of the button used in the **SQUICH®** series inserts **allow a measuring probe to be inserted.**

This allows checks to be carried out to ensure that the wiring is correct.

Simple terminal reopening

To reopen the terminals, simply introduce the tip of a common 0,5 x 3,5 mm flat blade screwdriver in the shaped pocket on the head of the actuator, and slightly rotate the screwdriver downwards: this will lift the actuator into its open terminal position.

SQUICH® Connection technology

WIRING

step 1
Deeply insert a stripped conductor into a round seat

step 2
Push the actuator button to close the terminal.

RE-OPENING



step 3
Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

CDA 10 poles + ⏚ 16A - 250V

enclosures:
size “49.16” **page:**

IL-BRID	**374 - 377, 382**
CZ7 IP67, single lever	**384**
W-TYPE for aggressive environments	**519**
E-Xtreme® corrosion proof	**540**
EMC	**576**

panel supports: **page:**

COB + adaptor	**652 - 654**

inserts,
screw terminal connection



inserts,
screw terminal connection



description	part No.	part No.
indirect, with pressure plate [1]		
female inserts with female contacts	**CDAF 10**	
male inserts with male contacts	**CDAM 10**	
direct, without pressure plate [2]		
female inserts with female contacts		**CDAF 10 X**
male inserts with male contacts		**CDAM 10 X**

- characteristics according to EN 61984:
  16A 250V 4kV 3
  16A 230/400V 4kV 2
- cULus (UL for USA and Canada), SP, CQC, DNV·GL
  BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- according to recommendations EUROMAP N° 16
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



- inserts with pressure plate for conductors cross-sections:
  0,5 - 4 mm² - AWG 20 - 12
- conductors stripping length: 7 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

[1] for unprepared conductors

CDA ...



contacts side (front view)



- inserts without pressure plate for prepared conductors with cross-sections:
  0,25 - 2,5 mm² - AWG 24 - 14
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

[2] for conductors with end sleeve ferrule

CDA ... X

CDA 10 poles connector inserts
Maximum current load derating diagram

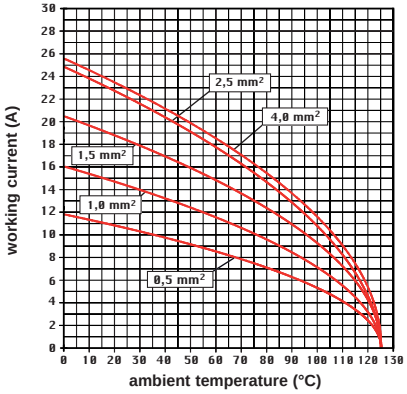

dimensions shown in mm are not binding and may be changed without notice

CSAH-SQUICH® 10 poles + ⏚ 16A - 250V

enclosures:
size “49.16” **page:**

IL-BRID	**374 - 377, 382**
CZ7 IP67, single lever	**384**
W-TYPE for aggressive environments	**519**
E-Xtreme® corrosion proof	**540**
EMC	**576**

panel supports: **page:**

COB + adaptor	**652 - 654**

inserts,
spring terminal connections without tools

description	part No.
spring terminals with actuator button female inserts with female contacts male inserts with male contacts	**CSAHF 10** **CSAHM 10**

- characteristics according to EN 61984:
  16A 250V 4kV 3
  16A 400V 4kV 2
- cULus (UL for USA and Canada), CSA, DNV-GL, BUREAU VERITAS
- EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



- inserts for connectors with the following sections: 0,14 - 2,5 mm² - AWG 26 - 14
- for wires with crimped ferrule, usable section: up to 1,5 mm² (AWG 16)
- conductors stripping length: 9...11 mm

CSAH 10 poles connector inserts
Maximum current load derating diagram

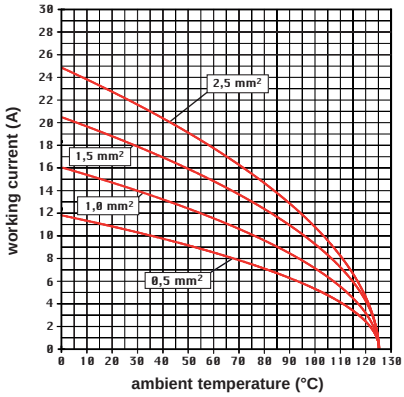

SQUICH®-spring connection technology

WIRING

1



Deeply insert a stripped conductor into a round terminal.

2

Push the actuator button to close the terminal.

RE-OPENING

3



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

CDA 16 poles + ⏚ 16A - 250V

enclosures: size “66.16”	page:
IL-BRID	378 - 382
CZ7 IP67, single lever	385
W-TYPE for aggressive environments	520
E-Xtreme® corrosion proof	541
EMC	577

panel supports:	page:
COB + adaptor	652 - 654

inserts, screw terminal connection

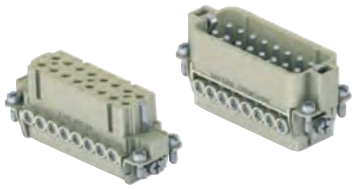

inserts, screw terminal connection

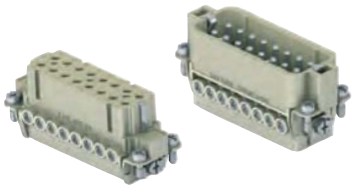

description	part No.	part No.
indirect, with pressure plate [1]		
female inserts with female contacts	**CDAF 16**	
male inserts with male contacts	**CDAM 16**	
direct, without pressure plate [2]		
female inserts with female contacts		**CDAF 16 X**
male inserts with male contacts		**CDAM 16 X**

- characteristics according to EN 61984:
  16A 250V 4kV 3
  16A 230/400V 4kV 2
- c UL us (UL for USA and Canada), SEV, cec, DNV·GL
  BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- according to recommendations EUROMAP N° 13 / N° 14.1
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



- inserts with pressure plate for conductors cross-sections:
  0,5 - 4 mm² - AWG 20 - 12
- conductors stripping length: 7 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

[1] for unprepared conductors

CDA ...



contacts side (front view)



- inserts without pressure plate for prepared conductors with cross-sections:
  0,25 - 2,5 mm² - AWG 24 - 14
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

[2] for conductors with end sleeve ferrule

CDA ... X

CDA 16 poles connector inserts
Maximum current load derating diagram

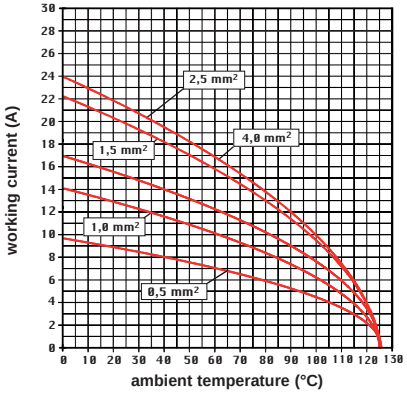

dimensions shown in mm are not binding and may be changed without notice

CSAH-SQUICH® 16 poles + ⏚ 16A - 250V

enclosures: size “66.16”	page:
IL-BRID	378 - 382
CZ7 IP67, single lever	385
W-TYPE for aggressive environments	520
E-Xtreme® corrosion proof	541
EMC	577

panel supports:	page:
COB + adaptor	652 - 654

inserts, spring terminal connections without tools

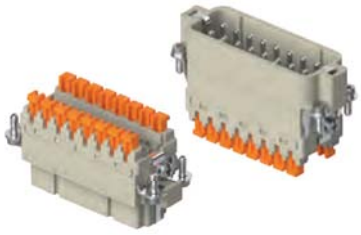

description	part No.
spring terminals with actuator button female inserts with female contacts male inserts with male contacts	**CSAHF 16** **CSAHM 16**

- characteristics according to EN 61984:
  16A 250V 4kV 3
  16A 400V 4kV 2
- c UL us (UL for USA and Canada), CSA, DNV-GL, BUREAU VERITAS
  EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



- inserts for connectors with the following sections: 0,14 - 2,5 mm² - AWG 26 - 14
- for wires with crimped ferrule, usable section: up to 1,5 mm² (AWG 16)
- conductors stripping length: 9...11 mm

CSAH 16 poles connector inserts
Maximum current load derating diagram

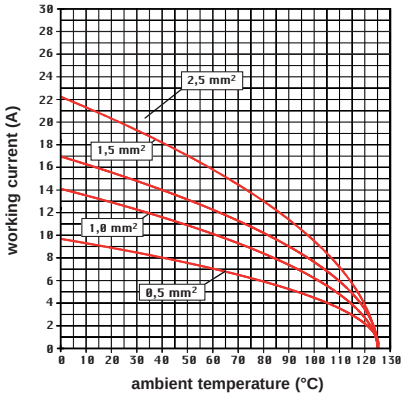

SQUICH®-spring connection technology

WIRING

1



Deeply insert a stripped conductor into a round terminal.

2

Push the actuator button to close the terminal.

RE-OPENING

3



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

CDA 32 poles + ⏚ 16A - 250V

enclosures:
size “66.40” **page:**

C-TYPE IP65/IP66 **431 - 434**
W-TYPE for aggressive environments **527**
E-Xtreme® corrosion proof **548**

inserts,
screw terminal connection

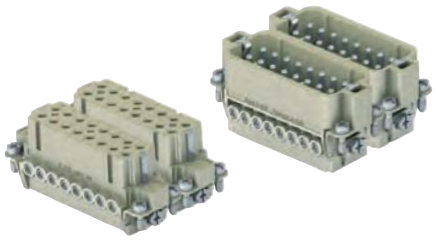

inserts,
screw terminal connection

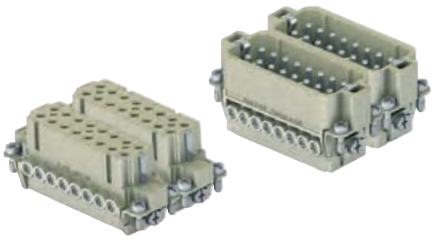

description	part No.	part No.	part No.	part No.
indirect, with pressure plate [1]				
female inserts, No. (1-16) and (17-32)	**CDAF 16**	**CDAF 16 N**		
male inserts, No. (1-16) and (17-32)	**CDAM 16**	**CDAM 16 N**		
direct, without pressure plate [2]				
female inserts, No. (1-16) and (17-32)			**CDAF 16 X**	**CDAF 16 XN**
male inserts, No. (1-16) and (17-32)			**CDAM 16 X**	**CDAM 16 XN**

- characteristics according to EN 61984:
  16A 250V 4kV 3
  16A 230/400V 4kV 2
- cULus (UL for USA and Canada), SP, CQC, DNV·GL
  BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- according to recommendations EUROMAP N° 12 / N° 62
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



- inserts with pressure plate for conductors cross-sections:
  0,5 - 4 mm² - AWG 20 - 12
- conductors stripping length: 7 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

[1] for unprepared conductors



contacts side (front view)



- inserts without pressure plate for prepared conductors with cross-sections:
  0,25 - 2,5 mm² - AWG 24 - 14
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

[2] for conductors with end sleeve ferrule

CDA 32 poles connector inserts
Maximum current load derating diagram

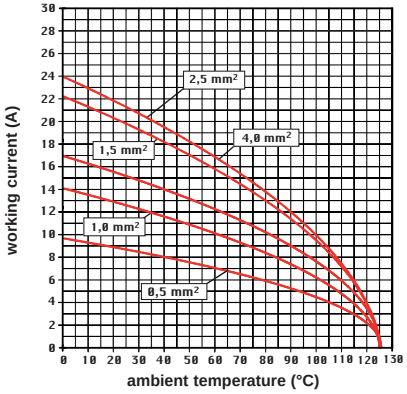

dimensions shown in mm are not binding and may be changed without notice

CSAH-SQUICH® 32 poles + ⏚ 16A - 250V

enclosures: size “66.40”	page:
C-TYPE IP65/IP66	431 - 434
W-TYPE for aggressive environments	527
E-Xtreme® corrosion proof	548

inserts, spring terminal connections without tools

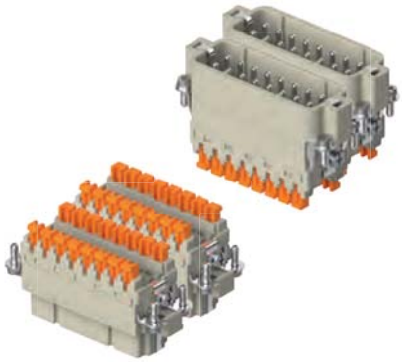

description	part No.	part No.
spring terminals with actuator button female inserts, No. (1-16) and (17-32) male inserts, No. (1-16) and (17-32)	**CSAHF 16** **CSAHM 16**	**CSAHF 16 N** **CSAHM 16 N**

- characteristics according to EN 61984:
  16A 250V 4kV 3
  16A 400V 4kV 2
- cULus (UL for USA and Canada), CSA, DNV-GL, BUREAU VERITAS
  EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



- inserts for connectors with the following sections: 0,14 - 2,5 mm² - AWG 26 - 14
- for wires with crimped ferrule, usable section: up to 1,5 mm² (AWG 16)
- conductors stripping length: 9...11 mm

CSAH 32 poles connector inserts
Maximum current load derating diagram

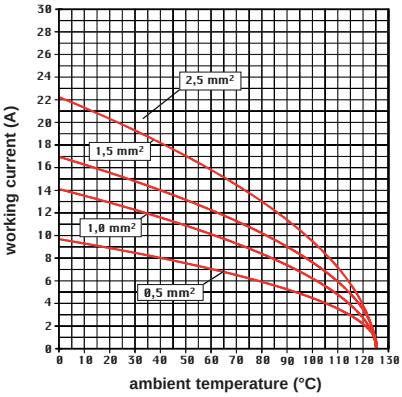

SQUICH®-spring connection technology

WIRING

1



Deeply insert a stripped conductor into a round terminal.

2

Push the actuator button to close the terminal.

RE-OPENING

3



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

CDC 10 poles + ⏚ 16A - 250V

enclosures:
size "49.16" **page:**

IL-BRID	**374 - 377, 382**
CZ7 IP67, single lever	**384**
W-TYPE for aggressive environments	**519**
E-Xtreme® corrosion proof	**540**
EMC	**576**

panel supports: **page:**

COB + adaptor	**652 - 654**

inserts, crimp connections

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CDCF 10**	
male inserts for male contacts	**CDCM 10**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCFA 0.3** / **CCFD 0.3**
0,5 mm² AWG 20 with no grooves		**CCFA 0.5** / **CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCFA 0.7** / **CCFD 0.7**
1 mm² AWG 18 one groove		**CCFA 1.0** / **CCFD 1.0**
1,5 mm² AWG 16 two grooves		**CCFA 1.5** / **CCFD 1.5**
2,5 mm² AWG 14 three grooves		**CCFA 2.5** / **CCFD 2.5**
3 mm² AWG 12 one wide groove		**CCFA 3.0** / **CCFD 3.0**
4 mm² AWG 12 with no grooves		**CCFA 4.0** / **CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCMA 0.3** / **CCMD 0.3**
0,5 mm² AWG 20 with no grooves		**CCMA 0.5** / **CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCMA 0.7** / **CCMD 0.7**
1 mm² AWG 18 one groove		**CCMA 1.0** / **CCMD 1.0**
1,5 mm² AWG 16t wo grooves		**CCMA 1.5** / **CCMD 1.5**
2,5 mm² AWG 14 three grooves		**CCMA 2.5** / **CCMD 2.5**
3 mm² AWG 12 one wide groove		**CCMA 3.0** / **CCMD 3.0**
4 mm² AWG 12 with no grooves		**CCMA 4.0** / **CCMD 4.0**
16A male crimp contacts for advanced opening		
0,5 mm² AWG 20 with no grooves		**CC 0.5 AN**
0,75 mm² AWG 18 one groove (back side)		**CC 0.7 AN**
1 mm² AWG 18 one groove		**CC 1.0 AN**
1,5 mm² AWG 16 two grooves		**CC 1.5 AN**
2,5 mm² AWG 14 three grooves		**CC 2.5 AN**

silver plated

gold plated+

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 250V 4kV 3
  16A 230/400V 4kV 2
- c UL us (UL for USA and Canada), SP cec DNV·GL
  BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- according to recommendations EUROMAP N° 16
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CDC 10 poles connector inserts
Maximum current load derating diagram

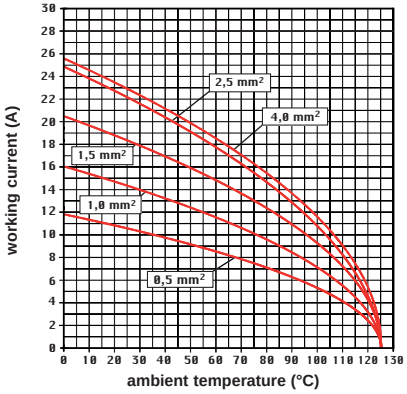



contacts side (front view)



- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF and CCM



CC...AN



CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

CDC 16 poles + ⏚ 16A - 250V

enclosures:
size "66.16"

	page:
IL-BRID	**378 - 382**
CZ7 IP67, single lever	**385**
W-TYPE for aggressive environments	**520**
E-Xtreme® corrosion proof	**541**
EMC	**577**

panel supports:

	page:
COB + adaptor	**652 - 654**

inserts, crimp connections

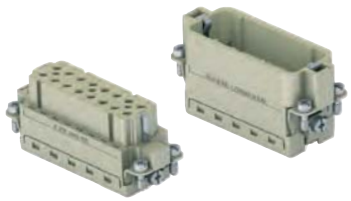

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CDCF 16**	
male inserts for male contacts	**CDCM 16**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCFA 0.3** / **CCFD 0.3**
0,5 mm² AWG 20 with no grooves		**CCFA 0.5** / **CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCFA 0.7** / **CCFD 0.7**
1 mm² AWG 18 one groove		**CCFA 1.0** / **CCFD 1.0**
1,5 mm² AWG 16 two grooves		**CCFA 1.5** / **CCFD 1.5**
2,5 mm² AWG 14 three grooves		**CCFA 2.5** / **CCFD 2.5**
3 mm² AWG 12 one wide groove		**CCFA 3.0** / **CCFD 3.0**
4 mm² AWG 12 with no grooves		**CCFA 4.0** / **CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCMA 0.3** / **CCMD 0.3**
0,5 mm² AWG 20 with no grooves		**CCMA 0.5** / **CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCMA 0.7** / **CCMD 0.7**
1 mm² AWG 18 one groove		**CCMA 1.0** / **CCMD 1.0**
1,5 mm² AWG 16t wo grooves		**CCMA 1.5** / **CCMD 1.5**
2,5 mm² AWG 14 three grooves		**CCMA 2.5** / **CCMD 2.5**
3 mm² AWG 12 one wide groove		**CCMA 3.0** / **CCMD 3.0**
4 mm² AWG 12 with no grooves		**CCMA 4.0** / **CCMD 4.0**
16A male crimp contacts for advanced opening		
0,5 mm² AWG 20 with no grooves		**CC 0.5 AN**
0,75 mm² AWG 18 one groove (back side)		**CC 0.7 AN**
1 mm² AWG 18 one groove		**CC 1.0 AN**
1,5 mm² AWG 16 two grooves		**CC 1.5 AN**
2,5 mm² AWG 14 three grooves		**CC 2.5 AN**

silver plated

gold plated÷

÷ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 250V 4kV 3
  16A 230/400V 4kV 2
- cULus (UL for USA and Canada), SP, CQC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- according to recommendations EUROMAP N° 13 / N° 14.1
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CDC 16 poles connector inserts
Maximum current load derating diagram

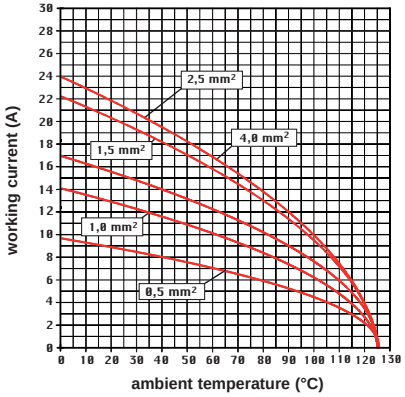



contacts side (front view)



- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF and CCM



CC...AN



CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CDC 32 poles + ⏚ 16A - 250V

enclosures:
size "66.40" **page:**

C-TYPE IP65/IP66	**431 - 434**
W-TYPE for aggressive environments	**527**
E-Xtreme® corrosion proof	**548**

inserts, crimp connections

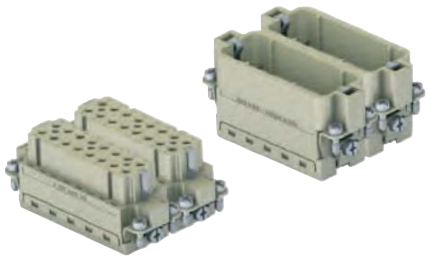

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description			part No.	part No.	part No.		part No.	
without contacts (to be ordered separately)								
female inserts, No. (1-16) and (17-32)			**CDCF 16**	**CDCF 16 N**				
male inserts, No. (1-16) and (17-32)			**CDCM 16**	**CDCM 16 N**				
16A female contacts								
0,14-0,37 mm²	AWG 26-22	one groove			**CCFA 0.3**	**silver plated**	**CCFD 0.3**	**gold plated+**
0,5 mm²	AWG 20	with no grooves			**CCFA 0.5**		**CCFD 0.5**	
0,75 mm²	AWG 18	one groove (back side)			**CCFA 0.7**		**CCFD 0.7**	
1 mm²	AWG 18	one groove			**CCFA 1.0**		**CCFD 1.0**	
1,5 mm²	AWG 16	two grooves			**CCFA 1.5**		**CCFD 1.5**	
2,5 mm²	AWG 14	three grooves			**CCFA 2.5**		**CCFD 2.5**	
3 mm²	AWG 12	one wide groove			**CCFA 3.0**		**CCFD 3.0**	
4 mm²	AWG 12	with no grooves			**CCFA 4.0**		**CCFD 4.0**	
16A male contacts								
0,14-0,37 mm²	AWG 26-22	one groove			**CCMA 0.3**		**CCMD 0.3**	
0,5 mm²	AWG 20	with no grooves			**CCMA 0.5**		**CCMD 0.5**	
0,75 mm²	AWG 18	one groove (back side)			**CCMA 0.7**		**CCMD 0.7**	
1 mm²	AWG 18	one groove			**CCMA 1.0**		**CCMD 1.0**	
1,5 mm²	AWG 16t	wo grooves			**CCMA 1.5**		**CCMD 1.5**	
2,5 mm²	AWG 14	three grooves			**CCMA 2.5**		**CCMD 2.5**	
3 mm²	AWG 12	one wide groove			**CCMA 3.0**		**CCMD 3.0**	
4 mm²	AWG 12	with no grooves			**CCMA 4.0**		**CCMD 4.0**	
16A male crimp contacts for advanced opening								
0,5 mm²	AWG 20	with no grooves			**CC 0.5 AN**			
0,75 mm²	AWG 18	one groove (back side)			**CC 0.7 AN**			
1 mm²	AWG 18	one groove			**CC 1.0 AN**			
1,5 mm²	AWG 16	two grooves			**CC 1.5 AN**			
2,5 mm²	AWG 14	three grooves			**CC 2.5 AN**			

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 250V 4kV 3
  16A 230/400V 4kV 2
- c UL us (UL for USA and Canada), SP cec DNV·GL
  BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- according to recommendations EUROMAP N° 12 / N° 62
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CDC 32 poles connector inserts
Maximum current load derating diagram

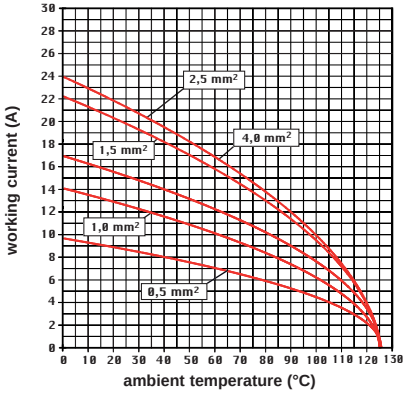

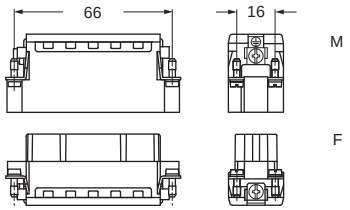

contacts side (front view)



- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF and CCM



CC...AN



CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

CNE - CNE...RY series

CNE series

CNE Series are the evolution of former series CN, one of the oldest and most successful heavy-duty multipole connection products of ILME. The evolution consisted in the complete overhauling of the connector bodies, the introduction of a **captive stainless steel protection plate for unprepared conductor strands** in the screw terminals, the adoption of galvanized steel terminal screws and the **increase of the rated voltage from former 400V to 500V.**

The ancestor series CN was intermateable with the German industry standard design with screw-type terminals, for **16A** rated current per pole and solid pins Ø 2,5 mm. The two larger sizes of this series – ILME designation "77.27" for **16 P + PE** and "104.27" for **24 P + PE** – share the dimensions of a similarly old and very popular series (series **CD** in this catalogue) dimensionally standardized by the historic standards of series **DIN 43652,** later replaced by **EN 175 301-801.** The lower sizes "44.27" for **6 P + PE** and "57.27" for **10 P + PE** were proportionally scaled down from the above mentioned larger sizes.

CNE connectors series come in two main variants:
- with pressure (protection) plate, **for unprepared conductors,** to preserve conductor strands from being cut from the screw head, or
- without pressure (protection) plate **(suffix X), for prepared conductors** (crimped with insulated or non-insulated wire ferrule of suitable size).

NOTE – Prepared conductors in principle do not need any pressure (protection) plate. Use of prepared conductors is possible – although with no added value – also for CNE with pressure plate, but the highest conductor cross-sectional area 4 mm^2 / 12 AWG can be used only unprepared.

CNE series connection technology is **screw-type,** requiring very simple and popular tools, like a 0,8x4 mm flat blade screwdriver or a Ph0 cross-headed screwdriver (torque to apply 0,5 Nm). All connectors series CNE have their contact holder (wiring side) duly cone shaped around each terminal cavity to securely guide all stranded wires inside the terminal seat. Terminal screw are unlosably retained in their seats. **All terminals are presented completely open** (unscrewed), ready to be wired, to allow spare of assembly time. The PE terminal is also screw-type (M4 screw with pressure plate, torque to apply 1,2 Nm) and is located on the mounting bracket on the pole #1 side. It covers the same conductor cross-sectional area range of the line terminals. Due to its design, the PE terminal allows two conductors per terminal (one on each side of the M4 screw); in such case it is recommended that these conductors are of the same size. Series CNE connectors are **polarized against 180° incorrect mating** by a system of keys and keyways along the contour of their mating faces.

CNE...RY variant

By partial or total replacement of the four M3 fixing screws, CNE connectors series may also use three different series of **coding and guide pins** to implement, e.g. in case of multiple identical connectors installed side by side, an "idiot-proof" system to avoid mating mismatches with counterpart.

NOTE – Coding may be obtained respectively by using: **CR 20 or CR 20 D single coding pins,** for up to 6 different codings, **CRF / CRM or CRF D / CRM D double coding and guide pins,** for up to 16 different codings, and the previous **double coding and guide pins plus a third element CR 72 or CR 72 D,** to allow up to 72 different coding combinations.

Connectors series CNE come in four sizes:
- size "44.27" 6 P + ⏚
- size "57.27" 10 P + ⏚
- size "77.27" 16 P + ⏚
- size "104.27" 24 P + ⏚

Two inserts – one with suffix **N** to denote special numbering, respectively CNEF/M 16 TN (or TXN) with pole numbering 17 to 32, CNEF/M 24 TN (or TXN) with numbering 25 to 48 – can be used with connector enclosures sized "77.62" or "104.62" to provide:
- size "77.62" 32 P + ⏚
- size "104.62" 48 P + ⏚

CNE...RY series for high temperatures

CNE series are available also in the **CNE...RY variant for use at high ambient temperatures up to 180 °C.** Thanks to a specific thermoplastic insulating material (whose natural colour is brown) and in combination with the dedicated connector enclosures "R-Type" for 180 °C temperature withstand, these multipole connectors are particularly suitable for installation in places in proximity of heat sources such as near ovens, moulds for thermoplastic or rubber moulding, moulds in foundries, paint booths, etc.

CSH-SQUICH® series

CSH-SQUICH® series

Spring connection with actuator button

In this view the wires are connected to the insert contacts by means of a spring terminal with actuator button.

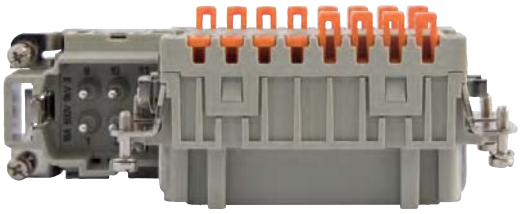

CSH-SQUICH® INSERTS SUM-UP

- **No special wire preparation (other than stripping)**
- **No wiring tool is necessary**
- **It offers an excellent fastening solution and a great resistance to strong vibrations;**
- **It allows solid and flexible wires with sections between 0,14 and 2,5 mm² (26-14 AWG) to be used (both with non-prepared conductors and those prepared with ferrule)**
- **It greatly reduces insert preparation and cabling times**
- **Built-in silver plated contacts**

Shaped button for measuring instruments

The profile of the button used in the **SQUICH®** series inserts **allow a measuring probe to be inserted.**

This allows checks to be carried out to ensure that the wiring is correct.

Simple terminal reopening

To reopen the terminals, simply introduce the tip of a common 0,5 x 3,5 mm flat blade screwdriver in the shaped pocket on the head of the actuator, and slightly rotate the screwdriver downwards: this will lift the actuator into its open terminal position.

CNE and CSH-SQUICH® series

TECHNICAL FEATURES

Insert series		**CNE** (with pressure plate) **CNE...X** (w/o pressure plate) **CNE...RY** (for high temperature)	**CSH-SQUICH®**
No. of poles [1]	Main contacts + ⏚	**6, 10, 16, 24,** (**32** = 2x16) (**48** = 2x24)	
	auxiliary contacts	—	
Rated current [2]		16A	
EN IEC 61984 Pollution degree 3	rated voltage	500V	
	rated impulse voltage	6kV	
	pollution degree	**3**	
EN IEC 61984 Pollution degree 2	rated voltage	400/690V	
	rated impulse voltage	6kW	
	pollution degree	**2**	
UL / CSA certification	rated voltage (a.c./d.c.)	600V	
Contact resistance		≤ 1 mΩ	≤ 3 mΩ
Insulation resistance		≥ 10 GΩ	
Ambient temperature limit (°C)	min	-40 °C	-40 °C
	max	+125 °C / **+180 °C (CNE...RY)**	+125 °C
Degree of protection	with enclosures (according to type)	**IP65**, **IP66**/IP69, IP66/**IP67**/IP69, IP66/**IP68**/IP69	
	without enclosures - termination side on male and female inserts - mating side on female inserts	**IP20** (IPXXB)	
Conductor connections		screw type	spring and clamp with actuator button
Conductor cross-sectional area	mm^2	0,5 - 4 **(CNE)**	0,14 - 2,5
		0,25 - 2,5 **(CNE...X)**	
	AWG	20 - 12 **(CNE)**	26 - 14
		24 - 14 **(CNE...X)**	
Mechanical endurance (mating cycles)		≥ 500	

1) Polarities shown in brackets may be obtained by using two inserts in their own double-sized housings
2) Please check the inserts derating diagrams to establish the actual maximum operating current according to the ambient temperature, the conductor cross-sectional area, the polarity of the connector, and any external constraint may derive e.g. by the continuous operating temperature sustained by the chosen conductor sheathing or by end-product safety standards fixing max allowed temperature rise on terminals (e.g. 30 K, 45 K or 50 K)

CNE CSH-SQUICH® 6 poles + ⏚ 16A - 500V

enclosures:
size “44.27” **page:**

C-TYPE IP65/IP66	387 - 392
C7 IP67, single lever	436 - 437
V-TYPE IP65/IP66, single lever	444 - 447
BIG hoods	466 - 467
T-TYPE IP65 insulating	480 - 481
T-TYPE / W IP66/IP69 insulating	489
HYGIENIC T-TYPE / H IP66/IP69	501
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	506
W-TYPE for aggressive environments	521
E-Xtreme® corrosion proof 530 - 531, 542, 550 - 551	
EMC	578
Central lever	603 - 605
LS-TYPE	618 - 619
IP68	632 - 635

panel supports: **page:**

COB	652 - 653

inserts,
screw terminal connections



inserts,
spring terminal connections without tools

description	part No.	part No.
indirect, with plate [1]		
female inserts with female contacts	**CNEF 06 T**	
male inserts with male contacts	**CNEM 06 T**	
direct, without plate [2]		
female inserts with female contacts	**CNEF 06 TX**	
male inserts with male contacts	**CNEM 06 TX**	
spring terminals with actuator button		
female inserts with female contacts		**CSHF 06**
male inserts with male contacts		**CSHM 06**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- c UL us (UL for USA and Canada), SP cec DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ (CNE) - ≤ 3 mΩ (CSH)
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

CNE 06 poles connector inserts
Maximum current load derating diagram

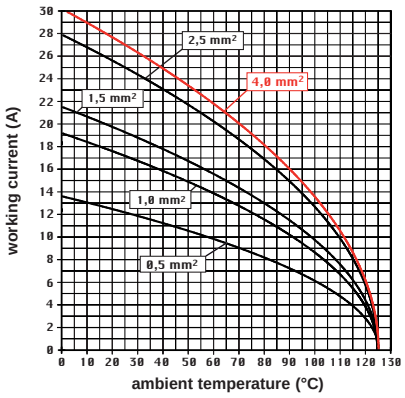

CSH 06 poles connector inserts
Maximum current load derating diagram

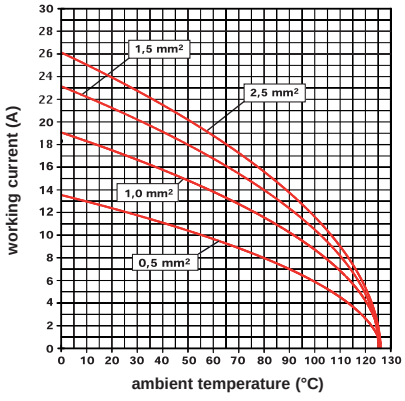



contacts side (front view)



- inserts with plate for section conductors:
  0,5 - 4 mm² - AWG 20 - 12
- inserts without plate for section conductors:
  0,25 - 2,5 mm² - AWG 24 - 14
- conductors stripping length: 7 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

[1] for unprepared conductors

[2] for conductors with end sleeve ferrule



contacts side (front view)



- inserts for connectors with the following sections:
  0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

SQUICH®-spring connection technology
WIRING

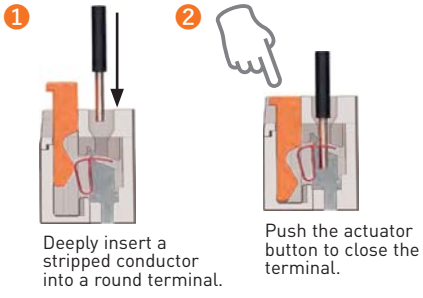

RE-OPENING



dimensions shown in mm are not binding and may be changed without notice

CNE CSH-SQUICH® 10 poles + ⏚ 16A - 500V

enclosures: size “57.27”	page:
C-TYPE IP65/IP66	393 - 401
C7 IP67, two levers	438
V-TYPE IP65/IP66, single lever	448 - 453
BIG hoods	468 - 469
T-TYPE IP65 insulating	482 - 483
T-TYPE / W IP66/IP69 insulating	490
HYGIENIC T-TYPE / H IP66/IP69	502
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	507
W-TYPE for aggressive environments	522
E-Xtreme® corrosion proof 532 - 533, 543, 552 - 553	
EMC	579
Central lever	606 - 608
LS-TYPE	620 - 621
IP68	636 - 639

panel supports:	page:
COB	652 - 653

inserts, screw terminal connections



inserts, spring terminal connections without tools



description	part No.	part No.
indirect, with plate [1]		
female inserts with female contacts	**CNEF 10 T**	
male inserts with male contacts	**CNEM 10 T**	
direct, without plate [2]		
female inserts with female contacts	**CNEF 10 TX**	
male inserts with male contacts	**CNEM 10 TX**	
spring terminals with actuator button		
female inserts with female contacts		**CSHF 10**
male inserts with male contacts		**CSHM 10**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- c UL us (UL for USA and Canada), CSA, CQC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ (CNE) - ≤ 3 mΩ (CSH)
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

CNE 10 poles connector inserts
Maximum current load derating diagram

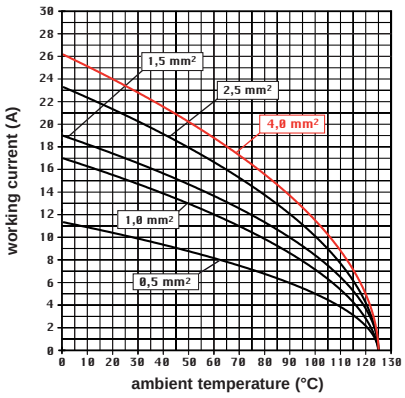

CSH 10 poles connector inserts
Maximum current load derating diagram

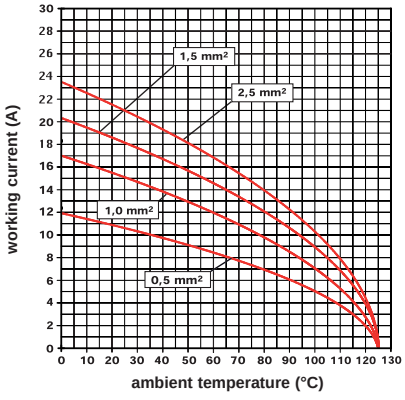



contacts side (front view)



- inserts with plate for section conductors:
  0,5 - 4 mm² - AWG 20 - 12
- inserts without plate for section conductors:
  0,25 - 2,5 mm² - AWG 24 - 14
- conductors stripping length: 7 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

[1] for unprepared conductors

[2] for conductors with end sleeve ferrule



contacts side (front view)



- inserts for connectors with the following sections:
  0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

SQUICH®-spring connection technology
WIRING

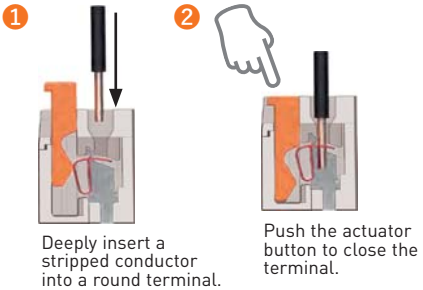

Deeply insert a stripped conductor into a round terminal.

Push the actuator button to close the terminal.

RE-OPENING



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

CNE CSH-SQUICH® 16 poles + ⏚ 16A - 500V

enclosures:
size “77.27” **page:**

C-TYPE IP65/IP66	402 - 411
C7 IP67, two levers	439 - 440
V-TYPE IP65/IP66, single lever	454 - 458
BIG hoods	470 - 471
T-TYPE IP65 insulating	484 - 485
T-TYPE / W IP66/IP69 insulating	491
HYGIENIC T-TYPE / H IP66/IP69	503
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	508
W-TYPE for aggressive environments	523
E-Xtreme® corrosion proof 534 - 535, 544, 554 - 555	
EMC	580
Central lever	609 - 611
LS-TYPE	622 - 623
IP68	640 - 643

panel supports: **page:**
COB **652 - 653**

inserts,
screw terminal connections

inserts,
spring terminal connections without tools

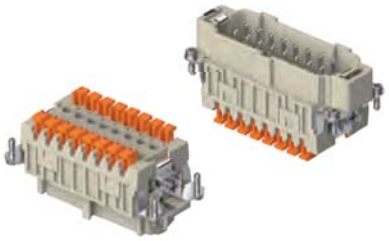

description	part No.	part No.
indirect, with plate [1]		
female inserts with female contacts	**CNEF 16 T**	
male inserts with male contacts	**CNEM 16 T**	
direct, without plate [2]		
female inserts with female contacts	**CNEF 16 TX**	
male inserts with male contacts	**CNEM 16 TX**	
spring terminals with actuator button		
female inserts with female contacts		**CSHF 16**
male inserts with male contacts		**CSHM 16**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- c UL us (UL for USA and Canada), SP CQC DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ (CNE) - ≤ 3 mΩ (CSH)
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

CNE 16 poles connector inserts
Maximum current load derating diagram

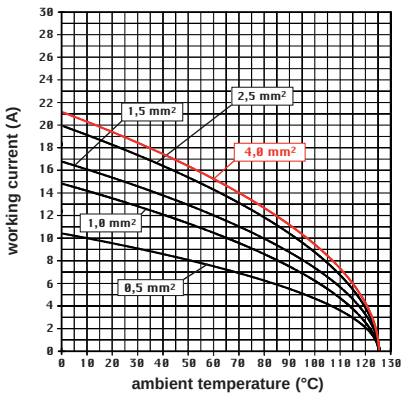

CSH 16 poles connector inserts
Maximum current load derating diagram

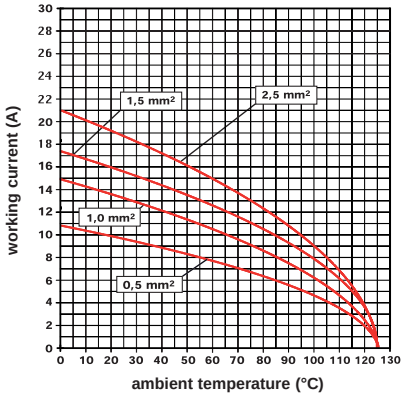

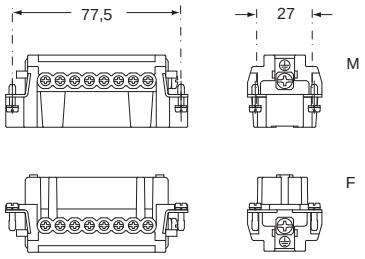

contacts side (front view)



- inserts with plate for section conductors:
  0,5 - 4 mm² - AWG 20 - 12
- inserts without plate for section conductors:
  0,25 - 2,5 mm² - AWG 24 - 14
- conductors stripping length: 7 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

[1] for unprepared conductors

[2] for conductors with end sleeve ferrule

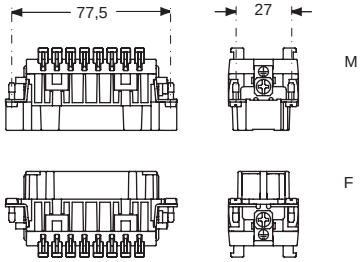

contacts side (front view)



- inserts for connectors with the following sections:
  0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

SQUICH®-spring connection technology
WIRING

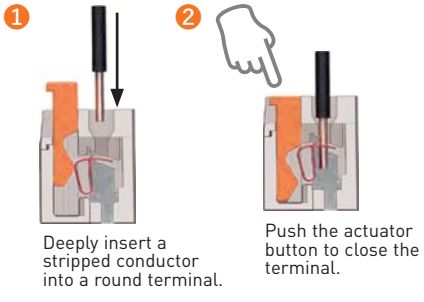

Deeply insert a stripped conductor into a round terminal.

Push the actuator button to close the terminal.

RE-OPENING



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

dimensions shown in mm are not binding and may be changed without notice

CNE CSH-SQUICK® 24 poles + ⏚ 16A - 500V

enclosures: size “104.27”	page:
C-TYPE IP65/IP66	412 - 423
C7 IP67, two levers	441 - 442
V-TYPE IP65/IP66, single lever	459 - 463
BIG hoods	472 - 473
T-TYPE IP65 insulating	486 - 487
T-TYPE / W IP66/IP69 insulating	492
HYGIENIC T-TYPE / H IP66/IP69	504
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	509
W-TYPE for aggressive environments	524
E-Xtreme® corrosion proof 536 - 537, 545, 556 - 557	
EMC	581
Central lever	612 - 614
LS-TYPE	624 - 625
IP68	644 - 647

panel supports:	page:
COB	652 - 653

inserts, screw terminal connections

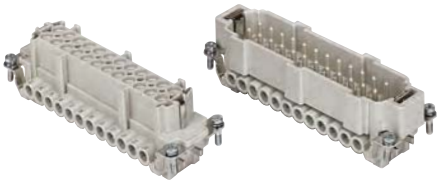

inserts, spring terminal connections without tools

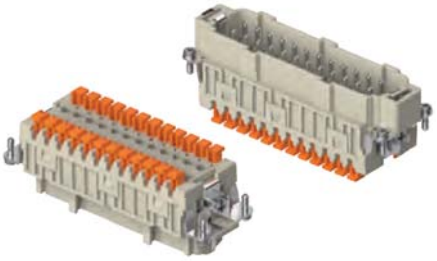

description	part No.	part No.
indirect, with plate [1]		
female inserts with female contacts	**CNEF 24 T**	
male inserts with male contacts	**CNEM 24 T**	
direct, without plate [2]		
female inserts with female contacts	**CNEF 24 TX**	
male inserts with male contacts	**CNEM 24 TX**	
spring terminals with actuator button		
female inserts with female contacts		**CSHF 24**
male inserts with male contacts		**CSHM 24**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- c UL us (UL for USA and Canada), CSA, CQC, DNV-GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ (CNE) - ≤ 3 mΩ (CSH)
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

CNE 24 poles connector inserts
Maximum current load derating diagram

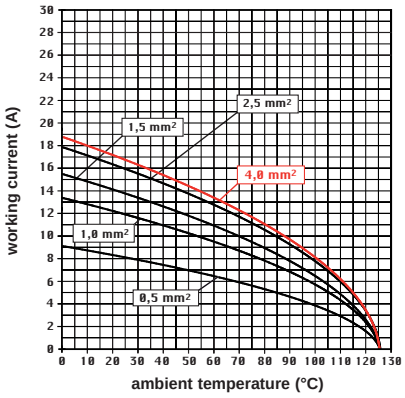

CSH 24 poles connector inserts
Maximum current load derating diagram

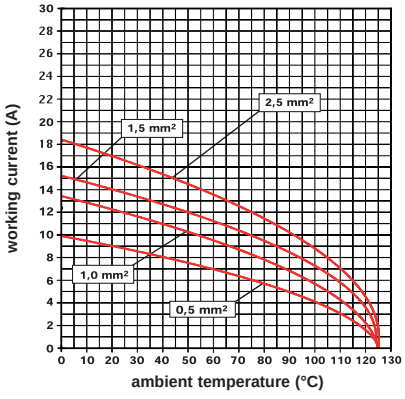

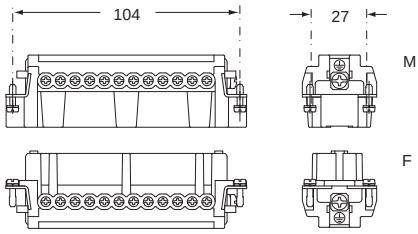

contacts side (front view)



- inserts with plate for section conductors: 0,5 - 4 mm² - AWG 20 - 12
- inserts without plate for section conductors: 0,25 - 2,5 mm² - AWG 24 - 14
- conductors stripping length: 7 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

[1] for unprepared conductors

[2] for conductors with end sleeve ferrule

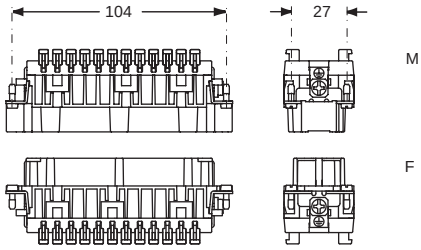

contacts side (front view)



- inserts for connectors with the following sections: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

SQUICK®-spring connection technology

WIRING

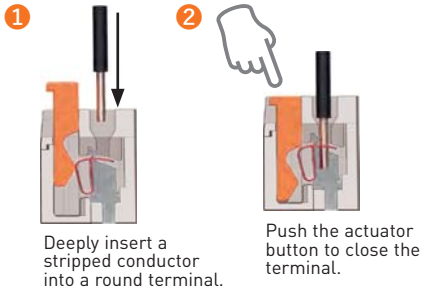

Deeply insert a stripped conductor into a round terminal.

Push the actuator button to close the terminal.

RE-OPENING



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

CNE CSH-SQUICH® 32 poles + ⏚ 16A - 500V

enclosures: size “77.62”	page:
C-TYPE IP65/IP66	424 - 429
W-TYPE for aggressive environments	525
E-Xtreme® corrosion proof	546

inserts, screw terminal connections

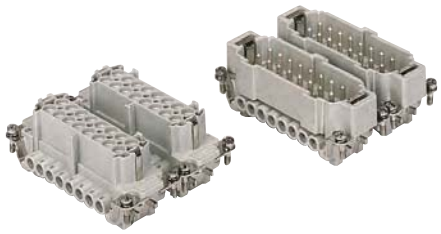

inserts, spring terminal connections without tools

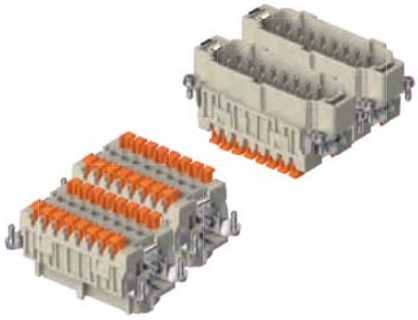

description	part No.	part No.	part No.	part No
indirect, with plate [1]				
female inserts, No. (1-16) and (17-32)	**CNEF 16 T**	**CNEF 16 TN**		
male inserts, No. (1-16) and (17-32)	**CNEM 16 T**	**CNEM 16 TN**		
direct, without plate [2]				
female inserts, No. (1-16) and (17-32)	**CNEF 16 TX**	**CNEF 16 TXN**		
male inserts, No. (1-16) and (17-32)	**CNEM 16 TX**	**CNEM 16 TXN**		
spring terminals with actuator button				
female inserts with female contacts, No. (1-16) and (17-32)			**CSHF 16**	**CSHF 16 N**
male inserts with male contacts, No. (1-16) and (17-32)			**CSHM 16**	**CSHM 16 N**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- c UL us (UL for USA and Canada), SP, CQC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ (CNE) - ≤ 3 mΩ (CSH)
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

CNE 32 poles connector inserts
Maximum current load derating diagram

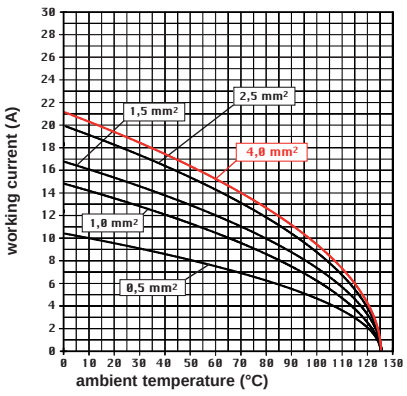

CSH 32 poles connector inserts
Maximum current load derating diagram

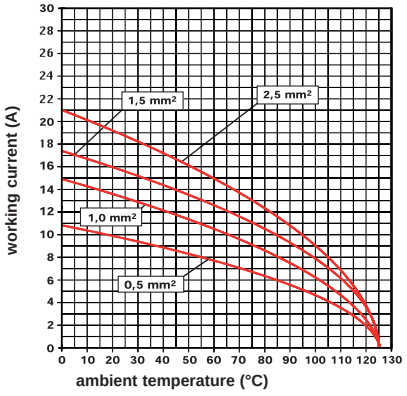

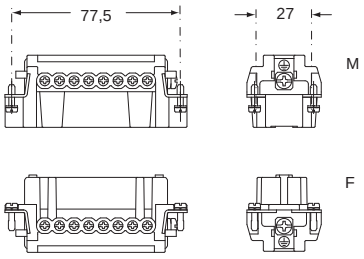

contacts side (front view)

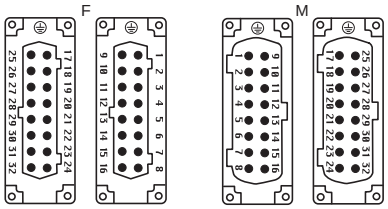

- inserts with plate for section conductors:
  0,5 - 4 mm² - AWG 20 - 12
- inserts without plate for section conductors:
  0,25 - 2,5 mm² - AWG 24 - 14
- conductors stripping length: 7 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

[1] for unprepared conductors

[2] for conductors with end sleeve ferrule

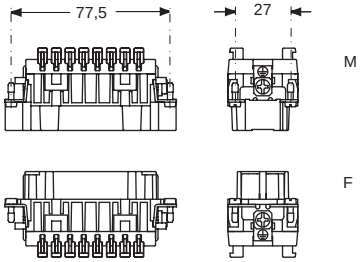

contacts side (front view)

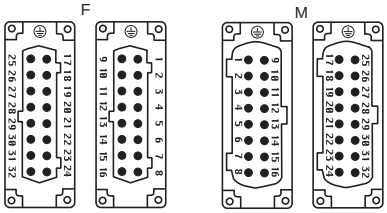

- inserts for connectors with the following sections:
  0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

SQUICH®-spring connection technology
WIRING

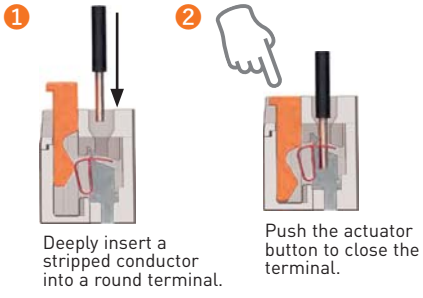

Deeply insert a stripped conductor into a round terminal.

Push the actuator button to close the terminal.

RE-OPENING



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

dimensions shown in mm are not binding and may be changed without notice

CNE CSH-SQUICK® 48 poles + ⏚ 16A - 500V

enclosures: size “104.62”	page:
C-TYPE IP65/IP66	430
W-TYPE for aggressive environments	526
E-Xtreme® corrosion proof	547

inserts, screw terminal connections

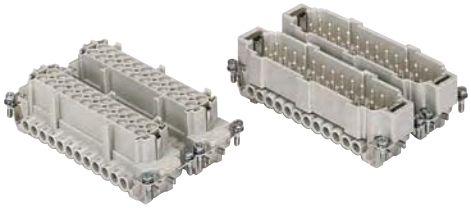

inserts, spring terminal connections without tools

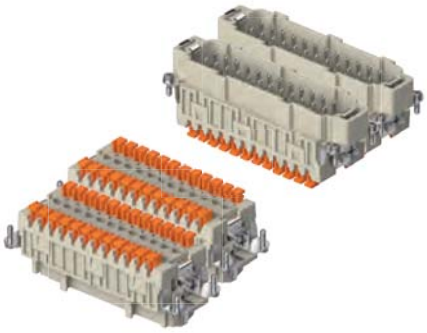

description	part No.	part No.	part No.	part No
indirect, with plate [1]				
female inserts, No. (1-24) and (25-48)	**CNEF 24 T**	**CNEF 24 TN**		
male inserts, No. (1-24) and (25-48)	**CNEM 24 T**	**CNEM 24 TN**		
direct, without plate [2]				
female inserts, No. (1-24) and (25-48)	**CNEF 24 TX**	**CNEF 24 TXN**		
male inserts, No. (1-24) and (25-48)	**CNEM 24 TX**	**CNEM 24 TXN**		
spring terminals with actuator button				
female inserts with female contacts, No. (1-24) and (25-48)			**CSHF 24**	**CSHF 24 N**
male inserts with male contacts, No. (1-24) and (25-48)			**CSHM 24**	**CSHM 24 N**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- c UL us (UL for USA and Canada), SP, cec, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ (CNE) - ≤ 3 mΩ (CSH)
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

CNE 48 poles connector inserts
Maximum current load derating diagram

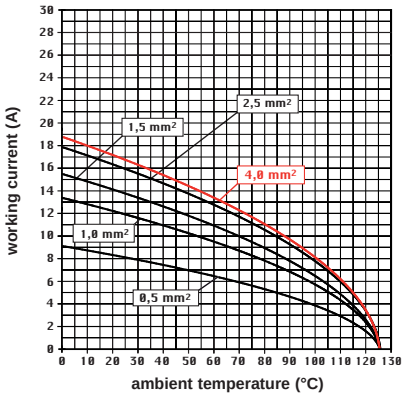

CSH 48 poles connector inserts
Maximum current load derating diagram

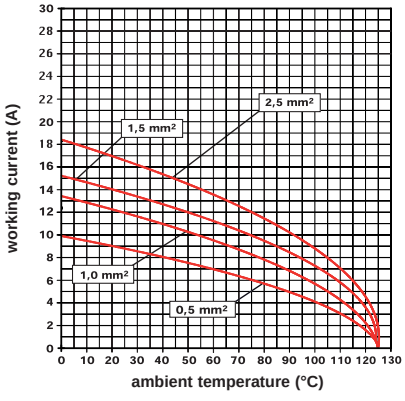

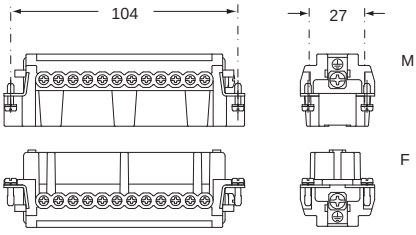

contacts side (front view)

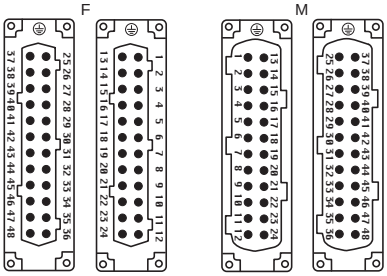

- inserts with plate for section conductors:
  0,5 - 4 mm² - AWG 20 - 12
- inserts without plate for section conductors:
  0,25 - 2,5 mm² - AWG 24 - 14
- conductors stripping length: 7 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

[1] for unprepared conductors

CNE ...

[2] for conductors with end sleeve ferrule

CNE ... X

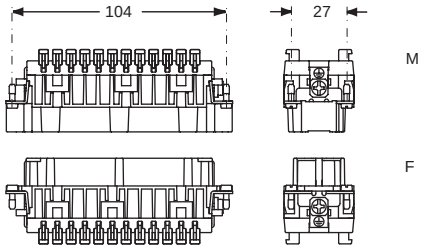

contacts side (front view)

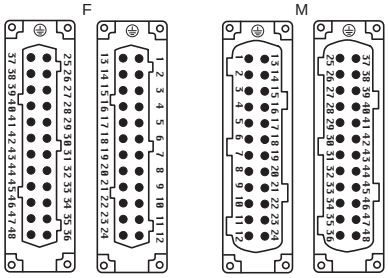

- inserts for connectors with the following sections:
  0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

SQUICH®-spring connection technology

WIRING

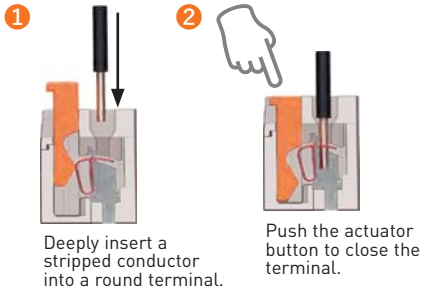

Deeply insert a stripped conductor into a round terminal.

Push the actuator button to close the terminal.

RE-OPENING



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

CNE...RY 6 poles + ⏚ 16A - 500V

enclosures:
size “44.27” **page:**

for 180 °C **586**

inserts,
screw terminal connections

Q 180 °C

description	part No.
indirect, with plate [1], use in up to 180 °C female inserts with female contacts, brown male inserts with male contacts, brown	**CNEF 06 RY** **CNEM 06 RY**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- c UL us (UL for USA and Canada), CSA, CQC, DNV·GL

BUREAU VERITAS EAC certified

- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +180 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



- inserts with plate for section conductors:
  0,5 - 4 mm² - AWG 20 - 12
- conductors stripping length: 7 mm
- terminal screw torque: 0,5 Nm (4,4 lb.in), for more information see page 20 and 21

CNE...RY 06 poles connector inserts
Maximum current load derating diagram

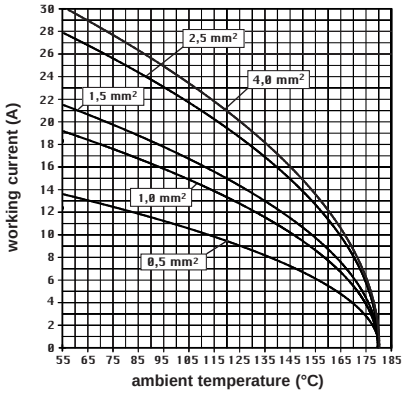

[1] for unprepared conductors

CNE...RY

dimensions shown in mm are not binding and may be changed without notice

CNE...RY 10 poles + ⏚ 16A - 500V

enclosures:
size "57.27" **page:**

for 180 °C **587**

inserts,
screw terminal connections



Q 180 °C

description	part No.
indirect, with plate [1], use in up to 180 °C female inserts with female contacts, brown male inserts with male contacts, brown	**CNEF 10 RY** **CNEM 10 RY**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- c UL us (UL for USA and Canada), CSA, cec, DNV·GL
  BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +180 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



- inserts with plate for section conductors:
  0,5 - 4 mm² - AWG 20 - 12
- conductors stripping length: 7 mm
- terminal screw torque: 0,5 Nm (4,4 lb.in), for more information see page 20 and 21

CNE...RY 10 poles connector inserts
Maximum current load derating diagram

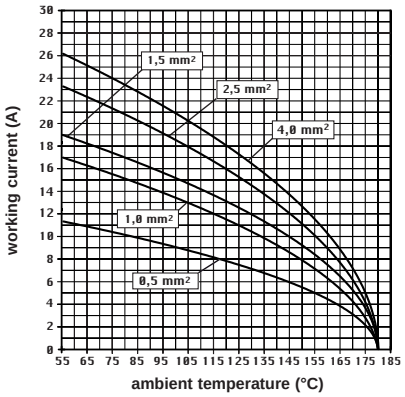

[1] for unprepared conductors

CNE...RY

CNE...RY 16 poles + ⏚ 16A - 500V

enclosures:
size “77.27” **page:**

for 180 °C **588**

inserts,
screw terminal connections

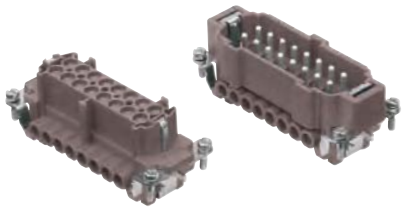

Q 180 °C

description	part No.
indirect, with plate [1], use in up to 180 °C	
female inserts with female contacts, brown	**CNEF 16 RY**
male inserts with male contacts, brown	**CNEM 16 RY**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- c UL us (UL for USA and Canada), CSA, cec, DNV·GL
  BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +180 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

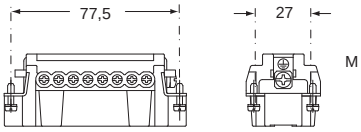

contacts side (front view)



- inserts with plate for section conductors:
  0,5 - 4 mm² - AWG 20 - 12
- conductors stripping length: 7 mm
- terminal screw torque: 0,5 Nm (4,4 lb.in), for more information see page 20 and 21

CNE...RY 16 poles connector inserts
Maximum current load derating diagram

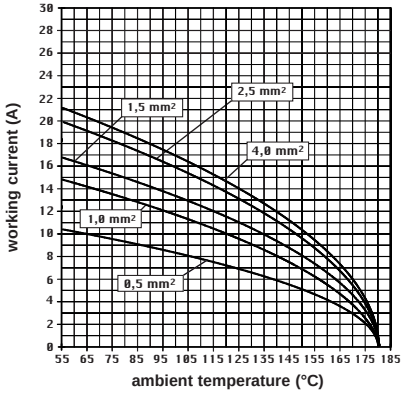

[1] for unprepared conductors

CNE...RY

dimensions shown in mm are not binding and may be changed without notice

CNE...RY 24 poles + ⏚ 16A - 500V

enclosures:
size “104.27” **page:**

for 180 °C **589**

inserts,
screw terminal connections

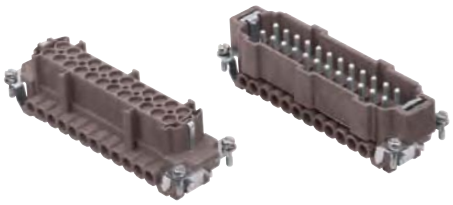

180 °C

description	part No.
indirect, with plate [1], use in up to 180 °C female inserts with female contacts, brown male inserts with male contacts, brown	**CNEF 24 RY** **CNEM 24 RY**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- c UL us (UL for USA and Canada), CSA, cec, DNV·GL
  BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +180 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

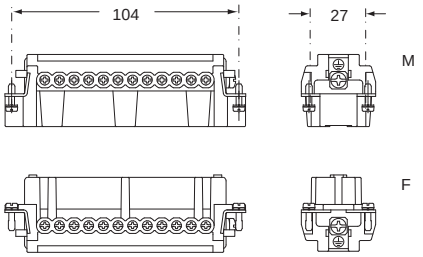

contacts side (front view)



- inserts with plate for section conductors:
  0,5 - 4 mm² - AWG 20 - 12
- conductors stripping length: 7 mm
- terminal screw torque: 0,5 Nm (4,4 lb.in), for more information see page 20 and 21

[1] for unprepared conductors

CNE...RY 24 poles connector inserts
Maximum current load derating diagram

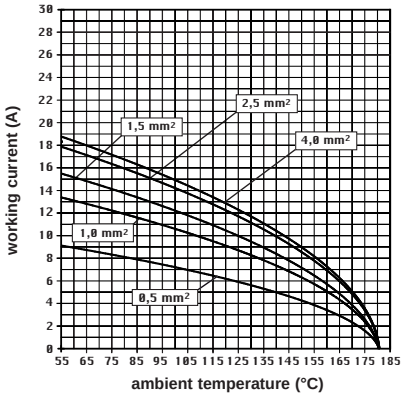

CNE...RY 48 poles + ⏚ 16A - 500V

enclosures:
size "104.62" **page:**

for 180 °C **590**

inserts,
screw terminal connections

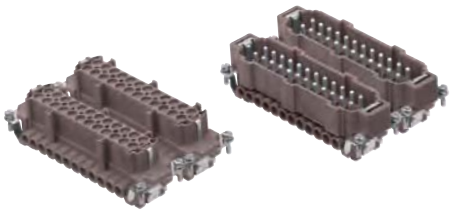

Q 180 °C

description	part No.	part No.
indirect, with plate [1], use in up to 180 °C		
female inserts, No. (1-24) and (25-48), brown	**CNEF 24 RY**	**CNEF 24 RYN**
male inserts, No. (1-24) and (25-48), brown	**CNEM 24 RY**	**CNEM 24 RYN**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- c UL us (UL for USA and Canada), SP cec DNV·GL
  BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +180 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

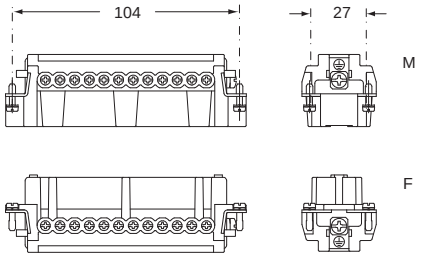

contacts side (front view)

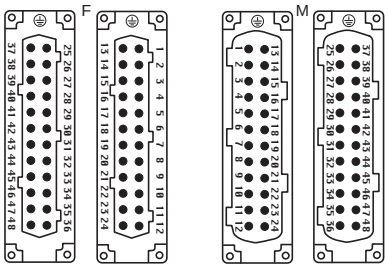

- inserts with plate for section conductors: 0,5 - 4 mm² - AWG 20 - 12
- conductors stripping length: 7 mm
- terminal screw torque: 0,5 Nm (4,4 lb.in), for more information see page 20 and 21

[1] for unprepared conductors

CNE...RY 48 poles connector inserts
Maximum current load derating diagram

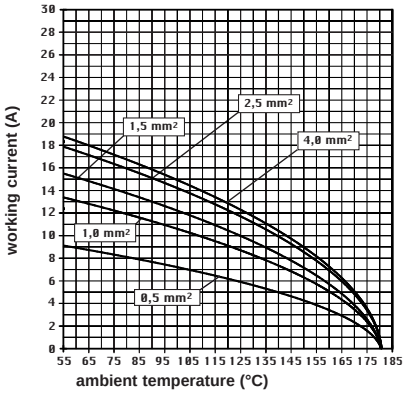

dimensions shown in mm are not binding and may be changed without notice

CSH **S**-SQUICH® series
TECHNICAL FEATURES

Demand for cost-effective solutions for large serial production is constantly growing and stamped contacts meet the basic needs fur such applications.

- ILME stamped contacts, thanks to their **silver-plated** treatment are suitable for up to **500 mating cycles,** consistently with th turned ones.

Q In order to easily recognize them, each insert is marked with an "S" at the end of the product code. meaning "stamped".

- Stamped contacts applied to the SQUICH® connection feature all the well-known advantages of the ILME proprietary technology:
  - **reduced wiring time** (spring-clamp terminals are presented "open", with the actuator button lifted up); up to **50% saving time** compared to screw connection;
  - **operator skill independence** (no need to open the spring-clamp terminals by direct operation of a possibly unsuitable tool on the spring);
  - **no special wire preparation** (only stripping at the correct length);
  - no wiring tool needed;
  - **resistance to strong vibrations** typical of the self-compensating spring-clamp technology;
  - possibility **to use solid and flexible** stranded copper conductors with range of cross sectional area between 0,14 mm^2 and 2,5 mm^2 (26 – 14 AWG);
  - possibility to insert the **test probe** of a measurement instrument in the cavity of the actuator button (proprietary design);
  - simple re-opening of a terminal (if needed) using a flat blade screwdriver on the actuator button dedicated side window.

stamped silver-plated contacts

CSHF/M 06 S 6 poles + ⏚ 16A - 500V SQUICH®

enclosures: size “44.27”	page:
C-TYPE IP65/IP66	387 - 392
C7 IP67, single lever	436 - 437
V-TYPE IP65/IP66, single lever	444 - 447
BIG hoods	466 - 467
T-TYPE IP65 insulating	480 - 481
T-TYPE / W IP66/IP69 insulating	489
HYGIENIC T-TYPE / H IP66/IP69	501
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	506
W-TYPE for aggressive environments	521
E-Xtreme® corrosion proof	530 - 531, 542, 550 - 551
EMC	578
Central lever	603 - 605
LS-TYPE	618 - 619
IP68	632 - 635

panel supports:	page:
COB	652 - 653

inserts, spring terminal connections

STAMPED CONTACTS, SILVER PLATED

description	part No.
spring terminals with actuator button	
female inserts with female contacts	**CSHF 06 S**
male inserts with male contacts	**CSHM 06 S**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- cURus, CSA, CQC, DNV-GL, BV, EAC pending
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ



contacts side (front view)



- inserts for connectors with the following conductor cross-sectional areas: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping lenght: 9...11 mm

SQUICH®-spring connection technology

WIRING

1



Deeply insert a stripped conductor into a round terminal.

2

Push the actuator button to close the terminal.

RE-OPENING

3



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

dimensions shown in mm are not binding and may be changed without notice

CSHF/M 10 S 10 poles + ⏚ 16A - 500V SQUICH®

enclosures: size “57.27”	page:
C-TYPE IP65/IP66	393 - 401
C7 IP67, two levers	438
V-TYPE IP65/IP66, single lever	448 - 453
BIG hoods	468 - 469
T-TYPE IP65 insulating	482 - 483
T-TYPE / W IP66/IP69 insulating	490
HYGIENIC T-TYPE / H IP66/IP69	502
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	507
W-TYPE for aggressive environments	522
E-Xtreme® corrosion proof 532 - 533, 543, 552 - 553	
EMC	579
Central lever	606 - 608
LS-TYPE	620 - 621
IP68	636 - 639

panel supports:	page:
COB	652 - 653

inserts, spring terminal connections

STAMPED CONTACTS, SILVER PLATED

description	part No.
spring terminals with actuator button female inserts with female contacts male inserts with male contacts	**CSHF 10 S** **CSHM 10 S**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- cURus, CSA, CQC, DNV-GL, BV, EAC pending
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ



contacts side (front view)



- inserts for connectors with the following conductor cross-sectional areas: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping lenght: 9...11 mm

SQUICH®-spring connection technology

WIRING

1



Deeply insert a stripped conductor into a round terminal.

2

Push the actuator button to close the terminal.

RE-OPENING

3



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

CSHF/M 16 S 16 poles + ⏚ 16A - 500V SQUICH®

enclosures:
size “77.27” **page:**

C-TYPE IP65/IP66	402 - 411
C7 IP67, two levers	439 - 440
V-TYPE IP65/IP66, single lever	454 - 458
BIG hoods	470 - 471
T-TYPE IP65 insulating	484 - 485
T-TYPE / W IP66/IP69 insulating	491
HYGIENIC T-TYPE / H IP66/IP69	503
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	508
W-TYPE for aggressive environments	523
E-Xtreme® corrosion proof 534 - 535, 544, 554 - 555	
EMC	580
Central lever	609 - 611
LS-TYPE	622 - 623
IP68	640 - 643

panel supports: **page:**

COB	652 - 653

inserts,
spring terminal connections



STAMPED CONTACTS, SILVER PLATED

description	part No.
spring terminals with actuator button	
female inserts with female contacts	**CSHF 16 S**
male inserts with male contacts	**CSHM 16 S**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- cURus, CSA, CQC, DNV-GL, BV, EAC pending
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ

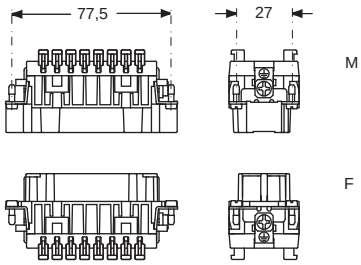

contacts side (front view)



- inserts for connectors with the following conductor cross-sectional areas: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping lenght: 9...11 mm

SQUICH®-spring connection technology

WIRING

1



Deeply insert a stripped conductor into a round terminal.

2

Push the actuator button to close the terminal.

RE-OPENING

3



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

dimensions shown in mm are not binding and may be changed without notice

CSHF/M 24 S 24 poles + ⏚ 16A - 500V SQUICH®

enclosures: size “104.27”	page:
C-TYPE IP65/IP66	412 - 423
C7 IP67, two levers	441 - 442
V-TYPE IP65/IP66, single lever	459 - 463
BIG hoods	472 - 473
T-TYPE IP65 insulating	486 - 487
T-TYPE / W IP66/IP69 insulating	492
HYGIENIC T-TYPE / H IP66/IP69	504
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	509
W-TYPE for aggressive environments	524
E-Xtreme® corrosion proof	536 - 537, 545, 556 - 557
EMC	581
Central lever	612 - 614
LS-TYPE	624 - 625
IP68	644 - 647

panel supports:	page:
COB	652 - 653

inserts, spring terminal connections

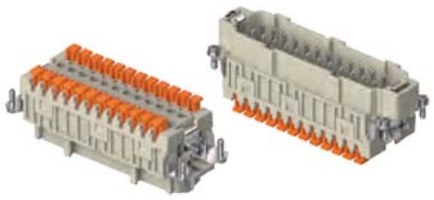

STAMPED CONTACTS, SILVER PLATED

description	part No.
spring terminals with actuator button	
female inserts with female contacts	**CSHF 24 S**
male inserts with male contacts	**CSHM 24 S**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- cURus, CSA, CQC, DNV-GL, BV, EAC pending
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ

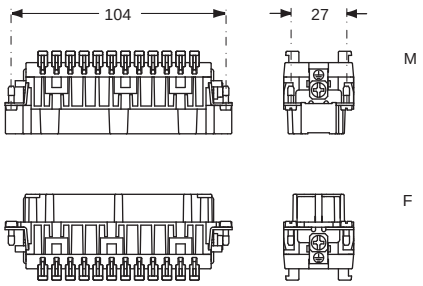

contacts side (front view)



- inserts for connectors with the following conductor cross-sectional areas: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping lenght: 9...11 mm

SQUICH®-spring connection technology

WIRING

1



Deeply insert a stripped conductor into a round terminal.

2

Push the actuator button to close the terminal.

RE-OPENING

3



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

CSHF/M SN 32 poles + ⏚ 16A - 500V SQUICH®

enclosures:
size "77.62" **page:**

C-TYPE IP65/IP66 **424 - 429**
W-TYPE for aggressive environments **525**
E-Xtreme® corrosion proof **546**

inserts,
spring terminal connections

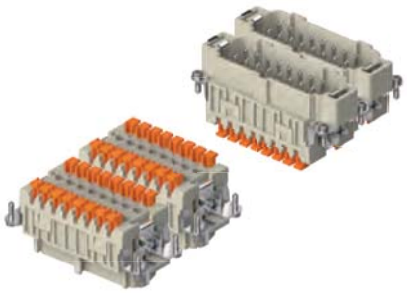

STAMPED CONTACTS, SILVER PLATED

description	part No.	part No.
spring terminals with actuator button female inserts with female contacts, No. (1-16) & (17-32) male inserts with male contacts, No. (1-16) & (17-32)	**CSHF 16 S** **CSHM 16 S**	**CSHF 16 SN** **CSHM 16 SN**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- cURus, CSA, CQC, DNV-GL, BV, EAC pending
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ

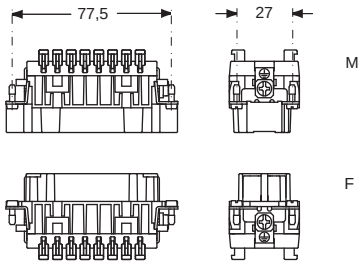

contacts side (front view)

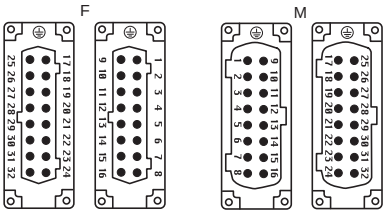

- inserts for connectors with the following conductor cross-sectional areas: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping lenght: 9...11 mm

SQUICH®-spring connection technology

WIRING

1



Deeply insert a stripped conductor into a round terminal.

2

Push the actuator button to close the terminal.

RE-OPENING

3



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

dimensions shown in mm are not binding and may be changed without notice

CSHF/M SN 48 poles + ⏚ 16A - 500V SQUICH®

enclosures:
size "104.62" **page:**

C-TYPE IP65/IP66 **430**
W-TYPE for aggressive environments **526**
E-Xtreme® corrosion proof **547**

inserts,
spring terminal connections

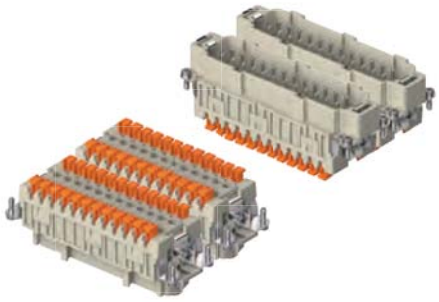

STAMPED CONTACTS, SILVER PLATED

description	part No.	part No.
spring terminals with actuator button female inserts with female contacts, No. (1-24) & (25-48) male inserts with male contacts, No. (1-24) & (25-48)	**CSHF 24 S** **CSHM 24 S**	**CSHF 24 SN** **CSHM 24 SN**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- cURus, CSA, CQC, DNV-GL, BV, EAC pending
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ

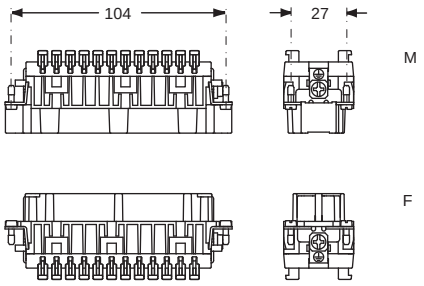

contacts side (front view)

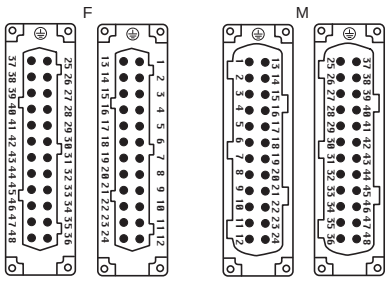

- inserts for connectors with the following conductor cross-sectional areas: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping lenght: 9...11 mm

SQUICH®-spring connection technology

WIRING

1



Deeply insert a stripped conductor into a round terminal.

2

Push the actuator button to close the terminal.

RE-OPENING

3



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

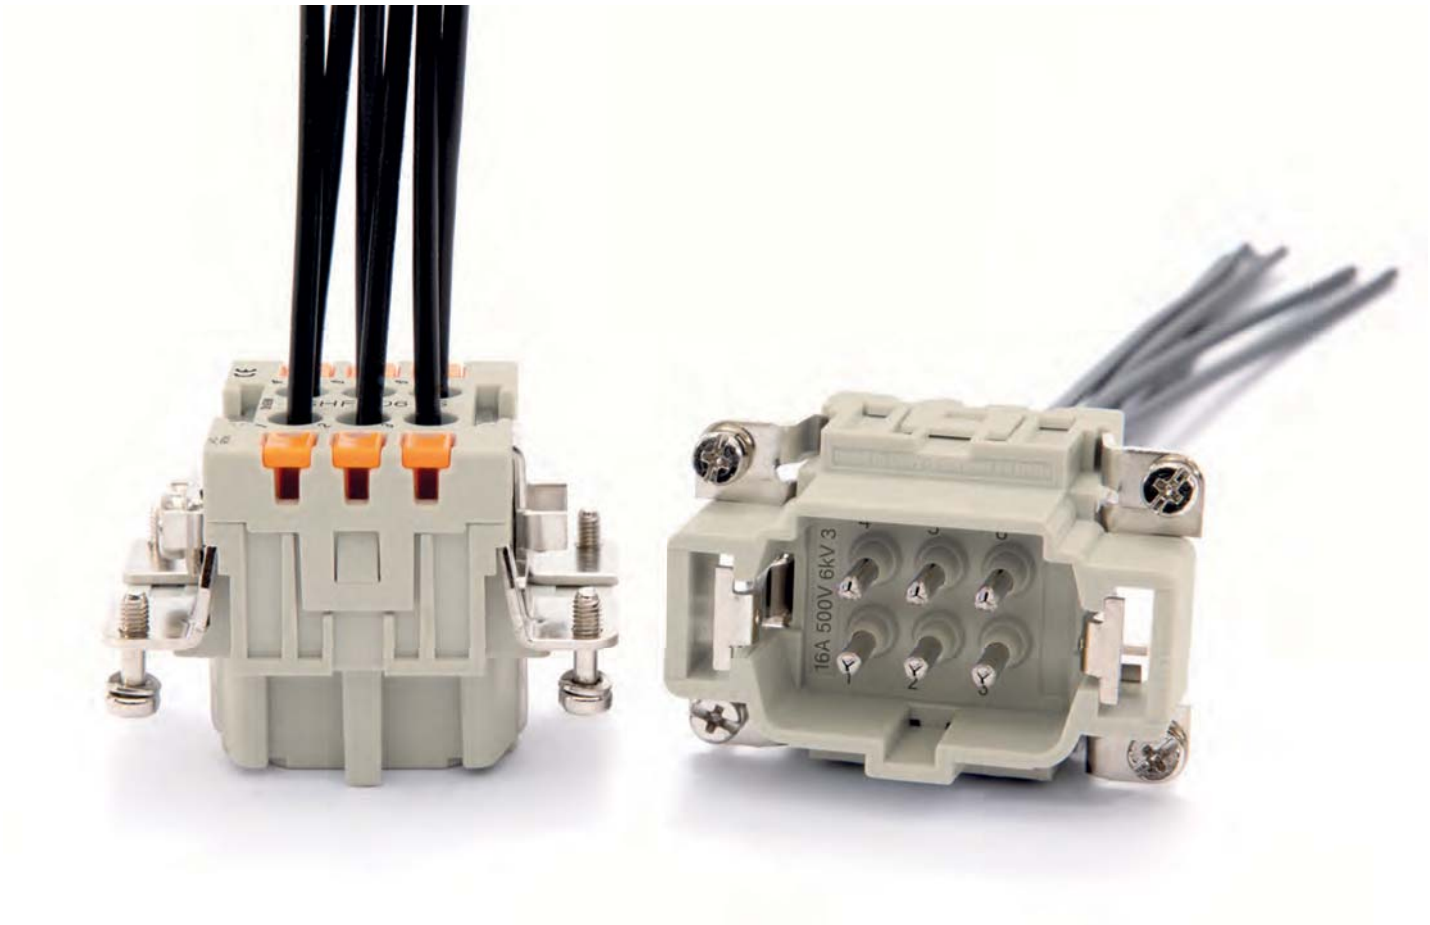
16A 500V 6kV 3

CCE series

TECHNICAL FEATURES

CCE series are the evolution of former CC series for removable crimp contacts CC series, with rated current up to 16A per pole.
It shares the four (six with double inserts) mating interfaces with series: **CNE** (screw-type), **CSH** (spring-type with actuator button, SQUICH® technology), **CSS** (double spring-type), CT (screw-type with 45° terminal block), **CTSE** (spring-type with 45° terminal block).
As for CNE series with former CN series, also CCE series are the result of a complete overhaul of the preceding CC series. Whereas CC series relied upon additional stainless steel spring element to perform contact retention, CCE series applies the modern and equally reliable concept of retention in the insulating body by a resilient element directly obtained in the contact holder. This enhances insulation, simplifies manufacturing and improves reliability.

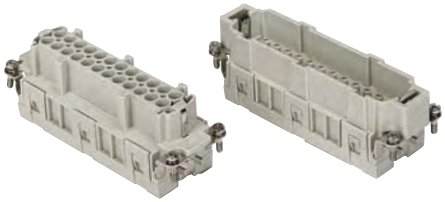

CCE series, through increase of creepage distances, attains as well the **rated voltage increase to 500V from previous 400V value.**
Solid machined crimp contacts and the relevant connector inserts are the preferred option in fields of application subject to high vibration levels, such as railway rolling stock and everywhere transportation and moving parts are foreseen with e.g. motors as potential source of vibration.

Insert series		**CCE**
No. of poles 1)	Main contacts + ⏚	**6, 10, 16, 24, (32 = 2x16), (48 = 2x24)**
	auxiliary contacts	—
Rated current 2)		16A
EN IEC 61984 Pollution degree 3	rated voltage	500V
	rated impulse voltage	6kV
	pollution degree	**3**
EN IEC 61984 Pollution degree 2	rated voltage	400/690V
	rated impulse voltage	6kW
	pollution degree	**2**
UL / CSA certification	rated voltage (a.c./d.c.)	600V
Contact resistance		≤ 1 mΩ
Insulation resistance		≥ 10 GΩ
Ambient temperature limit (°C)	min	-40 °C
	max	70 °C
Degree of protection	with enclosures	**IP65**, **IP66**/IP69, IP66/**IP67**/IP69,IP66/**IP68**/IP69 (according to type and model)
	without enclosures - termination side on male and female inserts - mating side on female inserts	**IP20** (IPXXB)
Conductor connections		crimp
Conductor cross-sectional area	mm^2	0,14 - 4
	AWG	26 - 12
Mechanical endurance (mating cycles)		≥ 500

1) Polarities shown in brackets may be obtained by using two inserts in their own double-sized housings
2) Please check the inserts derating diagrams to establish the actual maximum operating current according to the ambient temperature, the conductor cross-sectional area, the polarity of the connector, and any external constraint may derive e.g. by the continuous operating temperature sustained by the chosen conductor sheathing or by end-product safety standards fixing max allowed temperature rise on terminals (e.g. 30 K, 45 K or 50 K)

CCE 6 poles + ⏚ 16A - 500V

enclosures:
size “44.27” **page:**

C-TYPE IP65/IP66	387 - 392
C7 IP67, single lever	436 - 437
V-TYPE IP65/IP66, single lever	444 - 447
BIG hoods	466 - 467
T-TYPE IP65 insulating	480 - 481
T-TYPE / W IP66/IP69 insulating	489
HYGIENIC T-TYPE / H IP66/IP69	501
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	506
W-TYPE for aggressive environments	521
E-Xtreme® corrosion proof 530 - 531, 542, 550 - 551	
EMC	578
Central lever	603 - 605
LS-TYPE	618 - 619
IP68	632 - 635

panel supports: **page:**

COB	652 - 653

inserts, crimp connections

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CCEF 06**	
male inserts for male contacts	**CCEM 06**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCFA 0.3** / **CCFD 0.3**
0,5 mm² AWG 20 with no grooves		**CCFA 0.5** / **CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCFA 0.7** / **CCFD 0.7**
1 mm² AWG 18 one groove		**CCFA 1.0** / **CCFD 1.0**
1,5 mm² AWG 16 two grooves		**CCFA 1.5** / **CCFD 1.5**
2,5 mm² AWG 14 three grooves		**CCFA 2.5** / **CCFD 2.5**
3 mm² AWG 12 one wide groove		**CCFA 3.0** / **CCFD 3.0**
4 mm² AWG 12 with no grooves		**CCFA 4.0** / **CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCMA 0.3** / **CCMD 0.3**
0,5 mm² AWG 20 with no grooves		**CCMA 0.5** / **CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCMA 0.7** / **CCMD 0.7**
1 mm² AWG 18 one groove		**CCMA 1.0** / **CCMD 1.0**
1,5 mm² AWG 16t wo grooves		**CCMA 1.5** / **CCMD 1.5**
2,5 mm² AWG 14 three grooves		**CCMA 2.5** / **CCMD 2.5**
3 mm² AWG 12 one wide groove		**CCMA 3.0** / **CCMD 3.0**
4 mm² AWG 12 with no grooves		**CCMA 4.0** / **CCMD 4.0**
16A male crimp contacts for advanced opening		
0,5 mm² AWG 20 with no grooves		**CC 0.5 AN**
0,75 mm² AWG 18 one groove (back side)		**CC 0.7 AN**
1 mm² AWG 18 one groove		**CC 1.0 AN**
1,5 mm² AWG 16 two grooves		**CC 1.5 AN**
2,5 mm² AWG 14 three grooves		**CC 2.5 AN**

silver plated | **gold plated+**

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CCE 06 poles connector inserts
Maximum current load derating diagram

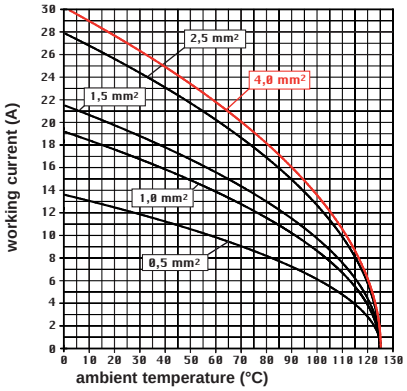



contacts side (front view)



- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF and CCM



CC...AN



CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

CCE 10 poles + ⏚ 16A - 500V

enclosures:
size "57.27" **page:**

C-TYPE IP65/IP66	393 - 401
C7 IP67, two levers	438
V-TYPE IP65/IP66, single lever	448 - 453
BIG hoods	468 - 469
T-TYPE IP65 insulating	482 - 483
T-TYPE / W IP66/IP69 insulating	490
HYGIENIC T-TYPE / H IP66/IP69	502
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	507
W-TYPE for aggressive environments	522
E-Xtreme® corrosion proof 532 - 533, 543, 552 - 553	
EMC	579
Central lever	606 - 608
LS-TYPE	620 - 621
IP68	636 - 639

panel supports: **page:**

COB	652 - 653

inserts, crimp connections

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description			part No.	part No. silver plated	part No. gold plated+
without contacts (to be ordered separately)					
female inserts for female contacts			**CCEF 10**		
male inserts for male contacts			**CCEM 10**		
16A female contacts					
0,14-0,37 mm²	AWG 26-22	one groove		**CCFA 0.3**	**CCFD 0.3**
0,5 mm²	AWG 20	with no grooves		**CCFA 0.5**	**CCFD 0.5**
0,75 mm²	AWG 18	one groove (back side)		**CCFA 0.7**	**CCFD 0.7**
1 mm²	AWG 18	one groove		**CCFA 1.0**	**CCFD 1.0**
1,5 mm²	AWG 16	two grooves		**CCFA 1.5**	**CCFD 1.5**
2,5 mm²	AWG 14	three grooves		**CCFA 2.5**	**CCFD 2.5**
3 mm²	AWG 12	one wide groove		**CCFA 3.0**	**CCFD 3.0**
4 mm²	AWG 12	with no grooves		**CCFA 4.0**	**CCFD 4.0**
16A male contacts					
0,14-0,37 mm²	AWG 26-22	one groove		**CCMA 0.3**	**CCMD 0.3**
0,5 mm²	AWG 20	with no grooves		**CCMA 0.5**	**CCMD 0.5**
0,75 mm²	AWG 18	one groove (back side)		**CCMA 0.7**	**CCMD 0.7**
1 mm²	AWG 18	one groove		**CCMA 1.0**	**CCMD 1.0**
1,5 mm²	AWG 16t	wo grooves		**CCMA 1.5**	**CCMD 1.5**
2,5 mm²	AWG 14	three grooves		**CCMA 2.5**	**CCMD 2.5**
3 mm²	AWG 12	one wide groove		**CCMA 3.0**	**CCMD 3.0**
4 mm²	AWG 12	with no grooves		**CCMA 4.0**	**CCMD 4.0**
16A male crimp contacts for advanced opening					
0,5 mm²	AWG 20	with no grooves		**CC 0.5 AN**	
0,75 mm²	AWG 18	one groove (back side)		**CC 0.7 AN**	
1 mm²	AWG 18	one groove		**CC 1.0 AN**	
1,5 mm²	AWG 16	two grooves		**CC 1.5 AN**	
2,5 mm²	AWG 14	three grooves		**CC 2.5 AN**	

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CCE 10 poles connector inserts
Maximum current load derating diagram

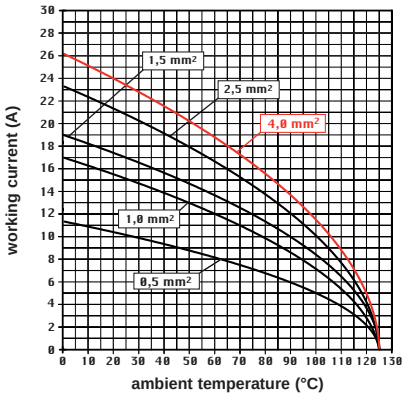



contacts side (front view)



- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF and CCM

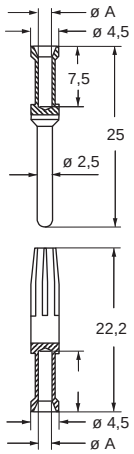

CC...AN



CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CCE 16 poles + ⏚ 16A - 500V

enclosures:
size "77.27"

	page:
C-TYPE IP65/IP66	402 - 411
C7 IP67, two levers	439 - 440
V-TYPE IP65/IP66, single lever	454 - 458
BIG hoods	470 - 471
T-TYPE IP65 insulating	484 - 485
T-TYPE / W IP66/IP69 insulating	491
HYGIENIC T-TYPE / H IP66/IP69	503
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	508
W-TYPE for aggressive environments	523
E-Xtreme® corrosion proof 534 - 535, 544, 554 - 555	
EMC	580
Central lever	609 - 611
LS-TYPE	622 - 623
IP68	640 - 643

panel supports:

	page:
COB	652 - 653

inserts, crimp connections

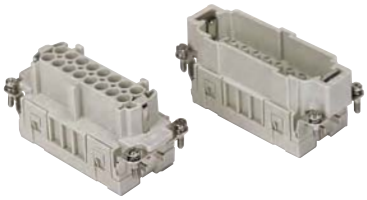

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CCEF 16**	
male inserts for male contacts	**CCEM 16**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCFA 0.3** / **CCFD 0.3**
0,5 mm² AWG 20 with no grooves		**CCFA 0.5** / **CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCFA 0.7** / **CCFD 0.7**
1 mm² AWG 18 one groove		**CCFA 1.0** / **CCFD 1.0**
1,5 mm² AWG 16 two grooves		**CCFA 1.5** / **CCFD 1.5**
2,5 mm² AWG 14 three grooves		**CCFA 2.5** / **CCFD 2.5**
3 mm² AWG 12 one wide groove		**CCFA 3.0** / **CCFD 3.0**
4 mm² AWG 12 with no grooves		**CCFA 4.0** / **CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCMA 0.3** / **CCMD 0.3**
0,5 mm² AWG 20 with no grooves		**CCMA 0.5** / **CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCMA 0.7** / **CCMD 0.7**
1 mm² AWG 18 one groove		**CCMA 1.0** / **CCMD 1.0**
1,5 mm² AWG 16t wo grooves		**CCMA 1.5** / **CCMD 1.5**
2,5 mm² AWG 14 three grooves		**CCMA 2.5** / **CCMD 2.5**
3 mm² AWG 12 one wide groove		**CCMA 3.0** / **CCMD 3.0**
4 mm² AWG 12 with no grooves		**CCMA 4.0** / **CCMD 4.0**
16A male crimp contacts for advanced opening		
0,5 mm² AWG 20 with no grooves		**CC 0.5 AN**
0,75 mm² AWG 18 one groove (back side)		**CC 0.7 AN**
1 mm² AWG 18 one groove		**CC 1.0 AN**
1,5 mm² AWG 16 two grooves		**CC 1.5 AN**
2,5 mm² AWG 14 three grooves		**CC 2.5 AN**

silver plated

gold plated+

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CCE 16 poles connector inserts
Maximum current load derating diagram

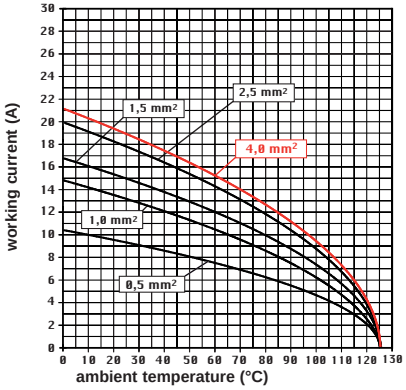

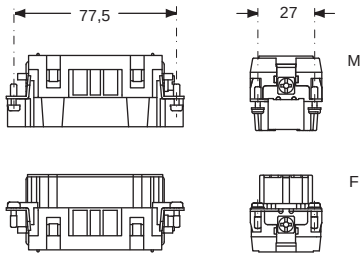

contacts side (front view)



- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF and CCM



CC...AN



CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

CCE 24 poles + ⏚ 16A - 500V

enclosures:
size "104.27" **page:**

C-TYPE IP65/IP66	412 - 423
C7 IP67, two levers	441 - 442
V-TYPE IP65/IP66, single lever	459 - 463
BIG hoods	472 - 473
T-TYPE IP65 insulating	486 - 487
T-TYPE / W IP66/IP69 insulating	492
HYGIENIC T-TYPE / H IP66/IP69	504
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	509
W-TYPE for aggressive environments	524
E-Xtreme® corrosion proof 536 - 537, 545, 556 - 557	
EMC	581
Central lever	612 - 614
LS-TYPE	624 - 625
IP68	644 - 647

panel supports: **page:**

COB	652 - 653

inserts, crimp connections

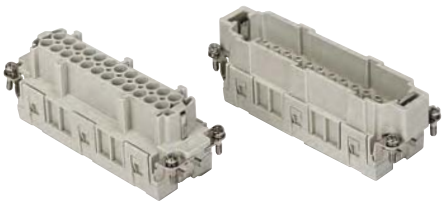

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CCEF 24**	
male inserts for male contacts	**CCEM 24**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove	**CCFA 0.3**	**CCFD 0.3**
0,5 mm² AWG 20 with no grooves	**CCFA 0.5**	**CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)	**CCFA 0.7**	**CCFD 0.7**
1 mm² AWG 18 one groove	**CCFA 1.0**	**CCFD 1.0**
1,5 mm² AWG 16 two grooves	**CCFA 1.5**	**CCFD 1.5**
2,5 mm² AWG 14 three grooves	**CCFA 2.5**	**CCFD 2.5**
3 mm² AWG 12 one wide groove	**CCFA 3.0**	**CCFD 3.0**
4 mm² AWG 12 with no grooves	**CCFA 4.0**	**CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove	**CCMA 0.3**	**CCMD 0.3**
0,5 mm² AWG 20 with no grooves	**CCMA 0.5**	**CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)	**CCMA 0.7**	**CCMD 0.7**
1 mm² AWG 18 one groove	**CCMA 1.0**	**CCMD 1.0**
1,5 mm² AWG 16t wo grooves	**CCMA 1.5**	**CCMD 1.5**
2,5 mm² AWG 14 three grooves	**CCMA 2.5**	**CCMD 2.5**
3 mm² AWG 12 one wide groove	**CCMA 3.0**	**CCMD 3.0**
4 mm² AWG 12 with no grooves	**CCMA 4.0**	**CCMD 4.0**
16A male crimp contacts for advanced opening		
0,5 mm² AWG 20 with no grooves	**CC 0.5 AN**	
0,75 mm² AWG 18 one groove (back side)	**CC 0.7 AN**	
1 mm² AWG 18 one groove	**CC 1.0 AN**	
1,5 mm² AWG 16 two grooves	**CC 1.5 AN**	
2,5 mm² AWG 14 three grooves	**CC 2.5 AN**	

silver plated | **gold plated+**

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CCE 24 poles connector inserts
Maximum current load derating diagram

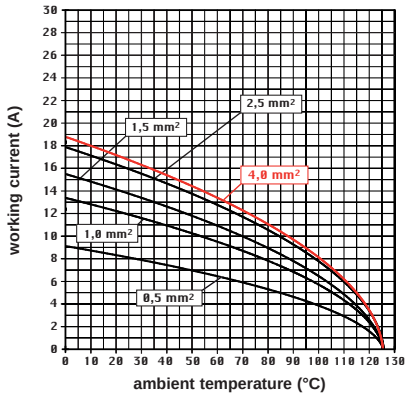

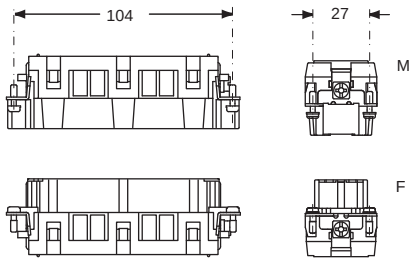

contacts side (front view)



- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF and CCM

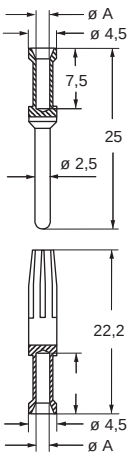

CC...AN



CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CCE 32 poles + ⏚ 16A - 500V

enclosures:
size "77.62" **page:**

C-TYPE IP65/IP66	**424 - 429**
W-TYPE for aggressive environments	**525**
E-Xtreme® corrosion proof	**546**

inserts, crimp connections

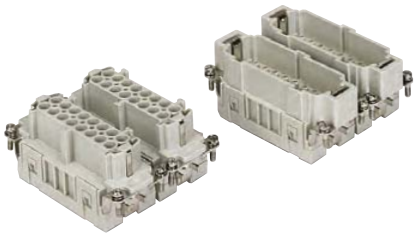

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.	part No.		part No.	
without contacts (to be ordered separately)						
female inserts for female contacts, No. (1-16) and (17-32)	**CCEF 16**		**CCEF 16 N**			
male inserts for male contacts, No. (1-16) and (17-32)	**CCEM 16**		**CCEM 16 N**			
16A female contacts						
0,14-0,37 mm²	AWG 26-22	one groove			**CCFA 0.3**	**CCFD 0.3**
0,5 mm²	AWG 20	with no grooves			**CCFA 0.5**	**CCFD 0.5**
0,75 mm²	AWG 18	one groove (back side)			**CCFA 0.7**	**CCFD 0.7**
1 mm²	AWG 18	one groove			**CCFA 1.0**	**CCFD 1.0**
1,5 mm²	AWG 16	two grooves			**CCFA 1.5**	**CCFD 1.5**
2,5 mm²	AWG 14	three grooves			**CCFA 2.5**	**CCFD 2.5**
3 mm²	AWG 12	one wide groove			**CCFA 3.0**	**CCFD 3.0**
4 mm²	AWG 12	with no grooves			**CCFA 4.0**	**CCFD 4.0**
16A male contacts						
0,14-0,37 mm²	AWG 26-22	one groove			**CCMA 0.3**	**CCMD 0.3**
0,5 mm²	AWG 20	with no grooves			**CCMA 0.5**	**CCMD 0.5**
0,75 mm²	AWG 18	one groove (back side)			**CCMA 0.7**	**CCMD 0.7**
1 mm²	AWG 18	one groove			**CCMA 1.0**	**CCMD 1.0**
1,5 mm²	AWG 16t	wo grooves			**CCMA 1.5**	**CCMD 1.5**
2,5 mm²	AWG 14	three grooves			**CCMA 2.5**	**CCMD 2.5**
3 mm²	AWG 12	one wide groove			**CCMA 3.0**	**CCMD 3.0**
4 mm²	AWG 12	with no grooves			**CCMA 4.0**	**CCMD 4.0**
16A male crimp contacts for advanced opening						
0,5 mm²	AWG 20	with no grooves			**CC 0.5 AN**	
0,75 mm²	AWG 18	one groove (back side)			**CC 0.7 AN**	
1 mm²	AWG 18	one groove			**CC 1.0 AN**	
1,5 mm²	AWG 16	two grooves			**CC 1.5 AN**	
2,5 mm²	AWG 14	three grooves			**CC 2.5 AN**	

silver plated

gold plated+

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CCE 32 poles connector inserts
Maximum current load derating diagram

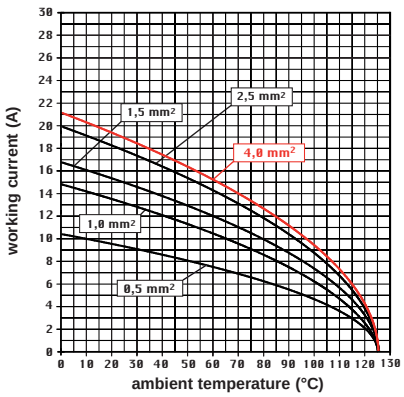



contacts side (front view)

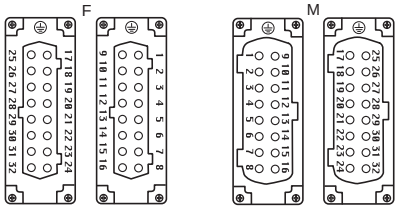

- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF and CCM



CC...AN



CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

CCE 48 poles + ⏚ 16A - 500V

enclosures:
size "104.62" **page:**

C-TYPE IP65/IP66	**430**
W-TYPE for aggressive environments	**526**
E-Xtreme® corrosion proof	**547**

inserts, crimp connections

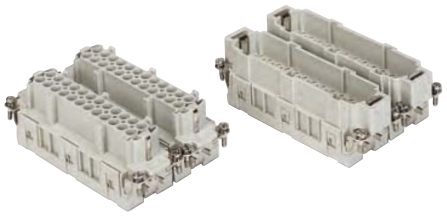

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.	part No.		part No.	
without contacts (to be ordered separately)						
female inserts for female contacts, No. (1-24) and (25-48)	**CCEF 24**	**CCEF 24 N**				
male inserts for male contacts, No. (1-24) and (25-48)	**CCEM 24**	**CCEM 24 N**				
16A female contacts						
0,14-0,37 mm²	AWG 26-22	one groove	**CCFA 0.3**		**CCFD 0.3**	
0,5 mm²	AWG 20	with no grooves	**CCFA 0.5**		**CCFD 0.5**	
0,75 mm²	AWG 18	one groove (back side)	**CCFA 0.7**		**CCFD 0.7**	
1 mm²	AWG 18	one groove	**CCFA 1.0**		**CCFD 1.0**	
1,5 mm²	AWG 16	two grooves	**CCFA 1.5**		**CCFD 1.5**	
2,5 mm²	AWG 14	three grooves	**CCFA 2.5**		**CCFD 2.5**	
3 mm²	AWG 12	one wide groove	**CCFA 3.0**		**CCFD 3.0**	
4 mm²	AWG 12	with no grooves	**CCFA 4.0**		**CCFD 4.0**	
16A male contacts						
0,14-0,37 mm²	AWG 26-22	one groove	**CCMA 0.3**		**CCMD 0.3**	
0,5 mm²	AWG 20	with no grooves	**CCMA 0.5**		**CCMD 0.5**	
0,75 mm²	AWG 18	one groove (back side)	**CCMA 0.7**		**CCMD 0.7**	
1 mm²	AWG 18	one groove	**CCMA 1.0**		**CCMD 1.0**	
1,5 mm²	AWG 16t	wo grooves	**CCMA 1.5**		**CCMD 1.5**	
2,5 mm²	AWG 14	three grooves	**CCMA 2.5**		**CCMD 2.5**	
3 mm²	AWG 12	one wide groove	**CCMA 3.0**		**CCMD 3.0**	
4 mm²	AWG 12	with no grooves	**CCMA 4.0**		**CCMD 4.0**	
16A male crimp contacts for advanced opening						
0,5 mm²	AWG 20	with no grooves	**CC 0.5 AN**			
0,75 mm²	AWG 18	one groove (back side)	**CC 0.7 AN**			
1 mm²	AWG 18	one groove	**CC 1.0 AN**			
1,5 mm²	AWG 16	two grooves	**CC 1.5 AN**			
2,5 mm²	AWG 14	three grooves	**CC 2.5 AN**			

silver plated | **gold plated+**

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CCE 48 poles connector inserts
Maximum current load derating diagram

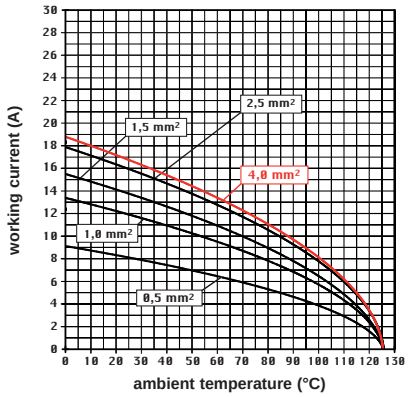

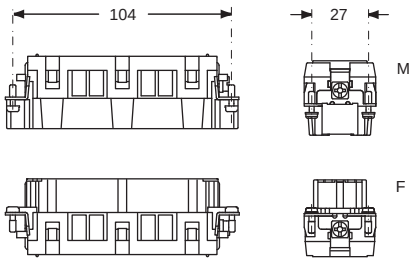

contacts side (front view)

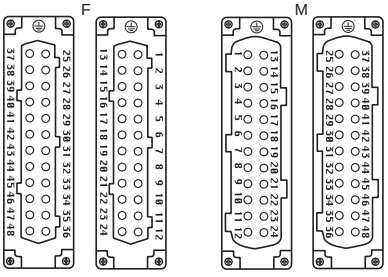

- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF and CCM



CC...AN



CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CMSH-SQUICH® 3 + 2 (aux) poles + ⏚ 16A - 830V

enclosures:
size "57.27" **page:**

C-TYPE IP65/IP66	393 - 401
C7 IP67, two levers	438
V-TYPE IP65/IP66, single lever	448 - 453
BIG hoods	468 - 469
T-TYPE IP65 insulating	482 - 483
T-TYPE / W IP66/IP69 insulating	490
HYGIENIC T-TYPE / H IP66/IP69	502
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	507
W-TYPE for aggressive environments	522
E-Xtreme® corrosion proof 532 - 533, 543, 552 - 553	
EMC	579
Central lever	606 - 608
LS-TYPE	620 - 621
IP68	636 - 639

panel supports: **page:**
COB 652 - 653

inserts,
spring terminal connection without tools



SILVER PLATED CONTACTS

description	part No.
spring terminals with actuator button female inserts with female contacts male inserts with male contacts	**CMSHF 03** **CMSHM 03**

- characteristics according to EN 61984:
  16A 830V 8kV 3
  16A 1000V 8kV 2
  16A 720/1250V 8kV 2
- auxiliary contacts: **16A 500V 6kV 3**
- c UL us (UL for USA and Canada), DNV·GL BUREAU VERITAS
  EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



◑ the auxiliary contacts are in the forward position upon opening

- inserts for section conductors:
  0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping lenght: 9...11 mm

CMSH 03 poles connector inserts
Maximum current load derating diagram

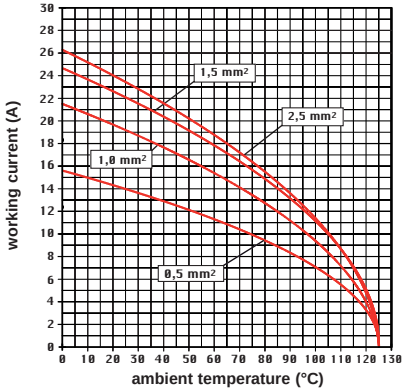

SQUICH®-spring connection technology

WIRING

1



Deeply insert a stripped conductor into a round terminal.

2

Push the actuator button to close the terminal.

RE-OPENING

3



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

dimensions shown in mm are not binding and may be changed without notice

CMCE 3 + 2 (aux) poles + ⏚ 16A - 830V

enclosures:
size "57.27"

	page:
C-TYPE IP65/IP66	393 - 401
C7 IP67, two levers	438
V-TYPE IP65/IP66, single lever	448 - 453
BIG hoods	468 - 469
T-TYPE IP65 insulating	482 - 483
T-TYPE / W IP66/IP69 insulating	490
HYGIENIC T-TYPE / H IP66/IP69	502
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	507
W-TYPE for aggressive environments	522
E-Xtreme® corrosion proof 532 - 533, 543, 552 - 553	
EMC	579
Central lever	606 - 608
LS-TYPE	620 - 621
IP68	636 - 639

panel supports:

	page:
COB	652 - 653

inserts, crimp connections

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CMCEF 03**	
male inserts for male contacts	**CMCEM 03**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCFA 0.3** / **CCFD 0.3**
0,5 mm² AWG 20 with no grooves		**CCFA 0.5** / **CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCFA 0.7** / **CCFD 0.7**
1 mm² AWG 18 one groove		**CCFA 1.0** / **CCFD 1.0**
1,5 mm² AWG 16 two grooves		**CCFA 1.5** / **CCFD 1.5**
2,5 mm² AWG 14 three grooves		**CCFA 2.5** / **CCFD 2.5**
3 mm² AWG 12 one wide groove		**CCFA 3.0** / **CCFD 3.0**
4 mm² AWG 12 with no grooves		**CCFA 4.0** / **CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCMA 0.3** / **CCMD 0.3**
0,5 mm² AWG 20 with no grooves		**CCMA 0.5** / **CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCMA 0.7** / **CCMD 0.7**
1 mm² AWG 18 one groove		**CCMA 1.0** / **CCMD 1.0**
1,5 mm² AWG 16t wo grooves		**CCMA 1.5** / **CCMD 1.5**
2,5 mm² AWG 14 three grooves		**CCMA 2.5** / **CCMD 2.5**
3 mm² AWG 12 one wide groove		**CCMA 3.0** / **CCMD 3.0**
4 mm² AWG 12 with no grooves		**CCMA 4.0** / **CCMD 4.0**
16A male crimp contacts for advanced opening		
0,5 mm² AWG 20 with no grooves		**CC 0.5 AN**
0,75 mm² AWG 18 one groove (back side)		**CC 0.7 AN**
1 mm² AWG 18 one groove		**CC 1.0 AN**
1,5 mm² AWG 16 two grooves		**CC 1.5 AN**
2,5 mm² AWG 14 three grooves		**CC 2.5 AN**

silver plated

gold plated+

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 830V 8kV 3
  16A 1000V 8kV 2
  16A 720/1250V 8kV 2
- auxiliary contacts: **16A 500V 6kV 3**
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CMCE 03 poles connector inserts
Maximum current load derating diagram

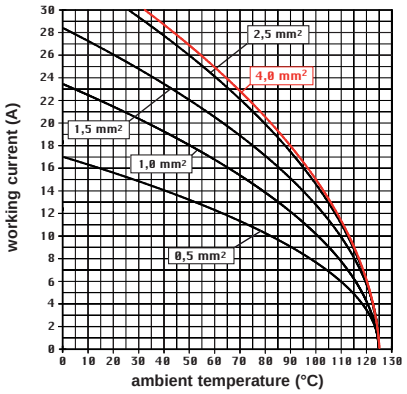



contacts side (front view)



◑ the auxiliary contacts are in the forward position upon opening

- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF and CCM





CC...AN



CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CMSH-SQUICH® 6 + 2 (aux) poles + ⏚ 16A - 830V

enclosures:
size "77.27" **page:**

C-TYPE IP65/IP66	402 - 411
C7 IP67, two levers	439 - 440
V-TYPE IP65/IP66, single lever	454 - 458
BIG hoods	470 - 471
T-TYPE IP65 insulating	484 - 485
T-TYPE / W IP66/IP69 insulating	491
HYGIENIC T-TYPE / H IP66/IP69	503
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	508
W-TYPE for aggressive environments	523
E-Xtreme® corrosion proof 534 - 535, 544, 554 - 555	
EMC	580
Central lever	609 - 611
LS-TYPE	622 - 623
IP68	640 - 643

panel supports: **page:**

COB	652 - 653

inserts,
spring terminal connection without tools

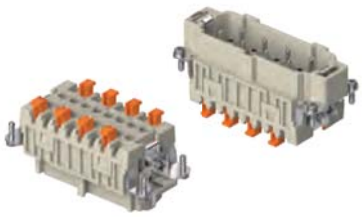

SILVER PLATED CONTACTS

description	part No.
spring terminals with actuator button female inserts with female contacts male inserts with male contacts	**CMSHF 06** **CMSHM 06**

- characteristics according to EN 61984:
  16A 830V 8kV 3
  16A 1000V 8kV 2
  16A 720/1250V 8kV 2
- auxiliary contacts: **16A 500V 6kV 3**
- c UL us (UL for USA and Canada), DNV·GL BUREAU VERITAS
  EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

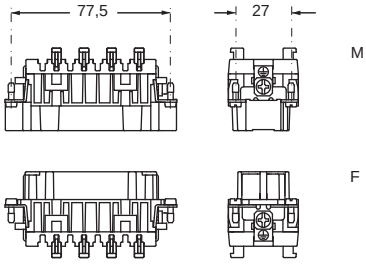

contacts side (front view)



◑ the auxiliary contacts are in the forward position upon opening

- inserts for section conductors:
  0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping lenght: 9...11 mm

CMSH 06 poles connector inserts
Maximum current load derating diagram

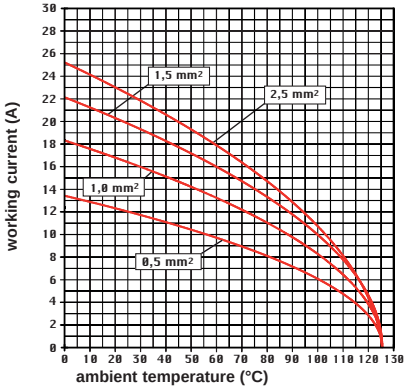

SQUICH®-spring connection technology

WIRING

1



Deeply insert a stripped conductor into a round terminal.

2

Push the actuator button to close the terminal.

RE-OPENING

3



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

dimensions shown in mm are not binding and may be changed without notice

CMCE 6 + 2 (aux) poles + ⏚ 16A - 830V

enclosures:
size "77.27" **page:**

C-TYPE IP65/IP66	402 - 411
C7 IP67, two levers	439 - 440
V-TYPE IP65/IP66, single lever	454 - 458
BIG hoods	470 - 471
T-TYPE IP65 insulating	484 - 485
T-TYPE / W IP66/IP69 insulating	491
HYGIENIC T-TYPE / H IP66/IP69	503
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	508
W-TYPE for aggressive environments	523
E-Xtreme® corrosion proof 534 - 535, 544, 554 - 555	
EMC	580
Central lever	609 - 611
LS-TYPE	622 - 623
IP68	640 - 643

panel supports: **page:**
COB 652 - 653

inserts, crimp connections

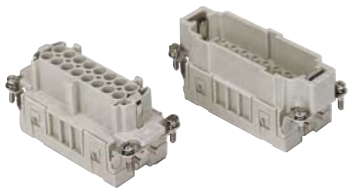

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CMCEF 06**	
male inserts for male contacts	**CMCEM 06**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCFA 0.3** / **CCFD 0.3**
0,5 mm² AWG 20 with no grooves		**CCFA 0.5** / **CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCFA 0.7** / **CCFD 0.7**
1 mm² AWG 18 one groove		**CCFA 1.0** / **CCFD 1.0**
1,5 mm² AWG 16 two grooves		**CCFA 1.5** / **CCFD 1.5**
2,5 mm² AWG 14 three grooves		**CCFA 2.5** / **CCFD 2.5**
3 mm² AWG 12 one wide groove		**CCFA 3.0** / **CCFD 3.0**
4 mm² AWG 12 with no grooves		**CCFA 4.0** / **CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCMA 0.3** / **CCMD 0.3**
0,5 mm² AWG 20 with no grooves		**CCMA 0.5** / **CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCMA 0.7** / **CCMD 0.7**
1 mm² AWG 18 one groove		**CCMA 1.0** / **CCMD 1.0**
1,5 mm² AWG 16t wo grooves		**CCMA 1.5** / **CCMD 1.5**
2,5 mm² AWG 14 three grooves		**CCMA 2.5** / **CCMD 2.5**
3 mm² AWG 12 one wide groove		**CCMA 3.0** / **CCMD 3.0**
4 mm² AWG 12 with no grooves		**CCMA 4.0** / **CCMD 4.0**
16A male crimp contacts for advanced opening		
0,5 mm² AWG 20 with no grooves		**CC 0.5 AN**
0,75 mm² AWG 18 one groove (back side)		**CC 0.7 AN**
1 mm² AWG 18 one groove		**CC 1.0 AN**
1,5 mm² AWG 16 two grooves		**CC 1.5 AN**
2,5 mm² AWG 14 three grooves		**CC 2.5 AN**

silver plated | **gold plated**+

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 830V 8kV 3
  16A 1000V 8kV 2
  16A 720/1250V 8kV 2
- auxiliary contacts: **16A 500V 6kV 3**
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CMCE 06 poles connector inserts
Maximum current load derating diagram

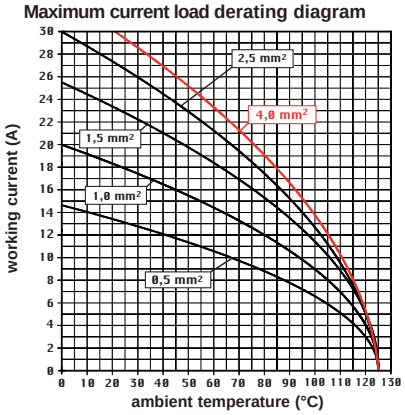

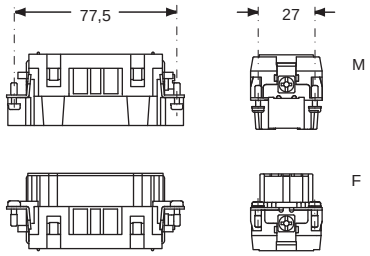

contacts side (front view)



◑ the auxiliary contacts are in the forward position upon opening

- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF and CCM





CC...AN



CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CMSH-SQUICH® 10 + 2 (aux) poles + ⏚ 16A - 830V

enclosures:
size "104.27" **page:**

C-TYPE IP65/IP66	412 - 423
C7 IP67, two levers	441 - 442
V-TYPE IP65/IP66, single lever	459 - 463
BIG hoods	472 - 473
T-TYPE IP65 insulating	486 - 487
T-TYPE / W IP66/IP69 insulating	492
HYGIENIC T-TYPE / H IP66/IP69	504
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	509
W-TYPE for aggressive environments	524
E-Xtreme® corrosion proof 536 - 537, 545, 556 - 557	
EMC	581
Central lever	612 - 614
LS-TYPE	624 - 625
IP68	644 - 647

panel supports: **page:**

COB	652 - 653

inserts,
spring terminal connection without tools

SILVER PLATED CONTACTS

description	part No.
spring terminals with actuator button female inserts with female contacts male inserts with male contacts	**CMSHF 10** **CMSHM 10**

- characteristics according to EN 61984:
  16A 830V 8kV 3
  16A 1000V 8kV 2
  16A 720/1250V 8kV 2
- auxiliary contacts: **16A 500V 6kV 3**
- c UL us (UL for USA and Canada), DNV·GL BUREAU VERITAS
  EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

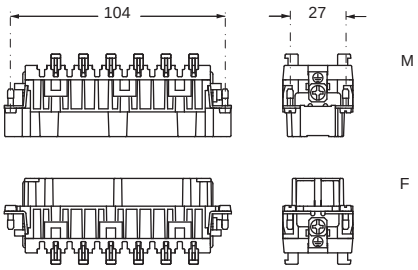

contacts side (front view)



◑ the auxiliary contacts are in the forward position upon opening

- inserts for section conductors: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping lenght: 9...11 mm

CMSH 10 poles connector inserts
Maximum current load derating diagram

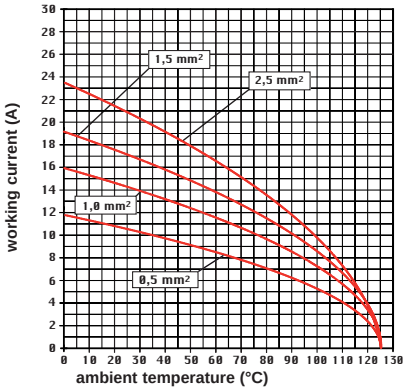

SQUICH®-spring connection technology

WIRING

1



Deeply insert a stripped conductor into a round terminal.

2

Push the actuator button to close the terminal.

RE-OPENING

3



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

dimensions shown in mm are not binding and may be changed without notice

CMCE 10 + 2 (aux) poles + ⏚ 16A - 830V

enclosures:
size "104.27" **page:**

C-TYPE IP65/IP66	412 - 423
C7 IP67, two levers	441 - 442
V-TYPE IP65/IP66, single lever	459 - 463
BIG hoods	472 - 473
T-TYPE IP65 insulating	486 - 487
T-TYPE / W IP66/IP69 insulating	492
HYGIENIC T-TYPE / H IP66/IP69	504
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	509
W-TYPE for aggressive environments	524
E-Xtreme® corrosion proof 536 - 537, 545, 556 - 557	
EMC	581
Central lever	612 - 614
LS-TYPE	624 - 625
IP68	644 - 647

panel supports: **page:**

COB	652 - 653

inserts, crimp connections

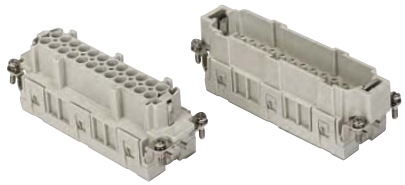

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CMCEF 10**	
male inserts for male contacts	**CMCEM 10**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove	**CCFA 0.3**	**CCFD 0.3**
0,5 mm² AWG 20 with no grooves	**CCFA 0.5**	**CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)	**CCFA 0.7**	**CCFD 0.7**
1 mm² AWG 18 one groove	**CCFA 1.0**	**CCFD 1.0**
1,5 mm² AWG 16 two grooves	**CCFA 1.5**	**CCFD 1.5**
2,5 mm² AWG 14 three grooves	**CCFA 2.5**	**CCFD 2.5**
3 mm² AWG 12 one wide groove	**CCFA 3.0**	**CCFD 3.0**
4 mm² AWG 12 with no grooves	**CCFA 4.0**	**CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove	**CCMA 0.3**	**CCMD 0.3**
0,5 mm² AWG 20 with no grooves	**CCMA 0.5**	**CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)	**CCMA 0.7**	**CCMD 0.7**
1 mm² AWG 18 one groove	**CCMA 1.0**	**CCMD 1.0**
1,5 mm² AWG 16t wo grooves	**CCMA 1.5**	**CCMD 1.5**
2,5 mm² AWG 14 three grooves	**CCMA 2.5**	**CCMD 2.5**
3 mm² AWG 12 one wide groove	**CCMA 3.0**	**CCMD 3.0**
4 mm² AWG 12 with no grooves	**CCMA 4.0**	**CCMD 4.0**
16A male crimp contacts for advanced opening		
0,5 mm² AWG 20 with no grooves	**CC 0.5 AN**	
0,75 mm² AWG 18 one groove (back side)	**CC 0.7 AN**	
1 mm² AWG 18 one groove	**CC 1.0 AN**	
1,5 mm² AWG 16 two grooves	**CC 1.5 AN**	
2,5 mm² AWG 14 three grooves	**CC 2.5 AN**	

silver plated

gold plated+

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 830V 8kV 3
  16A 1000V 8kV 2
  16A 720/1250V 8kV 2
- auxiliary contacts: **16A 500V 6kV 3**
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CMCE 10 poles connector inserts
Maximum current load derating diagram

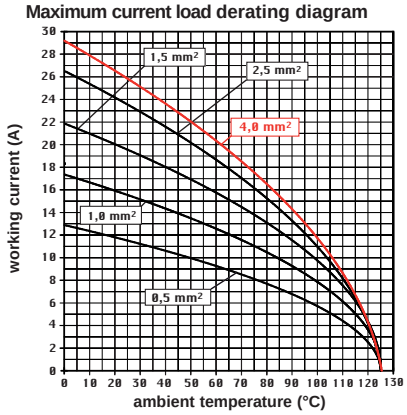

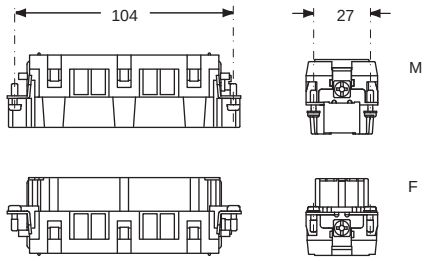

contacts side (front view)



◑ the auxiliary contacts are in the forward position upon opening

- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF and CCM



CC...AN



CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CMSH-SQUICH® 12 + 4 (aux) poles + ⏚ 16A - 830V

enclosures:
size "77.62" **page:**

C-TYPE IP65/IP66	**424 - 429**
W-TYPE for aggressive environments	**525**
E-Xtreme® corrosion proof	**546**

inserts,
spring terminal connection without tools

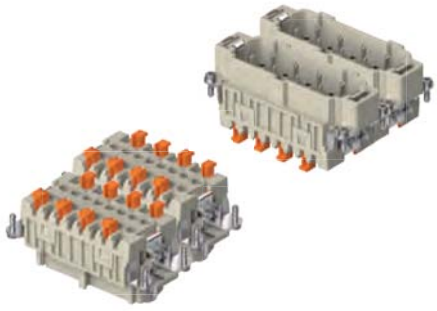

SILVER PLATED CONTACTS

description	part No.	part No.
spring terminals with actuator button female inserts with female contacts, No. (1-16) and (17-32) male inserts with male contacts, No. (1-16) and (17-32)	**CMSHF 06** **CMSHM 06**	**CMSHF 06 N** **CMSHM 06 N**

- characteristics according to EN 61984:
  16A 830V 8kV 3
  16A 1000V 8kV 2
  16A 720/1250V 8kV 2
- auxiliary contacts: **16A 500V 6kV 3**
- c UL us (UL for USA and Canada), DNV·GL BUREAU VERITAS
  EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

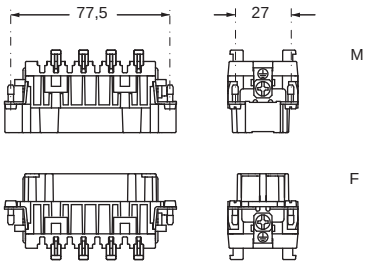

contacts side (front view)

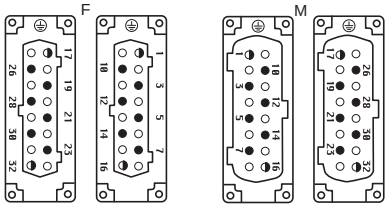

◑ the auxiliary contacts are in the forward position upon opening

- inserts for section conductors:
  0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping lenght: 9...11 mm

CMSH 12 poles connector inserts
Maximum current load derating diagram

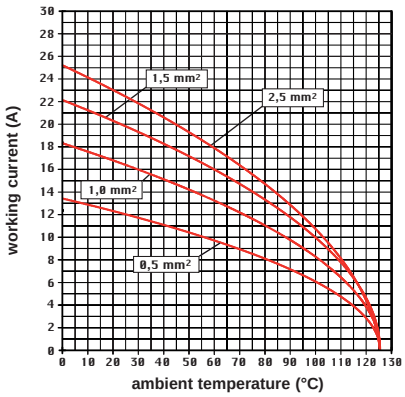

SQUICH®-spring connection technology

WIRING

1



Deeply insert a stripped conductor into a round terminal.

2

Push the actuator button to close the terminal.

RE-OPENING

3



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

dimensions shown in mm are not binding and may be changed without notice

CMCE 12 + 4 (aux) poles + ⏚ 16A - 830V

enclosures:
size "77.62" **page:**

C-TYPE IP65/IP66	**424 - 429**
W-TYPE for aggressive environments	**525**
E-Xtreme® corrosion proof	**546**

inserts, crimp connections

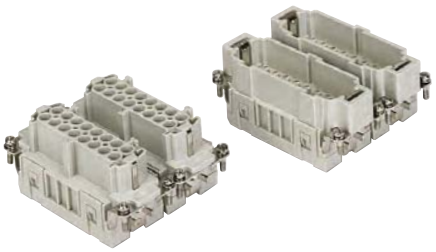

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.	part No.		part No.	
without contacts (to be ordered separately)						
female inserts for female contacts, No. (1-16) and (17-32)	**CMCEF 06**	**CMCEF 06 N**				
male inserts for male contacts, No. (1-16) and (17-32)	**CMCEM 06**	**CMCEM 06 N**				
16A female contacts						
0,14-0,37 mm²	AWG 26-22	one groove	**CCFA 0.3**	**silver plated**	**CCFD 0.3**	**gold plated+**
0,5 mm²	AWG 20	with no grooves	**CCFA 0.5**		**CCFD 0.5**	
0,75 mm²	AWG 18	one groove (back side)	**CCFA 0.7**		**CCFD 0.7**	
1 mm²	AWG 18	one groove	**CCFA 1.0**		**CCFD 1.0**	
1,5 mm²	AWG 16	two grooves	**CCFA 1.5**		**CCFD 1.5**	
2,5 mm²	AWG 14	three grooves	**CCFA 2.5**		**CCFD 2.5**	
3 mm²	AWG 12	one wide groove	**CCFA 3.0**		**CCFD 3.0**	
4 mm²	AWG 12	with no grooves	**CCFA 4.0**		**CCFD 4.0**	
16A male contacts						
0,14-0,37 mm²	AWG 26-22	one groove	**CCMA 0.3**		**CCMD 0.3**	
0,5 mm²	AWG 20	with no grooves	**CCMA 0.5**		**CCMD 0.5**	
0,75 mm²	AWG 18	one groove (back side)	**CCMA 0.7**		**CCMD 0.7**	
1 mm²	AWG 18	one groove	**CCMA 1.0**		**CCMD 1.0**	
1,5 mm²	AWG 16	two grooves	**CCMA 1.5**		**CCMD 1.5**	
2,5 mm²	AWG 14	three grooves	**CCMA 2.5**		**CCMD 2.5**	
3 mm²	AWG 12	one wide groove	**CCMA 3.0**		**CCMD 3.0**	
4 mm²	AWG 12	with no grooves	**CCMA 4.0**		**CCMD 4.0**	
16A male crimp contacts for advanced opening						
0,5 mm²	AWG 20	with no grooves	**CC 0.5 AN**			
0,75 mm²	AWG 18	one groove (back side)	**CC 0.7 AN**			
1 mm²	AWG 18	one groove	**CC 1.0 AN**			
1,5 mm²	AWG 16	two grooves	**CC 1.5 AN**			
2,5 mm²	AWG 14	three grooves	**CC 2.5 AN**			

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 830V 8kV 3
  16A 1000V 8kV 2
  16A 720/1250V 8kV 2
- auxiliary contacts: **16A 500V 6kV 3**
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CMCE 12 poles connector inserts
Maximum current load derating diagram

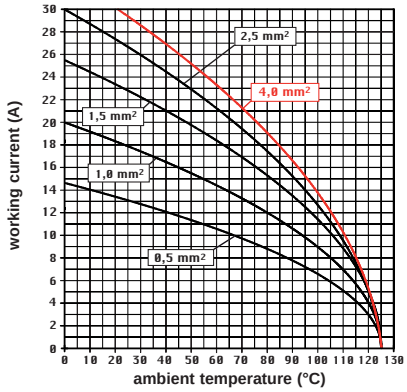

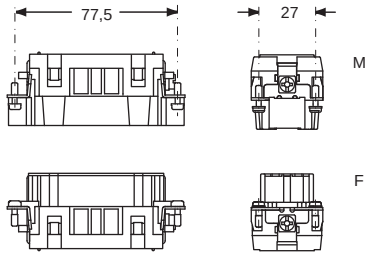

contacts side (front view)

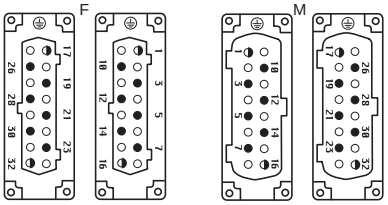

◑ the auxiliary contacts are in the forward position upon opening

- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF and CCM



CC...AN



CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CMSH-SQUICH® 20 + 4 (aux) poles + ⏚ 16A - 830V

enclosures:
size "104.62" **page:**

C-TYPE IP65/IP66	**430**
W-TYPE for aggressive environments	**526**
E-Xtreme® corrosion proof	**547**

inserts,
spring terminal connection without tools

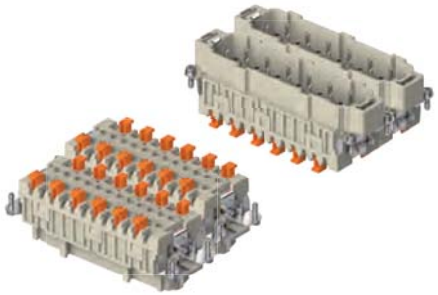

SILVER PLATED CONTACTS

description	part No.	part No.
spring terminals with actuator button female inserts with female contacts, No. (1-24) and (25-48) male inserts with male contacts, No. (1-24) and (25-48)	**CMSHF 10** **CMSHM 10**	**CMSHF 10 N** **CMSHM 10 N**

- characteristics according to EN 61984:
  16A 830V 8kV 3
  16A 1000V 8kV 2
  16A 720/1250V 8kV 2
- auxiliary contacts: **16A 500V 6kV 3**
- c UL us (UL for USA and Canada), DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

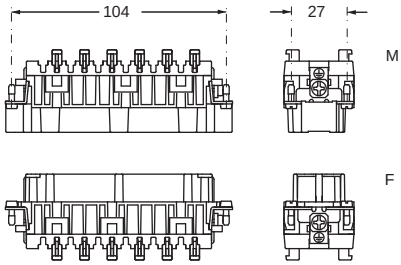

contacts side (front view)

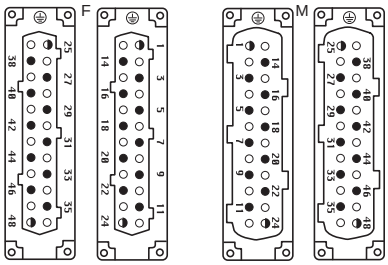

◑ the auxiliary contacts are in the forward position upon opening

- inserts for section conductors:
  0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping lenght: 9...11 mm

CMSH 20 poles connector inserts
Maximum current load derating diagram

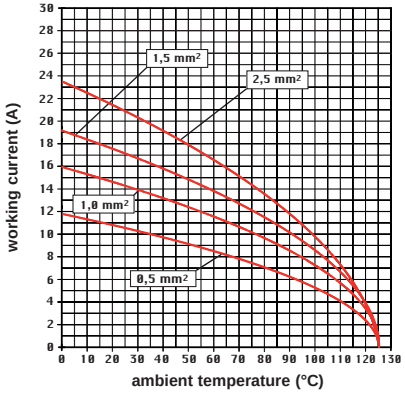

SQUICH®-spring connection technology

WIRING

1



Deeply insert a stripped conductor into a round terminal.

2

Push the actuator button to close the terminal.

RE-OPENING

3



Insert a **0,5 x 3,5 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

dimensions shown in mm are not binding and may be changed without notice

CMCE 20 + 4 (aux) poles + ⏚ 16A - 830V

enclosures:
size "104.62" **page:**

C-TYPE IP65/IP66 **430**
W-TYPE for aggressive environments **526**
E-Xtreme® corrosion proof **547**

inserts, crimp connections

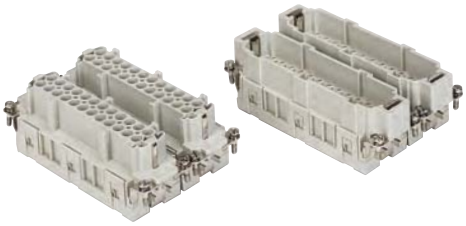

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.	part No.		part No.	
without contacts (to be ordered separately)						
female inserts for female contacts, No. (1-24) and (25-48)	**CMCEF 10**	**CMCEF 10 N**				
male inserts for male contacts, No. (1-24) and (25-48)	**CMCEM 10**	**CMCEM 10 N**				
16A female contacts						
0,14-0,37 mm² AWG 26-22 one groove			**CCFA 0.3**	**silver plated**	**CCFD 0.3**	**gold plated+**
0,5 mm² AWG 20 with no grooves			**CCFA 0.5**		**CCFD 0.5**	
0,75 mm² AWG 18 one groove (back side)			**CCFA 0.7**		**CCFD 0.7**	
1 mm² AWG 18 one groove			**CCFA 1.0**		**CCFD 1.0**	
1,5 mm² AWG 16 two grooves			**CCFA 1.5**		**CCFD 1.5**	
2,5 mm² AWG 14 three grooves			**CCFA 2.5**		**CCFD 2.5**	
3 mm² AWG 12 one wide groove			**CCFA 3.0**		**CCFD 3.0**	
4 mm² AWG 12 with no grooves			**CCFA 4.0**		**CCFD 4.0**	
16A male contacts						
0,14-0,37 mm² AWG 26-22 one groove			**CCMA 0.3**		**CCMD 0.3**	
0,5 mm² AWG 20 with no grooves			**CCMA 0.5**		**CCMD 0.5**	
0,75 mm² AWG 18 one groove (back side)			**CCMA 0.7**		**CCMD 0.7**	
1 mm² AWG 18 one groove			**CCMA 1.0**		**CCMD 1.0**	
1,5 mm² AWG 16t wo grooves			**CCMA 1.5**		**CCMD 1.5**	
2,5 mm² AWG 14 three grooves			**CCMA 2.5**		**CCMD 2.5**	
3 mm² AWG 12 one wide groove			**CCMA 3.0**		**CCMD 3.0**	
4 mm² AWG 12 with no grooves			**CCMA 4.0**		**CCMD 4.0**	
16A male crimp contacts for advanced opening						
0,5 mm² AWG 20 with no grooves			**CC 0.5 AN**			
0,75 mm² AWG 18 one groove (back side)			**CC 0.7 AN**			
1 mm² AWG 18 one groove			**CC 1.0 AN**			
1,5 mm² AWG 16 two grooves			**CC 1.5 AN**			
2,5 mm² AWG 14 three grooves			**CC 2.5 AN**			

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 830V 8kV 3
  16A 1000V 8kV 2
  16A 720/1250V 8kV 2
- auxiliary contacts: **16A 500V 6kV 3**
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CMCE 20 poles connector inserts
Maximum current load derating diagram

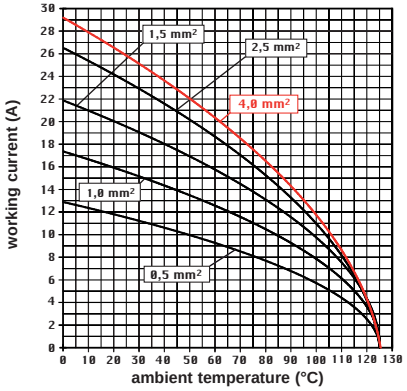

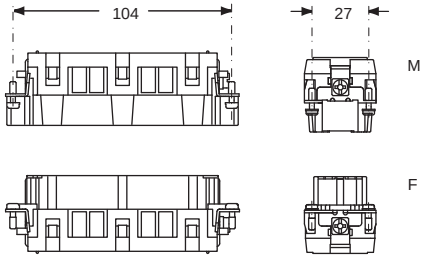

contacts side (front view)

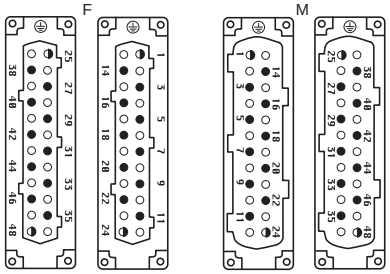

◑ the auxiliary contacts are in the forward position upon opening

- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF and CCM





CC...AN



CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CSS series

Connection with dual spring terminal per pole

Series **CSS** is the “two spring clamp terminal per contact” counterpart of series CSH connectors, which have one spring-clamp terminal per contact.

CSS connection technology see page 23

In series CSS inserts **are made available to the user with two spring clamp terminals per contact** so that two conductors can be connected to each of them.

Series CSS inserts share the mating interface (dimensions) with equally sized inserts of series **CNE** (screw-type) **CCE** (crimp type) **CSH** (spring-type with actuator button SQUICH®), **CT** (screw-type with 45° terminal block) and **CTSE** (spring-type with 45° terminal block).

With connectors like **CSS** and suitably developed housings, electric motors can be prepared for the fastest and safest installation. The motor terminal box may be replaced by the specially developed motor connection angled housing **CVI 10 LA** or **MVI 10 LAP32** (see page 450). The “57.27” size for the connector insert and the housing has been chosen to fulfil motor connection requirements.

Star or delta (triangle) bridges may be realized in the mating (free) female connector, realizing simple bridges thanks to the double terminals per pole feature of **CSS,** by short conductors stripped at both ends and “U-bent”. Fast and easy exchange of a motor for maintenance is made easy, reducing costs for downtime.

(*) DESINA standards for **DE**centralized and **S**tandardized **IN**stall**A**tion Technology. This working group was founded by the Association of German Machine Tools Manufacturers (VDW) with the target to develop a field bus independent, standardized installation system for machines and production plants. The task was fulfilled in close cooperation with machine tools manufacturers, the automotive industry and their supply chain. DESINA specifications have been transferred to series **ISO 22570** international standards.

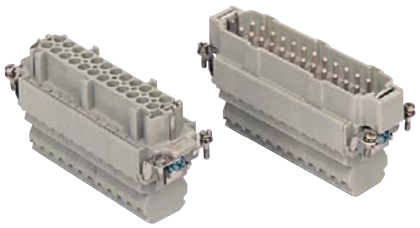

SUM-UP

- **Dual spring terminal per pole**
- **Two spring clamp terminals per contact**
- **No special tools are needed**
- **Suitable for standard hoods/housings size “44.27”, “57.27”, “77.27”, “77.62”, “104.27”, “104.62” high construction versions**
- **Bridges are made by using a simple 0,5x3,5 mm flat screwdriver to open the spring terminals**
- **Vibration and shock resistant**
- **Ideal as motor connectors, as they provide the possibility to connect motor windings in star and delta configuration**
- **The 10 pole version specified by DESINA Specifications* and by ISO 22570-1:2009 as type 1 connector for motor connection (6 poles for three-phase star or delta connection + 2 poles for breaking circuit + 2 poles for temperature sensing motor protection circuit)**
- **Bult-in silver plated contacts**

CSS series

TECHNICAL FEATURES

Insert series		**CSS**
No. of poles [1]	Main contacts + ⏚	**6, 10, 16, 24, (32 = 2x16), (48 = 2x24)**
	auxiliary contacts	—
Rated current [2]		16A
EN IEC 61984 Pollution degree 3	rated voltage	500V
	rated impulse voltage	6kV
	pollution degree	**3**
EN IEC 61984 Pollution degree 2	rated voltage	400/690V
	rated impulse voltage	6kW
	pollution degree	**2**
UL / CSA certification	rated voltage (a.c./d.c.)	600V
Contact resistance		≤ 3 mΩ
Insulation resistance		≥ 10 GΩ
Ambient temperature limit (°C)	min	-40 °C
	max	+125 °C
Degree of protection	with enclosures	**IP65**, **IP66**/IP69, IP66/**IP67**/IP69, IP66/**IP68**/IP69 (according to type and model)
	without enclosures - termination side on male and female inserts - mating side on female inserts	**IP20** (IPXXB)
Conductor connections		spring type
Conductor cross-sectional area	mm^2	0,14 - 2,5
	AWG	26 - 14
Mechanical endurance (mating cycles)		≥ 500

1) Polarities shown in brackets may be obtained by using two inserts in their own double-sized housings

2) Please check the inserts derating diagrams to establish the actual maximum operating current according to the ambient temperature, the conductor cross-sectional area, the polarity of the connector, and any external constraint may derive e.g. by the continuous operating temperature sustained by the chosen conductor sheathing or by end-product safety standards fixing max allowed temperature rise on terminals (e.g. 30 K, 45 K or 50 K)

CSS 6 poles + ⏚ 16A - 500V

enclosures:
size “44.27” **page:**

C-TYPE IP65/IP66	387 - 392
C7 IP67, single lever	436 - 437
V-TYPE IP65/IP66, single lever	444 - 447
BIG hoods	466 - 467
T-TYPE IP65 insulating	480 - 481
T-TYPE / W IP66/IP69 insulating	489
HYGIENIC T-TYPE / H IP66/IP69	501
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	506
W-TYPE for aggressive environments	521
E-Xtreme® corrosion proof 530 - 531, 542, 550 - 551	
EMC	578
Central lever	603 - 605
LS-TYPE	618 - 619
IP68	632 - 635

panel supports: **page:**

COB	652 - 653

can be mated with CNE, CCE, CTSE, CSH inserts

inserts,
connection with dual spring terminal per pole



description	part No.
dual spring terminal per pole	
female inserts with female contacts	**CSSF 06**
male inserts with male contacts	**CSSM 06**

The CSS series inserts can be inserted in flush mounted enclosures or in fixed / portable high enclosures.

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



- inserts with plate for section conductors: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

Connection technology

step 1



step 2



step 3

step 4

CSS 06 poles connector inserts
Maximum current load derating diagram

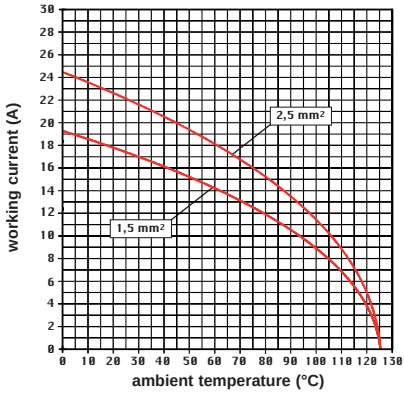

dimensions shown in mm are not binding and may be changed without notice

CSS 10 poles + ⏚ 16A - 500V

enclosures:
size "57.27" **page:**

C-TYPE IP65/IP66	393 - 401
C7 IP67, two levers	438
V-TYPE IP65/IP66, single lever	448 - 453
BIG hoods	468 - 469
T-TYPE IP65 insulating	482 - 483
T-TYPE / W IP66/IP69 insulating	490
HYGIENIC T-TYPE / H IP66/IP69	502
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	507
W-TYPE for aggressive environments	522
E-Xtreme® corrosion proof 532 - 533, 543, 552 - 553	
EMC	579
Central lever	606 - 608
LS-TYPE	620 - 621
IP68	636 - 639

panel supports: **page:**

COB	652 - 653

can be mated with CNE, CCE, CTSE, CSH inserts

inserts,
connection with dual spring terminal per pole



description	part No.
dual spring terminal per pole	
female inserts with female contacts	**CSSF 10**
male inserts with male contacts	**CSSM 10**

The CSS series inserts can be inserted in flush mounted enclosures or in fixed / portable high enclosures.

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



- inserts with plate for section conductors: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

CSS 10 poles connector inserts
Maximum current load derating diagram

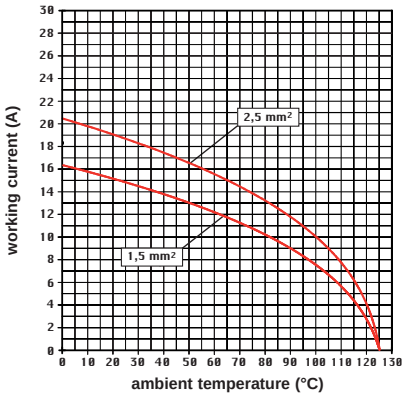

Connection technology

step 1



step 2



step 3

step 4

CSS 16 poles + ⏚ 16A - 500V

enclosures:
size “77.27” **page:**

C-TYPE IP65/IP66	**402 - 411**
C7 IP67, two levers	**439 - 440**
V-TYPE IP65/IP66, single lever	**454 - 458**
BIG hoods	**470 - 471**
T-TYPE IP65 insulating	**484 - 485**
T-TYPE / W IP66/IP69 insulating	**491**
HYGIENIC T-TYPE / H IP66/IP69	**503**
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	**508**
W-TYPE for aggressive environments	**523**
E-Xtreme® corrosion proof 534 - 535, 544, 554 - 555	
EMC	**580**
Central lever	**609 - 611**
LS-TYPE	**622 - 623**
IP68	**640 - 643**

panel supports: **page:**

COB	**652 - 653**

can be mated with CNE, CCE, CTSE, CSH inserts

inserts,
connection with dual spring terminal per pole

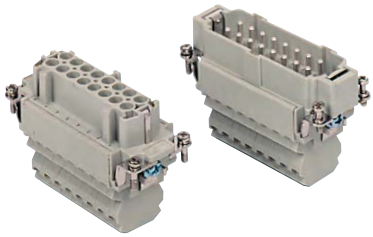

description	part No.
dual spring terminal per pole	
female inserts with female contacts	**CSSF 16**
male inserts with male contacts	**CSSM 16**

The CSS series inserts can be inserted in flush mounted enclosures or in fixed / portable high enclosures.

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

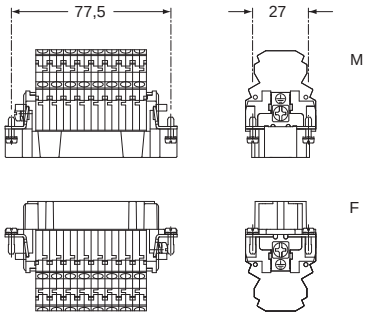

contacts side (front view)



- inserts with plate for section conductors: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

CSS 16 poles connector inserts
Maximum current load derating diagram

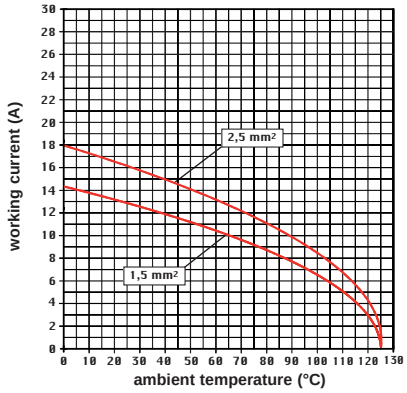

Connection technology

step 1



step 2



step 3

step 4

dimensions shown in mm are not binding and may be changed without notice

CSS 24 poles + ⏚ 16A - 500V

enclosures: size “104.27”	page:
C-TYPE IP65/IP66	412 - 423
C7 IP67, two levers	441 - 442
V-TYPE IP65/IP66, single lever	459 - 463
BIG hoods	472 - 473
T-TYPE IP65 insulating	486 - 487
T-TYPE / W IP66/IP69 insulating	492
HYGIENIC T-TYPE / H IP66/IP69	504
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	509
W-TYPE for aggressive environments	524
E-Xtreme® corrosion proof 536 - 537, 545, 556 - 557	
EMC	581
Central lever	612 - 614
LS-TYPE	624 - 625
IP68	644 - 647

panel supports:	page:
COB	652 - 653

can be mated with CNE, CCE, CTSE, CSH inserts

inserts, connection with dual spring terminal per pole

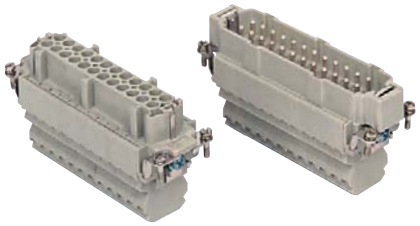

description	part No.
dual spring terminal per pole	
female inserts with female contacts	**CSSF 24**
male inserts with male contacts	**CSSM 24**

The CSS series inserts can be inserted in flush mounted enclosures or in fixed / portable high enclosures.

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

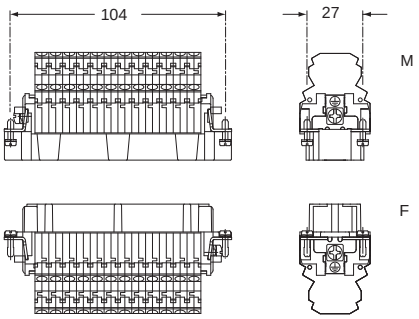

contacts side (front view)



- inserts with plate for section conductors: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

CSS 24 poles connector inserts
Maximum current load derating diagram

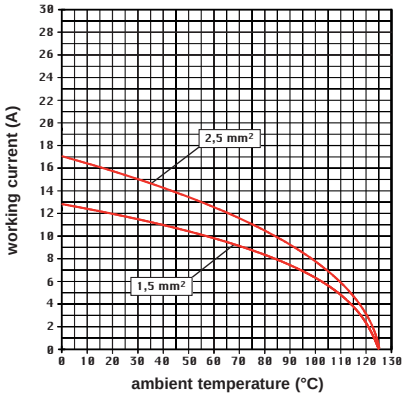

Connection technology

step 1



step 2



step 3



step 4

CSS 32 poles + ⏚ 16A - 500V

enclosures:
size “77.62” **page:**

C-TYPE IP65/IP66 **424 - 429**
W-TYPE for aggressive environments **525**
E-Xtreme® corrosion proof **546**

inserts,
connection with dual spring terminal per pole

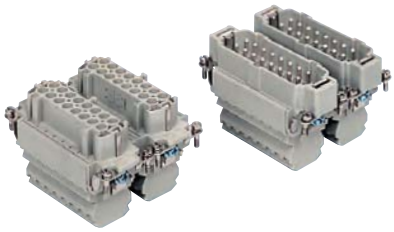

can be mated with CNE, CCE, CTSE, CSH inserts

description	part No.	part No.
dual spring terminal per pole		
female inserts with female contacts, No. (1-16) and (17-32)	**CSSF 16**	**CSSF 16 N**
male inserts with male contacts, No. (1-16) and (17-32)	**CSSM 16**	**CSSM 16 N**

The CSS series inserts can be inserted in flush mounted enclosures or in fixed / portable high enclosures.

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

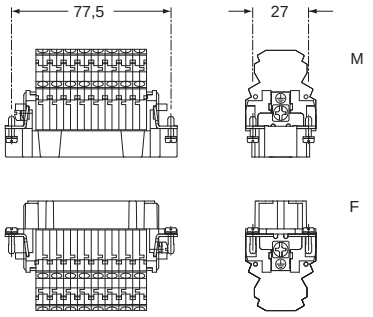

contacts side (front view)

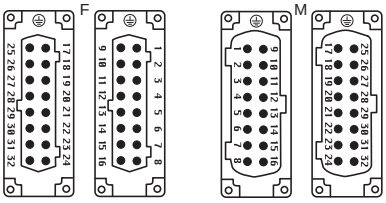

- inserts with plate for section conductors: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

CSS 32 poles connector inserts
Maximum current load derating diagram

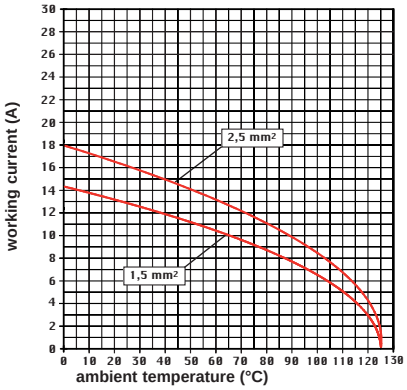

Connection technology

step 1



step 2



step 3



step 4

dimensions shown in mm are not binding and may be changed without notice

CSS 48 poles + ⏚ 16A - 500V

enclosures:
size “104.62” **page:**

C-TYPE IP65/IP66	**430**
W-TYPE for aggressive environments	**526**
E-Xtreme® corrosion proof	**547**

inserts,
connection with dual spring terminal per pole

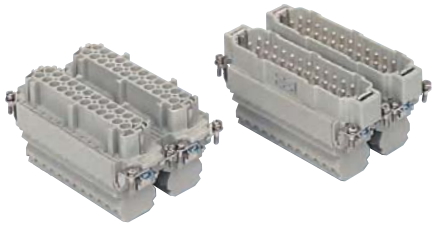

can be mated with CNE, CCE, CTSE, CSH inserts

description	part No.	part No.
spring terminals with actuator button		
female inserts with female contacts, No. (1-24) and (25-48)	**CSSF 24**	**CSSF 24 N**
male inserts with male contacts, No. (1-24) and (25-48)	**CSSM 24**	**CSSM 24 N**

The CSS series inserts can be inserted in flush mounted enclosures or in fixed / portable high enclosures.

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

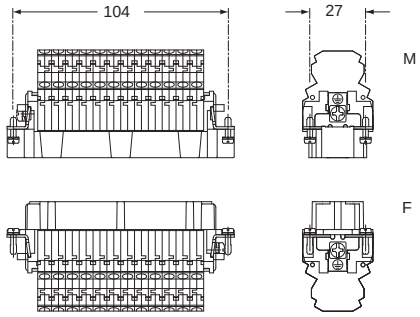

contacts side (front view)

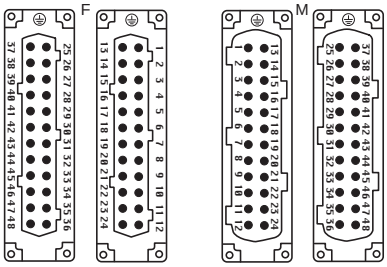

- inserts with plate for section conductors: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

Connection technology

step 1



step 2



step 3

step 4

CSS 48 poles connector inserts
Maximum current load derating diagram

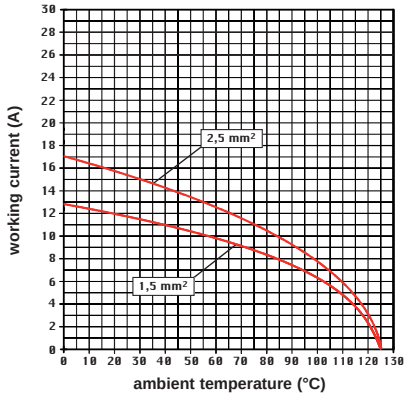

Inserts with incorporated terminal block for multipole connectors (10A max versions)

CT series multipole connectors (with incorporated 45° terminal block) are recommended for greater cost-saving and safety for use on machines and command and control panels.

For control panel mounting, bulkhead housings must be used.

CT series inserts (10A max versions) are supplied in the plug or socket versions and must be mounted with insertion from the rear of the enclosure (**Figures 1** and **2**), as the space occupied by the terminal block does not allow for the passage of the insert and insertion from the front of the enclosure.

As an alternative to the traditional terminal blocks, the inserts can be mounted inside the control panels on DIN EN 60715 rails (**Figure 5**) using suitable accessories providing the added advantage of easy sectioning.

The special structure of CT inserts provides all the conductor connections on the same side, achiering easier wiring and a complete view of the work area.

The 45° terminal block has also slots for housing the identification wire markers of each contact.

Wire markers of different manufacturers may be used such as: Cabur, Grafoplast, Modernotecnica, Phoenix Contact, Siemens, Wago, Weidmüller.

CT series is available in the versions “left-hand” and “right-hand” for mounting on the left (**Figure 3**) or on the right (**Figure 4**) of the control panel walls.

This characteristic is determined by the position of contact “1” and the protective earth terminal in the upper part of the insert terminal block for both left and right mounting.

The installation of inserts on DIN rails (**Figure 5**) inside the control panels is usually made to ease the wiring in sectionable parts.

In this case the degree of protection for coupled connectors is IP20 (in accordance with EN 60529).

This type of mounting requires supports (CT APE) suitable for mounting on DIN EN 60715 rail. to be provided to the inserts.

In addition, CRBF (female) and CRBM (male) coupling screws instead of normal screws are recommended for fixing the inserts to the enclosures (**Figure 5**) in order to guarantee a stable and safe coupling between the CT and CTS inserts installed on the DIN rails and corresponding mating CD inserts.

Figures 1 and 2 (rear mounting)
The insert is inserted into the bulkhead housing with pre-wired conductors connected at the opposite end

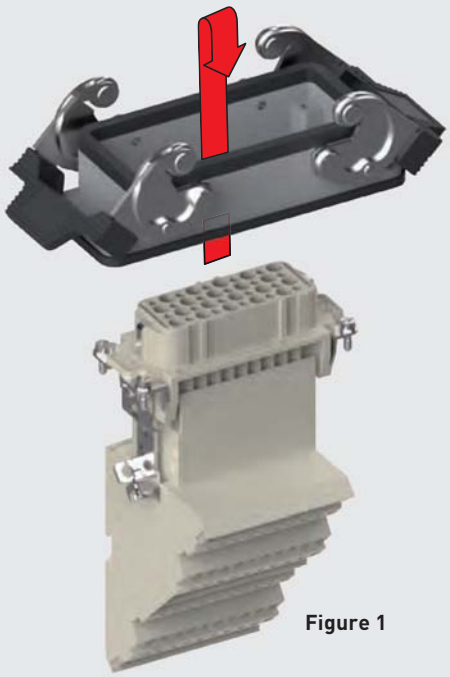

Figure 1

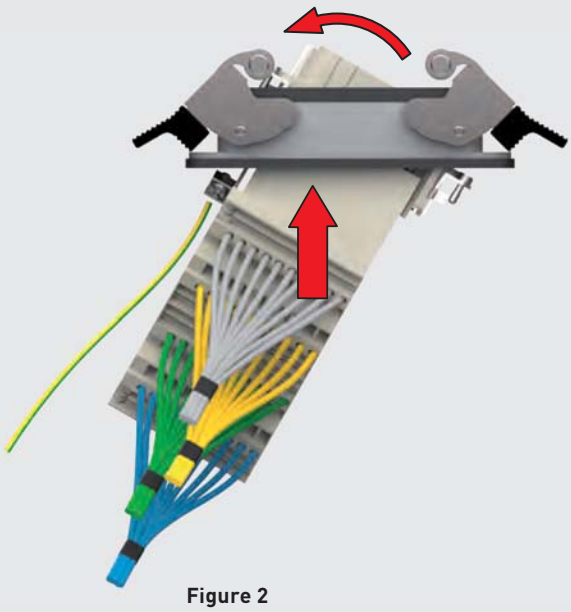

Figure 2

Figure 3 (left mounting)

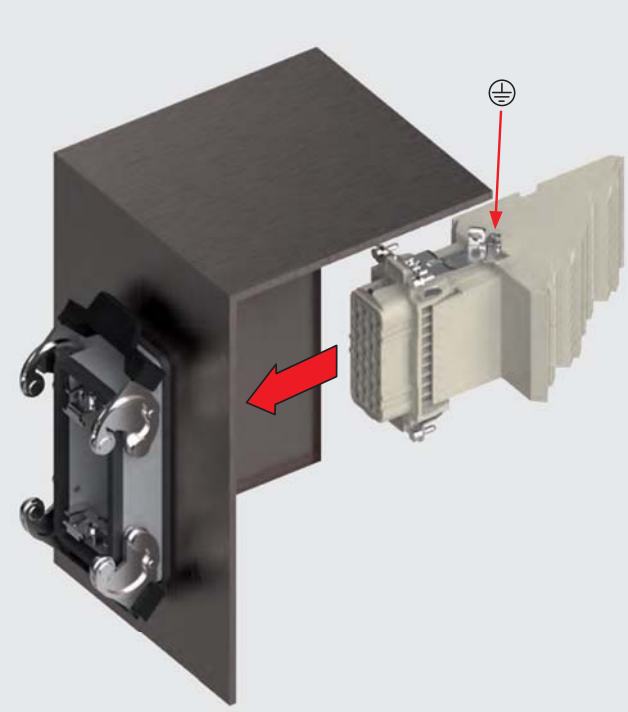

Figure 4 (right mounting)

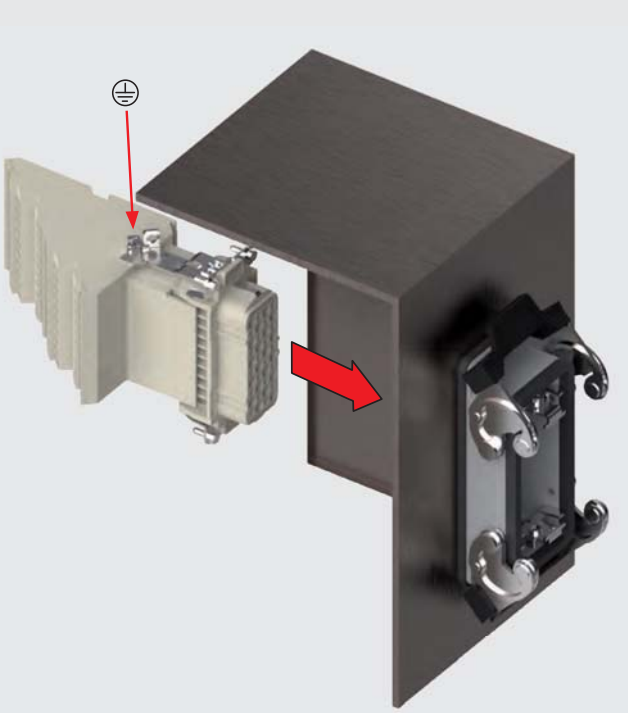

Figure 5 (mounting on DIN rail)

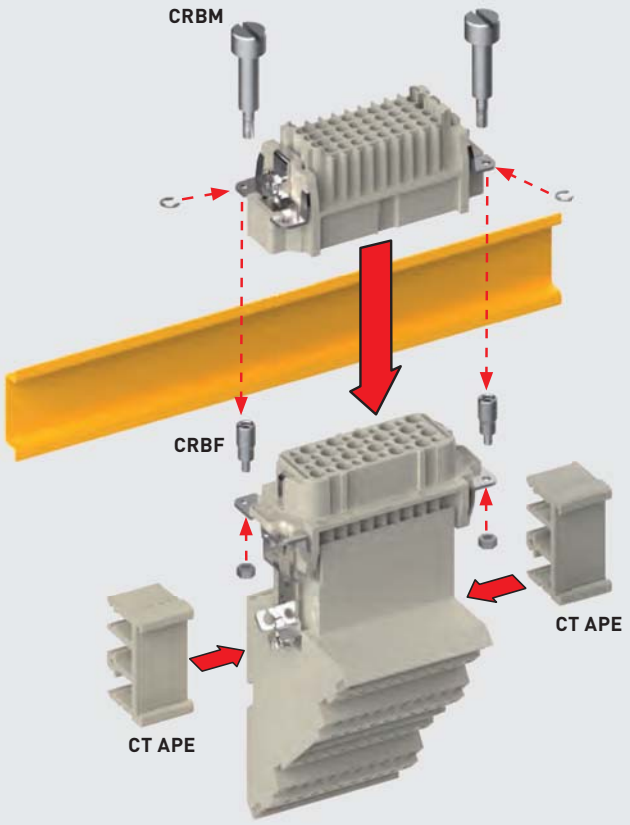

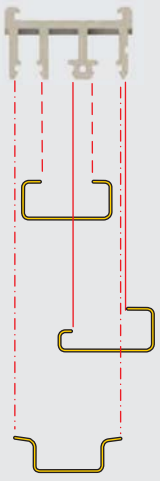

CT APE
possibility of coupling to DIN EN 60715 rail (for a greater stability of the CT inserts of 40 and 64 poles we recommend using the two CT APE supports)

EN 60715
C 30

EN 60715
G 32

EN 60715
TH 35-7,5 and TH 35-15

Accessories for CT inserts
- support for mounting on DIN rail (**CT APE** page 669)
- inserts coupling screws (**CRBM** and **CRBF** page 669)
- cable-clamping plates (**CRAD** and **CRAS** page 669)

CT - CTS 40 poles + ⏚ 10A - 250V

enclosures *): size “77.27”	page:
C-TYPE IP65/IP66	402
C7 IP67, two levers	439 - 440
V-TYPE IP65/IP66, single lever	454 - 455
W-TYPE for aggressive environments	523
E-Xtreme® corrosion proof	534, 544
EMC	580
Central lever	609
LS-TYPE	622

*) only bulkhead mounted housings

- can be mated with CD inserts
- rear-mounted inserts

terminal block inserts screw terminal connection

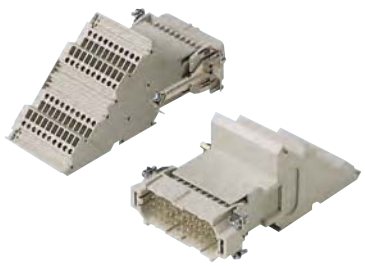

Q SILVER PLATED CONTACTS

terminal block inserts spring terminal connection

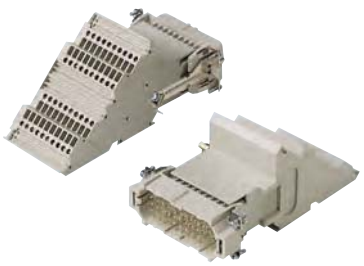

Q SILVER PLATED CONTACTS

description	part No.	part No.	part No.	part No.
mounting side (see page 155)	left	right		
female inserts with female contacts 1)	**CTF 40 L**	**CTF 40 R**		
male inserts with male contacts 1)	**CTM 40 L**	**CTM 40 R**		
mounting side (see page 155)			left	right
female inserts with female contacts			**CTSF 40 L**	**CTSF 40 R**
male inserts with male contacts			**CTSM 40 L**	**CTSM 40 R**

1) for non-prepared conductors

- characteristics according to EN 61984:
  10A 250V 4kV 3
  10A 230/400V 4kV 2
- certified (**CT**)
- certified (**CTS**)
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 4 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

female inserts (CTF and CTSF)

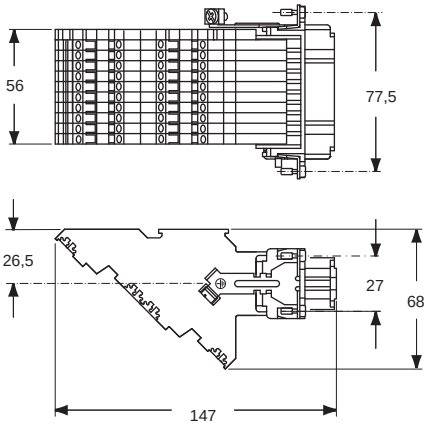

male inserts (CTM and CTSM)

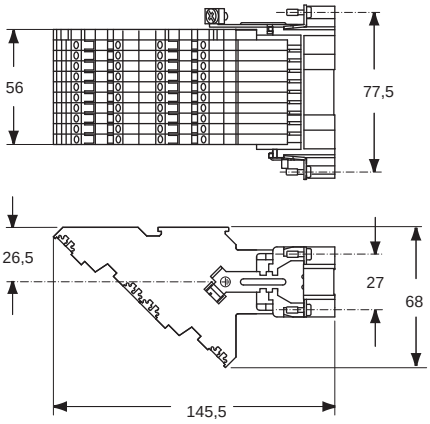

contacts side (front view)

female inserts (CTF and CTSF)



male inserts (CTM and CTSM)



- CT inserts with plate, for section conductors: 0,75 - 2,5 mm² - AWG 18 - 14
- conductors stripping length: 12 mm
- terminal screw torque: 0,4 Nm (3,54 lb.in), for more information see page 20 and 21

- CTS spring inserts for section conductors: effective sections for non-prepared conductors 0,14 - 2,5 mm² - AWG 26 - 14 effective sections for prepared conductors 0,14 - 1 mm² - AWG 26 - 18
- conductors stripping length: 9...11 mm

CT and CTS 40 poles connector inserts
Maximum current load derating diagram

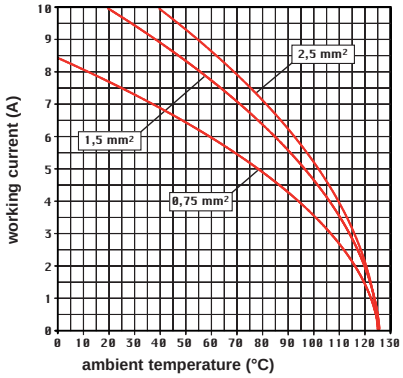

Connection technology with spring terminal

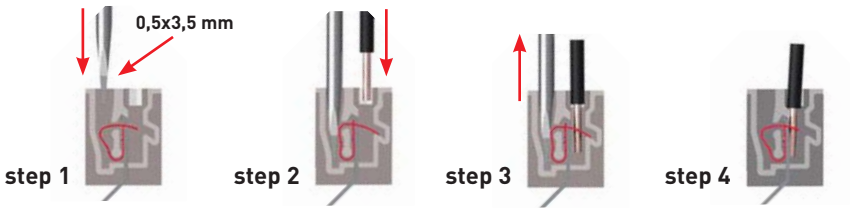

dimensions shown in mm are not binding and may be changed without notice

CT - CTS 64 poles + ⏚ 10A - 250V

enclosures *): size “104.27”	page:
C-TYPE IP65/IP66	412
C7 IP67, two levers	441 - 442
V-TYPE IP65/IP66, single lever	459 - 460
W-TYPE for aggressive environments	524
E-Xtreme® corrosion proof	536, 545
EMC	581
Central lever	612
LS-TYPE	624

*) only bulkhead mounted housings

- can be mated with CD inserts
- rear-mounted inserts

terminal block inserts screw terminal connection

Q SILVER PLATED CONTACTS

terminal block inserts spring terminal connection

Q SILVER PLATED CONTACTS

description	part No.	part No.	part No.	part No.
mounting side (see page 155)	left	right		
female inserts with female contacts 1)	**CTF 64 L**	**CTF 64 R**		
male inserts with male contacts 1)	**CTM 64 L**	**CTM 64 R**		
mounting side (see page 155)			left	right
female inserts with female contacts			**CTSF 64 L**	**CTSF 64 R**
male inserts with male contacts			**CTSM 64 L**	**CTSM 64 R**

1) for non-prepared conductors

- characteristics according to EN 61984:
  10A 250V 4kV 3
  10A 230/400V 4kV 2
- certified (**CT**)
- certified (**CTS**)
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 4 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

female inserts (CTF and CTSF)

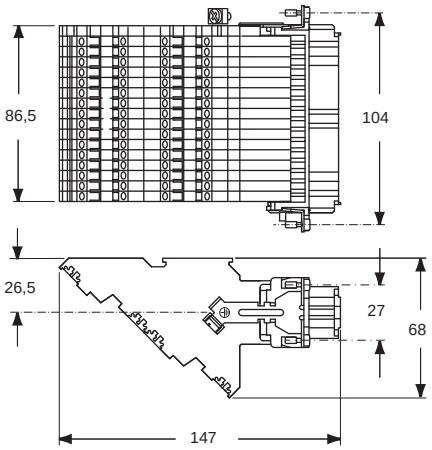

male inserts (CTM and CTSM)

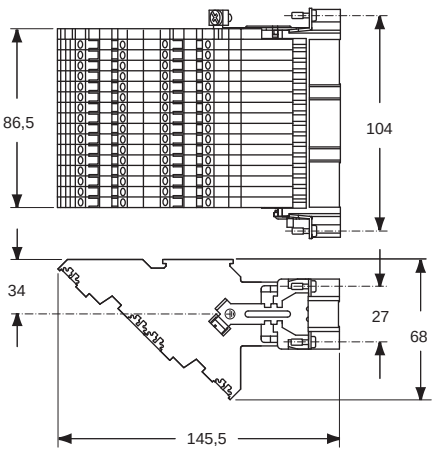

contacts side (front view)

female inserts (CTF and CTSF)



- CT inserts with plate, for section conductors:
  0,75 - 2,5 mm² - AWG 18 - 14
- conductors stripping length: 9...11 mm
- terminal screw torque: 0,4 Nm (3,54 lb.in),
  for more information see page 20 and 21

male inserts (CTM and CTSM)



- CTS spring inserts for section conductors:
  effective sections for non-prepared conductors
  0,14 - 2,5 mm² - AWG 26 - 14
  effective sections for prepared conductors
  0,14 - 1 mm² - AWG 26 - 18
- conductors stripping length: 9...11 mm

CT and CTS 64 poles connector inserts
Maximum current load derating diagram

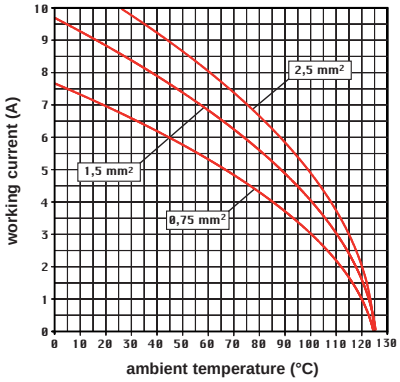

Connection technology with spring terminal

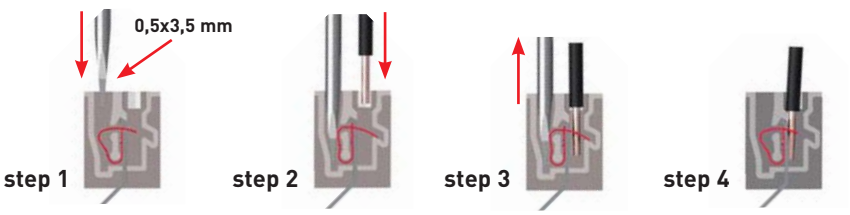

Inserts with incorporated terminal block for multipole connectors (16A max versions)

45° CT - CTSE series multipole connectors (with incorporated terminal block) are recommended for greater cost-saving and safety for use on machines and command and control panels.

The CT - CTSE series inserts (16A max versions) are supplied in the plug or socket versions and may be mounted with insertion from the front of the enclosure (**Figure 1** for all the polarities of the inserts) or with insertion from the rear of the enclosure (**Figure 2**, only for 16 and 24-pole inserts).

As an alternative to the traditional terminal blocks, the inserts can be mounted inside the control panels on DIN EN rails (**Figure 5**) using suitable accessories providing the added advantage of easy sectioning.

The special structure of the CT - CTSE inserts has all the conductor connections on the same side providing for easier wiring and a complete view of the work area.

The terminal block has also slots for housing the identification wire markers of each contact.

Wire markers of different manufacturers may be used such as: Cabur, Grafoplast, Modernotecnica, Phoenix Contact, Siemens, Wago, Weidmüller.

The CT - CTSE series is available in the versions “left” and “right” for mounting on the left (**Figure 3**) or on the right (**Figure 4**) of the control panel walls.

This characteristic is determined by the position of contact “1” and the ground terminal in the upper part of the insert terminal block for both left and right mounting.

The installation of inserts on DIN rails (**Figure 5**) inside the control panels is usually made to facilitate the wiring into sectionable parts.

In this case the degree of protection for coupled connectors is IP20 (in accordance with EN 60529).

This type of mounting requires supports (CT APE) suitable for mounting on DIN EN 60715 rails.

Furthermore, to ensure a stable and secure mating between the CT and CTSE inserts installed on DIN rails and counterparts CNE, CCE, CSH, CSS mating screws CRBF (female) and CRBM (male) are recommended, to replace the ordinary fastening screws to the enclosures (**Figure 5**).

Figure 1 (front mounting)

The insert is inserted into the bulkhead housing without wired conductors or with pre-wired conductors that are not connected at the opposite end.

Mounting for inserts of 06, 10, 16 and 24 poles

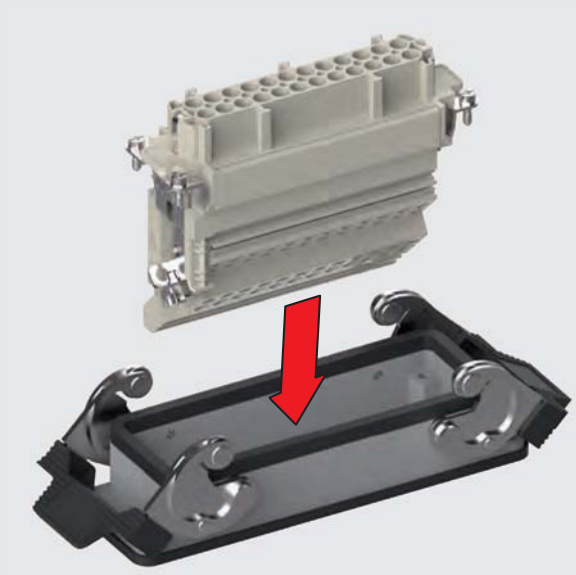

Figure 2 (rear mounting)

The insert is inserted into the bulkheadhousing with pre-wired conductors connected at the opposite end.

Mounting for inserts of 16 and 24 poles

Except version T-TYPE

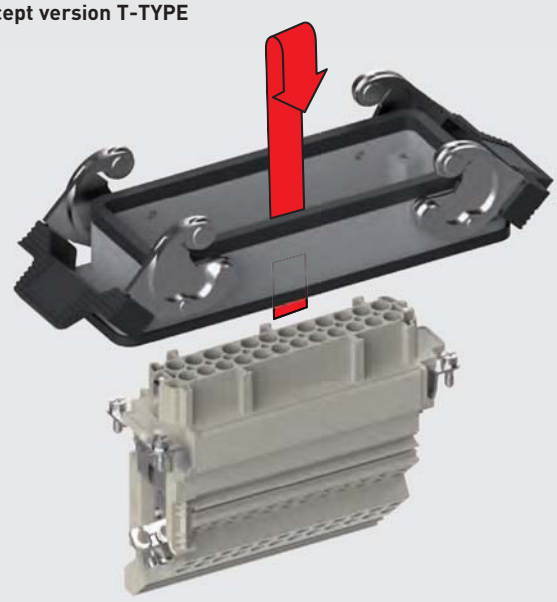

Figure 3 (left mounting)

Figure 4 (right mounting)

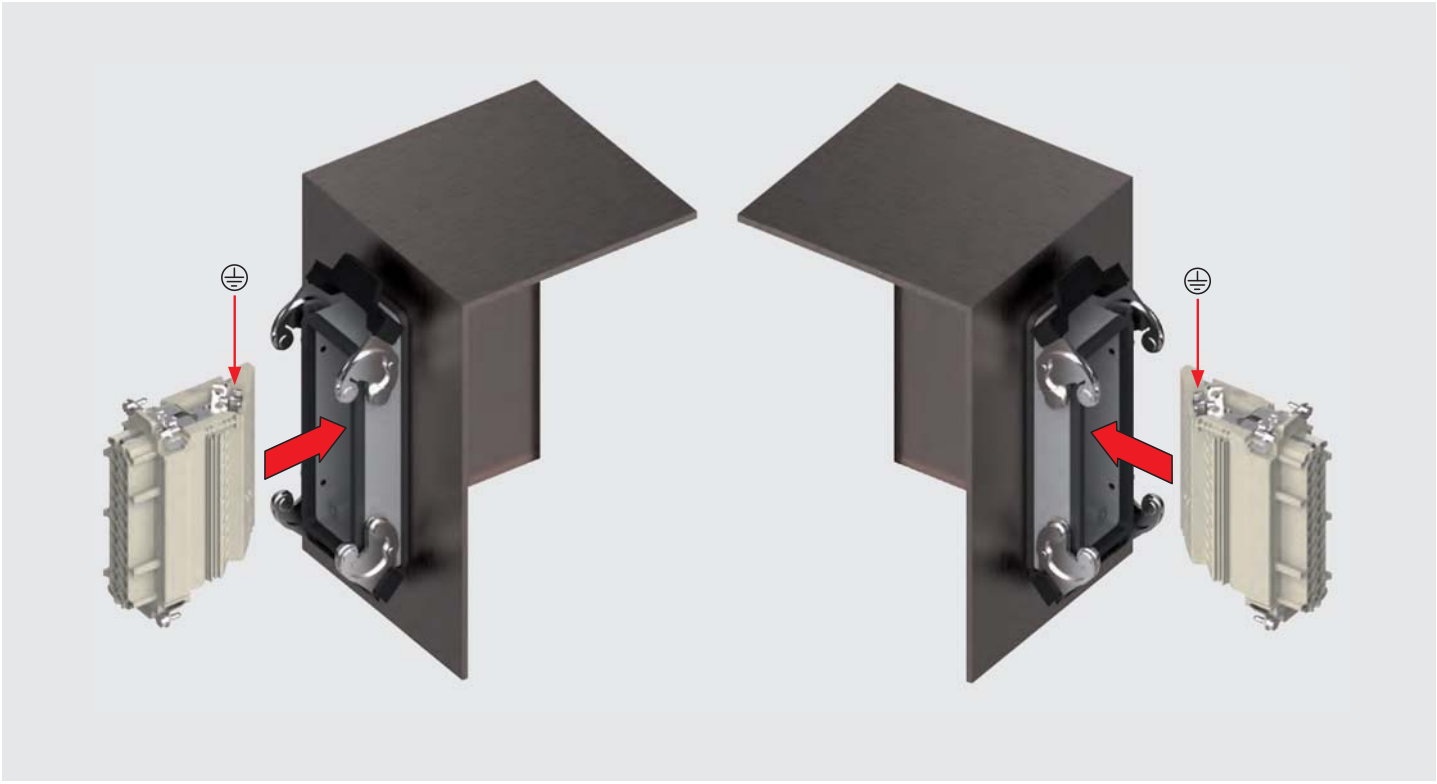

Figure 5 (mounting on DIN rail)

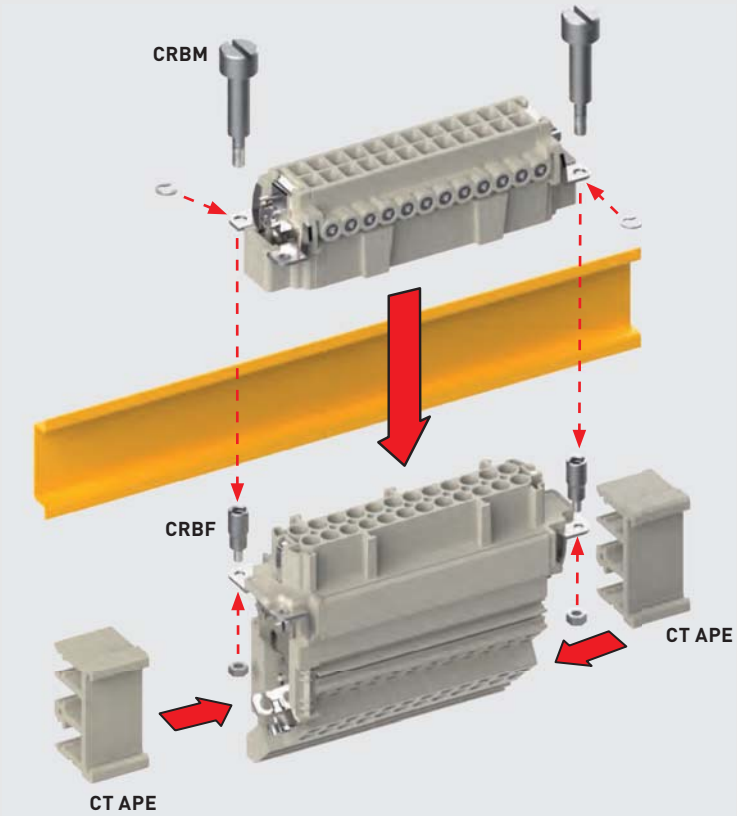

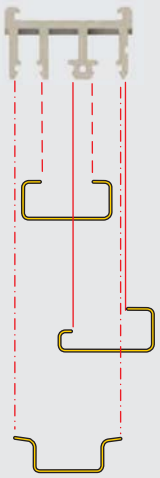

CT APE
possibility of coupling to DIN EN 60715 rail (for a greater stability of the CT, CTSE inserts of 16 and 24 poles we recommend using the two CT APE supports)

EN 60715
C 30

EN 60715
G 32

EN 60715
TH 35-7,5 and TH 35-15

Accessories for CT inserts
- support for mounting on DIN rail (**CT APE** page 669)
- inserts coupling screws (**CRBM** and **CRBF** page 669)
- cable-clamping plates (**CRAD** and **CRAS** page 669)

CT 6 poles + ⏚ 16A - 400V CTSE 6 poles + ⏚ 16A - 500V

enclosures *):
size “44.27”

	page:
C-TYPE IP65/IP66	387
C7 IP67, single lever	436 - 437
V-TYPE IP65/IP66, single lever	444 - 445
BIG hoods	466 - 467
T-TYPE IP65 insulating	480 - 481
T-TYPE / W IP66/IP69 insulating	489
HYGIENIC T-TYPE / H IP66/IP69	501
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	506
W-TYPE for aggressive environments	521
E-Xtreme® corrosion proof	530, 542
EMC	578
Central lever	603
LS-TYPE	618

***) only bulkhead mounted housings and BIG hoods**

- can be mated with CNE, CCE, CSS, CSH inserts
- inserts may be fitted from front of enclosure

terminal block inserts
screw terminal connection

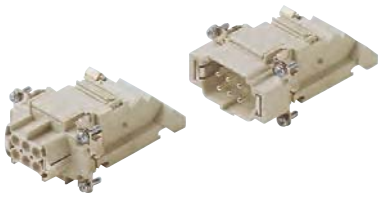

terminal block inserts
spring terminal connection

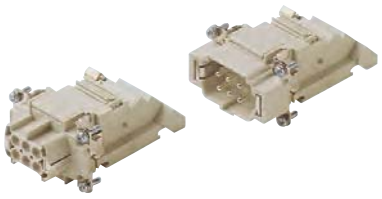

Q SILVER PLATED CONTACTS

Q SILVER PLATED CONTACTS

description	part No.	part No.	part No.	part No.
mounting side (see page 159)	left	right		
female inserts with female contacts 1)	**CTF 06 L**	**CTF 06 R**		
male inserts with male contacts 1)	**CTM 06 L**	**CTM 06 R**		
mounting side (see page 159)			left	right
female inserts with female contacts			**CTSEF 06 L**	**CTSEF 06 R**
male inserts with male contacts			**CTSEM 06 L**	**CTSEM 06 R**

1) for non-prepared conductors

- characteristics according to EN 61984:
  16A 230/400V 4kV 3 (CT)
  16A 400V 4kV 2 (CT)
  16A 500V 6kV 3 (CTSE)
  16A 400/690V 6kV 2 (CTSE)
- certified (**CT**)
- certified (**CTSE**)
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 4 mΩ
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

CT 06 poles connector inserts
Maximum current load derating diagram

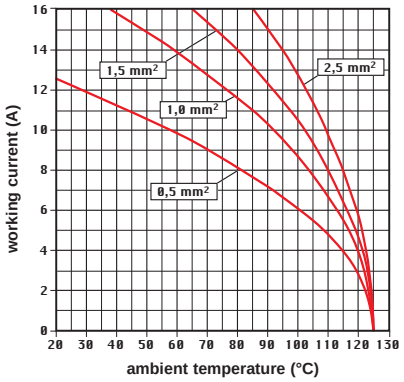

CTSE 06 poles connector inserts
Maximum current load derating diagram

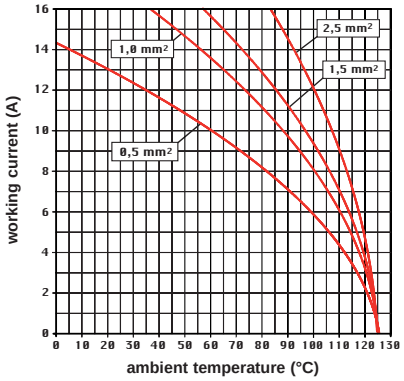

female inserts (CTF and CTSEF)



male inserts (CTM and CTSEM)



contacts side (front view)

female inserts (CTF and CTSEF)



male inserts (CTM and CTSEM)



- CT inserts with plate, for section conductors: 0,75 - 2,5 mm² - AWG 18 - 14
- conductors stripping length: 12 mm
- terminal screw torque: 0,4 Nm (3,54 lb.in), for more information see page 20 and 21

- CTSE spring inserts for section conductors: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

Connection technology with spring terminal

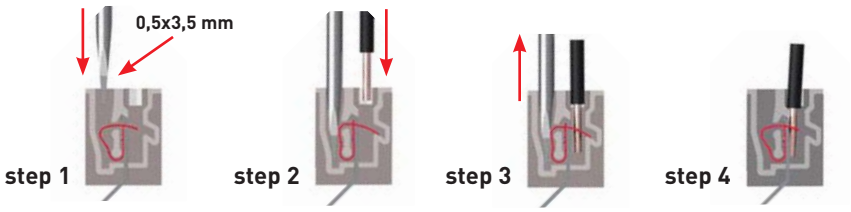

dimensions shown in mm are not binding and may be changed without notice

CT 10 poles + ⏚ 16A - 400V CTSE 10 poles + ⏚ 16A - 500V

enclosures *):
size "57.27"

	page:
C-TYPE IP65/IP66	393
C7 IP67, two levers	438
V-TYPE IP65/IP66, single lever	448 - 449
BIG hoods	468 - 469
T-TYPE IP65 insulating	482 - 483
T-TYPE / W IP66/IP69 insulating	490
HYGIENIC T-TYPE / H IP66/IP69	502
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	507
W-TYPE for aggressive environments	522
E-Xtreme® corrosion proof	532, 543
EMC	579
Central lever	606
LS-TYPE	620

***) only bulkhead mounted housings and BIG hoods**

- can be mated with CNE, CCE, CSS, CSH inserts
- inserts may be fitted from front of enclosure

terminal block inserts
screw terminal connection

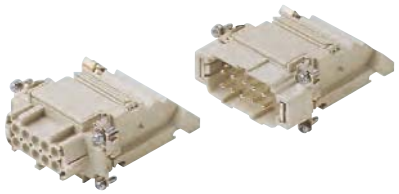

terminal block inserts
spring terminal connection

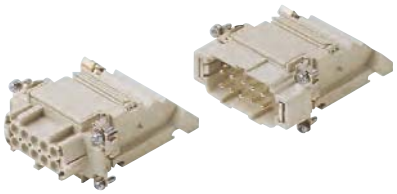

SILVER PLATED CONTACTS

SILVER PLATED CONTACTS

description	part No.	part No.	part No.	part No.
mounting side (see page 159)	left	right		
female inserts with female contacts [1]	**CTF 10 L**	**CTF 10 R**		
male inserts with male contacts [1]	**CTM 10 L**	**CTM 10 R**		
mounting side (see page 159)			left	right
female inserts with female contacts			**CTSEF 10 L**	**CTSEF 10 R**
male inserts with male contacts			**CTSEM 10 L**	**CTSEM 10 R**

[1] for non-prepared conductors

- characteristics according to EN 61984:
  16A 230/400V 4kV 3 (CT)
  16A 400V 4kV 2 (CT)
  16A 500V 6kV 3 (CTSE)
  16A 400/690V 6kV 2 (CTSE)
- certified (**CT**)
- certified (**CTSE**)
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 4 mΩ
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

CT 10 poles connector inserts
Maximum current load derating diagram

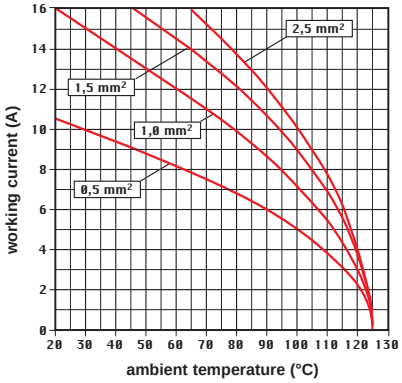

CTSE 10 poles connector inserts
Maximum current load derating diagram

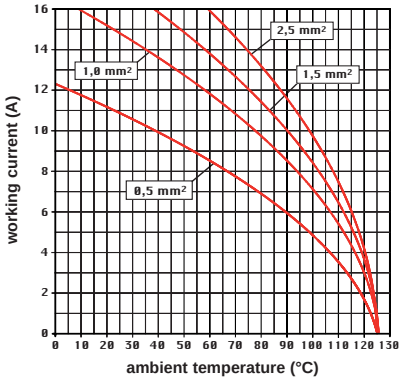

female inserts (CTF and CTSEF)



male inserts (CTM and CTSEM)



contacts side (front view)

female inserts (CTF and CTSEF)



male inserts (CTM and CTSEM)



- CT inserts with plate, for section conductors: 0,75 - 2,5 mm² - AWG 18 - 14
- conductors stripping length: 12 mm
- terminal screw torque: 0,4 Nm (3,54 lb.in), for more information see page 20 and 21

- CTSE spring inserts for section conductors: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

Connection technology with spring terminal

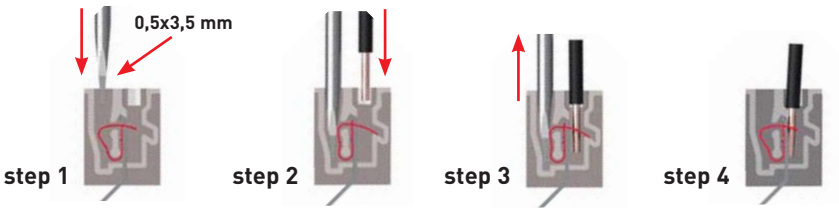

CT 16 poles + ⏚ 16A - 400V CTSE 16 poles + ⏚ 16A - 500V

enclosures *):
size “77.27”

	page:
C-TYPE IP65/IP66	402
C7 IP67, two levers	439 - 440
V-TYPE IP65/IP66, single lever	454 - 455
BIG hoods	470 - 471
T-TYPE IP65 insulating	484 - 485
T-TYPE / W IP66/IP69 insulating	491
HYGIENIC T-TYPE / H IP66/IP69	503
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	508
W-TYPE for aggressive environments	523
E-Xtreme® corrosion proof	534, 544
EMC	580
Central lever	609
LS-TYPE	622

***) only bulkhead mounted housings and BIG hoods**

- can be mated with CNE, CCE, CSS, CSH inserts
- inserts may be fitted from front of enclosure

terminal block inserts
screw terminal connection

terminal block inserts
spring terminal connection

Q SILVER PLATED CONTACTS

Q SILVER PLATED CONTACTS

description	part No.	part No.	part No.	part No.
mounting side (see page 159)	left	right		
female inserts with female contacts 1)	**CTF 16 L**	**CTF 16 R**		
male inserts with male contacts 1)	**CTM 16 L**	**CTM 16 R**		
mounting side (see page 159)			left	right
female inserts with female contacts			**CTSEF 16 L**	**CTSEF 16 R**
male inserts with male contacts			**CTSEM 16 L**	**CTSEM 16 R**

1) for non-prepared conductors

- characteristics according to EN 61984:
  16A 230/400V 4kV 3 (CT)
  16A 400V 4kV 2 (CT)
  16A 500V 6kV 3 (CTSE)
  16A 400/690V 6kV 2 (CTSE)
- certified (**CT**)
- certified (**CTSE**)
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 4 mΩ
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

CT 16 poles connector inserts
Maximum current load derating diagram

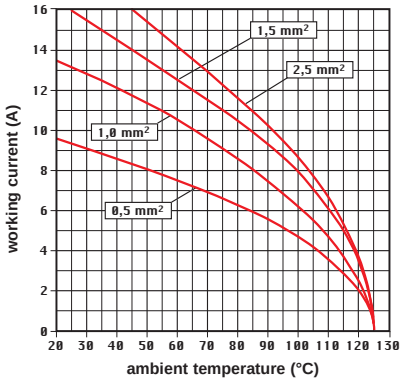

CTSE 16 poles connector inserts
Maximum current load derating diagram

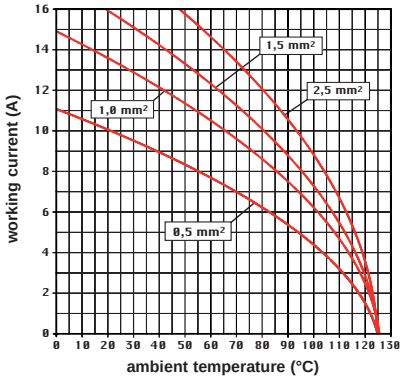

female inserts (CTF and CTSEF)

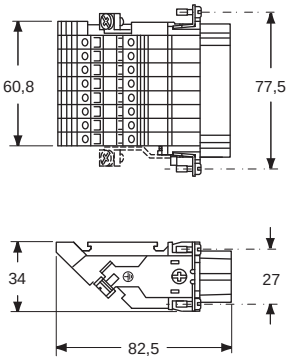

male inserts (CTM and CTSEM)

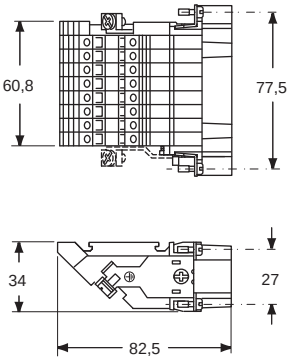

contacts side (front view)

female inserts (CTF and CTSEF)



male inserts (CTM and CTSEM)



- CT inserts with plate, for section conductors: 0,75 - 2,5 mm² - AWG 18 - 14
- conductors stripping length: 12 mm
- terminal screw torque: 0,4 Nm (3,54 lb.in), for more information see page 20 and 21

- CTSE spring inserts for section conductors: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

Connection technology with spring terminal

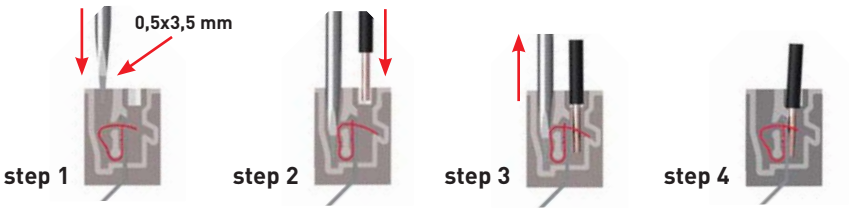

dimensions shown in mm are not binding and may be changed without notice

CT 24 poles + ⏚ 16A - 400V CTSE 24 poles + ⏚ 16A - 500V

enclosures *): size “104.27”	page:
C-TYPE IP65/IP66	412
C7 IP67, two levers	441 - 442
V-TYPE IP65/IP66, single lever	459 - 460
BIG hoods	472 - 473
T-TYPE IP65 insulating	486 - 487
T-TYPE / W IP66/IP69 insulating	492
HYGIENIC T-TYPE / H IP66/IP69	504
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	509
W-TYPE for aggressive environments	524
E-Xtreme® corrosion proof	536, 545
EMC	581
Central lever	612
LS-TYPE	624

*) only bulkhead mounted housings and BIG hoods

- can be mated with CNE, CCE, CSS, CSH inserts
- inserts may be fitted from front of enclosure

terminal block inserts screw terminal connection

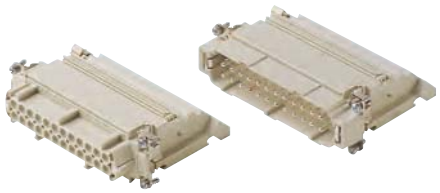

terminal block inserts spring terminal connection

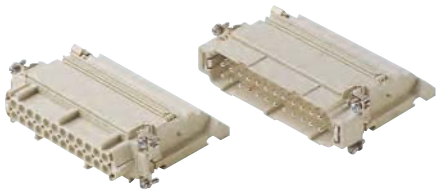

Q SILVER PLATED CONTACTS

Q SILVER PLATED CONTACTS

description	part No.	part No.	part No.	part No.
mounting side (see page 159)	left	right		
female inserts with female contacts 1)	**CTF 24 L**	**CTF 24 R**		
male inserts with male contacts 1)	**CTM 24 L**	**CTM 24 R**		
mounting side (see page 159)			left	right
female inserts with female contacts			**CTSEF 24 L**	**CTSEF 24 R**
male inserts with male contacts			**CTSEM 24 L**	**CTSEM 24 R**

1) for non-prepared conductors

- characteristics according to EN 61984:
  16A 230/400V 4kV 3 (CT)
  16A 400V 4kV 2 (CT)
  16A 500V 6kV 3 (CTSE)
  16A 400/690V 6kV 2 (CTSE)
- certified (**CT**)
- certified (**CTSE**)
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 4 mΩ
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

CT 24 poles connector inserts
Maximum current load derating diagram

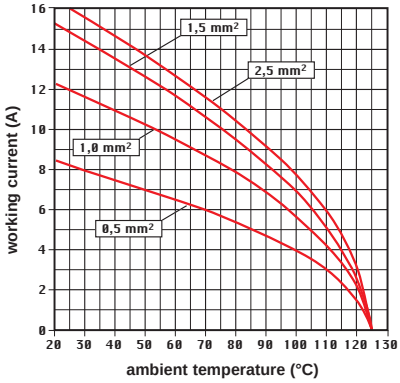

CTSE 24 poles connector inserts
Maximum current load derating diagram

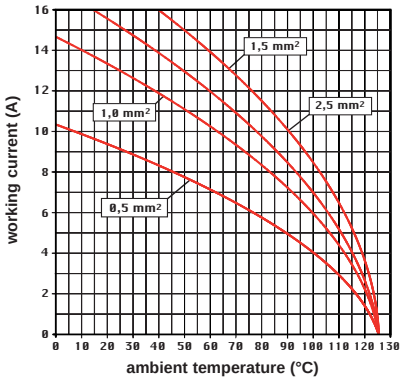

female inserts (CTF and CTSEF)

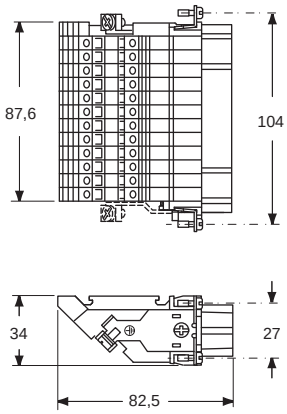

contacts side (front view)

female inserts (CTF and CTSEF)



- CT inserts with plate, for section conductors: 0,75 - 2,5 mm² - AWG 18 - 14
- conductors stripping length: 12 mm
- terminal screw torque: 0,4 Nm (3,54 lb.in), for more information see page 20 and 21

male inserts (CTM and CTSEM)

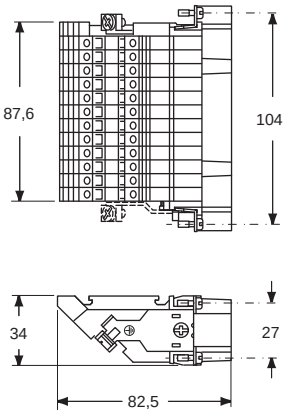

male inserts (CTM and CTSEM)



- CTSE spring inserts for section conductors: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

Connection technology with spring terminal

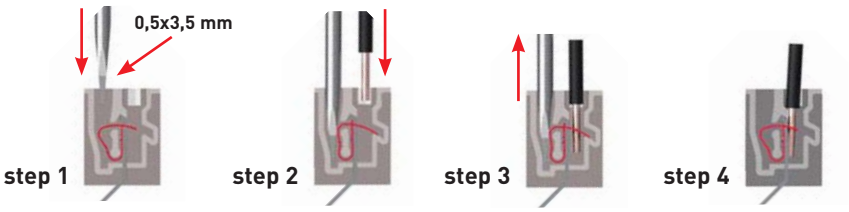

CTSE 32 poles + ⏚ 16A - 500V

enclosures *):
size “77.62” **page:**

C-TYPE IP65/IP66	**424**
W-TYPE for aggressive environments	**525**
E-Xtreme® corrosion proof	**546**

***) only bulkhead mounted housings**

terminal block inserts
spring terminal connection

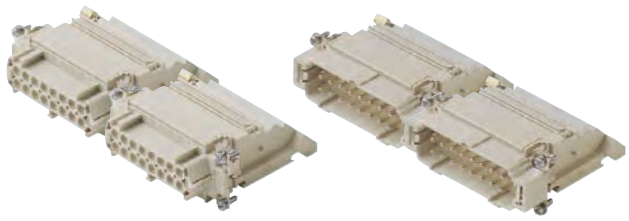

- CT screw version: on request
- can be mated with CNE, CCE, CSS, CSH inserts
- inserts may be fitted from front of enclosure

SILVER PLATED CONTACTS

description	part No.	part No.	part No.	part No.
mounting side (see page 159)	left	right	left	right
female inserts with female contacts, No. (1-16) and (17-32) 1)	**CTSEF 16 LN**	**CTSEF 16 R**	**CTSEF 16 L**	**CTSEF 16 RN**
male inserts with male contacts, No. (1-16) and (17-32) 1)	**CTSEM 16 LN**	**CTSEM 16 R**	**CTSEM 16 L**	**CTSEM 16 RN**

1) for non-prepared conductors

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 4 mΩ
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

female inserts (CTSEF)

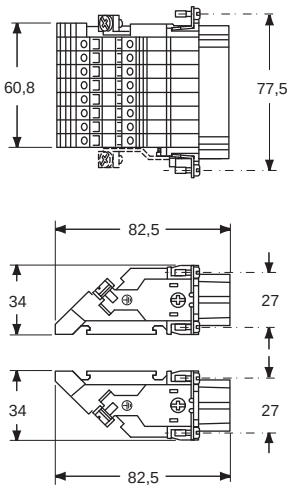

male inserts (CTSEM)

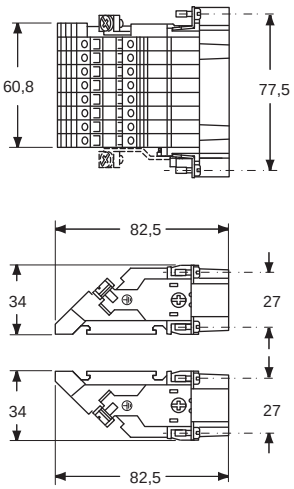

contacts side (front view)

female inserts (CTSEF)

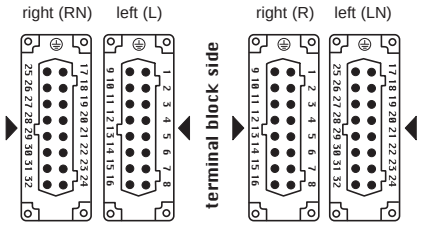

male inserts (CTSEM)

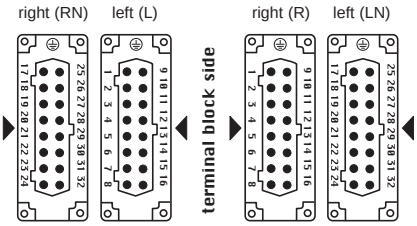

CTSE 32 poles connector inserts
Maximum current load derating diagram

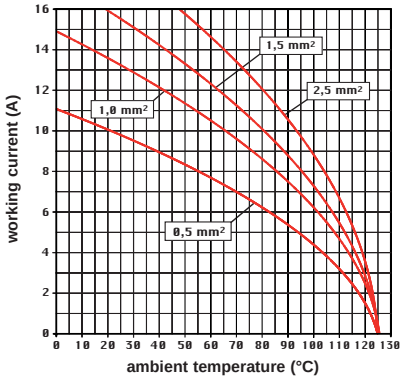

- CTSE spring inserts for section conductors: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

Connection technology with spring terminal

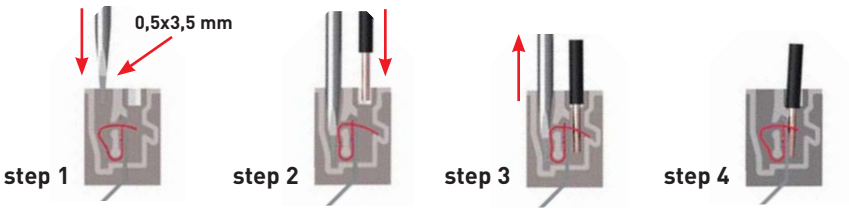

dimensions shown in mm are not binding and may be changed without notice

CTSE 48 poles + ⏚ 16A - 500V

enclosures *):
size “104.62” **page:**

C-TYPE IP65/IP66	**430**
W-TYPE for aggressive environments	**526**
E-Xtreme® corrosion proof	**547**

***) only bulkhead mounted housings**

terminal block inserts
spring terminal connection

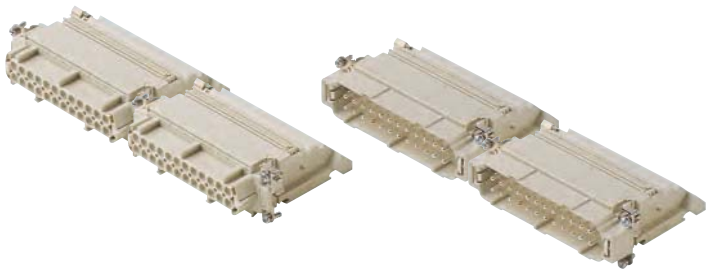

- CT screw version: on request
- can be mated with CNE, CCE, CSS, CSH inserts
- inserts may be fitted from front of enclosure

SILVER PLATED CONTACTS

description	part No.	part No.	part No.	part No.
mounting side (see page 159)	left	right	left	right
female inserts with female contacts, No. (1-24) and (25-48) 1)	**CTSEF 24 LN**	**CTSEF 24 R**	**CTSEF 24 L**	**CTSEF 24 RN**
male inserts with male contacts, No. (1-24) and (25-48) 1)	**CTSEM 24 LN**	**CTSEM 24 R**	**CTSEM 24 L**	**CTSEM 24 RN**

1) for non-prepared conductors

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 4 mΩ
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

female inserts (CTSEF)

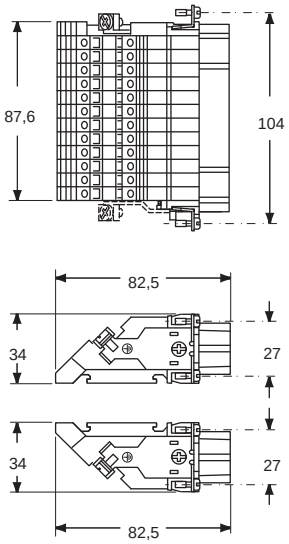

male inserts (CTSEM)

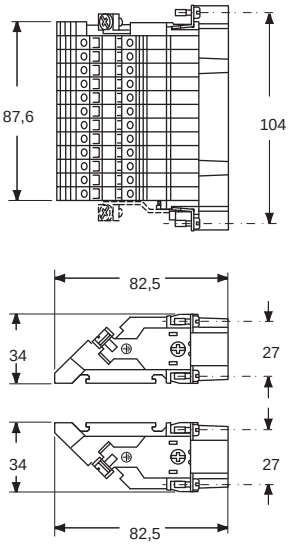

contacts side (front view)

female inserts (CTSEF)

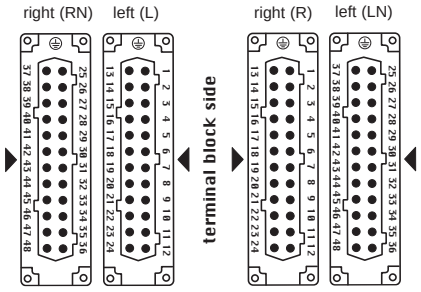

male inserts (CTSEM)

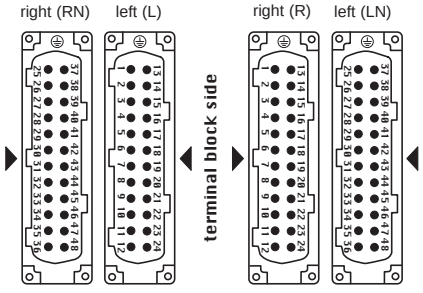

- CTSE spring inserts for section conductors: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

CTSE 48 poles connector inserts
Maximum current load derating diagram

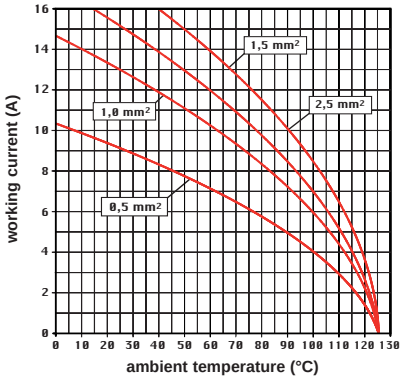

Connection technology with spring terminal

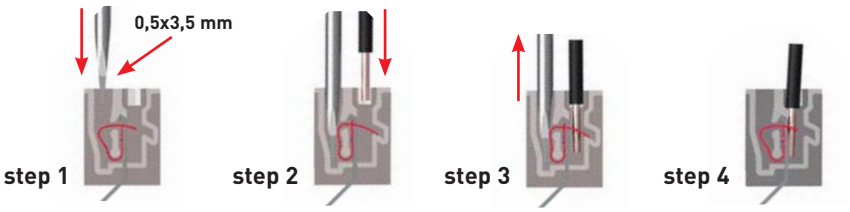

CQE series

TECHNICAL FEATURES

CQE connector inserts are disegned for removable crimp contacts series **CC** (solid pin ø 2,5 mm), (including male pins **CC x.x AN** for advanced opening) with rated current up to **16A** per pole, and are the "high density" evolution of historic series **CCE**: in the same housing sizes, the number of pole (contact density) is increased as shown in this table:

Size	series CCE # of poles	series CQE # of poles	density increase
44.27	6 + ⏚	10 + ⏚	1,67
57.27	10 + ⏚	18 + ⏚	1,80
77.27	16 + ⏚	32 + ⏚	2,00
104.27	24 + ⏚	46 + ⏚	1,92
77.62	32 + ⏚ (2x16)	64 + ⏚ (2x32)	2,00
104.62	48 + ⏚ (2x24)	92 + ⏚ (2x46)	1,92

NOTE - The contact density is almost doubled in the same footprint by doubling the number of rows of contacts from 2 to 4. Except for size 77.27, which shows 4 rows of contacts seats equally dimensioned, central rows - due to space costraints to keep the required insulating distances towards the PE lateral contacts - are limited in number to one contact seat less than the peripheral rows.

This allows using the same size of connector housing for wiring almost twice the amount of circuits, or conversely to step down by one size the dimension of the connector housing to wire the same number of circuits, with cost and space efficiency. The only precaution is to suitably select the size of cable entry in case of increase of number of individual wires or diameter of a multi-core cable. Contact retention is operated by the retainers incorporated in the insulating body contact holder. Suitable removal tool **CQES**.

Inserts series		**CQE**
No. of poles [1]	main contacts + ⏚	**10, 18, 32, 46, (64 = 2x32), (92 = 2x46)**
	auxiliary contacts	--
rated current [2]		16A
EN IEC 61984 pollution degree 3	rated voltage	500V
	rated impulse voltage	6kV
	pollution degree	3
EN IEC 61984 pollution degree 2	rated voltage	830V
	rated impulse voltage	8kV
	pollution degree	2
UL/CSA certification	rated voltage AC/DC	600V
contact resistance		≤ 1 mΩ
insulation resistance		≥ 10 GΩ
ambient temperature limit (°C)	min	-40 °C
	max	+125 °C
degree of protection	with enclosures	**IP65**, **IP66**/IP69, IP66/**IP67**/IP69, IP66/**IP68**/IP69 (according to type and model)
	without enclosures - termination side on male and female inserts; - mating side on female inserts	**IP20** (IPXXB)
conductor connections		crimp (⏚ only: screw)
conductor cross-sectional area	mm^2	0,14 - 2,5
	AWG	26 - 12
mechanical endurance (mating cycles)		≥ 500

1) Polarities shown in brakets may be obtained by using two inserts in their own double-sized housings
2) Please check the inserts derating diagrams to establish the actual maximum operating current according to the ambient temperature, the conductot cross-sectional area, the polarity of the connector, and any external constraint that may derive e.g. by the continuous operating temperature sustained by the chosen conductor sheathing or by end-product safety standards fixing max allowed temperature rise on terminals (e.g. 30 K, 45 K or 50 K)

When all the contacts are used, CQE connector inserts may be used at rated voltage up to 500V (first column) pollution degree 3, in accordance with the standard EN 61984. If the number of contacts is reduced and the contacts accordingly assigned, these connectors may be used at higher voltages.

This is possible because the decrease in the number of contacts leads to an increase clearences and creepage distances.
When the contacts are arranged as shown below, the inserts may be used at rated voltages of 690V (second column) and 1000V (third column) pollution degree 3, in accordance with the standard EN 61984.

Special voltages for CQE inserts

For use up to 500V pollution degree 3	For use up to 690V pollution degree 3	For use up to 1000V pollution degree 3
diagrams contacts side (front view)	diagrams contacts side (front view)	diagrams contacts side (front view)
CQE 10 - 10 + ⏚	**CQE 10 - 4 +** ⏚	**CQE 10 - 2 +** ⏚
		
CQE 18 - 18 + ⏚	**CQE 18 - 8 +** ⏚	**CQE 18 - 4 +** ⏚
		
CQE 32 - 32 + ⏚	**CQE 32 - 14 +** ⏚	**CQE 32 - 8 +** ⏚
		
CQE 46 - 46 + ⏚	**CQE 46 - 20 +** ⏚	**CQE 46 - 12 +** ⏚
		

Legend:

- ● working contact
- ○ without contact
- M = male insert
- F = female insert

CQE 10 poles + ⏚ 16A - 500V

enclosures:
size “44.27” **page:**

C-TYPE IP65/IP66	387 - 392
C7 IP67, single lever	436 - 437
V-TYPE IP65/IP66, single lever	444 - 447
BIG hoods	466 - 467
T-TYPE IP65 insulating	480 - 481
T-TYPE / W IP66/IP69 insulating	489
HYGIENIC T-TYPE / H IP66/IP69	501
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	506
W-TYPE for aggressive environments	521
E-Xtreme® corrosion proof 530 - 531, 542, 550 - 551	
EMC	578
Central lever	603 - 605
LS-TYPE	618 - 619
IP68	632 - 635

panel supports: **page:**

COB	652 - 653

- for applications requiring higher voltages, please see the special voltage application section on page 167

inserts, crimp connections

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CQEF 10**	
male inserts for male contacts	**CQEM 10**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove	**CCFA 0.3**	**CCFD 0.3**
0,5 mm² AWG 20 with no grooves	**CCFA 0.5**	**CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)	**CCFA 0.7**	**CCFD 0.7**
1 mm² AWG 18 one groove	**CCFA 1.0**	**CCFD 1.0**
1,5 mm² AWG 16 two grooves	**CCFA 1.5**	**CCFD 1.5**
2,5 mm² AWG 14 three grooves	**CCFA 2.5**	**CCFD 2.5**
3 mm² AWG 12 one wide groove	**CCFA 3.0**	**CCFD 3.0**
4 mm² AWG 12 with no grooves	**CCFA 4.0**	**CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove	**CCMA 0.3**	**CCMD 0.3**
0,5 mm² AWG 20 with no grooves	**CCMA 0.5**	**CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)	**CCMA 0.7**	**CCMD 0.7**
1 mm² AWG 18 one groove	**CCMA 1.0**	**CCMD 1.0**
1,5 mm² AWG 16t wo grooves	**CCMA 1.5**	**CCMD 1.5**
2,5 mm² AWG 14 three grooves	**CCMA 2.5**	**CCMD 2.5**
3 mm² AWG 12 one wide groove	**CCMA 3.0**	**CCMD 3.0**
4 mm² AWG 12 with no grooves	**CCMA 4.0**	**CCMD 4.0**
16A male crimp contacts for advanced opening		
0,5 mm² AWG 20 with no grooves	**CC 0.5 AN**	
0,75 mm² AWG 18 one groove (back side)	**CC 0.7 AN**	
1 mm² AWG 18 one groove	**CC 1.0 AN**	
1,5 mm² AWG 16 two grooves	**CC 1.5 AN**	
2,5 mm² AWG 14 three grooves	**CC 2.5 AN**	

silver plated

gold plated+

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 830V 8kV 2
- c UL us (UL for USA and Canada), CSA, CQC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CQE 10 poles connector inserts
Maximum current load derating diagram

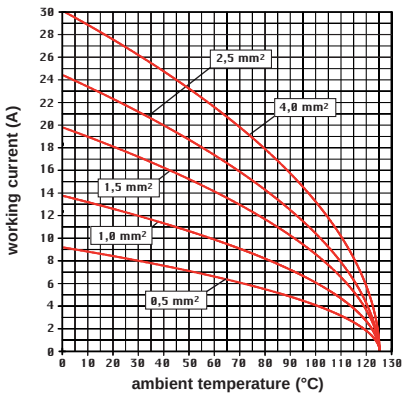



contacts side (front view)



CR CPQ coding pins (page 689)

CCF and CCM

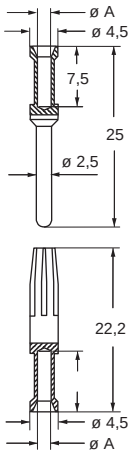

CC...AN



- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

CQE 18 poles + ⏚ 16A - 500V

enclosures:
size "57.27" **page:**

C-TYPE IP65/IP66	**393 - 401**
C7 IP67, two levers	**438**
V-TYPE IP65/IP66, single lever	**448 - 453**
BIG hoods	**468 - 469**
T-TYPE IP65 insulating	**482 - 483**
T-TYPE / W IP66/IP69 insulating	**490**
HYGIENIC T-TYPE / H IP66/IP69	**502**
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	**507**
W-TYPE for aggressive environments	**522**
E-Xtreme® corrosion proof 532 - 533, 543, 552 - 553	
EMC	**579**
Central lever	**606 - 608**
LS-TYPE	**620 - 621**
IP68	**636 - 639**

panel supports: **page:**
COB **652 - 653**

- for applications requiring higher voltages, please see the special voltage application section on page 167

inserts, crimp connections

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CQEF 18**	
male inserts for male contacts	**CQEM 18**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCFA 0.3** / **CCFD 0.3**
0,5 mm² AWG 20 with no grooves		**CCFA 0.5** / **CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCFA 0.7** / **CCFD 0.7**
1 mm² AWG 18 one groove		**CCFA 1.0** / **CCFD 1.0**
1,5 mm² AWG 16 two grooves		**CCFA 1.5** / **CCFD 1.5**
2,5 mm² AWG 14 three grooves		**CCFA 2.5** / **CCFD 2.5**
3 mm² AWG 12 one wide groove		**CCFA 3.0** / **CCFD 3.0**
4 mm² AWG 12 with no grooves		**CCFA 4.0** / **CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCMA 0.3** / **CCMD 0.3**
0,5 mm² AWG 20 with no grooves		**CCMA 0.5** / **CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCMA 0.7** / **CCMD 0.7**
1 mm² AWG 18 one groove		**CCMA 1.0** / **CCMD 1.0**
1,5 mm² AWG 16t wo grooves		**CCMA 1.5** / **CCMD 1.5**
2,5 mm² AWG 14 three grooves		**CCMA 2.5** / **CCMD 2.5**
3 mm² AWG 12 one wide groove		**CCMA 3.0** / **CCMD 3.0**
4 mm² AWG 12 with no grooves		**CCMA 4.0** / **CCMD 4.0**
16A male crimp contacts for advanced opening		
0,5 mm² AWG 20 with no grooves		**CC 0.5 AN**
0,75 mm² AWG 18 one groove (back side)		**CC 0.7 AN**
1 mm² AWG 18 one groove		**CC 1.0 AN**
1,5 mm² AWG 16 two grooves		**CC 1.5 AN**
2,5 mm² AWG 14 three grooves		**CC 2.5 AN**

silver plated | **gold plated+**

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 830V 8kV 2
- c UL us (UL for USA and Canada), CSA, CQC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CQE 18 poles connector inserts
Maximum current load derating diagram

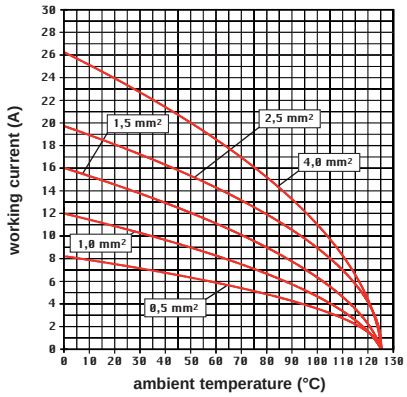



contacts side (front view)



CR CPQ coding pins (page 689)

CCF and CCM



CC...AN



- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CQE 32 poles + ⏚ 16A - 500V

enclosures:
size "77.27" **page:**

C-TYPE IP65/IP66	402 - 411
C7 IP67, two levers	439 - 440
V-TYPE IP65/IP66, single lever	454 - 458
BIG hoods	470 - 471
T-TYPE IP65 insulating	484 - 485
T-TYPE / W IP66/IP69 insulating	491
HYGIENIC T-TYPE / H IP66/IP69	503
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	508
W-TYPE for aggressive environments	523
E-Xtreme® corrosion proof	534 - 535, 544, 554 - 555
EMC	580
Central lever	609 - 611
LS-TYPE	622 - 623
IP68	640 - 643

panel supports: **page:**

COB	652 - 653

- for applications requiring higher voltages, please see the special voltage application section on page 167

inserts, crimp connections

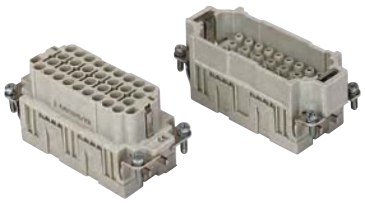

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CQEF 32**	
male inserts for male contacts	**CQEM 32**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCFA 0.3** / **CCFD 0.3**
0,5 mm² AWG 20 with no grooves		**CCFA 0.5** / **CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCFA 0.7** / **CCFD 0.7**
1 mm² AWG 18 one groove		**CCFA 1.0** / **CCFD 1.0**
1,5 mm² AWG 16 two grooves		**CCFA 1.5** / **CCFD 1.5**
2,5 mm² AWG 14 three grooves		**CCFA 2.5** / **CCFD 2.5**
3 mm² AWG 12 one wide groove		**CCFA 3.0** / **CCFD 3.0**
4 mm² AWG 12 with no grooves		**CCFA 4.0** / **CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCMA 0.3** / **CCMD 0.3**
0,5 mm² AWG 20 with no grooves		**CCMA 0.5** / **CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCMA 0.7** / **CCMD 0.7**
1 mm² AWG 18 one groove		**CCMA 1.0** / **CCMD 1.0**
1,5 mm² AWG 16t wo grooves		**CCMA 1.5** / **CCMD 1.5**
2,5 mm² AWG 14 three grooves		**CCMA 2.5** / **CCMD 2.5**
3 mm² AWG 12 one wide groove		**CCMA 3.0** / **CCMD 3.0**
4 mm² AWG 12 with no grooves		**CCMA 4.0** / **CCMD 4.0**
16A male crimp contacts for advanced opening		
0,5 mm² AWG 20 with no grooves		**CC 0.5 AN**
0,75 mm² AWG 18 one groove (back side)		**CC 0.7 AN**
1 mm² AWG 18 one groove		**CC 1.0 AN**
1,5 mm² AWG 16 two grooves		**CC 1.5 AN**
2,5 mm² AWG 14 three grooves		**CC 2.5 AN**

silver plated / **gold plated**+

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 830V 8kV 2
- c UL us (UL for USA and Canada), CSA, CQC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CQE 32 poles connector inserts
Maximum current load derating diagram

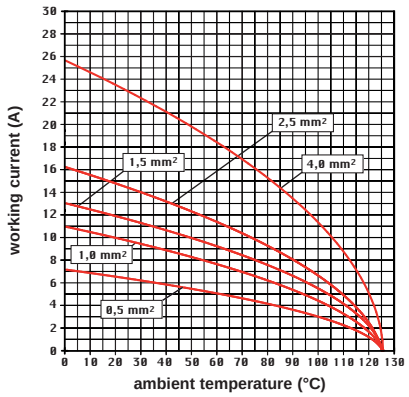

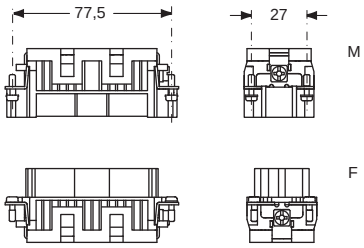

contacts side (front view)



CR CPQ coding pins (page 689)

CCF and CCM



CC...AN





- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

CQE 46 poles + ⏚ 16A - 500V

enclosures:
size “104.27”

	page:
C-TYPE IP65/IP66	412 - 423
C7 IP67, two levers	441 - 442
V-TYPE IP65/IP66, single lever	459 - 463
BIG hoods	472 - 473
T-TYPE IP65 insulating	486 - 487
T-TYPE / W IP66/IP69 insulating	492
HYGIENIC T-TYPE / H IP66/IP69	504
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	509
W-TYPE for aggressive environments	524
E-Xtreme® corrosion proof 536 - 537, 545, 556 - 557	
EMC	581
Central lever	612 - 614
LS-TYPE	624 - 625
IP68	644 - 647

panel supports:

	page:
COB	652 - 653

- for applications requiring higher voltages, please see the special voltage application section on page 167

inserts, crimp connections

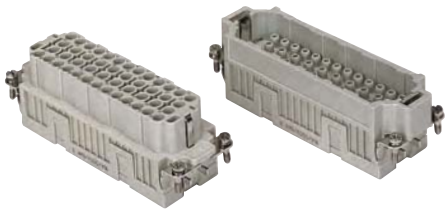

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CQEF 46**	
male inserts for male contacts	**CQEM 46**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCFA 0.3** / **CCFD 0.3**
0,5 mm² AWG 20 with no grooves		**CCFA 0.5** / **CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCFA 0.7** / **CCFD 0.7**
1 mm² AWG 18 one groove		**CCFA 1.0** / **CCFD 1.0**
1,5 mm² AWG 16 two grooves		**CCFA 1.5** / **CCFD 1.5**
2,5 mm² AWG 14 three grooves		**CCFA 2.5** / **CCFD 2.5**
3 mm² AWG 12 one wide groove		**CCFA 3.0** / **CCFD 3.0**
4 mm² AWG 12 with no grooves		**CCFA 4.0** / **CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCMA 0.3** / **CCMD 0.3**
0,5 mm² AWG 20 with no grooves		**CCMA 0.5** / **CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCMA 0.7** / **CCMD 0.7**
1 mm² AWG 18 one groove		**CCMA 1.0** / **CCMD 1.0**
1,5 mm² AWG 16t wo grooves		**CCMA 1.5** / **CCMD 1.5**
2,5 mm² AWG 14 three grooves		**CCMA 2.5** / **CCMD 2.5**
3 mm² AWG 12 one wide groove		**CCMA 3.0** / **CCMD 3.0**
4 mm² AWG 12 with no grooves		**CCMA 4.0** / **CCMD 4.0**
16A male crimp contacts for advanced opening		
0,5 mm² AWG 20 with no grooves		**CC 0.5 AN**
0,75 mm² AWG 18 one groove (back side)		**CC 0.7 AN**
1 mm² AWG 18 one groove		**CC 1.0 AN**
1,5 mm² AWG 16 two grooves		**CC 1.5 AN**
2,5 mm² AWG 14 three grooves		**CC 2.5 AN**

silver plated

gold plated+

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 830V 8kV 2
- c UL us (UL for USA and Canada), CSA, CQC, DNV GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CQE 46 poles connector inserts
Maximum current load derating diagram

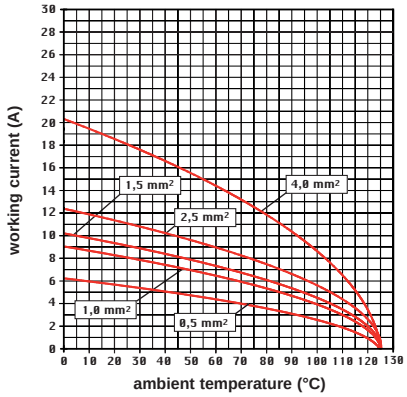

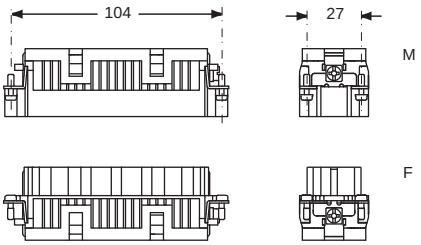

contacts side (front view)



CR CPQ coding pins (page 689)

CCF and CCM



CC...AN





- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CQE 64 poles + ⏚ 16A - 500V

enclosures:
size “77.62” **page:**

C-TYPE IP65/IP66 **424 - 429**
W-TYPE for aggressive environments **525**
E-Xtreme® corrosion proof **546**

- for applications requiring higher voltages, please see the special voltage application section on page 167

inserts, crimp connections

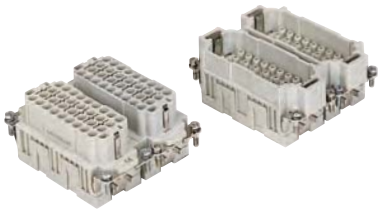

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.	part No.		part No.	
without contacts (to be ordered separately)						
female inserts for female contacts, No. (1-32) and (33-64)	**CQEF 32**	**CQEF 32 N**				
male inserts for male contacts, No. (1-32) and (33-64)	**CQEM 32**	**CQEM 32 N**				
16A female contacts						
0,14-0,37 mm²	AWG 26-22	one groove	**CCFA 0.3**	**silver plated**	**CCFD 0.3**	**gold plated⁺**
0,5 mm²	AWG 20	with no grooves	**CCFA 0.5**		**CCFD 0.5**	
0,75 mm²	AWG 18	one groove (back side)	**CCFA 0.7**		**CCFD 0.7**	
1 mm²	AWG 18	one groove	**CCFA 1.0**		**CCFD 1.0**	
1,5 mm²	AWG 16	two grooves	**CCFA 1.5**		**CCFD 1.5**	
2,5 mm²	AWG 14	three grooves	**CCFA 2.5**		**CCFD 2.5**	
3 mm²	AWG 12	one wide groove	**CCFA 3.0**		**CCFD 3.0**	
4 mm²	AWG 12	with no grooves	**CCFA 4.0**		**CCFD 4.0**	
16A male contacts						
0,14-0,37 mm²	AWG 26-22	one groove	**CCMA 0.3**		**CCMD 0.3**	
0,5 mm²	AWG 20	with no grooves	**CCMA 0.5**		**CCMD 0.5**	
0,75 mm²	AWG 18	one groove (back side)	**CCMA 0.7**		**CCMD 0.7**	
1 mm²	AWG 18	one groove	**CCMA 1.0**		**CCMD 1.0**	
1,5 mm²	AWG 16t	wo grooves	**CCMA 1.5**		**CCMD 1.5**	
2,5 mm²	AWG 14	three grooves	**CCMA 2.5**		**CCMD 2.5**	
3 mm²	AWG 12	one wide groove	**CCMA 3.0**		**CCMD 3.0**	
4 mm²	AWG 12	with no grooves	**CCMA 4.0**		**CCMD 4.0**	
16A male crimp contacts for advanced opening						
0,5 mm²	AWG 20	with no grooves	**CC 0.5 AN**			
0,75 mm²	AWG 18	one groove (back side)	**CC 0.7 AN**			
1 mm²	AWG 18	one groove	**CC 1.0 AN**			
1,5 mm²	AWG 16	two grooves	**CC 1.5 AN**			
2,5 mm²	AWG 14	three grooves	**CC 2.5 AN**			

⁺ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 830V 8kV 2
- c UL us (UL for USA and Canada), SP cec SNVG.
  BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CQE 64 poles connector inserts
Maximum current load derating diagram

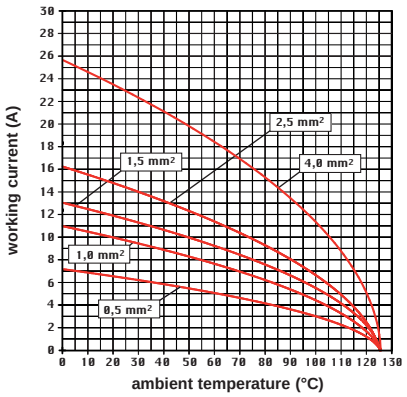

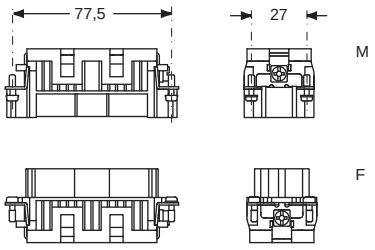

contacts side (front view)

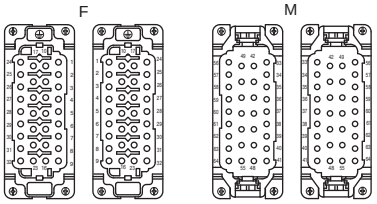

CR CPQ coding pins (page 689)

CCF and CCM





CC...AN



- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 705 - 741)

CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

CQE 92 poles + ⏚ 16A - 500V

enclosures:
size "104.62" **page:**

C-TYPE IP65/IP66 **430**
W-TYPE for aggressive environments **526**
E-Xtreme® corrosion proof **547**

- for applications requiring higher voltages, please see the special voltage application section on page 167

inserts, crimp connections

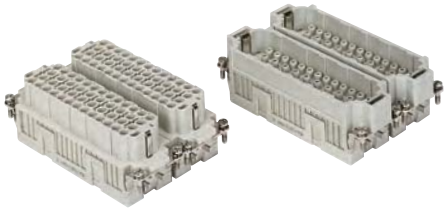

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.	part No.		part No.	
without contacts (to be ordered separately)						
female inserts for female contacts, No. (1-46) and (47-92)	**CQEF 46**	**CQEF 46 N**				
male inserts for male contacts, No. (1-46) and (47-92)	**CQEM 46**	**CQEM 46 N**				
16A female contacts						
0,14-0,37 mm²	AWG 26-22	one groove			**CCFA 0.3**	**CCFD 0.3**
0,5 mm²	AWG 20	with no grooves			**CCFA 0.5**	**CCFD 0.5**
0,75 mm²	AWG 18	one groove (back side)			**CCFA 0.7**	**CCFD 0.7**
1 mm²	AWG 18	one groove			**CCFA 1.0**	**CCFD 1.0**
1,5 mm²	AWG 16	two grooves			**CCFA 1.5**	**CCFD 1.5**
2,5 mm²	AWG 14	three grooves			**CCFA 2.5**	**CCFD 2.5**
3 mm²	AWG 12	one wide groove			**CCFA 3.0**	**CCFD 3.0**
4 mm²	AWG 12	with no grooves			**CCFA 4.0**	**CCFD 4.0**
16A male contacts						
0,14-0,37 mm²	AWG 26-22	one groove			**CCMA 0.3**	**CCMD 0.3**
0,5 mm²	AWG 20	with no grooves			**CCMA 0.5**	**CCMD 0.5**
0,75 mm²	AWG 18	one groove (back side)			**CCMA 0.7**	**CCMD 0.7**
1 mm²	AWG 18	one groove			**CCMA 1.0**	**CCMD 1.0**
1,5 mm²	AWG 16t	wo grooves			**CCMA 1.5**	**CCMD 1.5**
2,5 mm²	AWG 14	three grooves			**CCMA 2.5**	**CCMD 2.5**
3 mm²	AWG 12	one wide groove			**CCMA 3.0**	**CCMD 3.0**
4 mm²	AWG 12	with no grooves			**CCMA 4.0**	**CCMD 4.0**
16A male crimp contacts for advanced opening						
0,5 mm²	AWG 20	with no grooves			**CC 0.5 AN**	
0,75 mm²	AWG 18	one groove (back side)			**CC 0.7 AN**	
1 mm²	AWG 18	one groove			**CC 1.0 AN**	
1,5 mm²	AWG 16	two grooves			**CC 1.5 AN**	
2,5 mm²	AWG 14	three grooves			**CC 2.5 AN**	

silver plated

gold plated+

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 830V 8kV 2
- c UL us (UL for USA and Canada), CSA, CQC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CQE 92 poles connector inserts
Maximum current load derating diagram

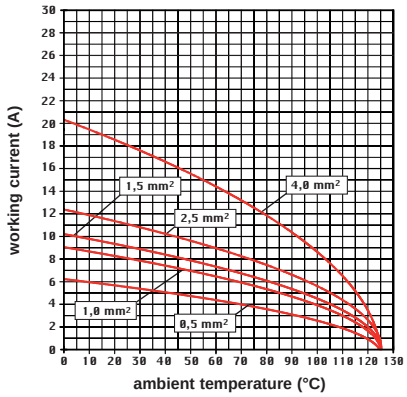

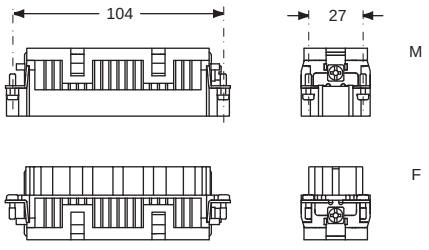

contacts side (front view)

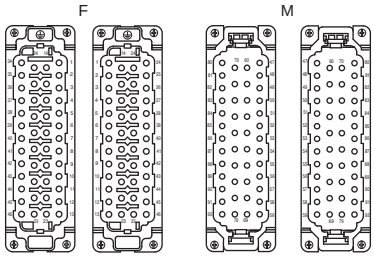

CR CPQ coding pins (page 689)

CCF and CCM



CC...AN





- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 705 - 741)

CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CQEE series

TECHNICAL FEATURES

Connector inserts series **CQEE** are the logical extension of the existing series CQE for removable crimp contacts series CC (16A max, available both in gold plated and in silver plated version) that include the CC…AN pin contacts with anticipated opening (first-to-break) and delayed closing (last-to-make).

Compared with the connector inserts of the same size of series CQE, connector inserts series **CQEE** provide a sensibly higher number of contacts: 64P+⏚ instead of 46P+⏚ for size 104.27 (+39%), 40P+⏚ instead of 32P+⏚ for size 77.27 (+25%).

With the same number of circuits, it is conversely possible to reduce the size of the connector inserts and of the related hood and housing, thus reducing the overall cost.

Connector inserts series **CQEE** may replace in the same size (77.27, 104.27) and with the same contact density (40P+⏚ and 64P+⏚) the corresponding inserts of series CD for removable crimp contacts series CD (10A max).

This may be particularly useful when, as a function of the intended use, it is required:

- to use the connector at a higher rated voltage: CQEE covers use at 500V / 6kV / 3 where CD stops at 250V / 4kV /3;
- to assign a larger current-carrying capacity, both due to the lower contact resistance (1 mΩ instead of 3 mΩ) and the larger wire size available for series CC compared with series CD contacts;
- to use wires with the larger cross-sectional area of 4 mm^2 / AWG 12, in order to contain the percent voltage drop [%] in circuits fed with extra-low voltage and with comparatively high currents, or in circuits of considerable length;
- to use crimp contacts with inherently higher mechanical robustness;
- to use anticipated pin contacts CC…AN (e.g. for the remote signal ling of the “OPEN” or “CLOSED” status of the connector).

CQEE series

TECHNICAL FEATURES

Inserts series		**CQEE**
No. of poles	main contacts + ⏚	**40 + ⏚, 64 + ⏚**
rated current [1)]		16A
EN 61984 pollution degree 3	rated voltage	500V
	rated impulse voltage	6kV
	pollution degree	3
EN 61984 pollution degree 2	rated voltage rated impulse voltage	830V 6kV
	pollution degree	2
UL/CSA certification	rated voltage AC/DC	600V
contact resistance		≤ 1 mΩ
insulation resistance		≥ 10 GΩ
ambient temperature limit (°C)	min	-40 °C
	max	+125 °C
degree of protection	with enclosures (according to version)	**IP65**, **IP66**/IP69, IP66/**IP67**/IP69, IP66/**IP68**/IP69 (according to type and model)
	without enclosures	**IP20** (IPXXB)
conductor connections		crimp (only ⏚: screw)
conductor cross-section (CC contact series)	mm^2	0,14 4,0
	AWG	26 - 12
stripping length	mm	7,5
mechanical endurance (mating cycles)		≥ 500

[1)] Please check the inserts derating diagrams to establish the actual maximum operating current according to the ambient temperature, the conductot cross-sectional area, the polarity of the connector, and any external constraint that may derive e.g. by the continuous operating temperature sustained by the chosen conductor sheathing or by end-product safety standards fixing max allowed temperature rise on terminals (e.g. 30 K, 45 K or 50 K)

CQEE 40 poles + ⏚ 16A - 500V

enclosures:
size "77.27" **page:**

C-TYPE IP65/IP66	402 - 411
C7 IP67, two levers	439 - 440
V-TYPE IP65/IP66, single lever	454 - 458
BIG hoods	470 - 471
T-TYPE IP65 insulating	484 - 485
T-TYPE / W IP66/IP69 insulating	491
HYGIENIC T-TYPE / H IP66/IP69	503
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	508
W-TYPE for aggressive environments	523
E-Xtreme® corrosion proof 534 - 535, 544, 554 - 555	
EMC	580
Central lever	609 - 611
LS-TYPE	622 - 623
IP68	640 - 643

panel supports: **page:**

COB	652 - 653

inserts, crimp connections



16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CQEEF 40**	
male inserts for male contacts	**CQEEM 40**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove	**CCFA 0.3**	**CCFD 0.3**
0,5 mm² AWG 20 with no grooves	**CCFA 0.5**	**CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)	**CCFA 0.7**	**CCFD 0.7**
1 mm² AWG 18 one groove	**CCFA 1.0**	**CCFD 1.0**
1,5 mm² AWG 16 two grooves	**CCFA 1.5**	**CCFD 1.5**
2,5 mm² AWG 14 three grooves	**CCFA 2.5**	**CCFD 2.5**
3 mm² AWG 12 one wide groove	**CCFA 3.0**	**CCFD 3.0**
4 mm² AWG 12 with no grooves	**CCFA 4.0**	**CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove	**CCMA 0.3**	**CCMD 0.3**
0,5 mm² AWG 20 with no grooves	**CCMA 0.5**	**CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)	**CCMA 0.7**	**CCMD 0.7**
1 mm² AWG 18 one groove	**CCMA 1.0**	**CCMD 1.0**
1,5 mm² AWG 16t wo grooves	**CCMA 1.5**	**CCMD 1.5**
2,5 mm² AWG 14 three grooves	**CCMA 2.5**	**CCMD 2.5**
3 mm² AWG 12 one wide groove	**CCMA 3.0**	**CCMD 3.0**
4 mm² AWG 12 with no grooves	**CCMA 4.0**	**CCMD 4.0**
16A male crimp contacts for advanced opening		
0,5 mm² AWG 20 with no grooves	**CC 0.5 AN**	
0,75 mm² AWG 18 one groove (back side)	**CC 0.7 AN**	
1 mm² AWG 18 one groove	**CC 1.0 AN**	
1,5 mm² AWG 16 two grooves	**CC 1.5 AN**	
2,5 mm² AWG 14 three grooves	**CC 2.5 AN**	

silver plated

gold plated⁺

⁺ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 500V 6kV 3
- c UL us (UL for USA and Canada), SP CQC DNV-GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CQEE 40 poles connector inserts
Maximum current load derating diagram

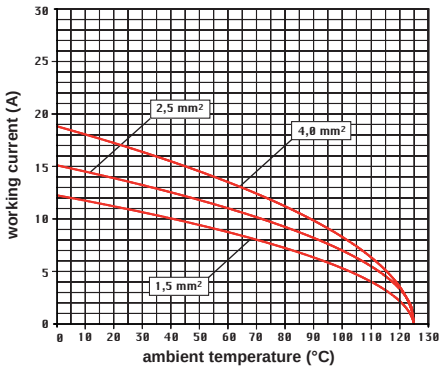

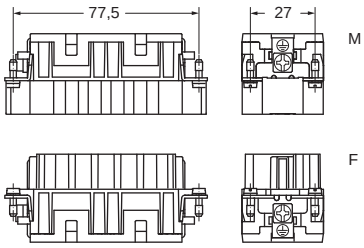

contacts side (front view)



CR CPQ coding pins (page 689)

CCF and CCM



CC...AN





- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

CQEE 64 poles + ⏚ 16A - 500V

enclosures: size “104.27”	page:
C-TYPE IP65/IP66	412 - 423
C7 IP67, two levers	441 - 442
V-TYPE IP65/IP66, single lever	459 - 463
BIG hoods	472 - 473
T-TYPE IP65 insulating	486 - 487
T-TYPE / W IP66/IP69 insulating	492
HYGIENIC T-TYPE / H IP66/IP69	504
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	509
W-TYPE for aggressive environments	524
E-Xtreme® corrosion proof	536 - 537, 545, 556 - 557
EMC	581
Central lever	612 - 614
LS-TYPE	624 - 625
IP68	644 - 647

panel supports:	page:
COB	652 - 653

inserts, crimp connections

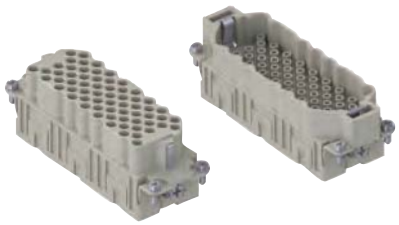

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CQEEF 64**	
male inserts for male contacts	**CQEEM 64**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCFA 0.3** / **CCFD 0.3**
0,5 mm² AWG 20 with no grooves		**CCFA 0.5** / **CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCFA 0.7** / **CCFD 0.7**
1 mm² AWG 18 one groove		**CCFA 1.0** / **CCFD 1.0**
1,5 mm² AWG 16 two grooves		**CCFA 1.5** / **CCFD 1.5**
2,5 mm² AWG 14 three grooves		**CCFA 2.5** / **CCFD 2.5**
3 mm² AWG 12 one wide groove		**CCFA 3.0** / **CCFD 3.0**
4 mm² AWG 12 with no grooves		**CCFA 4.0** / **CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCMA 0.3** / **CCMD 0.3**
0,5 mm² AWG 20 with no grooves		**CCMA 0.5** / **CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCMA 0.7** / **CCMD 0.7**
1 mm² AWG 18 one groove		**CCMA 1.0** / **CCMD 1.0**
1,5 mm² AWG 16t wo grooves		**CCMA 1.5** / **CCMD 1.5**
2,5 mm² AWG 14 three grooves		**CCMA 2.5** / **CCMD 2.5**
3 mm² AWG 12 one wide groove		**CCMA 3.0** / **CCMD 3.0**
4 mm² AWG 12 with no grooves		**CCMA 4.0** / **CCMD 4.0**
16A male crimp contacts for advanced opening		
0,5 mm² AWG 20 with no grooves		**CC 0.5 AN**
0,75 mm² AWG 18 one groove (back side)		**CC 0.7 AN**
1 mm² AWG 18 one groove		**CC 1.0 AN**
1,5 mm² AWG 16 two grooves		**CC 1.5 AN**
2,5 mm² AWG 14 three grooves		**CC 2.5 AN**

silver plated

gold plated+

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 500V 6kV 3
- c UL us (UL for USA and Canada), SP cqc DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CQEE 64 poles connector inserts
Maximum current load derating diagram

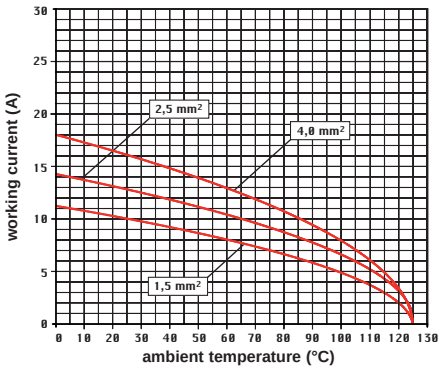

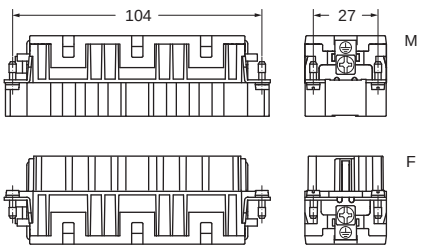

contacts side (front view)



CR CPQ coding pins (page 689)

CCF and CCM



CC...AN





- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CP - CP...RY 6 poles + ⏚ 35A - 400/690V

enclosures:
size “77.27” **page:**

C-TYPE IP65/IP66	402 - 411
C7 IP67, two levers	439 - 440
V-TYPE IP65/IP66, single lever	454 - 458
BIG hoods	470 - 471
T-TYPE IP65 insulating	484 - 485
T-TYPE / W IP66/IP69 insulating	491
HYGIENIC T-TYPE / H IP66/IP69	503
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	508
W-TYPE for aggressive environments	523
E-Xtreme® corrosion proof 534 - 535, 544, 554 - 555	
EMC	580
Central lever	609 - 611
LS-TYPE	622 - 623
IP68	640 - 643

panel supports: **page:**
COB **652 - 653**

inserts, screw terminal connection

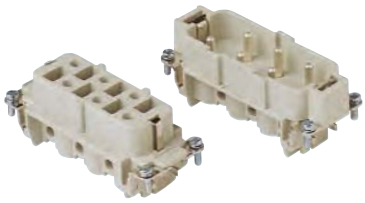

Q SILVER PLATED CONTACTS

inserts, screw terminal connection

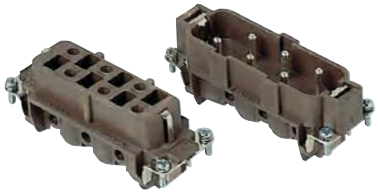

Q SILVER PLATED CONTACTS

description	part No.	part No.
indirect, with plate female inserts with female contacts male inserts with male contacts	**CPF 06** **CPM 06**	
indirect, with plate, use in temperatures up to 180 °C female inserts with female contacts, brown male inserts with male contacts, brown		**CPF 06 RY** **CPM 06 RY**

- characteristics according to EN 61984:
  35A 400/690V 6kV 3
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C (CP RY version up to 180 °C)
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,5 mΩ
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

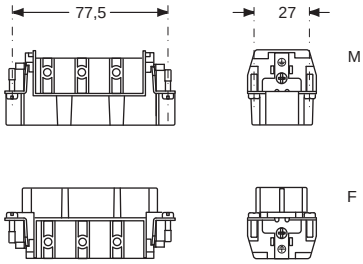

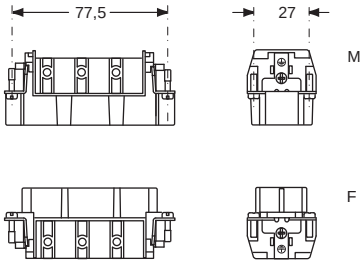

CP 06 poles connector inserts
Maximum current load derating diagram

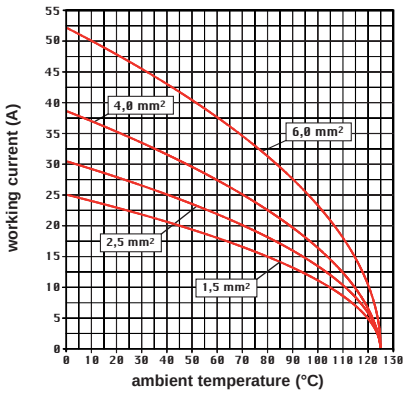

contacts side (front view)



contacts side (front view)



CP...RY 06 poles connector inserts
Maximum current load derating diagram

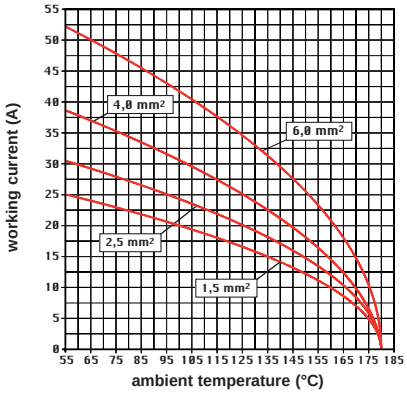

- inserts with plate, for section conductors: 0,75 - 6 mm² - AWG 18 - 10
- conductors stripping length: 10,5 mm
- terminal screw torque: 1,2 Nm (10,7 lb.in), information see page 20 and 21

- inserts with plate, for section conductors: 0,75 - 6 mm² - AWG 18 - 10
- conductors stripping length: 10,5 mm
- terminal screw torque: 1,2 Nm (10,7 lb.in), information see page 20 and 21

dimensions shown in mm are not binding and may be changed without notice

CP 12 poles + ⏚ 35A - 400/690V

enclosures:
size “77.62” **page:**

C-TYPE IP65/IP66 **424 - 429**
W-TYPE for aggressive environments **525**
E-Xtreme® corrosion proof **546**

inserts, screw terminal connection

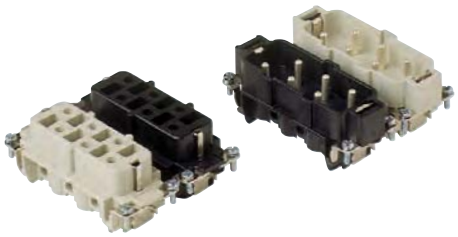

SILVER PLATED CONTACTS

description	part No.	part No.
indirect, with plate		
female inserts No. (1-6), white and black	**CPF 06**	**CPF 06 N**
male inserts No. (1-6), white and black	**CPM 06**	**CPM 06 N**

- characteristics according to EN 61984:
  35A 400/690V 6kV 3
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C (CP RY version up to 180 °C)
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,5 mΩ
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

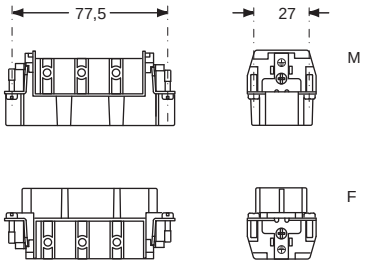

contacts side (front view)

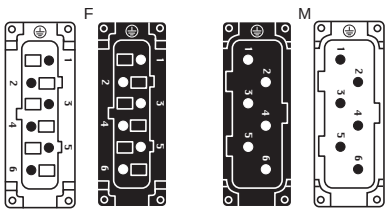

- inserts with plate, for section conductors: 0,75 - 6 mm² - AWG 18 - 10
- conductors stripping length: 10,5 mm
- terminal screw torque: 1,2 Nm (10,7 lb.in), information see page 20 and 21

CP 12 poles connector inserts
Maximum current load derating diagram

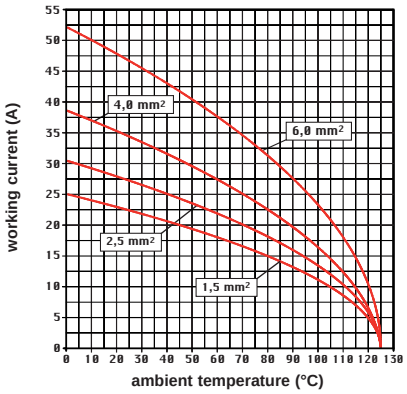

CQ4 (CQ4F /M 02 – CQ4F /M 02 H – CQ4F /M 03)

Compact size “21.21” for high current or higher voltage

- Compact size **“21.21” 2P+PE** and **3P+PE** connector inserts for **high current** (**40 A**), and either standard voltage up to 400 V or **higher voltage 830 V**, ideally complemented by the expanding range of hoods and housings size “21.21” with **M25** threaded cable entry, either insulating or metallic (**MK, MKA, MGK**), which are particularly suitable for use with high cross-sectional area conductors (large cable diameter).
- Series **CQ4** encompasses the following size “21.21” connector inserts:
  - **CQ4F /M 03** with 3P+PE with up to 40 A current-carrying capacity and standard rated voltage up to 400 V (e.g. for 3-phase motor connections);
  - **CQ4F /M 02** with 2P+PE with up to 40 A current-carrying capacity and standard rated voltage up to 400 V (e.g. for 1-phase AC or for DC power connections), this one with better current-carrying capacity by the derating diagrams, due to a power contact less in the same space;
  - **CQ4F /M 02 H** with 2P+PE with up to 40 A current-carrying capacity and higher rated voltage applications, up to **830 V** (for 1-phase AC or for DC higher power connections).
- Suitable for series **CX** crimp contacts (including the PE pre-leading one), covering stranded copper conductors cross sectional area range **1,5 mm² to 10 mm²** (16 AWG to 8 AWG).
- Protection against direct contact when unmated:
  - **CQ4F 02**: both male and female connector inserts are **fingerproof** (IP2X) even on the mating face when uncoupled (useful e.g. when a male connector is on the motor side of a drive including capacitors, potentially charged for residual time).
  - **CQ4F 03**: the female insert is **fingerproof** (IP2X) even on the mating face when uncoupled, while the male insert **CQ4M 03** in that circumstance is protected from access with the back of the hand (IP1X).
- **CQ4F /M 02** and **CQ4F /M 02 H** specific features:
  - Special **polarisation key** on the connector bodies mating face of both versions, differently oriented, to avoid the mismating of CQ4F /M 02 H **830 V** version with the lower voltage CQ4F /M 02 **400 V** version.
  - **CQ4F /M 02 H** supplied with a **special insulating heat-shrinking tube** that provides the required additional insulation towards a metal housing.
  - **CQ4F /M 02 H** specific **830 V** rated voltage duly marked on the inserts, to avoid any possible confusion with similar CQ4F /M 02 for 400 V.
- Codings:
  - **CQ4 03**: possibility of up to **4 different codings** thanks to the use of the **optional CR Q03 coding pin** (4 possible positions);
  - **CQ4 02** and **CQ4 02 H**: possibility of up to **16 different codings** thanks to the use of **two optional CR Q02 coding pins** (it is possible to install two pins with 4 positions each).

CQ4F/M 02
Lower voltage version

CQ4F/M 02 H
Higher 830V voltage version

CQ4 series

TECHNICAL FEATURES

Inserts series		**CQ4**		
Cat. No.		**CQ4F /M 02**	**CQ4F /M 02 H**	**CQ4F /M 03**
No. of poles		2 + ⏚	2 + ⏚	3 + ⏚
rated current [1)]		40 A		
EN 61984 pollution degree 3	rated voltage	400 V	830 V	400 V
	rated impulse voltage	6 kV		
	pollution degree	3		
contact resistance		≤ 0,3 mΩ		
insulation resistance		≥ 10 GΩ		
ambient temperature limit (°C)	min (LLT)	-40 °C		
	max (ULT)	+125 °C		
degree of protection	with enclosures (according to version)	IP44, IP65, IP66, IP67, IP68, IP69		
conductor connections		crimp		
conductor cross-sectional area	mm^2	1,5 10		
	AWG	16 8		
stripping lenght	mm	9 - 9,6 - 15 (according to contact size)		
mechanical endurance (mating cycles)		≥ 500		

1) See derating diagrams

CQ4F/M 02 2 poles + ⏚ 40A - 400V

enclosures:
size “21.21”

	page:
Insulating type	**339 - 348**
Metallic type	**349 - 363**
W-TYPE for aggressive environments	**512 - 518**
EMC	**564 - 572**
IP68	**628 - 631**
E-Xtreme® corrosion proof	**538 - 539**

- cannot be used in angled enclosures (IA/IAP/VA version)

inserts, crimp connections

40A crimp contacts silver plated

description	part No.	part No.
without contacts (to be ordered separately), including PE		
female inserts for female contacts	**CQ4F 02**	
male inserts for male contacts	**CQ4M 02**	
40A female crimp contacts		
1,5 mm² AWG 16		**CXFA 1.5**
2,5 mm² AWG 14		**CXFA 2.5**
4 mm² AWG 12		**CXFA 4.0**
6 mm² AWG 10		**CXFA 6.0**
10 mm² AWG 8		**CXFA 10**
40A male crimp contacts		
1,5 mm² AWG 16		**CXMA 1.5**
2,5 mm₂ AWG 14		**CXMA 2.5**
4 mm² AWG 12		**CXMA 4.0**
6 mm² AWG 10		**CXMA 6.0**
10 mm² AWG 8		**CXMA 10**

silver plated

- characteristics according to EN 61984:
  40A 400V 6kV 3
- c UL us (UL for USA and Canada), DNV·GL, BUREAU VERITAS
  EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,3 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts CXF and CXM series,on pages 708 - 741)

- wire diameter: up to 7,5 mm
  conductor cross-sectional area: up to 10 mm²



contacts side (front view)

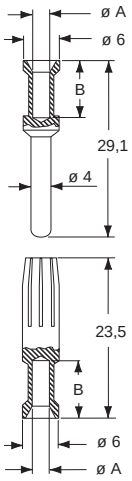

CXF and CXM contacts

conductor cross-sectional area (mm²)	conductor slot ø A (mm)	conductor stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6
10	4,3	15

Coding pins CR Q02 (page 691)

dimensions shown in mm are not binding and may be changed without notice

CQ4F/M 02 H 2 poles + ⏚ 40A - 830V

enclosures:
size “21.21” **page:**

Insulating type	**339 - 348**
Metallic type	**349 - 363**
W-TYPE for aggressive environments	**512 - 518**
EMC	**564 - 572**
IP68	**628 - 631**
E-Xtreme® corrosion proof	**538 - 539**

- cannot be used in angled enclosures (IA/IAP/VA version)

inserts, crimp connections
heat-shrinking tube

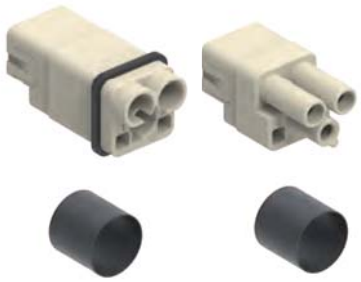

HIGHER VOLTAGE 830V

40A crimp contacts
silver plated

description	part No.	part No.
without contacts (to be ordered separately), including PE		
female inserts for female contacts	**CQ4F 02 H**	
male inserts for male contacts	**CQ4M 02 H**	
40A female crimp contacts		
1,5 mm² AWG 16		**CXFA 1.5**
2,5 mm² AWG 14		**CXFA 2.5**
4 mm² AWG 12		**CXFA 4.0**
6 mm² AWG 10		**CXFA 6.0**
10 mm² AWG 8		**CXFA 10**
40A male crimp contacts		
1,5 mm² AWG 16		**CXMA 1.5**
2,5 mm₂ AWG 14		**CXMA 2.5**
4 mm² AWG 12		**CXMA 4.0**
6 mm² AWG 10		**CXMA 6.0**
10 mm² AWG 8		**CXMA 10**

silver plated

- characteristics according to EN 61984:
  40A 830V 6kV 3
- cULus (UL for USA and Canada), DNV-GL, BUREAU VERITAS
  EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,3 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts CXF and CXM series,on pages 708 - 741)

- wire diameter: up to 7,5 mm
  conductor cross-sectional area: up to 10 mm²

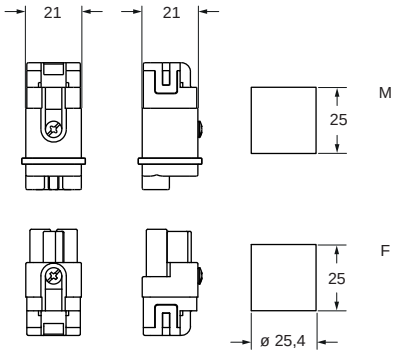

contacts side (front view)

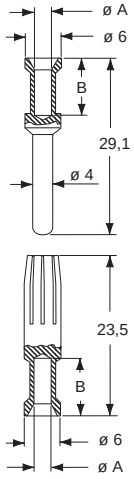

CXF and CXM contacts

conductor cross-sectional area (mm²)	conductor slot ø A (mm)	conductor stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6
10	4,3	15

Coding pins
CR Q02
(page 691)

CQ4F/M 03 3 poles + ⏚ 40A - 400V

enclosures:
size "21.21" **page:**

Insulating type	**339 - 348**
Metallic type	**349 - 363**
W-TYPE for aggressive environments	**512 - 518**
EMC	**564 - 572**
IP68	**628 - 631**
E-Xtreme® corrosion proof	**538 - 539**

- cannot be used in angled enclosures (IA/IAP/VA version)

inserts, crimp connections

40A crimp contacts silver plated

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts *	**CQ4F 03**	
male inserts for male contacts *	**CQ4M 03**	
40A female crimp contacts		
1,5 mm² AWG 16		**CXFA 1.5**
2,5 mm² AWG 14		**CXFA 2.5**
4 mm² AWG 12		**CXFA 4.0**
6 mm² AWG 10		**CXFA 6.0**
10 mm² AWG 8		**CXFA 10**
40A male crimp contacts		
1,5 mm² AWG 16		**CXMA 1.5**
2,5 mm₂ AWG 14		**CXMA 2.5**
4 mm² AWG 12		**CXMA 4.0**
6 mm² AWG 10		**CXMA 6.0**
10 mm² AWG 8		**CXMA 10**

silver plated

- the female insert **CQ4F 03** is finger proof (IP2X or IPXXB) even if not coupled, while the male insert **CQ4M 03** in this circumstance is protected from access with the back of the hand (IP1X or IPXXA).

- characteristics according to EN 61984:
  40A 400V 6kV 3
- cULus (UL for USA and Canada), DNV·GL BUREAU VERITAS EAC certified
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,3 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts CXF and CXM series,on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

***** cable diameter: up to 7,5 mm
contact section: up to 10 mm²



contacts side (front view)



CXF and CXM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6
10	4,3	15

CQ4 03, 3 poles + PE connector inserts
Maximum current load derating diagram

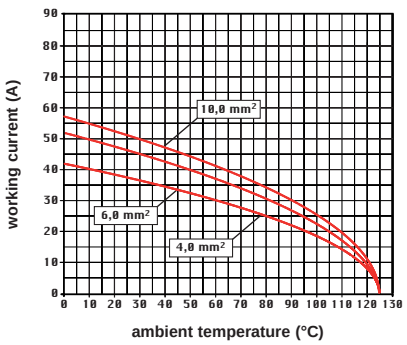

Coding pins CR Q03 (4 possible positions) (page 692)

dimensions shown in mm are not binding and may be changed without notice

1
2
2
1

CQ 5 poles + ⏚ 16A - 230/400V

enclosures:
size "21.21"

	page:
Insulating type	**339 - 348**
Metallic type	**349 - 363**
W-TYPE for aggressive environments	**512 - 518**
EMC	**564 - 572**
IP68	**628 - 631**
E-Xtreme® corrosion proof	**538 - 539**

- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)
- inserts and enclosures for applications with temperatures up to 180 °C, available on request
- can also be used partially fitted with 4 mm² section contacts

inserts, crimp connections

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CQF 05**	
male inserts for male contacts	**CQM 05**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove	**CCFA 0.3**	**CCFD 0.3**
0,5 mm² AWG 20 with no grooves	**CCFA 0.5**	**CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)	**CCFA 0.7**	**CCFD 0.7**
1 mm² AWG 18 one groove	**CCFA 1.0**	**CCFD 1.0**
1,5 mm² AWG 16 two grooves	**CCFA 1.5**	**CCFD 1.5**
2,5 mm² AWG 14 three grooves	**CCFA 2.5**	**CCFD 2.5**
3 mm² AWG 12 one wide groove	**CCFA 3.0**	**CCFD 3.0**
4 mm² AWG 12 with no grooves	**CCFA 4.0**	**CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove	**CCMA 0.3**	**CCMD 0.3**
0,5 mm² AWG 20 with no grooves	**CCMA 0.5**	**CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)	**CCMA 0.7**	**CCMD 0.7**
1 mm² AWG 18 one groove	**CCMA 1.0**	**CCMD 1.0**
1,5 mm² AWG 16t wo grooves	**CCMA 1.5**	**CCMD 1.5**
2,5 mm² AWG 14 three grooves	**CCMA 2.5**	**CCMD 2.5**
3 mm² AWG 12 one wide groove	**CCMA 3.0**	**CCMD 3.0**
4 mm² AWG 12 with no grooves	**CCMA 4.0**	**CCMD 4.0**
16A male crimp contacts for advanced opening		
0,5 mm² AWG 20 with no grooves	**CC 0.5 AN**	
0,75 mm² AWG 18 one groove (back side)	**CC 0.7 AN**	
1 mm² AWG 18 one groove	**CC 1.0 AN**	
1,5 mm² AWG 16 two grooves	**CC 1.5 AN**	
2,5 mm² AWG 14 three grooves	**CC 2.5 AN**	

silver plated

gold plated+

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 230/400V 4kV 3
  16A 320/500V 4kV 2
- c UL us (UL for USA and Canada), CSA, CEC, DNV-GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CQ 05 poles connector inserts
Maximum current load derating diagram

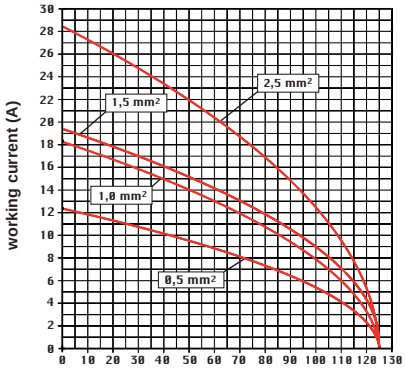



contacts side (front view)

Note:
PE screw connection for unprepared wires only

Coding pins CR CPQ
(page 689)

CCF and CCM



CC...AN



CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

CQ 7 poles + ⏚ 10A - 400V

enclosures:
size "21.21"

	page:
Insulating type	**339 - 348**
Metallic type	**349 - 363**
W-TYPE for aggressive environments	**512 - 518**
EMC	**564 - 572**
IP68	**628 - 631**
E-Xtreme® corrosion proof	**538 - 539**

inserts, crimp connections

10A crimp contacts
silver and gold plated

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts	**CQF 07**	
male inserts for male contacts	**CQM 07**	
10A female contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3** / **CDFD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5** / **CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7** / **CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0** / **CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5** / **CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5** / **CDFD 2.5**
10A male contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3** / **CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5** / **CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7** / **CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0** / **CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5** / **CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5** / **CDMD 2.5**

silver plated | **gold plated✢**

- characteristics according to EN 61984:
  10A 400V 6kV 3
- c UL us (UL for USA and Canada), DNV-GL, BUREAU VERITAS
  EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- inserts already supplied with stainless steel fixing screw with gasket, which ensures IP66/IP67/IP69 degree of protection
- first-make last-break screw-type PE contact
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CQ 07 poles connector inserts
Maximum current load derating diagram

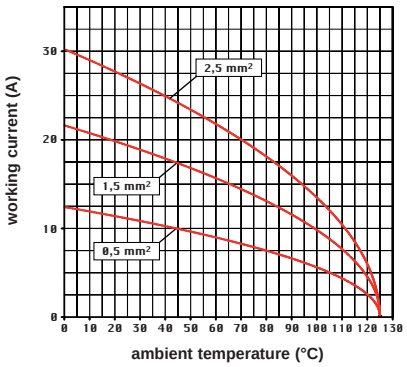



contacts side (front view)



Note:
PE screw connection for unprepared wires only

☑ The **CR QF07** and **CR QM07** coding pins (to be ordered separately), allow the user to create 6 different combinations, according to the diagram shown on **page 690**



CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

✢ for basic or high thickness gold plating, please refer to page 674

CQ 12 poles + ⏚ series

TECHNICAL FEATURES

Compactness meets performance

Compact solution for high density needs.

Reliable, 16 coding possibilities, perfect for small motors with bridges for star/delta configuration.

CR BDE

CR BST

Bridges for delta or star connection
from page 694, 695

Coding positions for CQ 12 connector
See following page

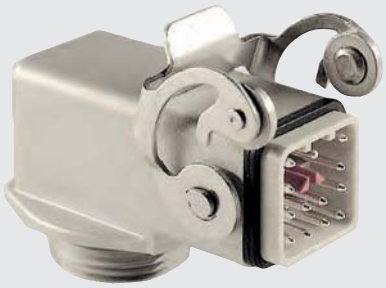

Legend:

(A B) CQ 12 coding pin

M = male insert

F = female insert

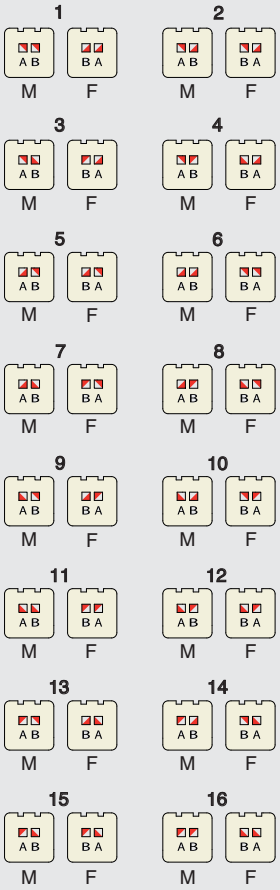

CQ 12 poles + ⏚ 10A - 400V

enclosures:
size "21.21"

	page:
Insulating type	**339 - 348**
Metallic type	**349 - 363**
W-TYPE for aggressive environments	**512 - 518**
EMC	**564 - 572**
IP68	**628 - 631**
E-Xtreme® corrosion proof	**538 - 539**

ISO 23570-3 standard and DESINA® specification compliant

inserts, crimp connections

10A crimp contacts silver and gold plated

description	part No.	part No		part No	
without contacts (to be ordered separately)					
female inserts for female contacts	**CQF 12**				
male inserts for male contacts	**CQM 12**				
10A female contacts					
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3**	silver plated	**CDFD 0.3**	gold plated+
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5**		**CDFD 0.5**	
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7**		**CDFD 0.7**	
1 mm² AWG 18 identification No. 3		**CDFA 1.0**		**CDFD 1.0**	
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5**		**CDFD 1.5**	
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5**		**CDFD 2.5**	
10A male contacts					
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3**		**CDMD 0.3**	
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5**		**CDMD 0.5**	
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7**		**CDMD 0.7**	
1 mm² AWG 18 identification No. 3		**CDMA 1.0**		**CDMD 1.0**	
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5**		**CDMD 1.5**	
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5**		**CDMD 2.5**	

- characteristics according to EN 61984:
  10A 400V 6kV 3
  10A 400/690V 6kV 2
- c UL us (UL for USA and Canada), CSA, CQC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- inserts already supplied with stainless steel fixing screw with gasket, which ensures IP66/IP67/IP69 degree of protection
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CQ 12 poles connector inserts
Maximum current load derating diagram

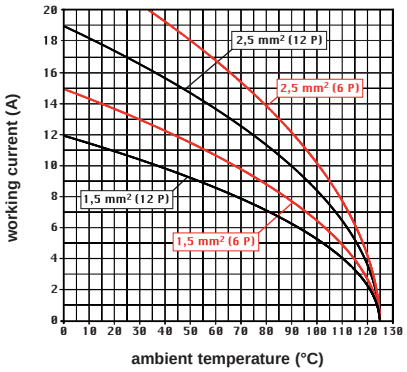



contacts side (front view)



Note:
PE screw connection for unprepared wires only

☑ The **CR Q12** coding pins (to be ordered separately), allow the user to create 16 different combinations, according to the diagram shown on **page 689**

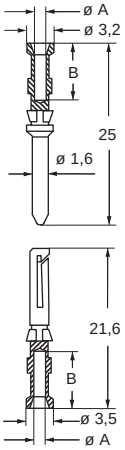

CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

+ for basic or high thickness gold plating, please refer to page 674

CQ 21 poles 6,5A - 50V ac / 120V dc

enclosures:
size “21.21” **page:**

Insulating type	**339 - 348**
Metallic type	**349 - 363**
W-TYPE for aggressive environments	**512 - 518**
EMC	**564 - 572**
IP68	**628 - 631**
E-Xtreme® corrosion proof	**538 - 539**

inserts, crimp connections

CI crimp contacts
silver and gold plated

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CQF 21**	
male inserts for male contacts	**CQM 21**	
CI female crimp contacts		
0,08-0,21 mm² AWG 28-24		**CIFA 0.2** / **CIFD 0.2**
0,13-0,33 mm² AWG 26-22		**CIFA 0.3** / **CIFD 0.3**
0,33-0,52 mm² AWG 22-20		**CIFA 0.5** / **CIFD 0.5**
CI male crimp contacts		
0,08-0,21 mm² AWG 28-24		**CIMA 0.2** / **CIMD 0.2**
0,13-0,33 mm² AWG 26-22		**CIMA 0.3** / **CIMD 0.3**
0,33-0,52 mm² AWG 22-20		**CIMA 0.5** / **CIMD 0.5**

silver plated **gold plated**

- characteristics according to EN 61984:
  6,5A 50V ac / 120V dc 0,8kV 3
- c UL us (UL for USA and Canada), DNV·GL BUREAU VERITAS certified
- rated voltage according to UL/CSA: 250V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 4 mΩ
- seat of contact #9 on both inserts set forward to obtain pre-leading contact (e.g. for FE functional earth)
- for crimp contacts CI series use, see page 716 - 719
  CIPZ D crimping tool
  CITP D turret head
  CIES insertion / removal tool
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)

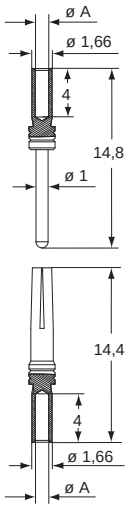

CIF and CIM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,08-0,21	0,64	4
0,13-0,33	0,90	4
0,33-0,52	1,12	4

max insulation diameter: 1,7 mm

CQ 21 poles connector inserts
Maximum current load derating diagram

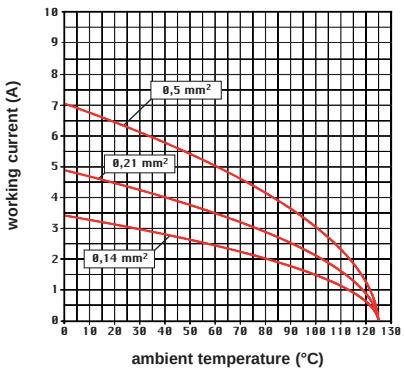

dimensions shown in mm are not binding and may be changed without notice

CQ 4 poles (40A - 400/690V) + 2 poles (10A - 250V) + ⏚

enclosures:
size "32.13" **page:**

insulating type **365 - 367**
EMC **573 - 574**

ISO 23570-3 standard and DESINA® specification compliant

inserts, crimp connections

40A and 10A crimp contacts silver and gold plated

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts	**CQF 04/2**	
male inserts for male contacts	**CQM 04/2**	
40A female crimp contacts		
1,5 mm² AWG 16		**CXFA 1.5** (silver plated)
2,5 mm² AWG 14		**CXFA 2.5**
4 mm² AWG 12		**CXFA 4.0**
6 mm² AWG 10		**CXFA 6.0**
40A male crimp contacts		
1,5 mm² AWG 16		**CXMA 1.5**
2,5 mm₂ AWG 14		**CXMA 2.5**
4 mm² AWG 12		**CXMA 4.0**
6 mm² AWG 10		**CXMA 6.0**
10A female contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3** / **CDFD 0.3** (gold plated+)
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5** / **CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7** / **CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0** / **CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5** / **CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5** / **CDFD 2.5**
10A male contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3** / **CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5** / **CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7** / **CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0** / **CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5** / **CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5** / **CDMD 2.5**

+ for basic or high thickness gold plating, please refer to page 674

- characteristics according to EN 61984:
  4 poles 40A 400/690V 6kV 3
  2 poles 10A 250V 4kV 3
- cULus (UL for USA and Canada), SP, CQC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,3 mΩ (4 poles), ≤ 3 mΩ (2 poles)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CQ 04/2 power poles connector inserts
Maximum current load derating diagram

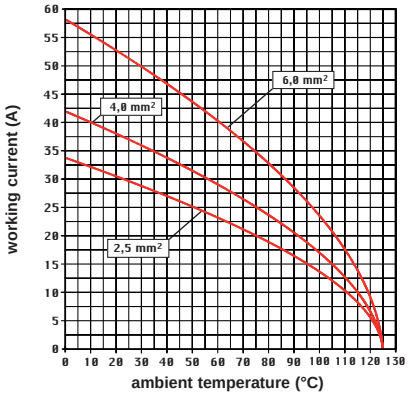

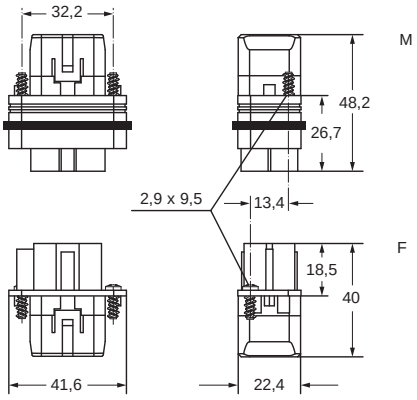

contacts side (front view)



- each insert supplied with 2 fixing screws, self-tapping, zinc plated steel Ø2,9x9,5 mm, Ph1
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts, CXF, CXM series and 10A contacts CDF, CDM series on pages 708 - 741)

CXF and CXM



CDF and CDM



CXF and CXM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6

CDF and CDM contacts

0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CQ 8 poles + ⏚ 16A - 500V

enclosures:
size "32.13" **page:**

insulating type **365 - 367**
EMC **573 - 574**

- can also be used partially fitted with 4 mm² section contacts

ISO 23570-3 standard and DESINA specification compliant

inserts, crimp connections

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CQF 08**	
male inserts for male contacts	**CQM 08**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove	**CCFA 0.3**	**CCFD 0.3**
0,5 mm² AWG 20 with no grooves	**CCFA 0.5**	**CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)	**CCFA 0.7**	**CCFD 0.7**
1 mm² AWG 18 one groove	**CCFA 1.0**	**CCFD 1.0**
1,5 mm² AWG 16 two grooves	**CCFA 1.5**	**CCFD 1.5**
2,5 mm² AWG 14 three grooves	**CCFA 2.5**	**CCFD 2.5**
3 mm² AWG 12 one wide groove	**CCFA 3.0**	**CCFD 3.0**
4 mm² AWG 12 with no grooves	**CCFA 4.0**	**CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove	**CCMA 0.3**	**CCMD 0.3**
0,5 mm² AWG 20 with no grooves	**CCMA 0.5**	**CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)	**CCMA 0.7**	**CCMD 0.7**
1 mm² AWG 18 one groove	**CCMA 1.0**	**CCMD 1.0**
1,5 mm² AWG 16t wo grooves	**CCMA 1.5**	**CCMD 1.5**
2,5 mm² AWG 14 three grooves	**CCMA 2.5**	**CCMD 2.5**
3 mm² AWG 12 one wide groove	**CCMA 3.0**	**CCMD 3.0**
4 mm² AWG 12 with no grooves	**CCMA 4.0**	**CCMD 4.0**
16A male crimp contacts for advanced opening		
0,5 mm² AWG 20 with no grooves	**CC 0.5 AN**	
0,75 mm² AWG 18 one groove (back side)	**CC 0.7 AN**	
1 mm² AWG 18 one groove	**CC 1.0 AN**	
1,5 mm² AWG 16 two grooves	**CC 1.5 AN**	
2,5 mm² AWG 14 three grooves	**CC 2.5 AN**	

silver plated | **gold plated+**

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 8kV 2
- c UL us (UL for USA and Canada), CSA, CQC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CQ 08 poles connector inserts
Maximum current load derating diagram

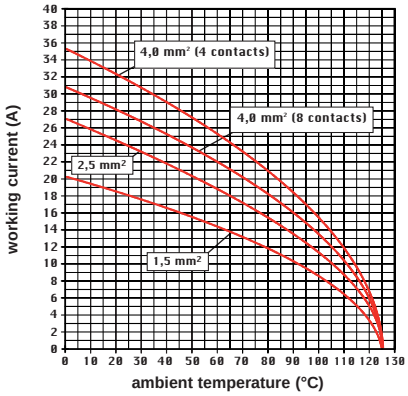

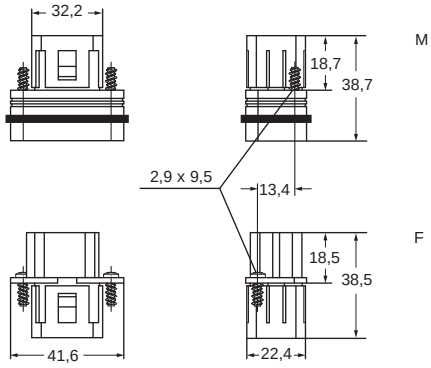

contacts side (front view)



- each insert supplied with 2 fixing screws, self-tapping, zinc plated steel Ø2,9x9,5 mm, Ph1
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series on pages 708 - 741)

CCF and CCM



CC...AN



CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

CQ 17 poles + ⏚ 10A - 160V

enclosures:
size "32.13" **page:**

insulating type **365 - 367**
EMC **573 - 574**

inserts, crimp connections

10A crimp contacts
silver and gold plated

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CQF 17**	
male inserts for male contacts	**CQM 17**	
10A female contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3** / **CDFD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5** / **CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7** / **CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0** / **CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5** / **CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5** / **CDFD 2.5**
10A male contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3** / **CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5** / **CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7** / **CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0** / **CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5** / **CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5** / **CDMD 2.5**

silver plated **gold plated✢**

- characteristics according to EN 61984:
  10A 160V 2,5kV 3
  10A 250V 4kV 2
- c UL us (UL for USA and Canada), DNV-GL, BUREAU VERITAS
  EAC certified
- rated voltage according to UL/CSA: 250V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- seat of PE contact on female insert set forward to obtain pre-leading PE
- each insert supplied with 2 fixing screws, self-tapping, zinc plated steel Ø2,9x9,5 mm, Ph1
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

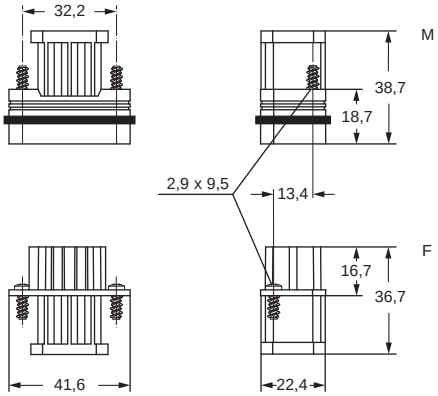

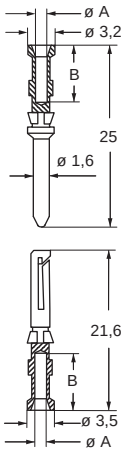

contacts side (front view)



CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CQ 17 poles connector inserts
Maximum current load derating diagram

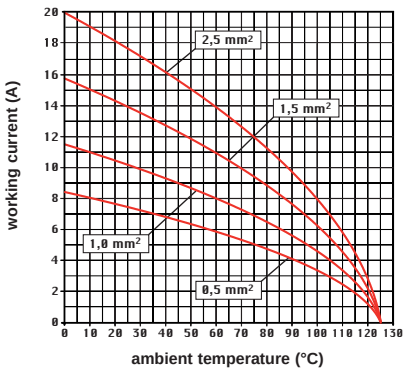

CR CP coding pin with loss of one contact (page 689)

✢ for basic or high thickness gold plating, please refer to page 674

CX 8 poles (16A - 400V) + 24 poles (10A - 250V) + ⏚

enclosures:
size "57.27" **page:**

C-TYPE IP65/IP66	**393 - 401**
C7 IP67, two levers	**438**
V-TYPE IP65/IP66, single lever	**448 - 453**
BIG hoods	**468 - 469**
T-TYPE IP65 insulating	**482 - 483**
T-TYPE / W IP66/IP69 insulating	**490**
HYGIENIC T-TYPE / H IP66/IP69	**502**
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	**507**
W-TYPE for aggressive environments	**522**
E-Xtreme® corrosion proof	**532 - 533, 543, 552 - 553**
EMC	**579**
Central lever	**606 - 608**
LS-TYPE	**620 - 621**
IP68	**636 - 639**

panel supports: **page:**
COB **652 - 653**

inserts, crimp connections



description	part No.
without contacts (to be ordered separately)	
female inserts for female contacts	**CXF 8/24**
male inserts for male contacts	**CXM 8/24**

- characteristics according to EN 61984:
  16A 230/400V 4kV 3
  16A 400V 4kV 2
  10A 160V 2,5kV 3
  10A 250V 4kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance:
  ≤ 1 mΩ (8 poles)
  ≤ 3 mΩ (24 poles)
- **it is recommended to crimp the contacts with crimping tools homologated by ILME**
  (please see the crimping tool section 16A contacts, CCF, CCM, CC...AN series and 10A contacts CDF, CDM series on pages 708 - 741)
- PCBs interface, see article CIF 2.4 (10A contacts)
- for max. current load see the connector inserts derating diagrams below; for more information see page 28



contacts side (front view)



CX 8/24 power poles connector inserts
Maximum current load derating diagram

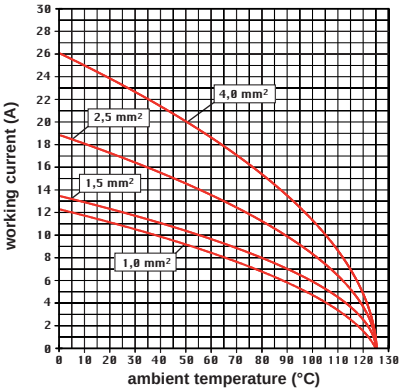

CX 8/24 auxiliary poles connector inserts
Maximum current load derating diagram

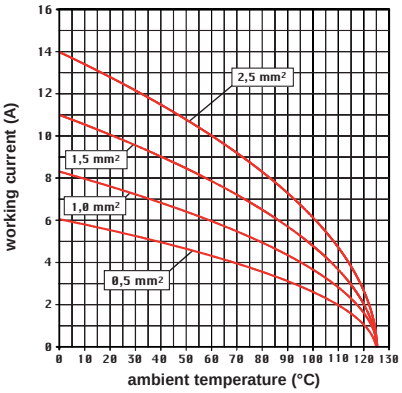

Note: for connector with power poles and auxiliary poles simultaneously loaded in the combinations

power poles	auxiliary poles
4,0 mm²	2,5 mm²
2,5 mm²	1,5 mm²
1,5 mm²	1,0 mm²
1,0 mm²	0,5 mm²

with power / auxiliary current ratios = 1,6 / 1

dimensions shown in mm are not binding and may be changed without notice

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

10A crimp contacts
silver and gold plated

description			part No. silver plated	part No. gold plated÷
16A female contacts				
0,14-0,37 mm²	AWG 26-22	one groove	**CCFA 0.3**	**CCFD 0.3**
0,5 mm²	AWG 20	with no grooves	**CCFA 0.5**	**CCFD 0.5**
0,75 mm²	AWG 18	one groove (back side)	**CCFA 0.7**	**CCFD 0.7**
1 mm²	AWG 18	one groove	**CCFA 1.0**	**CCFD 1.0**
1,5 mm²	AWG 16	two grooves	**CCFA 1.5**	**CCFD 1.5**
2,5 mm²	AWG 14	three grooves	**CCFA 2.5**	**CCFD 2.5**
3 mm²	AWG 12	one wide groove	**CCFA 3.0**	**CCFD 3.0**
4 mm²	AWG 12	with no grooves	**CCFA 4.0**	**CCFD 4.0**
16A male contacts				
0,14-0,37 mm²	AWG 26-22	one groove	**CCMA 0.3**	**CCMD 0.3**
0,5 mm²	AWG 20	with no grooves	**CCMA 0.5**	**CCMD 0.5**
0,75 mm²	AWG 18	one groove (back side)	**CCMA 0.7**	**CCMD 0.7**
1 mm²	AWG 18	one groove	**CCMA 1.0**	**CCMD 1.0**
1,5 mm²	AWG 16t	wo grooves	**CCMA 1.5**	**CCMD 1.5**
2,5 mm²	AWG 14	three grooves	**CCMA 2.5**	**CCMD 2.5**
3 mm²	AWG 12	one wide groove	**CCMA 3.0**	**CCMD 3.0**
4 mm²	AWG 12	with no grooves	**CCMA 4.0**	**CCMD 4.0**
16A male crimp contacts for advanced opening				
0,5 mm²	AWG 20	with no grooves	**CC 0.5 AN**	
0,75 mm²	AWG 18	one groove (back side)	**CC 0.7 AN**	
1 mm²	AWG 18	one groove	**CC 1.0 AN**	
1,5 mm²	AWG 16	two grooves	**CC 1.5 AN**	
2,5 mm²	AWG 14	three grooves	**CC 2.5 AN**	

description			part No. silver plated	part No. gold plated÷
10A female contacts				
0,14-0,37 mm²	AWG 26-22	identification No. 1	**CDFA 0.3**	**CDFD 0.3**
0,5 mm²	AWG 20	identification No. 2	**CDFA 0.5**	**CDFD 0.5**
0,75 mm²	AWG 18	identification No. ②	**CDFA 0.7**	**CDFD 0.7**
1 mm²	AWG 18	identification No. 3	**CDFA 1.0**	**CDFD 1.0**
1,5 mm²	AWG 16	identification No. 4	**CDFA 1.5**	**CDFD 1.5**
2,5 mm²	AWG 14	identification No. 5	**CDFA 2.5**	**CDFD 2.5**
10A male contacts				
0,14-0,37 mm²	AWG 26-22	identification No. 1	**CDMA 0.3**	**CDMD 0.3**
0,5 mm²	AWG 20	identification No. 2	**CDMA 0.5**	**CDMD 0.5**
0,75 mm²	AWG 18	identification No. ②	**CDMA 0.7**	**CDMD 0.7**
1 mm²	AWG 18	identification No. 3	**CDMA 1.0**	**CDMD 1.0**
1,5 mm²	AWG 16	identification No. 4	**CDMA 1.5**	**CDMD 1.5**
2,5 mm²	AWG 14	identification No. 5	**CDMA 2.5**	**CDMD 2.5**

CCF, CCM and CC..AN contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CCF and CCM



CC...AN



÷ for basic or high thickness gold plating, please refer to page 675

CDF and CDM

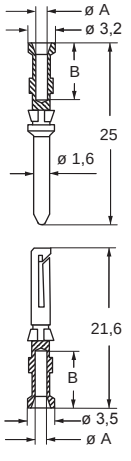

÷ for basic or high thickness gold plating, please refer to page 674

Inserts with a retainer device on crimp contacts

CX 6/12 insert has been developed **with a retainer device on crimp contacts.**

This layout enables the wires to be connected to the socket and plug insert removable contacts by crimping them with a crimp tool and its locating turret.

The crimp connection is insured and is **extremely resistant even to the most insidious strains**, such as vibrations.

SUM-UP

- **Crimp connection**
- **Great resistance to strong vibrations**
- **For wires: up to 10 mm² (AWG 8)**
- **Auxiliary crimp contacts: silver or gold plated**

Inserts series		**CX 6/12**	
No. of poles	main contact	6 + ⏚ (40A)	
	auxiliary contacts	12 (10A)	
rated current		40A	10A
EN 61984 pollution degree 3	rated voltage	690V	230V/400V
	rated impulse withstand voltage	8kV	4kV
	pollution degree	3	3
contact resistance		≤ 0,3 mΩ (40A) ≤ 1 mΩ (16A)	
insulation resistance		≥ 10 GΩ	
ambient temperature limit (°C)	min	-40 °C	
	max	+125 °C	
degree of protection	with enclosures (according to version)	IP65, IP66/IP69, IP66/IP67/IP69, IP66/IP68/IP69	
	without enclosures	IP20	
conductor connections		crimp	
conductor cross-section	mm^2	1,5 10	
	AWG	16 - 8	
conductor cross-section (CC contact series)	mm_2	0,14 2,5	
	AWG	26 - 14	
CX/CC stripping lenght	mm	8 / 9 / 15	
mechanical endurance (mating cycles)		≥ 500	

CX 6 poles (40A - 690V) + 12 poles (10A - 230/400V) + ⏚

enclosures: size "77.27"	page:
C-TYPE IP65/IP66	402 - 411
C7 IP67, two levers	439 - 440
V-TYPE IP65/IP66, single lever	454 - 458
BIG hoods	470 - 471
T-TYPE IP65 insulating	484 - 485
T-TYPE / W IP66/IP69 insulating	491
HYGIENIC T-TYPE / H IP66/IP69	503
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	508
W-TYPE for aggressive environments	523
E-Xtreme® corrosion proof	534 - 535, 544, 554 - 555
EMC	580
Central lever	609 - 611
LS-TYPE	622 - 623
IP68	640 - 643

panel supports:	page:
COB	652 - 653

inserts, crimp connections

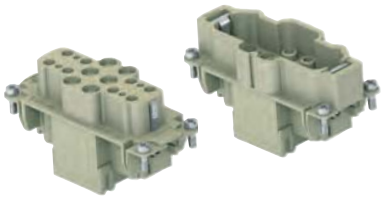

40A and 10A crimp contacts silver and gold plated

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts	**CXF 6/12**	
male inserts for male contacts	**CXM 6/12**	
40A female crimp contacts		
1,5 mm² AWG 16		**CXFA 1.5**
2,5 mm² AWG 14		**CXFA 2.5**
4 mm² AWG 12		**CXFA 4.0**
6 mm² AWG 10		**CXFA 6.0**
10 mm² AWG 8		**CXFA 10**
40A male crimp contacts		
1,5 mm² AWG 16		**CXMA 1.5**
2,5 mm² AWG 14		**CXMA 2.5**
4 mm² AWG 12		**CXMA 4.0**
6 mm² AWG 10		**CXMA 6.0**
10 mm² AWG 8		**CXMA 10**
10A female contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3** / **CDFD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5** / **CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7** / **CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0** / **CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5** / **CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5** / **CDFD 2.5**
10A male contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3** / **CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5** / **CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7** / **CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0** / **CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5** / **CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5** / **CDMD 2.5**

silver plated | **gold plated+**

+ for basic or high thickness gold plating, please refer to page 674

- characteristics according to EN 61984:
  40A 690V 8kV 3
  10A 230/400V 4kV 3
- DNV·GL BUREAU VERITAS EAC certified
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance:
  ≤ 0,3 mΩ (6 poles)
  ≤ 1 mΩ (12 poles)
- cable diameter: up to 7,5 mm
- contact section: up to 10 mm²
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts, CXF, CXM series and 10A contacts CDF, CDM series on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 6/12 power poles connector inserts
Maximum current load derating diagram

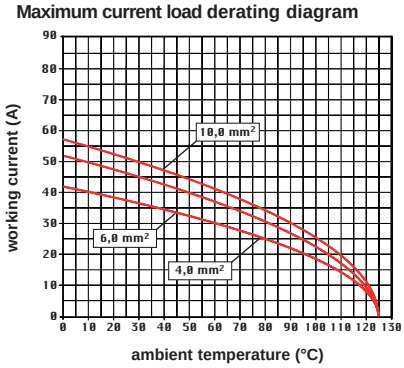



contacts side (front view)



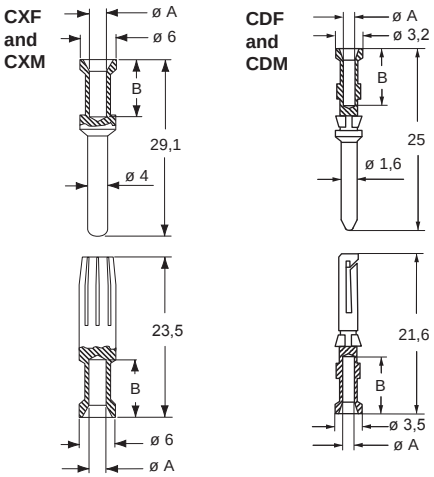

CXF and CXM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6
10	4,3	15
CDF and CDM contacts		
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CX 6 poles (40A - 690V) + 36 poles (10A - 250V) + ⏚

enclosures:
size “77.27” **page:**

C-TYPE IP65/IP66	**402 - 411**
C7 IP67, two levers	**439 - 440**
V-TYPE IP65/IP66, single lever	**454 - 458**
BIG hoods	**470 - 471**
T-TYPE IP65 insulating	**484 - 485**
T-TYPE / W IP66/IP69 insulating	**491**
HYGIENIC T-TYPE / H IP66/IP69	**503**
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	**508**
W-TYPE for aggressive environments	**523**
E-Xtreme® corrosion proof	**534 - 535, 544, 554 - 555**
EMC	**580**
Central lever	**609 - 611**
LS-TYPE	**622 - 623**
IP68	**640 - 643**

panel supports: **page:**
COB **652 - 653**

- PCBs interface, see article CIF 2.4 (10A contacts)

inserts, crimp connections

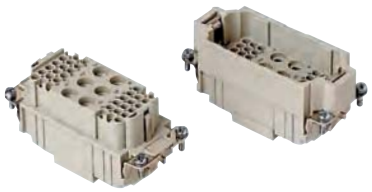

40A and 10A crimp contacts silver and gold plated

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts	**CXF 6/36**	
male inserts for male contacts	**CXM 6/36**	
40A female crimp contacts		
1,5 mm² AWG 16		**CXFA 1.5**
2,5 mm² AWG 14		**CXFA 2.5**
4 mm² AWG 12		**CXFA 4.0**
6 mm² AWG 10		**CXFA 6.0**
40A male crimp contacts		
1,5 mm² AWG 16		**CXMA 1.5**
2,5 mm₂ AWG 14		**CXMA 2.5**
4 mm² AWG 12		**CXMA 4.0**
6 mm² AWG 10		**CXMA 6.0**
10A female contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3** / **CDFD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5** / **CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7** / **CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0** / **CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5** / **CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5** / **CDFD 2.5**
10A male contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3** / **CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5** / **CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7** / **CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0** / **CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5** / **CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5** / **CDMD 2.5**

silver plated

gold plated+

+ for basic or high thickness gold plating, please refer to page 674

- characteristics according to EN 61984:
  40A 690V 8kV 3
  10A 160V 2,5kV 3
  10A 250V 4kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,3 mΩ (6 poles), ≤ 1 mΩ (36 poles)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 6/36 power poles connector inserts
Maximum current load derating diagram

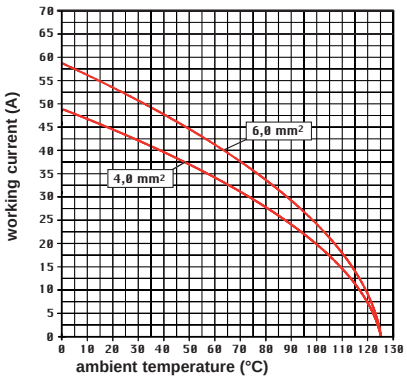



contacts side (front view)



- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts, CXF, CXM series and 10A contacts CDF, CDM series on pages 708 - 741

CXF and CXM

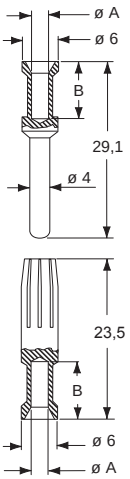

CDF and CDM



CXF and CXM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6
CDF and CDM contacts		
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

dimensions shown in mm are not binding and may be changed without notice

CX 12 poles (40A - 690V) + 2 poles (10A - 250V) + ⏚

enclosures:
size "77.27"

	page:
C-TYPE IP65/IP66	402 - 411
C7 IP67, two levers	439 - 440
V-TYPE IP65/IP66, single lever	454 - 458
BIG hoods	470 - 471
T-TYPE IP65 insulating	484 - 485
T-TYPE / W IP66/IP69 insulating	491
HYGIENIC T-TYPE / H IP66/IP69	503
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	508
W-TYPE for aggressive environments	523
E-Xtreme® corrosion proof 534 - 535, 544, 554 - 555	
EMC	580
Central lever	609 - 611
LS-TYPE	622 - 623
IP68	640 - 643

panel supports:

	page:
COB	652 - 653

inserts, crimp connections

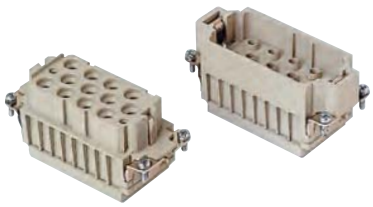

40A and 10A crimp contacts silver and gold plated

description			part No.	part No	
without contacts (to be ordered separately)					
female inserts for female contacts			**CXF 12/2**		
male inserts for male contacts			**CXM 12/2**		
40A female crimp contacts					
1,5 mm²	AWG 16			**CXFA 1.5**	
2,5 mm²	AWG 14			**CXFA 2.5**	
4 mm²	AWG 12			**CXFA 4.0**	
6 mm²	AWG 10			**CXFA 6.0**	
40A male crimp contacts					
1,5 mm²	AWG 16			**CXMA 1.5**	
2,5 mm₂	AWG 14			**CXMA 2.5**	
4 mm²	AWG 12			**CXMA 4.0**	
6 mm²	AWG 10			**CXMA 6.0**	
10A female contacts					
0,14-0,37 mm²	AWG 26-22	identification No. 1		**CDFA 0.3**	**CDFD 0.3**
0,5 mm²	AWG 20	identification No. 2		**CDFA 0.5**	**CDFD 0.5**
0,75 mm²	AWG 18	identification No. ②		**CDFA 0.7**	**CDFD 0.7**
1 mm²	AWG 18	identification No. 3		**CDFA 1.0**	**CDFD 1.0**
1,5 mm²	AWG 16	identification No. 4		**CDFA 1.5**	**CDFD 1.5**
2,5 mm²	AWG 14	identification No. 5		**CDFA 2.5**	**CDFD 2.5**
10A male contacts					
0,14-0,37 mm²	AWG 26-22	identification No. 1		**CDMA 0.3**	**CDMD 0.3**
0,5 mm²	AWG 20	identification No. 2		**CDMA 0.5**	**CDMD 0.5**
0,75 mm²	AWG 18	identification No. ②		**CDMA 0.7**	**CDMD 0.7**
1 mm²	AWG 18	identification No. 3		**CDMA 1.0**	**CDMD 1.0**
1,5 mm²	AWG 16	identification No. 4		**CDMA 1.5**	**CDMD 1.5**
2,5 mm²	AWG 14	identification No. 5		**CDMA 2.5**	**CDMD 2.5**

silver plated

gold plated+

+ for basic or high thickness gold plating, please refer to page 674

- characteristics according to EN 61984:
  40A 690V 8kV 3
  10A 160V 2,5kV 3
  10A 250V 4kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,3 mΩ (12 poles), ≤ 1 mΩ (2 poles)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 12/2 power poles connector inserts
Maximum current load derating diagram

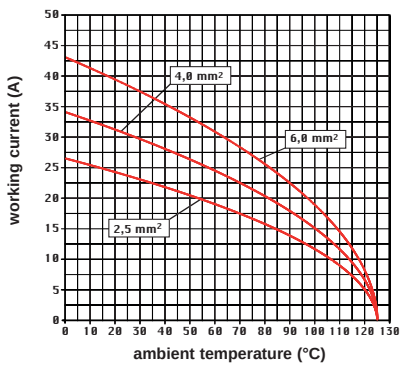



contacts side (front view)



- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts, CXF, CXM series and 10A contacts CDF, CDM series on pages 708 - 741

CXF and CXM



CDF and CDM



CXF and CXM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6

CDF and CDM contacts

0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CX 4 poles (80A - 830V) + ⏚

enclosures: size “77.27”	page:
C-TYPE IP65/IP66	402 - 411
C7 IP67, two levers	439 - 440
V-TYPE IP65/IP66, single lever	454 - 458
BIG hoods	470 - 471
T-TYPE IP65 insulating	484 - 485
T-TYPE / W IP66/IP69 insulating	491
HYGIENIC T-TYPE / H IP66/IP69	503
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	508
W-TYPE for aggressive environments	523
E-Xtreme® corrosion proof 534 - 535, 544, 554 - 555	
EMC	580
Central lever	609 - 611
LS-TYPE	622 - 623
IP68	640 - 643

panel supports:	page:
COB	652 - 653

inserts, screw terminal connection

RATING 830V

SILVER PLATED CONTACTS

description	part No.
female inserts with female contacts	**CXF 4/0**
male inserts with male contacts	**CXM 4/0**

- characteristics according to EN 61984:
  80A 830V 8kV 3
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



80A contacts
- without plate for section conductors: 4 - 16 mm² - AWG 12 - 6
- conductors stripping length: 14 mm
- terminal screw torque: 2,5 Nm (22.1 lb.in), for more information see page 20 and 21

CX 4/0 poles connector inserts
Maximum current load derating diagram

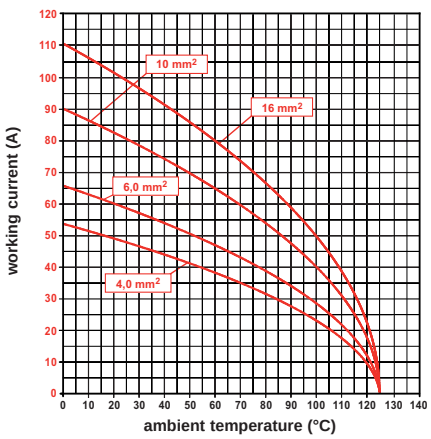

dimensions shown in mm are not binding and may be changed without notice

CX 4 poles (80A - 830V) + 2 poles (16A - 400V) + ⏚

enclosures:
size "77.27" **page:**

C-TYPE IP65/IP66	402 - 411
C7 IP67, two levers	439 - 440
V-TYPE IP65/IP66, single lever	454 - 458
BIG hoods	470 - 471
T-TYPE IP65 insulating	484 - 485
T-TYPE / W IP66/IP69 insulating	491
HYGIENIC T-TYPE / H IP66/IP69	503
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	508
W-TYPE for aggressive environments	523
E-Xtreme® corrosion proof 534 - 535, 544, 554 - 555	
EMC	580
Central lever	609 - 611
LS-TYPE	622 - 623
IP68	640 - 643

panel supports: **page:**

COB	652 - 653

inserts,
screw terminal connection

RATING 830V

SILVER PLATED CONTACTS

description	part No.
female inserts with female contacts	**CXF 4/2**
male inserts with male contacts	**CXM 4/2**

- characteristics according to EN 61984:
  80A 830V 8kV 3
  16A 400V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance:
  ≤ 0,3 mΩ (4 poles)
  ≤ 1 mΩ (2 poles)
- for max. current load see the connector inserts derating diagrams below; for more information see page 28



contacts side (front view)



80A contacts
- without plate for section conductors:
  4 - 16 mm² - AWG 12 - 6
- conductors stripping lenght: 14 mm
- terminal screw torque: 2,5 Nm (22.1 lb.in), for more information see page 20 and 21

16A contacts
- without plate for section conductors:
  0,25 - 2,5 mm² - AWG 24 - 14
- conductors stripping lenght: 7 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

CX 4/2 poles connector inserts
Maximum current load derating diagram

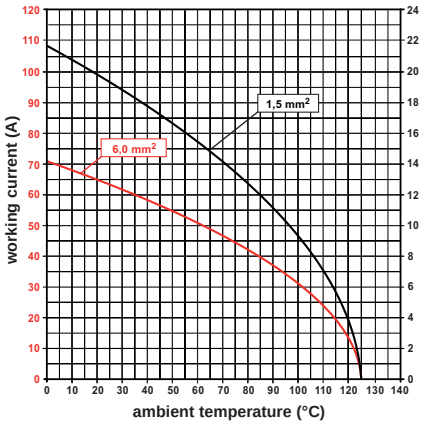

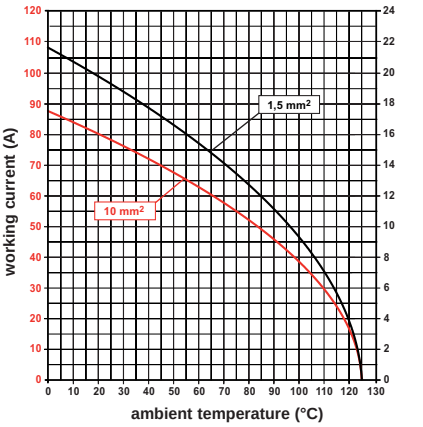

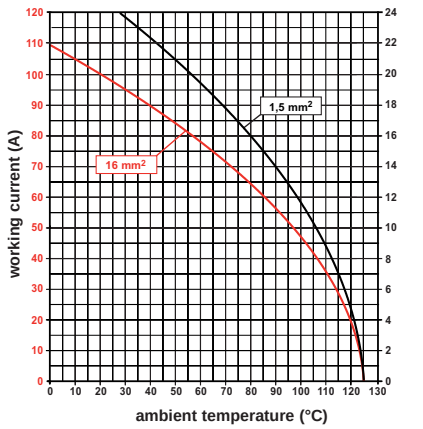

CX...RY 4 poles (80A - 830V) + ⏚ PPS-GF40 VARIANT

enclosures:
size "77.27" **page:**

For 180 °C **588**

inserts,
screw terminal connection

RATING 830V
180 °C
SILVER PLATED CONTACTS

description	part No.
use in temperatures up to 180 °C	
female inserts with female contacts, brown	**CXF 4/0 RY**
male inserts with male contacts, brown	**CXM 4/0 RY**

- characteristics according to EN 61984:
  80A 830V 8kV 3
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +180 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance:
  ≤ 0,3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



80A contacts
- without plate for section conductors:
  4-16 mm² - AWG 12-6
- conductors stripping lenght: 14 mm
- terminal screw torque: 2,5 Nm (22.1 lb.in),
  for more information see page 20 and 21

CX...RY 4/0 poles connector inserts
Maximum current load derating diagram

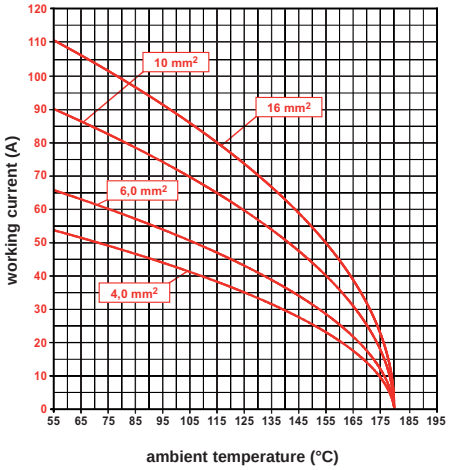

dimensions shown in mm are not binding and may be changed without notice

CX...RY 4 poles (80A - 830V) + 2 poles (16A - 400V) + ⏚ PPS-GF40 VARIANT

enclosures:
size "77.27" **page:**

For 180 °C **588**

inserts,
screw terminal connection

RATING 830V
180 °C
SILVER PLATED CONTACTS

description	part No.
use in temperatures up to 180 °C	
female inserts with female contacts, brown	**CXF 4/2 RY**
male inserts with male contacts, brown	**CXM 4/2 RY**

- characteristics according to EN 61984:
  80A 830V 8kV 3
  16A 400V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +180 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance:
  ≤ 0,3 mΩ (4 poles)
  ≤ 1 mΩ (2 poles)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

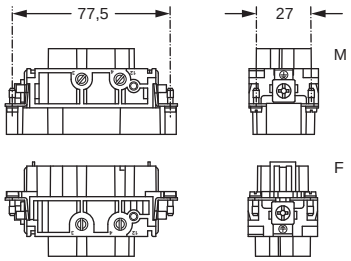

contacts side (front view)



80A contacts
- without plate for section conductors:
  4 - 16 mm² - AWG 12 - 6
- conductors stripping lenght: 14 mm
- terminal screw torque: 2,5 Nm (22.1 lb.in), for more information see page 20 and 21

16A contacts
- without plate for section conductors:
  0,25 - 2,5 mm² - AWG 24 - 14
- conductors stripping lenght: 7 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

CX..RY 4/2 poles connector inserts
Maximum current load derating diagram

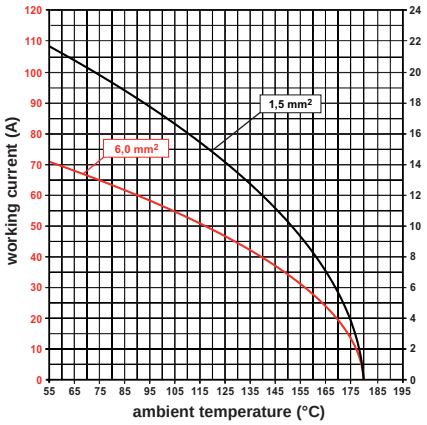

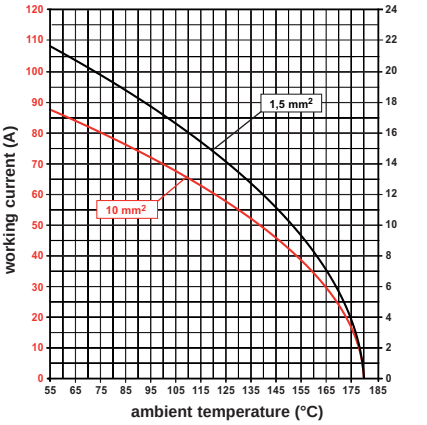

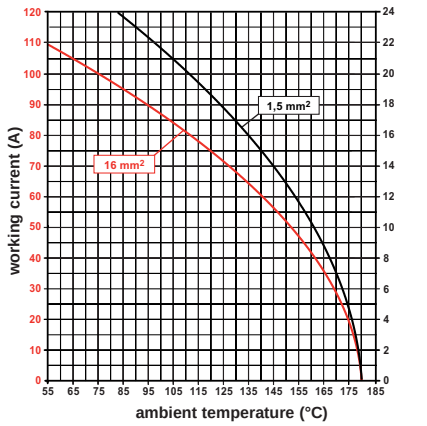

CX - CX...RY 4 poles (80A - 400V) + 8 poles (16A - 230/400V) + ⏚ PPS-GF40 VARIANT

enclosures:
size "104.27" **page:**

CX 4/8:

C-TYPE IP65/IP66	412 - 423
C7 IP67, two levers	441 - 442
V-TYPE IP65/IP66, single lever	459 - 463
BIG hoods	472 - 473
T-TYPE IP65 insulating	486 - 487
T-TYPE / W IP66/IP69 insulating	492
HYGIENIC T-TYPE / H IP66/IP69	504
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	509
W-TYPE for aggressive environments	524
E-Xtreme® corrosion proof	536 - 537, 545, 556 - 557
EMC	581
Central lever	612 - 614
LS-TYPE	624 - 625
IP68	644 - 647

panel supports:

COB	652 - 653

CX 4/8 RY:

For 180 °C	589

inserts,
screw terminal connection

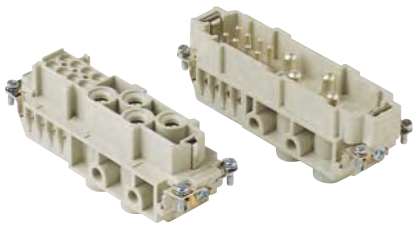

SILVER PLATED CONTACTS

inserts,
screw terminal connection

180 °C

SILVER PLATED CONTACTS

description	part No.	part No
female inserts with female contacts male inserts with male contacts	**CXF 4/8** **CXM 4/8**	
use in temperatures up to 180 °C female inserts with female contacts male inserts with male contacts		**CXF 4/8 RY** **CXM 4/8 RY**

- characteristics according to EN 61984:
  80A 400V 6kV 3
  80A 400/690V 6kV 2
  16A 230/400V 4kV 3
  16A 400V 4kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C (CX)
- ambient temperature limit: -40 °C ... +180 °C (CX...RY)
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance:
  ≤ 0,3 mΩ (4 poles)
  ≤ 1 mΩ (8 poles)
- for max. current load see the connector inserts derating diagrams below; for more information see page 28

CX - CX..RY

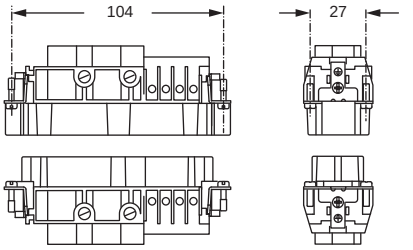

contacts side (front view)



80A contacts
- without plate for section conductors:
  4 - 16 mm² - AWG 12 - 6
- conductors stripping lenght: 14 mm
- terminal screw torque: 2,5 Nm (22.1 lb.in), for more information see page 20 and 21

16A contacts
- with plate for section conductors:
  0,75 - 2,5 mm² - AWG 18 - 14
- conductors stripping lenght: 7 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 20 and 21

The derating curves for the connector's **power** (red) and **signal** (black) portions provided in the diagram are valid for the following combinations of cross-sectional area on the power side and on the signal side:

- power 4 mm² with signal 1 mm²;
- power 6 mm² with signal 1 mm²;
- power 10 mm² or 6 mm² with signal 1,5 mm²;
- power 16 mm² with signal 2,5 mm²;

NOTE 1
Any cross-sectional area on the signal side higher than that combined to the relevant cross-sectional area on the power side may be used, but with the derating curve for the cross-sectional area given as combined to that on the power side;

NOTE 2
Any cross-sectional area on the signal side lower that that combined to the relevant cross-sectional area on the power side (e.g. 1 mm² signal with 16 mm² power) may be used at the current indicated for the signal cross-sectional area belonging to the closest lower cross-sectional area on the power side (i.e. the 1 mm² curve combined to the 6 mm² power section)

CX 4/8 poles connector inserts
Maximum current load derating diagrams

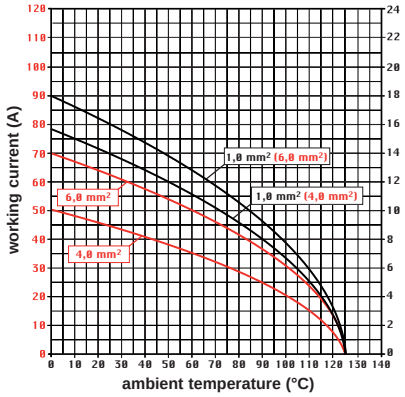

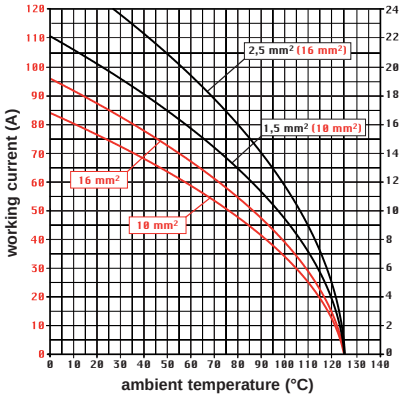

CX..RY 4/8 poles connector inserts
Maximum current load derating diagram

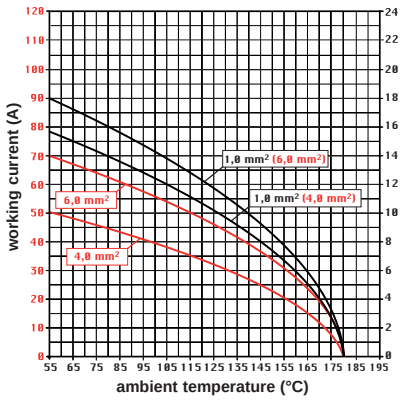

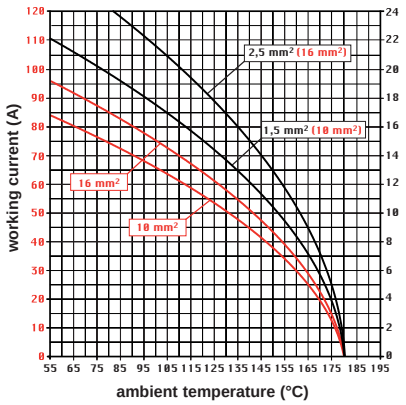

dimensions shown in mm are not binding and may be changed without notice

CX 6/6 inserts 100A/16A version

The CX series of combined "power /auxiliaries" connector inserts has been enhanced with a **new insert, CX 6/6 suitable for currents up to 100A** in the power side and 16A on the auxiliaries side, for crimp contacts series CG (100A max) and series CC (16A max) several benefits over conventional screw or axial screw contacts:

- more **resistant to mechanical stresses** such as vibrations, shock and cable loads;
- more **corrosion resistant** (gas tight);
- **quicker to connect** and ensuring more **consistent results** (regardless of the operators "force");
- the connector is **electrically more efficient** (reduced voltage drop).

This innovative insert design, by following the same concepts of the MIXO 100A CX..G model, **patented by ILME**, ensures a quicker fitting and removal of crimped contacts.
The **provided locking keys** firmly fasten the contact holder.
The power contacts may be removed **without any special tool**, using a simple screwdriver (e.g.: 0,5 x 3 mm, 0,5 x 3,5 mm, 0,6 x 4 mm and 0,8 x 4 mm flat blade).
The removal of auxiliary contacts series CC requires the CQES extraction tool. See figure below.
The crimping operation may be carried out quickly and efficiently with the **hand operated hydraulic pliers**, which is pre-fitted with the suitable locator. Suitable crimp dies are available on request.

Inserts series		**CX 6/6**		
No. of poles	main contact	6 + ⏚ (100A) **		
	auxiliary contacts	6 (16A)		
rated current [1]		100A	16A	
EN 61984 pollution degree 3	rated voltage	690V	400V	
	rated impulse withstand voltage	8kV	6kV	
	pollution degree	3	3	
contact resistance		≤ 0,3 mΩ (100A) ≤ 1 mΩ (16A)		
insulation resistance		≥ 10 GΩ		
ambient temperature limit (°C)	min	-40 °C		
	max	+125 °C		
degree of protection	with enclosures (according to version)	IP65, IP66/IP69, IP66/IP67/IP69, IP66/IP68/IP69		
	without enclosures	IP20		
conductor connections *		crimp		
conductor cross-section (CG contact series)	mm^2	16, 25, 35		
	AWG	6 - 5, 4 - 3, 2		
conductor cross-section (CC contact series)	mm^2	0,14 4,0		
	AWG	26 ÷ 12		
CG/CC stripping lenght	mm	15 / 7,5		
mechanical endurance (mating cycles)		≥ 500		

[1] Please check the insert load curves to establish the actual maximum operating current according to the ambient temperature.

* max external conductor Ø = 11,5 mm
** the power PE contact is not included and must be the same size as the power contacts used (for a total n° at contacts = 7)

CX 6/6 Assembling instructions

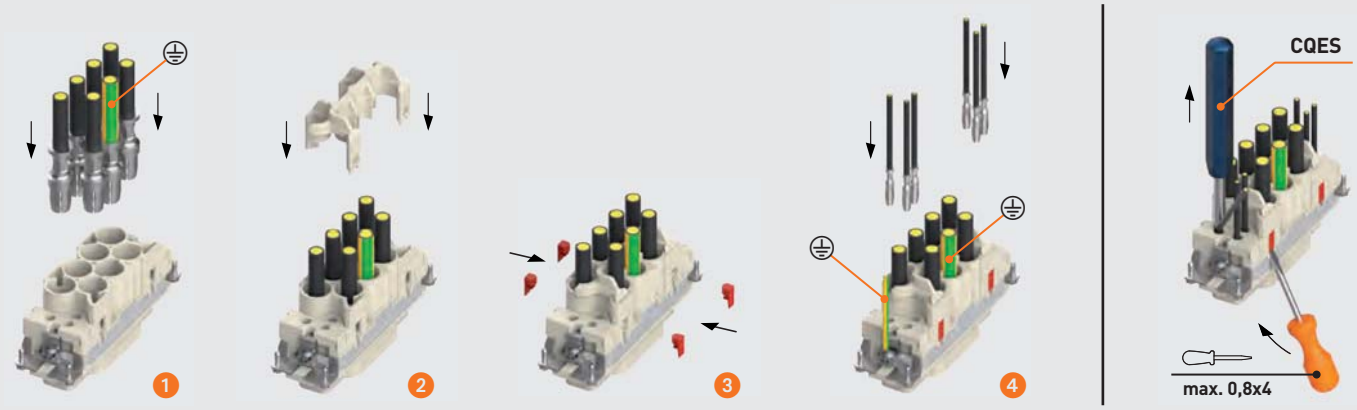

CX 6 poles + ⏚ (100A - 690V) + 6 poles (16A - 400V) + ⏚

enclosures:
size "104.27" **page:**

C-TYPE IP65/IP66	**412 - 423**
C7 IP67, two levers	**441 - 442**
V-TYPE IP65/IP66, single lever	**459 - 463**
BIG hoods	**472 - 473**
T-TYPE IP65 insulating	**486 - 487**
T-TYPE / W IP66/IP69 insulating	**492**
HYGIENIC T-TYPE / H IP66/IP69	**504**
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	**509**
W-TYPE for aggressive environments	**524**
E-Xtreme® corrosion proof	**536 - 537, 545, 556 - 557**
EMC	**581**
Central lever	**612 - 614**
LS-TYPE	**624 - 625**
IP68	**644 - 647**

panel supports: **page:**
COB **652 - 653**

enclosures:
bulkhead mounting housings, high construction housings or high construction hoods

inserts, crimp connections

100A and 16A crimp contacts silver and gold plated

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts	**CXF 6/6**	
male inserts for male contacts	**CXM 6/6**	
100A female crimp contacts		
8 - 10 mm² AWG 8 - 7		**CGFA 10**
16 mm² AWG 6 - 5		**CGFA 16**
25 mm² AWG 4 - 3		**CGFA 25**
35 mm² AWG 2		**CGFA 35**
100A male crimp contacts		
8 - 10 mm² AWG 8 - 7		**CGMA 10**
16 mm² AWG 6 - 5		**CGMA 16**
25 mm² AWG 4 - 3		**CGMA 25**
35 mm² AWG 2		**CGMA 35**
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCFA 0.3** / **CCFD 0.3**
0,5 mm² AWG 20 with no grooves		**CCFA 0.5** / **CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCFA 0.7** / **CCFD 0.7**
1 mm² AWG 18 one groove		**CCFA 1.0** / **CCFD 1.0**
1,5 mm² AWG 16 two grooves		**CCFA 1.5** / **CCFD 1.5**
2,5 mm² AWG 14 three grooves		**CCFA 2.5** / **CCFD 2.5**
3 mm² AWG 12 one wide groove		**CCFA 3.0** / **CCFD 3.0**
4 mm² AWG 12 with no grooves		**CCFA 4.0** / **CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCMA 0.3** / **CCMD 0.3**
0,5 mm² AWG 20 with no grooves		**CCMA 0.5** / **CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCMA 0.7** / **CCMD 0.7**
1 mm² AWG 18 one groove		**CCMA 1.0** / **CCMD 1.0**
1,5 mm² AWG 16t wo grooves		**CCMA 1.5** / **CCMD 1.5**
2,5 mm² AWG 14 three grooves		**CCMA 2.5** / **CCMD 2.5**
3 mm² AWG 12 one wide groove		**CCMA 3.0** / **CCMD 3.0**
4 mm² AWG 12 with no grooves		**CCMA 4.0** / **CCMD 4.0**

silver plated

gold plated+

+ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  100A 690V 8kV 3
  16A 400V 6kV 3
- c UL us (UL for USA and Canada), CSA, CQC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,3 mΩ (100A), ≤ 1 mΩ (16A)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 6/6 power poles connector inserts
Maximum current load derating diagram

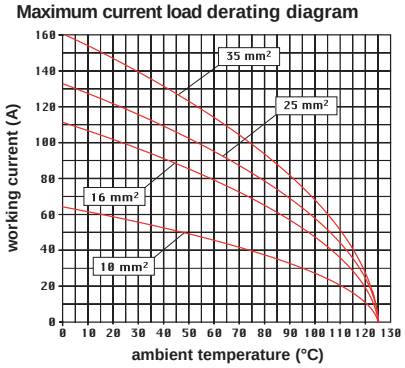

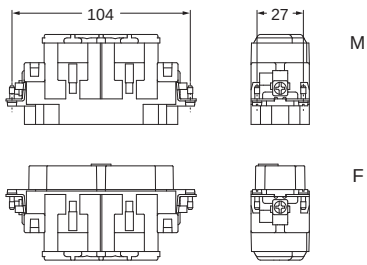

contacts side (front view)



- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 100A contacts CGF, CGM series and 16A contacts CCF, CCM series) on pages 708 - 741

CGF and CGM

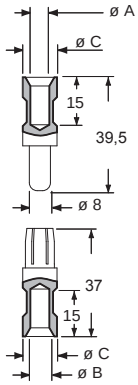

CCF and CCM



CGF and CGM contacts

conductor section (mm²)	conductor slot ø A (mm)	ø B (mm)	ø C (mm)	conductor stripping length (mm)
8-10	4,3	4,3	13	15
16	5,5	5,5	13	15
25	7,0	7,0	13	15
35	7,9	8,2	12,5	15

CCF and CCM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

HNM series

TECHNICAL FEATURES

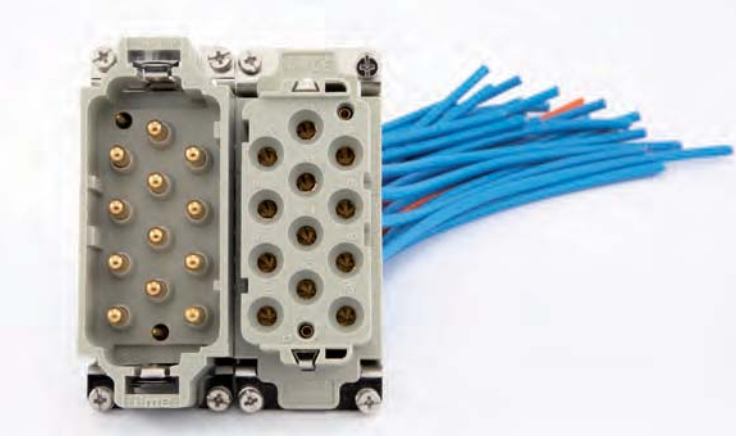

Specifically designed for applications requiring a high number of mating cycles, the **HNM series** guarantees **up to 10.000 matings**.

Ideal for test benches, the special **HNM inserts** guarantee 10.000 matings when used together with the **dedicated enclosure series**, thanks to the special antifriction treatment applied both on the contacts of the inserts and on the V-TYPE locking lever and the riveted pegs.

5.000 matings are achieved when working with standard enclosures.

The series features **special versions of the 10 and 16A gold plated crimp contacts** to be used both with **special crimp inserts** (up to 108 poles) and with standard MIXO inserts mounted in **special frames** equipped with **gold PE contacts**.

SUM-UP

- **Special treatment + special lubricant**
- **HNM marking on each insert**

RD 40 poles + ⏚ 10A - 250V HNM (High Number of Matings)

enclosures:
size "77.27" **page:**

HNM	**596 - 597**
C-TYPE IP65/IP66, single lever	**402 - 411**
V-TYPE IP65/IP66, single lever	**454 - 458**

inserts, crimp connections

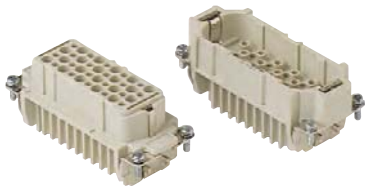

10.000 MATINGS WITH HNM ENCLOSURES

5.000 MATINGS WITH STANDARD ENCLOSURES, SINGLE LEVER

10A crimp contacts gold plated

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**RDF 40**	
male inserts for male contacts	**RDM 40**	
10A female contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDF2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDF2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDF2D 0.7**
1 mm² AWG 18 identification No. 3		**RDF2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDF2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDF2D 2.5**
10A male contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDM2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDM2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDM2D 0.7**
1 mm² AWG 18 identification No. 3		**RDM2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDM2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDM2D 2.5**

gold plated

- characteristics according to EN 61984:
  10A 250V 4kV 3
  10A 230/400V 4kV 2
- DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 65
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, RDF2D and RDM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)





RD 40 poles connector inserts
Maximum current load derating diagram

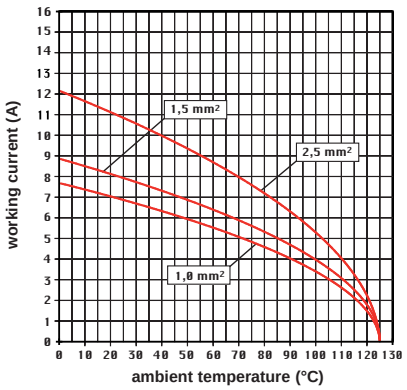

RDF2D and RDM2D contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CR CP coding pin with loss of one contact (page 684)

dimensions shown in mm are not binding and may be changed without notice

RD 64 poles + ⏚ 10A - 250V HNM (High Number of Matings)

enclosures:
size "104.27" **page:**

HNM	**598 - 599**
C-TYPE IP65/IP66, single lever	**412 - 423**
V-TYPE IP65/IP66, single lever	**459 - 463**

inserts, crimp connections

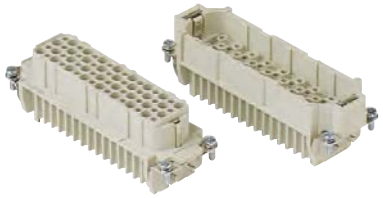

10.000 MATINGS WITH HNM ENCLOSURES

5.000 MATINGS WITH STANDARD ENCLOSURES, SINGLE LEVER

10A crimp contacts gold plated

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**RDF 64**	
male inserts for male contacts	**RDM 64**	
10A female contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDF2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDF2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDF2D 0.7**
1 mm² AWG 18 identification No. 3		**RDF2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDF2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDF2D 2.5**
10A male contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDM2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDM2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDM2D 0.7**
1 mm² AWG 18 identification No. 3		**RDM2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDM2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDM2D 2.5**

gold plated

- characteristics according to EN 61984:
  10A 250V 4kV 3
  10A 230/400V 4kV 2
- DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 65
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, RDF2D and RDM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

RD 64 poles connector inserts
Maximum current load derating diagram

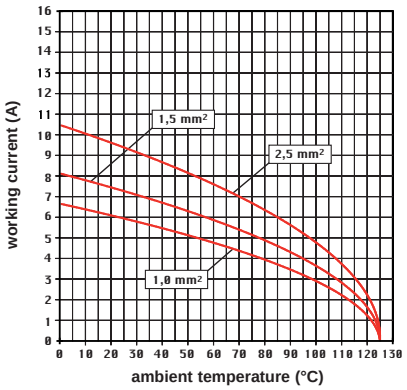

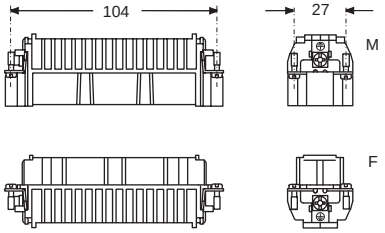

contacts side (front view)



CR CP coding pin with loss of one contact (page 684)

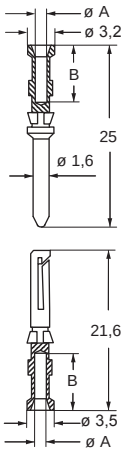

RDF2D and RDM2D contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

RDD 24 poles + ⏚ 10A - 250V HNM (High Number of Matings)

enclosures:
size "44.27" **page:**

HNM **592 - 593**

inserts, crimp connections



10.000 MATINGS WITH HNM ENCLOSURES

10A crimp contacts
gold plated

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**RDDF 24**	
male inserts for male contacts	**RDDM 24**	
10A female contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDF2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDF2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDF2D 0.7**
1 mm² AWG 18 identification No. 3		**RDF2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDF2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDF2D 2.5**
10A male contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDM2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDM2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDM2D 0.7**
1 mm² AWG 18 identification No. 3		**RDM2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDM2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDM2D 2.5**

gold plated

- characteristics according to EN 61984:
  10A 250V 4kV 2
- DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 75
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, RDF2D and RDM2D series) on pages 708 - 741
- PCBs interface, see article CIF 2.4
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



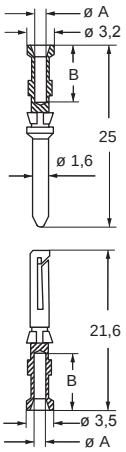

RDF2D and RDM2D contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

RDD 24 poles connector inserts
Maximum current load derating diagram

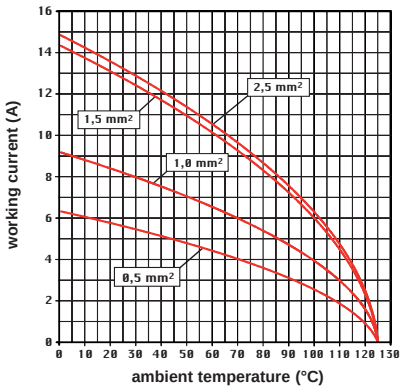

CR CP coding pin with loss of one contact (page 684)

dimensions shown in mm are not binding and may be changed without notice

RDD 42 poles + ⏚ 10A - 250V HNM (High Number of Matings)

enclosures:
size "57.27" **page:**

HNM	**594 - 595**
C-TYPE IP65/IP66, single lever	**393 - 401**
V-TYPE IP65/IP66, single lever	**448 - 453**

inserts, crimp connections

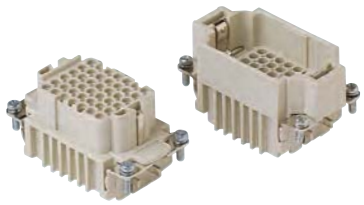

10.000 MATINGS WITH HNM ENCLOSURES

5.000 MATINGS WITH STANDARD ENCLOSURES, SINGLE LEVER

10A crimp contacts gold plated

HNM

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**RDDF 42**	
male inserts for male contacts	**RDDM 42**	
10A female contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDF2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDF2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDF2D 0.7**
1 mm² AWG 18 identification No. 3		**RDF2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDF2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDF2D 2.5**
10A male contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDM2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDM2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDM2D 0.7**
1 mm² AWG 18 identification No. 3		**RDM2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDM2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDM2D 2.5**

gold plated

- characteristics according to EN 61984:
  10A 250V 4kV 2
- DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 75
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, RDF2D and RDM2D series) on pages 708 - 741
- PCBs interface, see article CIF 2.4
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)



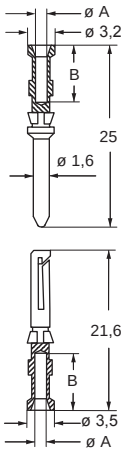

RDF2D and RDM2D contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

RDD 42 poles connector inserts
Maximum current load derating diagram

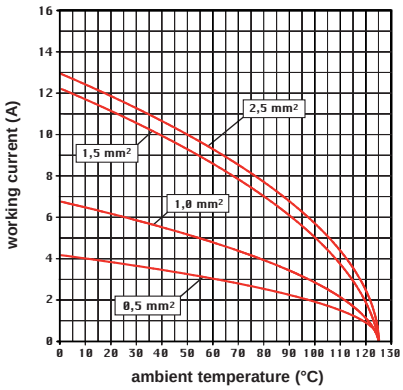

CR CP coding pin with loss of one contact (page 684)

RDD 72 poles + ⏚ 10A - 250V HNM (High Number of Matings)

enclosures:
size "77.27" **page:**

HNM	**596 - 597**
C-TYPE IP65/IP66, single lever	**402 - 411**
V-TYPE IP65/IP66, single lever	**454 - 458**

inserts, crimp connections

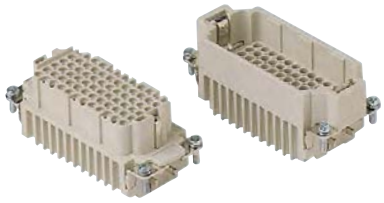

10A crimp contacts gold plated

10.000 MATINGS WITH HNM ENCLOSURES

5.000 MATINGS WITH STANDARD ENCLOSURES, SINGLE LEVER

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**RDDF 72**	
male inserts for male contacts	**RDDM 72**	
10A female contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDF2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDF2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDF2D 0.7**
1 mm² AWG 18 identification No. 3		**RDF2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDF2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDF2D 2.5**
10A male contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDM2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDM2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDM2D 0.7**
1 mm² AWG 18 identification No. 3		**RDM2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDM2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDM2D 2.5**

gold plated

- characteristics according to EN 61984:
  10A 250V 4kV 2
- DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 75
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, RDF2D and RDM2D series) on pages 708 - 741
- PCBs interface, see article CIF 2.4
- for max. current load see the connector inserts derating diagram below; for more information see page 28

RDD 72 poles connector inserts
Maximum current load derating diagram

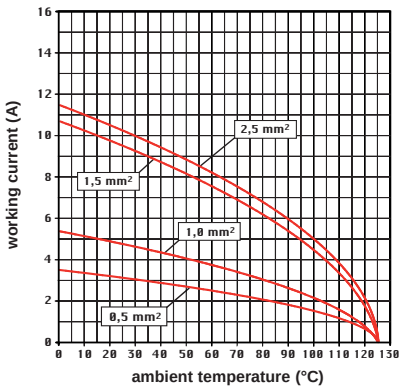



contacts side (front view)



CR CP coding pin with loss of one contact (page 684)



RDF2D and RDM2D contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

dimensions shown in mm are not binding and may be changed without notice

RDD 108 poles + ⏚ 10A - 250V HNM (High Number of Matings)

enclosures:
size "104.27" **page:**

HNM	**598 - 599**
C-TYPE IP65/IP66, single lever	**412 - 423**
V-TYPE IP65/IP66, single lever	**459 - 463**

inserts, crimp connections

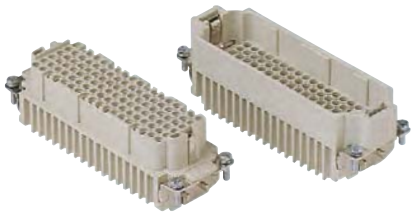

10.000 MATINGS WITH HNM ENCLOSURES

5.000 MATINGS WITH STANDARD ENCLOSURES, SINGLE LEVER

10A crimp contacts gold plated

HNM

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**RDDF 108**	
male inserts for male contacts	**RDDM 108**	
10A female contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDF2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDF2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDF2D 0.7**
1 mm² AWG 18 identification No. 3		**RDF2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDF2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDF2D 2.5**
10A male contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDM2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDM2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDM2D 0.7**
1 mm² AWG 18 identification No. 3		**RDM2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDM2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDM2D 2.5**

gold plated

- characteristics according to EN 61984:
  10A 250V 4kV 2
- DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 3 mΩ
- for applications requiring higher voltages, please see the special voltage application section on page 75
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, RDF2D and RDM2D series) on pages 708 - 741
- PCBs interface, see article CIF 2.4
- for max. current load see the connector inserts derating diagram below; for more information see page 28

RDD 108 poles connector inserts
Maximum current load derating diagram

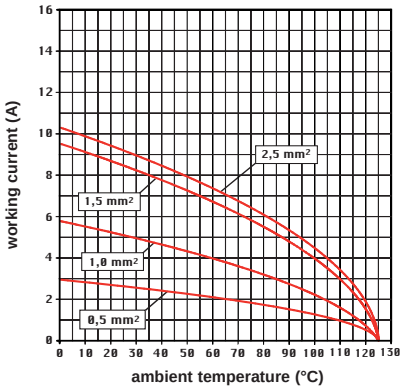

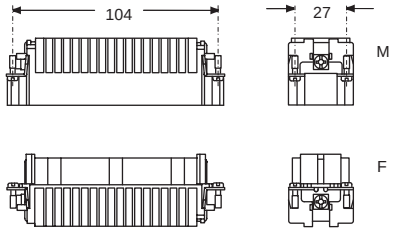

contacts side (front view)



CR CP coding pin with loss of one contact (page 684)



RDF2D and RDM2D contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

RCE 6 poles + ⏚ 16A - 500V HNM (High Number of Matings)

enclosures:
size “44.27” **page:**

HNM **592 - 593**

inserts, crimp connections

16A crimp contacts
gold plated

10.000 MATINGS WITH HNM ENCLOSURES

HNM

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**RCEF 06**	
male inserts for male contacts	**RCEM 06**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCF2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCF2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCF2D 0.7**
1 mm² AWG 18 one groove		**RCF2D 1.0**
1,5 mm² AWG 16 two grooves		**RCF2D 1.5**
2,5 mm² AWG 14 three grooves		**RCF2D 2.5**
3 mm² AWG 12 one wide groove		**RCF2D 3.0**
4 mm² AWG 12 with no grooves		**RCF2D 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCM2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCM2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCM2D 0.7**
1 mm² AWG 18 one groove		**RCM2D 1.0**
1,5 mm² AWG 16 two grooves		**RCM2D 1.5**
2,5 mm² AWG 14 three grooves		**RCM2D 2.5**
3 mm² AWG 12 one wide groove		**RCM2D 3.0**
4 mm² AWG 12 with no grooves		**RCM2D 4.0**

gold plated

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 1 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section16A contacts, RCF2D and RCM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

RCE 06 poles connector inserts
Maximum current load derating diagram

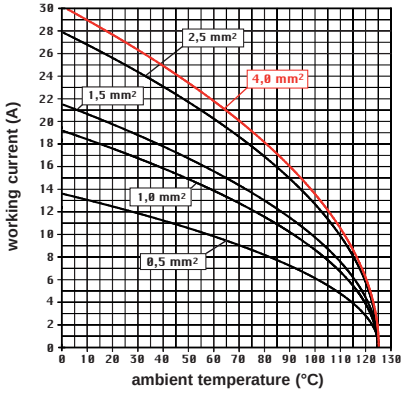



contacts side (front view)





RCF2D and RCM2D contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

RCE 10 poles + ⏚ 16A - 500V HNM (High Number of Matings)

enclosures:
size "57.27" **page:**

HNM	**594 - 595**
C-TYPE IP65/IP66, single lever	**393 - 401**
V-TYPE IP65/IP66, single lever	**448 - 453**

inserts, crimp connections

16A crimp contacts gold plated

10.000 MATINGS WITH HNM ENCLOSURES

5.000 MATINGS WITH STANDARD ENCLOSURES, SINGLE LEVER

HNM

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**RCEF 10**	
male inserts for male contacts	**RCEM 10**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCF2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCF2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCF2D 0.7**
1 mm² AWG 18 one groove		**RCF2D 1.0**
1,5 mm² AWG 16 two grooves		**RCF2D 1.5**
2,5 mm² AWG 14 three grooves		**RCF2D 2.5**
3 mm² AWG 12 one wide groove		**RCF2D 3.0**
4 mm² AWG 12 with no grooves		**RCF2D 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCM2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCM2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCM2D 0.7**
1 mm² AWG 18 one groove		**RCM2D 1.0**
1,5 mm² AWG 16 two grooves		**RCM2D 1.5**
2,5 mm² AWG 14 three grooves		**RCM2D 2.5**
3 mm² AWG 12 one wide groove		**RCM2D 3.0**
4 mm² AWG 12 with no grooves		**RCM2D 4.0**

gold plated

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 1 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section16A contacts, RCF2D and RCM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28



contacts side (front view)





RCE 10 poles connector inserts
Maximum current load derating diagram

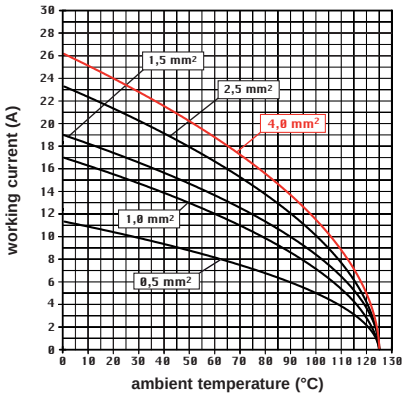

RCF2D and RCM2D contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

RCE 16 poles + ⏚ 16A - 500V HNM (High Number of Matings)

enclosures:
size "77.27" **page:**

HNM	**596 - 597**
C-TYPE IP65/IP66, single lever	**402 - 411**
V-TYPE IP65/IP66, single lever	**454 - 458**

inserts, crimp connections

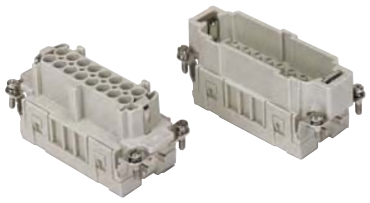

16A crimp contacts gold plated

10.000 MATINGS WITH HNM ENCLOSURES

5.000 MATINGS WITH STANDARD ENCLOSURES, SINGLE LEVER

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**RCEF 16**	
male inserts for male contacts	**RCEF 16**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCF2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCF2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCF2D 0.7**
1 mm² AWG 18 one groove		**RCF2D 1.0**
1,5 mm² AWG 16 two grooves		**RCF2D 1.5**
2,5 mm² AWG 14 three grooves		**RCF2D 2.5**
3 mm² AWG 12 one wide groove		**RCF2D 3.0**
4 mm² AWG 12 with no grooves		**RCF2D 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCM2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCM2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCM2D 0.7**
1 mm² AWG 18 one groove		**RCM2D 1.0**
1,5 mm² AWG 16 two grooves		**RCM2D 1.5**
2,5 mm² AWG 14 three grooves		**RCM2D 2.5**
3 mm² AWG 12 one wide groove		**RCM2D 3.0**
4 mm² AWG 12 with no grooves		**RCM2D 4.0**

gold plated

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 1 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section16A contacts, RCF2D and RCM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

RCE 16 poles connector inserts
Maximum current load derating diagram

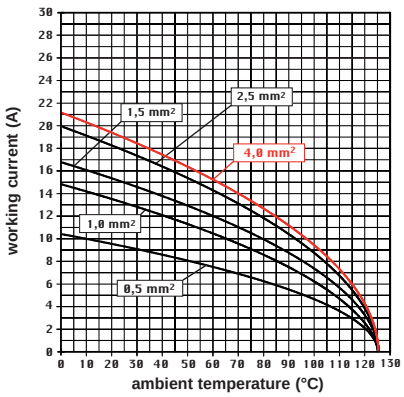

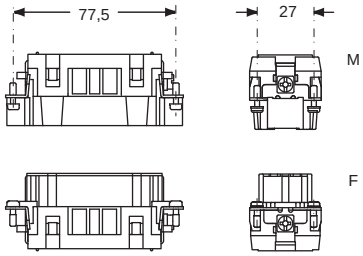

contacts side (front view)





RCF2D and RCM2D contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

RCE 24 poles + ⏚ 16A - 500V HNM (High Number of Matings)

enclosures:
size “104.27” **page:**

HNM **598 - 599**
C-TYPE IP65/IP66, single lever **412 - 423**
V-TYPE IP65/IP66, single lever **459 - 463**

inserts, crimp connections

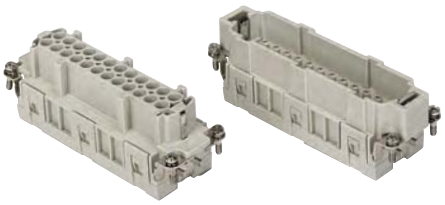

16A crimp contacts gold plated

- **10.000 MATINGS WITH HNM ENCLOSURES**
- **5.000 MATINGS WITH STANDARD ENCLOSURES, SINGLE LEVER**

HNM

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**RCEF 24**	
male inserts for male contacts	**RCEM 24**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCF2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCF2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCF2D 0.7**
1 mm² AWG 18 one groove		**RCF2D 1.0**
1,5 mm² AWG 16 two grooves		**RCF2D 1.5**
2,5 mm² AWG 14 three grooves		**RCF2D 2.5**
3 mm² AWG 12 one wide groove		**RCF2D 3.0**
4 mm² AWG 12 with no grooves		**RCF2D 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCM2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCM2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCM2D 0.7**
1 mm² AWG 18 one groove		**RCM2D 1.0**
1,5 mm² AWG 16 two grooves		**RCM2D 1.5**
2,5 mm² AWG 14 three grooves		**RCM2D 2.5**
3 mm² AWG 12 one wide groove		**RCM2D 3.0**
4 mm² AWG 12 with no grooves		**RCM2D 4.0**

gold plated

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 1 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section16A contacts, RCF2D and RCM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

RCE 24 poles connector inserts
Maximum current load derating diagram

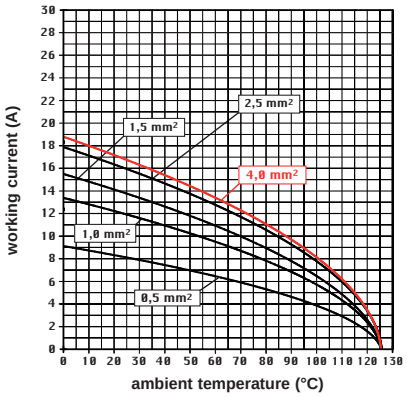

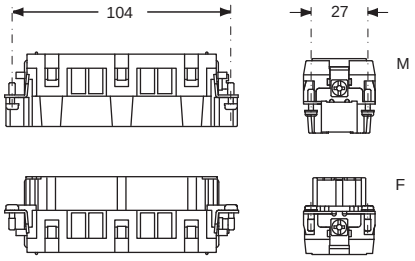

contacts side (front view)





RCF2D and RCM2D contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

RQEE 40 poles + ⏚ 16A - 500V HNM (High Number of Matings)

enclosures:
size "77.27" **page:**

HNM	**596 - 597**
C-TYPE IP65/IP66, single lever	**402 - 411**
V-TYPE IP65/IP66, single lever	**454 - 458**

inserts, crimp connections

16A crimp contacts gold plated

10.000 MATINGS WITH HNM ENCLOSURES

5.000 MATINGS WITH STANDARD ENCLOSURES, SINGLE LEVER

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**RQEEF 40**	
male inserts for male contacts	**RQEEM 40**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCF2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCF2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCF2D 0.7**
1 mm² AWG 18 one groove		**RCF2D 1.0**
1,5 mm² AWG 16 two grooves		**RCF2D 1.5**
2,5 mm² AWG 14 three grooves		**RCF2D 2.5**
3 mm² AWG 12 one wide groove		**RCF2D 3.0**
4 mm² AWG 12 with no grooves		**RCF2D 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCM2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCM2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCM2D 0.7**
1 mm² AWG 18 one groove		**RCM2D 1.0**
1,5 mm² AWG 16 two grooves		**RCM2D 1.5**
2,5 mm² AWG 14 three grooves		**RCM2D 2.5**
3 mm² AWG 12 one wide groove		**RCM2D 3.0**
4 mm² AWG 12 with no grooves		**RCM2D 4.0**

gold plated

- characteristics according to EN 61984:
  16A 500V 6kV 3
- DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 1 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, RCF2D and RCM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

RQEE 40 poles connector inserts
Maximum current load derating diagram

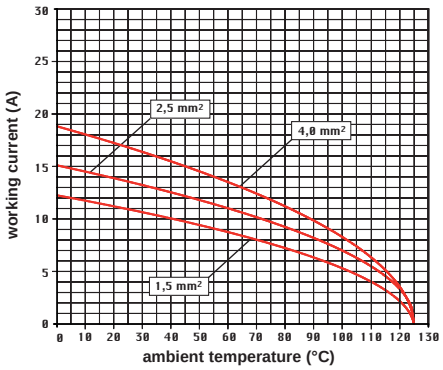

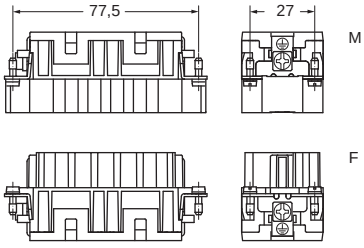

contacts side (front view)





CR CPQ coding pins (page 689)

RCF2D and RCM2D contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

RQEE 64 poles + ⏚ 16A - 500V HNM (High Number of Matings)

enclosures:
size "104.27" **page:**

HNM	**598 - 599**
C-TYPE IP65/IP66, single lever	**412 - 423**
V-TYPE IP65/IP66, single lever	**459 - 463**

inserts, crimp connections

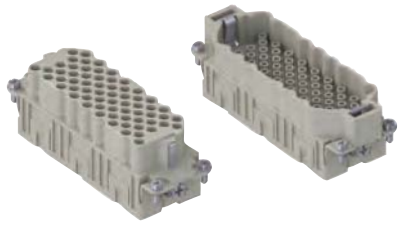

16A crimp contacts gold plated

10.000 MATINGS WITH HNM ENCLOSURES

5.000 MATINGS WITH STANDARD ENCLOSURES, SINGLE LEVER

HNM

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**RQEEF 64**	
male inserts for male contacts	**RQEEM 64**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCF2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCF2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCF2D 0.7**
1 mm² AWG 18 one groove		**RCF2D 1.0**
1,5 mm² AWG 16 two grooves		**RCF2D 1.5**
2,5 mm² AWG 14 three grooves		**RCF2D 2.5**
3 mm² AWG 12 one wide groove		**RCF2D 3.0**
4 mm² AWG 12 with no grooves		**RCF2D 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCM2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCM2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCM2D 0.7**
1 mm² AWG 18 one groove		**RCM2D 1.0**
1,5 mm² AWG 16 two grooves		**RCM2D 1.5**
2,5 mm² AWG 14 three grooves		**RCM2D 2.5**
3 mm² AWG 12 one wide groove		**RCM2D 3.0**
4 mm² AWG 12 with no grooves		**RCM2D 4.0**

gold plated

- characteristics according to EN 61984:
  16A 500V 6kV 3
- DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 1 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, RCF2D and RCM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

RQEE 64 poles connector inserts
Maximum current load derating diagram

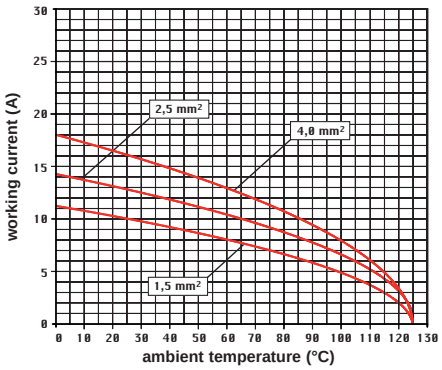

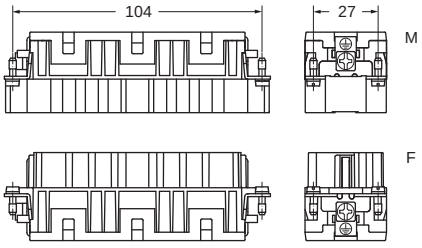

contacts side (front view)



CR CPQ coding pins (page 689)

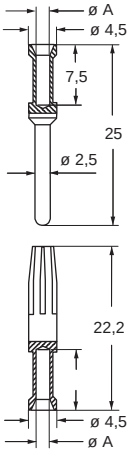

RCF2D and RCM2D contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

RXF/M 12/2

TECHNICAL FEATURES

Special **HNM** version (**High Number of Matings** up to 10.000 cycles) of CXF/M 12/2 connector inserts, to be used in combination with:

- **up to 12 40A HNM gold plated removable crimp contacts** of the **new RX** series,
- **2 10A HNM gold plated removable crimp contacts** of the **already available RD series;**

- crimp connector inserts with a combination of 12 power contacts (40A) plus 2 auxiliary contacts (10A) + PE;

- suitable for the operation of 4 three-phase AC motors with 2 auxiliary contacts;

- featuring a special antifriction treatment to guarantee up to **10.000 mating cycles**

- **5.000 mating cycles** with standard enclosures, single lever (excluding size “44.27”).

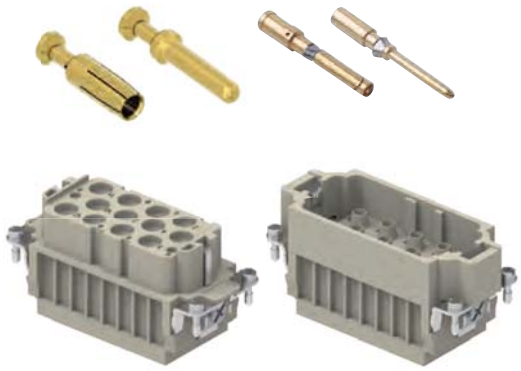

SUM-UP

- **Crimp connection**
- **Great resistance to strong vibrations**
- **For wires: up to 10 mm² (AWG 8)**
- **Auxiliary crimp contacts: silver or gold plated**

RX 12 poles (40A - 690V) + 2 poles (10A - 250V) + ⏚ HNM (High Number of Matings)

enclosures:
size "77.27" **page:**

HNM	**596 - 597**
C-TYPE IP65/IP66, single lever	**402 - 411**
V-TYPE IP65/IP66, single lever	**454 - 458**

inserts, crimp connections

Q 10.000 MATINGS WITH HNM ENCLOSURES

Q 5.000 MATINGS WITH STANDARD ENCLOSURES, SINGLE LEVER

40A and 10A crimp contacts gold plated

HNM

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts	**RXF 12/2**	
male inserts for male contacts	**RXM 12/2**	
40A female crimp contacts		
1,5 mm² AWG 16		**RXF2D 1.5**
2,5 mm² AWG 14		**RXF2D 2.5**
4 mm² AWG 12		**RXF2D 4.0**
6 mm² AWG 10		**RXF2D 6.0**
40A male crimp contacts		
1,5 mm² AWG 16		**RXM2D 1.5**
2,5 mm₂ AWG 14		**RXM2D 2.5**
4 mm² AWG 12		**RXM2D 4.0**
6 mm² AWG 10		**RXM2D 6.0**
10A female contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDF2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDF2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDF2D 0.7**
1 mm² AWG 18 identification No. 3		**RDF2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDF2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDF2D 2.5**
10A male contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDM2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDM2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDM2D 0.7**
1 mm² AWG 18 identification No. 3		**RDM2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDM2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDM2D 2.5**

gold plated

- characteristics according to EN 61984:
  40A 690V 8kV 3
  10A 250V 4kV 2
- cURus, CSA, CQC, DNV-GL, BV, EAC pending
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 0,3 mΩ (12 poles), ≤ 1 mΩ (2 poles)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

RX 12/2 power poles connector inserts
Maximum current load derating diagram

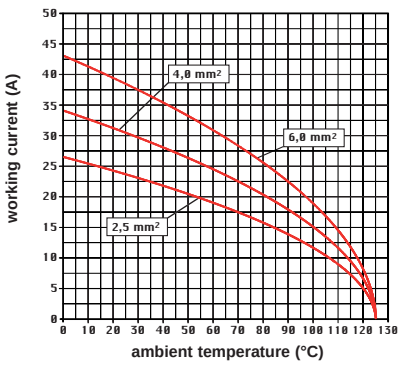

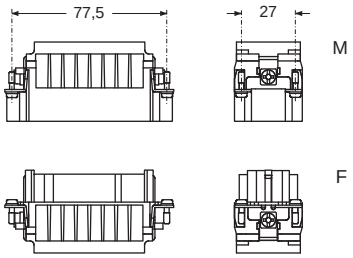

contacts side (front view)



- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts, RXF2D, RXM2D series and 10A contacts RDF2D, RDM2D series) on pages 708 - 741

RXF2D and RXM2D

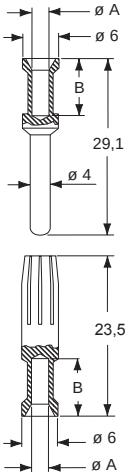

RDF2D and RDM2D

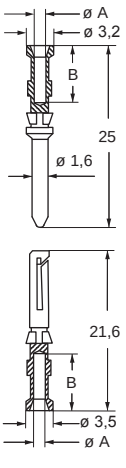

RXF2D and RXM2D contacts

conductor cross-sectional area mm²	conductor slot ø A (mm)	conductor stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6

RDF2D and RDM2D contacts

0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

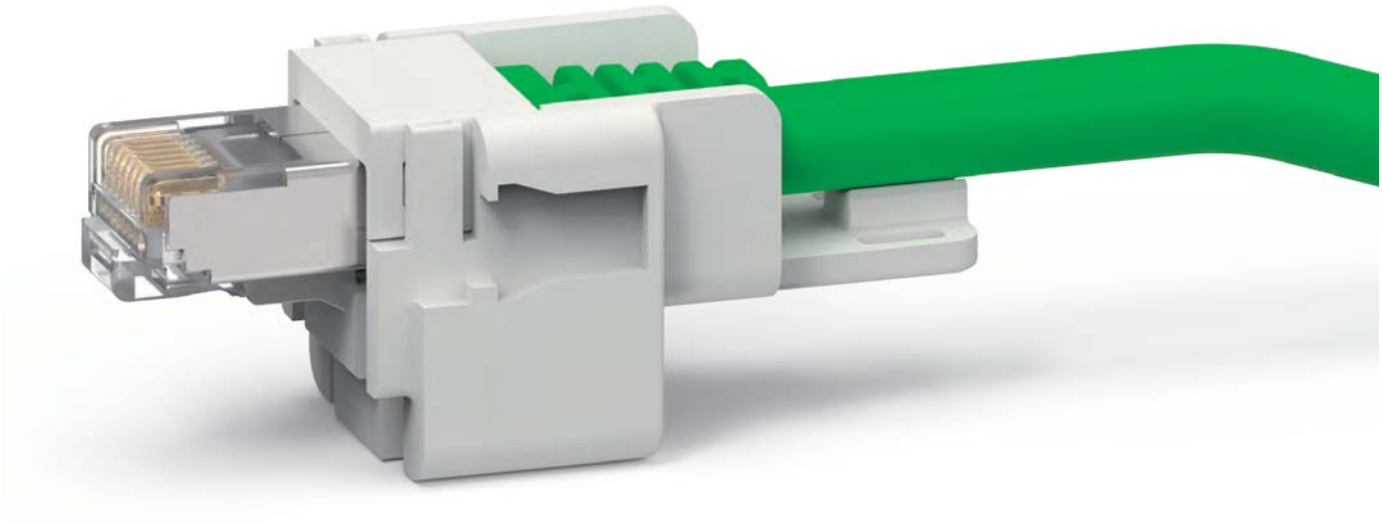

CJ RJ45 connector

enclosures:	page:
size “21.21”	
insulating type (CK IN, CKG/MKG VN/VAN)	**346 - 348**
metallic type (CKAX I, CKAG/MKAG V/VA)	**353 - 355**
IP68 (CKG I, CKG/MKG V)	**628 - 631**

adaptor for RJ45 connectors

RJ45 connectors



description	part No.	part No. data contacts only	part No. data contacts/+2 power contacts
without RJ45 connector (to be ordered separately) adapter for RJ45 female connector in fixed enclosures	**CJ KF**		
RJ45 coupler jack with 8 data contacts [1]		**CX 8 JF**	
RJ45 coupler jack with 8 data contacts/2 power contacts [1]			**CX 8/2 JF**
without RJ45 connector (to be ordered separately) adapter for RJ45 male connector [2]	**CJ KM**		
RJ45 plug with 4 data contacts		**CX 4 JM**	
RJ45 plug with 4 data contacts/2 power contacts			**CX 4/2 JM**
RJ45 plug with 6 data contacts/2 power contacts			**CX 6/2 JM**
RJ45 plug with 8 data contacts		**CX 8 JM**	
RJ45 plug, 4 data contacts **cat. 5e ProfiNET®**		**CX 4E JM**	

[1] 4-pole version on request, part No. **CX 4 JF** and **CX 4/2 JF** with “crossover” link

[2] to be used with hoods

RJ45 connector features:
- RJ45 insert, Class 5 Ethernet
- rated current: 2,1A at 70 °C
- rated voltage: 50VDC / 35VAC
- IDC terminals:
  for 0,22 mm² (AWG 24/7) data contacts **CX 4 JM**
  for 0,14 mm² (AWG 26/7) or 0,22 mm² (AWG 24/7) data contacts **CX 4/2 JM**
  for 0,34 mm² (AWG 22/7) or 0,38 mm² (AWG 22/19) power contacts
  for 0,14 mm² (AWG 26/7) data contacts **CX 6/2 JM**
  for 0,25 mm² (AWG 23/19) power contacts
  for 0,14 mm² (AWG 26/7) data contacts **CX 8 JM**
  for 0,34 mm² (AWG 22/7) data contacts **CX 4E JM**
- /7 = 7-strands wire
  /19 = 19-strands wire
- $Ø_{max}$ insulating conductors 1 mm (data), 1,4 mm (power and CX 4E JM)
- $Ø_{max}$ complete cable 7 mm (CX 8 JM: 6,9 mm)
- temperature range: from -40°C to 120 °C
- nickel plated brass screening
- insert coding pin for RJ45 adapters (optional)*: **CR KC**
  * Optional four coding positions CR KC insert coding pin (4 pins required for each connector coupling).
- self-extinguishing properties: to UL 94V-0
- crimp pliers: **CJPZ Y**
- screened cable stripper: **CJST**
- for crimping a male connector, see the crimp tool section page 735
- cULus (UL for USA and Canada) certified

CR KC insert coding pin



CJ KF, CJ KM

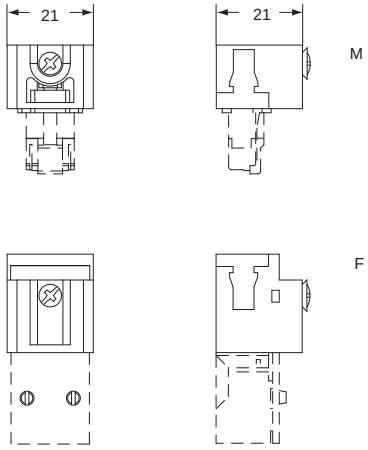

contacts side (front view)

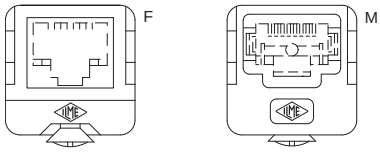

inserts already supplied with stainless steel fixing screw with gasket, which ensures IP66/IP67/IP69 degree of protection

CX 4 JF, CX 4/2 JF, CX 8 JF, CX 8/2 JF

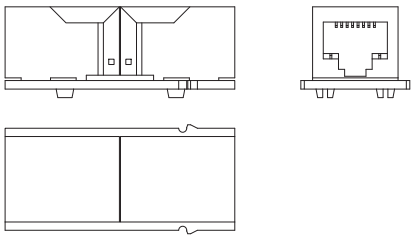

CX 4 JM, CX 4E JM, CX 4/2 JM, CX 6/2 JM, CX 8 JM



How to use CR KC coding pins (cannot be used with IP68 enclosures)

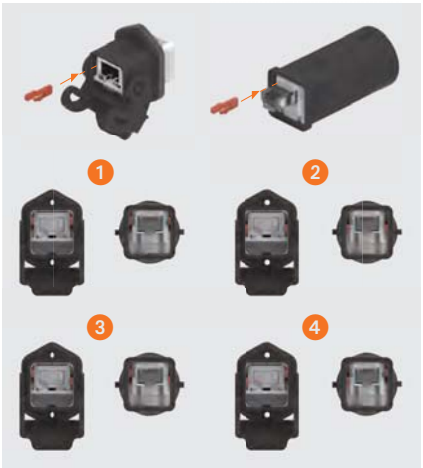

CJZ RJ45 connector

- IP66/IP67/IP69 degree of protection (EN 60529)
- insert RJ45, CAT. 5 Ethernet
- rated current: 2.1A at 70 °C
- rated voltage: 50V DC / 35V AC
- temperature limit: -40 °C, +120 °C
- nickel-plated brass screening
- insert coding pin: **CR KC**
- self-extinguishing: UL 94V-0
- insulating enclosures in black self-extinguishing thermoplastic material
- hoods with cable gland
- female insert with two connected entries

IP66 / IP67 connector in bulkhead housing, female inserts

patch cord with 2 RJ45 connectors, male inserts

description	part No.	part No.	(L) metre
connector in insulating enclosure and insert with 8 data contacts	**CJZ 8 IN**		
connector in metal enclosure and insert with 8 data contacts	**CJZA 8 I**		
RJ45 connector 8 data contacts, in insulating enclosure		**CWK 2 J2M8**	2
		CWK 5 J2M8	5
		CWK 10 J2M8	10
RJ45 connector 8 data contacts, in metal enclosure		**CWKA 2 J2M8**	2
		CWKA 5 J2M8	5
		CWKA 10 J2M8	10

panel cut-out for bulkhead mounting housings



CR KC
insert coding pin



How to use CR KC coding pins
(cannot be used with IP68 enclosures)

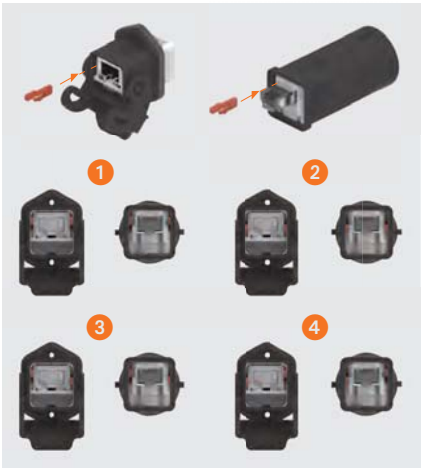

CJZ IN

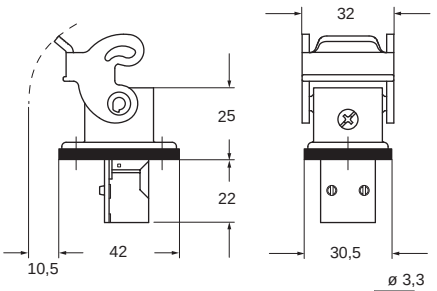

CJZA I

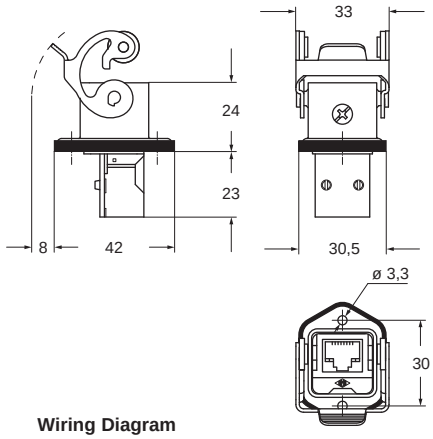

Wiring Diagram



CWK J2M8 and **CWKA J2M8**

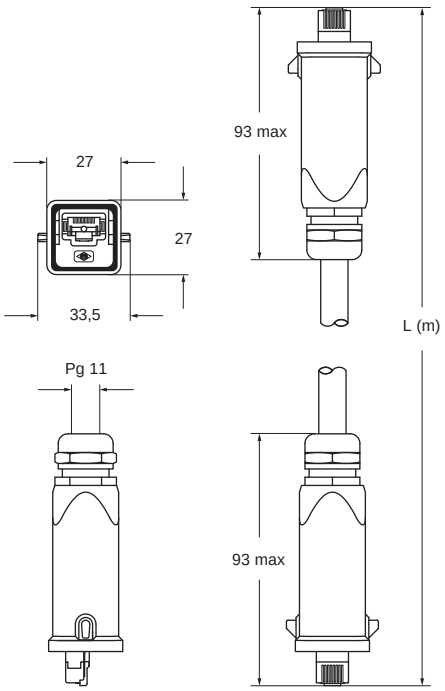

Wiring Diagram



dimensions shown in mm are not binding and may be changed without notice

CYG RJ45 connector

Allows two complete portable RJ45 connectors to be joined, IP65/IP67/IP69 version

insulated version coupling, for RJ45 connectors

metal version coupling, for RJ45 connectors

description	part No. data contacts only	part No. data contacts/+2 power contacts	part No. data contacts only	part No. data contacts/+2 power contacts
RJ45 coupler jack within housings, 8 data contacts [1] RJ45 coupler jack within housings, 8 data contacts/2 power contacts [1]	**CYG 8 JF**	**CYG 8/2 JF**		
RJ45 coupler jack within housings, 8 data contacts [2] RJ45 coupler jack within housings, 8 data contacts/2 power contacts [2]			**CYG 8 JFA**	**CYG 8/2 JFA**

[1] 4-pole version on request, part No. **CYG 4 JF** and **CYG 4/2 JF** with “crossover” link

[2] 4-pole version on request, part No. **CYG 4 JFA** and **CYG 4/2 JFA** with “crossover” link

RJ45 connector features:
- RJ45, Class 5 connector
- nominal current: 2.1A at 70 °C
- nominal voltage: 50VDC / 35VAC
- temperature range: from -40 °C to +120 °C
- nickel plated brass screening
- insert coding pin: **CR KC**
- self-extinguishing properties: UL 94V-0
- die cast zinc alloy metal enclosures
- black self-extinguishing thermoplastic insulated enclosures.

CYG 4 JF, CYG 4/2 JF, CYG 8 JF, CYG 8/2 JF

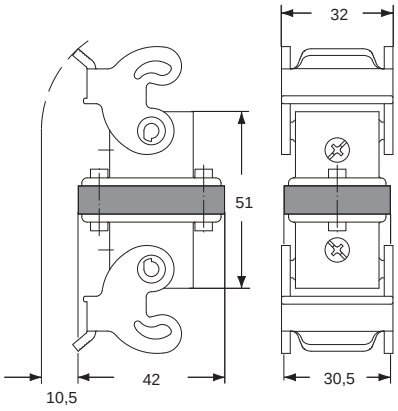

contacts side (front view)



CYG 4 JFA, CYG 4/2 JFA, CYG 8 JFA, CYG 8/2 JFA

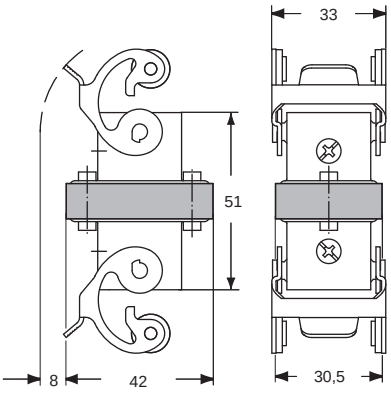

contacts side (front view)



CJK adapters 1 seat for RJ45 connector Cat. 6 Class E_A

enclosures:	page:
size "21.21"	
insulating type (CK IN, CKG/MKG VN/VAN *)	**346 - 348**
metallic type	
(CKAX I, CKAX/MKAX IAP/AP/VG)	**349 and 353**
(CKAG/MKAG V/VA *)	**354 - 355**
IP68	
(CKG I, CKG/MKG IAP, CKG/MKG V)	**628 - 631**

***)** angled enclosures cannot be used with CX 8 J6IM

- characteristics according to EN 61984:
  1A 50V 0,8kV 3
- c UL us (UL for USA and Canada) certified
- insulation resistance: ≥ 10 GΩ
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- temperature range: from -40 °C to +70 °C
- we recommend to fix the cable with cable tie

adapters for RJ45 male connectors, RJ45 female-female connectors

RJ45 male connectors, crimp and IDC termination

Watch our online tutorial

description	part No.	part No.
socket insert with 1 RJ45 female connector plug inserts for 1 RJ45 male crimp connector, 8 data contacts (without RJ45 connector, to be ordered separately) plug insert for 1 RJ45 male IDC connector, 8 data contacts (without RJ45 connector, to be ordered separately)	**CJK 8FT** **CJK 8MT** **CJK 8IMT**	
RJ45 male crimp connector, 8 data contacts		**CX 8 J6M**
RJ45 male IDC connector, 8 data contacts		**CX 8 J6IM**

CJK 8FT technical data:
- RJ45 female insert, Cat. 6 Class E_A
- shielding housing: zinc diecast
- housing finish: nickel-plated
- current carrying capacity at 50 °C: 1A
- adequate for Power over Ethernet: PoE according to IEEE 802.3af
- connectors: IEC 60603-7-5
- adequate for 10 Gigabit Ethernet: 10 Gigabit Ethernet acc. to IEEE 802.3an
- custom-designed cabling systems: PROFINET Installation Guideline
- generic cabling systems: ANSI/TIA/EIA-568-C.2 ISO/IEC 11801 EN50173-1 ISO/IEC 24702 EN 61918
- class E_A (channel): ISO/IEC 11801, EN 50173-1

CX 8 J6M technical data:
- RJ45 male crimp connectors Cat. 6_A
- crimp pliers: **CJPZ T**
- screened cable stripper: **CJST**
- Cu-conductor diameter solid: 0,40 - 0,51 mm (AWG 26/1 - 24/1) stranded: 0,46 - 0,61 mm (AWG 27/7 - 24/7)
- insulation diameter: 0,85 - 1,05 mm
- cable diameter: 5,0 - 7,0 mm
- connectors: IEC 60603-7-51
- 10 Gigabit Ethernet acc. to IEEE 802.3an: adequate for 10 Gigabit Ethernet
- category 6_A: ISO/IEC 11801; EN 50173-1
- class E_A: ISO/IEC 11801; EN 50173-1
- category 6_A: ANSI/TIA/EIA-568-C.2

CX 8 J6IM technical data:
- RJ45 male IDC connectors Cat. 6 Class E_A
- Cu-conductor diameter solid: 0,41 - 0,64 mm (AWG 26/1 - 22/1) stranded: 0,48 - 0,76 mm (AWG 26/7 - 22/7)
- insulation diameter: 0,85 - 1,6 mm
- cable diameter: 5,5 - 8,5 mm
- connectors: IEC 60603-7-5
- category 6_A: ISO/IEC 11801; DIN EN 50173-1
- wrenches pliers for CX 8 J6IM: **CJPW K**
- 10 Gigabit Ethernet acc. to IEEE 802.3an: adequate for 10 Gigabit Ethernet
- class E_A: ISO/IEC 11801; EN 50173-1
- category 6: ANSI/TIA/EIA-568-C.2
- custom-designed cabling systems: according to PROFINET Installation Guideline

CR KC insert coding pin



CJK 8FT



Female-Female

CJK 8MT [1)]

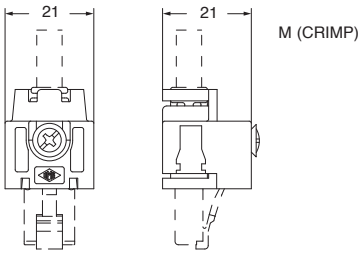

[1)] to be used with hoods

CJK 8IMT [1)]

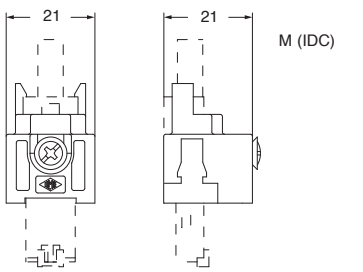

[1)] to be used with hoods

CX 8 J6M (can be used with CJK 8MT)

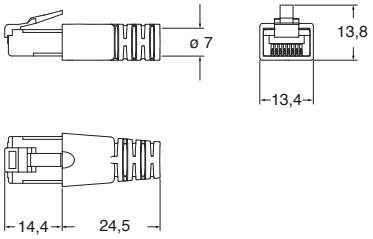

CX 8 J6IM (can be used with CJK 8IMT)



How to use CR KC coding pins (cannot be used with IP68 enclosures)

dimensions shown in mm are not binding and may be changed without notice

CW RJ45 patch cord

with 2 RJ45 male connectors

description	part No.	(L) meter
RJ45 male connector with 8 data contacts	**CW 1 J2M87**	1
	CW 2 J2M87	2
	CW 3 J2M87	3
	CW 5 J2M87	5
	CW 7.5J2M87	7,5
	CW 10 J2M87	10
	CW 15 J2M87	15

RJ45 patch cord technical data:
- S/FTP Cat. 7 PUR
- temperature range: from -40 °C ÷ +75 °C
- nickel plated brass screening
- green RAL 6018 colour

Can be used with:
- MIXO RJ45 **CX 01 J8M** male inserts (see page 302)
- **CJK 8MT** adapters

CW...J2M87

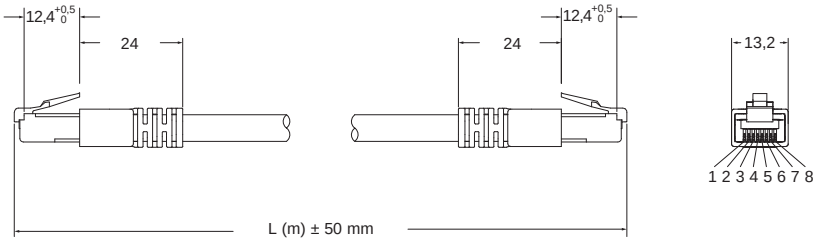

Wiring Diagram

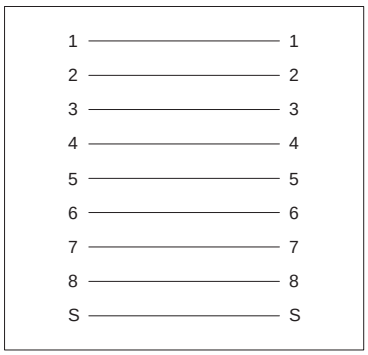

CJK 8MT male assembly

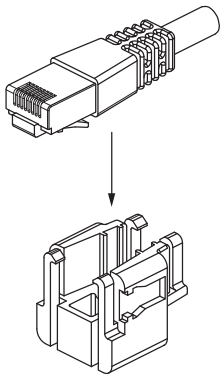

CJK 8FT to be used in VG or IAP enclosures with male crimp version

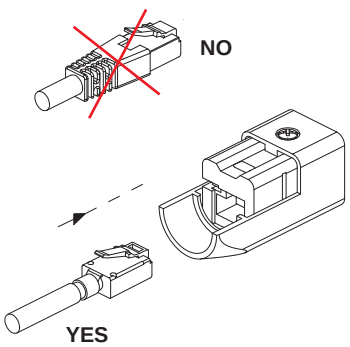

CJK adapters 1 seat for RJ45 IDC connector Cat. 6 Class E_A

enclosures:	page:
size "21.21"	
insulating type (CK IN, CKG/MKG VN/VAN *)	**346 - 348**
metallic type (CKAX I, CKAX/MKAX IAP/AP/VG)	**349 and 353**
(CKAG/MKAG V/VA *)	**354 - 355**
IP68 (CKG I, CKG/MKG IAP, CKG/MKG V)	**628 - 631**

***)** angled enclosures cannot be used with CX 8 J6IM

- characteristics according to EN 61984:
  1A 50V 0,8kV 3
- c UL us (UL for USA and Canada) certified
- insulation resistance: ≥ 10 GΩ
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- temperature range: from -40 °C to +70 °C
- we recommend to fix the cable with cable tie

adapters for RJ45 male connectors, RJ45 female - cable IDC connectors

RJ45 male connectors, IDC termination

Watch our online tutorial

description	part No.	part No.
socket insert with 1 RJ45 female-IDC connector contact coding according to **T568A**	**CJK 8IFT**	
socket insert with 1 RJ45 female-IDC connector contact coding according to **T568B**	**CJK 8B IFT**	
socket insert with 1 RJ45 female-IDC connector contact coding according to **PROFINET**	**CJK 8P IFT**	
plug insert for 1 RJ45 male IDC connector, 8 data contacts (without RJ45 connector, to be ordered separately)	**CJK 8IMT**	
RJ45 male IDC connector, 8 data contacts		**CX 8 J6IM**

CJK 8IFT, CJK 8B IFT, CJK 8P IFT technical data:
- RJ45 female insert, Cat. 6_A
- Cu-conductor diameter
  solid: 0,40 - 0,64 mm (AWG 26/1 - 22/1)
  stranded: 0,48 - 0,76 mm (AWG 26/7 - 22/7)
- insulation diameter: 0,85 - 1,6 mm (0,034 - 0,063 in.)
- shielding housing: zinc diecast
- housing finish: nickel-plated
- current carrying capacity at 50 °C: 1A
- adequate for Power over Ethernet:
  PoE according to IEEE 802.3af
- connectors: IEC 60603-7-5
- adequate for 10 Gigabit Ethernet:
  10 Gigabit Ethernet acc. to IEEE 802.3an
- custom-designed cabling systems: PROFINET Installation Guideline
- generic cabling systems:
  ANSI/TIA/EIA-568-C.2
  ISO/IEC 11801
  EN50173-1
  ISO/IEC 24702
  EN 61918
- class E_A (channel): ISO/IEC 11801, EN 50173-1

CX 8 J6IM technical data:
- RJ45 male IDC connectors Cat. 6 Class E_A
- Cu-conductor diameter
  solid: 0,41 - 0,64 mm (AWG 26/1 - 22/1)
  stranded: 0,48 - 0,76 mm (AWG 26/7 - 22/7)
- insulation diameter: 0,85 - 1,6 mm
- cable diameter: 5,5 - 8,5 mm
- connectors: IEC 60603-7-5
- category 6_A: ISO/IEC 11801; DIN EN 50173-1
- wrenches pliers for CX 8 J6IM: **CJPW K**
- 10 Gigabit Ethernet acc. to IEEE 802.3an:
  adequate for 10 Gigabit Ethernet
- class E_A: ISO/IEC 11801; EN 50173-1
- category 6: ANSI/TIA/EIA-568-C.2
- custom-designed cabling systems:
  according to PROFINET Installation Guideline

CR KC insert coding pin



CJK 8IFT



Female-Cable IDC

CJK 8IMT [1)]



[1)] to be used with hoods

CX 8 J6IM (can be used with CJK 8IMT)



How to use CR KC coding pins (cannot be used with IP68 enclosures)

dimensions shown in mm are not binding and may be changed without notice

CW - CWC connecting cables for MIXO RJ45 CAT. 6_A

with 2xRJ45 CAT. 6_A cable plug

M12x1 CAT. 7 cable plug black

description	part No.	(L) meter	part No.	(L) meter	part No.	(L) meter
S/FTP CAT. 6A cable 4x2xAWG 27/7 (**PUR**) * - SHIELDED ***** chemical resistant cable jacket Colour outer jacket green	**CW J6 1M** **CW J6 2M** **CW J6 3M** **CW J6 5M** **CW J6 7.5M** **CW J6 10M** **CW J6 15M**	1 2 3 5 7,5 10 15				
S/FTP CAT. 6A cable 4x2xAWG 27/7 (**PVC**) - SHIELDED Colour outer jacket green			**CWC J6 1M** **CWC J6 2M** **CWC J6 3M** **CWC J6 5M** **CWC J6 7.5M** **CWC J6 10M** **CWC J6 15M**	1 2 3 5 7,5 10 15		
Over moulded IP67 to RJ45 plug crimp IP20 **S/FTP CAT. 7 cable** 4x2xAWG 26/7 (**PUR**) * ***** chemical resistant cable jacket Colour outer jacket green					**CW XJ0.5M** **CW XJ1M** **CW XJ2M** **CW XJ3M** **CW XJ5M** **CW XJ7.5M** **CW XJ10M**	0,5 1 2 3 5 7,5 10

CW - CWC connecting cables for MIXO RJ45 CAT. 5

with 2xRJ45 CAT. 5 cable plug

description	part No.	(L) meter	part No.	(L) meter
SF/UTP CAT. 5 4x2xAWG 26/7 (**PUR**) [1] - SHIELDED [1] chemical resistant cable jacket Colour outer jacket green	**CW J5 1M** **CW J5 2M** **CW J5 3M** **CW J5 5M** **CW J5 7.5M** **CW J5 10M** **CW J5 15M**	1 2 3 5 7,5 10 15		
SF/UTP CAT. 5 4x2xAWG 26/7 (**PVC**) - SHIELDED Colour outer jacket green			**CWC J5 1M** **CWC J5 2M** **CWC J5 3M** **CWC J5 5M** **CWC J5 7.5M** **CWC J5 10M** **CWC J5 15M**	1 2 3 5 7,5 10 15

CWH connecting cables for MIXO RJ45 CAT. 6_A - CAT. 5e

with 2xRJ45 CAT. 6_A cable plug

with 2xRJ45 CAT. 5_e cable plug

description	part No.	(L) meter	part No.	(L) meter	part No.	(L) meter
CAT. 6_A wiring 1:1 cable S/FTP (LSHZ) - SHIELDED Colour outer jacket green	**CWH J6 0.25M** **CWH J6 0.5M** **CWH J6 1M** **CWH J6 2M** **CWH J6 3M** **CWH J6 5M** **CWH J6 7.5M** **CWH J6 10M** **CWH J6 15M**	0,25 0,5 1 2 3 5 7,5 10 15				
1x90° - 1x180° cable boot **CAT. 6_A wiring 1:1 cable** S/FTP (LSHZ) - shielded Colour outer jacket green			**CWH J6 0,5MA** **CWH J6 1MA** **CWH J6 2MA** **CWH J6 3MA** **CWH J6 5MA** **CWH J6 7.5MA** **CWH J6 10MA**	0,5 1 2 3 5 7,5 10		
CAT. 5_e wiring 1:1 cable S/FTP (LSHZ) - SHIELDED Colour outer jacket green					**CWH JE 0.5M** **CWH JE 1M** **CWH JE 2M** **CWH JE 3M** **CWH JE 5M** **CWH JE 7.5M** **CWH JE 10M** **CWH JE 15M**	0,5 1 2 3 5 7,5 10 15

CJK 8M

TECHNICAL FEATURES

- **CJK 8M** adapter insert size “21.21” for placing an RJ45 plug (male connector) of a pre-assembled patch cord into a **M25** size “21.21” top cable entry hood, either metal or insulating;
- it allows a **truly “universal”** use thanks to the possibility to install virtually any RJ45 patch cord plugs available on the market (of any Category: Cat. 5, 5e, 6, 6_A, 7, or 8) inside the growing range of size “21.21” top entry hoods with glued gasket, **without any disassembly of the patch cord.** A straighforward smart solution, all the more so if compared with more complex and expensive solutions;
- the **proprietary ILME design** of this adapter foresees a **two-part insulating carrier** (the first part acting as **carrier,** the second as **latch**) that can quickly and easily make captive the RJ45 plug (male connector), the assembly is then introduced in the relevant “21.21” M25 top entry hood and fastened to it by the usual screw;
- **a metallic** (nickel plated brass) **or insulating** (light grey or black colour) **M25 cable gland** with suitable internal diameter to let the patch cord RJ45 plug pass-through **is separately available;**
- the **special sealing gasket,** provided with the RJ45 adapter **CJK 8M, is longitudinally cut** on its flank and must be applied over the cable to increase its diameter in the portion to introduce in the cable gland sealing, according to instructions;

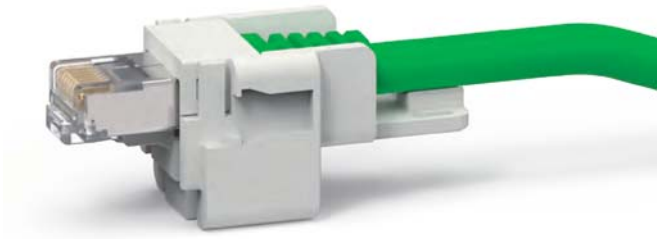

- suitable for the combination of an RJ45 patch cord with one or both RJ45 plug extremities mounted inside suitable size “21.21” *insulating* or *metal* M25 top entry hood with glued gasket, with an RJ45 jack counterpart (female connector), e.g. a **CJ KF** adapter combined with the relevant female/female RJ45 connector **CX 8 JF** or **CX 8/2 JF** (4-way version **CX 4 JF** or 4/2-way version **CX 4/2 JF** are available upon request), mounted inside a corresponding counterpart hood or housing with locking lever size “21.21”;
- optional four coding positions with **CR KC** insert coding pin (4 pins required for each connector coupling).

CJK 8M

enclosures:	page:
size “21.21”	
MKG V25	348
MKG VN25	348
MKAG V25	353

RJ45
universal patch cord adapter

M25
cable gland

description	part No	part No.	entry M
universal patch cord adapter	**CJK 8M**		
insert coding pin for RJ45 adapters (optional) [1]	**CR KC**		
plastic cable gland, light grey (RAL 7035)		**AW M25IJ**	25
plastic cable gland, black (RAL 9005)		**AW M25INJ**	25
nickel plated brass cable gland		**AW M25PJ**	25

[1] Optional four coding positions CR KC insert coding pin (4 pins required for each connector coupling).

How to use CR KC coding pins
(cannot be used with IP68 enclosures)

cURus pending

CJK 8M

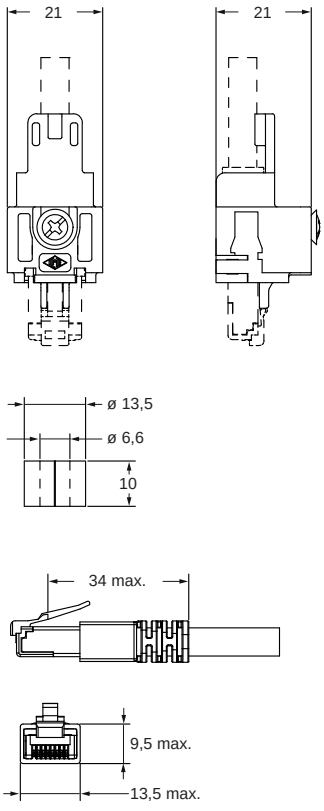

CR KC



AW M25IJ and AW M25INJ



AW M25PJ



Watch our online tutorial

Female inserts

RJ45 CONNECTOR Cat 6$_A$

RJ45 female/female coupler
(8 data contacts)

CJK 8FT

RJ45 female/IDC jack
(8 data contacts)

CJK 8IFT
CJK 8B IFT
CJK 8P IFT

RJ45 CONNECTOR Cat 5-5$_e$

RJ45
female crimp coupler jack
(8 data contacts)

CX 8 JF + CJ KF

RJ45
female crimp coupler jack
(8 data + 2 power contacts)

CX 8/2 JF + CJ KF

Housings

21.21 CK PLASTIC

MK VGN25***
MK VG25***

CK 03 IN
CK 03 I

21.21 CKA METAL

CKAX 03 I

CKAX 03 ILS

CKAX IAPS* /APS*** /VGS***
MKAX IAP20*** /AP20*** /VG20***

CKAX 03 IA4*
MKAX AP25 /IAP25***

MKAX IF

CKAX 03 CXA
(cover for hoods)

21.21 CKG IP68

CGKI

CGK IAP13*
MGK IAP20*

Legend
* angled enclosures cannot be used with CX 8 J6IM, CJK 8FT/IFT, CLK and CJ KF inserts/adapter
** version with 4 data crossover wirings on request (CX4 JF, CX4/2 JF)
*** cannot be used with CJ KF adapter
**** suitable cable glands AW M25 PJ/IJ/INJ
***** suitable cable glands AW M25 PJ/IJ/INJ + CR CJK G gasket; cannot be used with CJ KF adapter

Hoods

21.21 CK PLASTIC

CGK 03 V/VA
CGK 03 VN /VAN*
MGK VN20 /VAN 20*
MGK V20/VA20

CGK 03 C
CKG 03 CN
(cover for housings)

21.21 CKA METAL

CKAG 03 V /VA*
MKAG V20 /VA20*

CKAG 03 C
(cover for housings)

21.21 ENLARGED METAL/PLASTIC

MKAG V25****

MKG VN25****
MKG V25****

21.21 CKG IP68

CGK V13
MGK V20

MGK V25

Male inserts

RJ45 CONNECTOR Cat 6A

RJ45 male crimp plug

CX 8 J6M + CJK 8MT

RJ45 male IDC plug

CX 8 J6IM + CJK 8IMT

RJ45 CONNECTOR Cat 5-5e

RJ45 male crimp plug
(4 data contacts)

CX 4 JM + CJ KM

RJ45 male crimp plug
(8 data contacts)

CX 8 JM + CJ KM

RJ45 male crimp plug
(4 data + 2 power contacts)

CX 4/2 JM + CJ KM

RJ45 male crimp plug
(6 data + 2 power contacts)

CX 6/2 JM + CJ KM

RJ45 male crimp plug
(4 data cont. cat.5e) PROFINET

CX 4E JM + CJ KM

RJ45 universal patch cord

CJK 8M

CUK adapters with 1 USB connector

enclosures:	page:
size “21.21”	
insulating type (CK IN, CKG/MKG VN/VAN *)	346 - 348
metallic type (CKAX I, CKAX/MKAX IAP/AP/VG) (CKAG/MKAG V/VA *)	349 and 353 354 - 355
IP68 (CKG I, CKG/MKG IAP, CKG/MKG V)	628 - 631

*) angled enclosures cannot be used with CX 8 J6IM

USB female - female connectors

patch cable USB

description	part No.	part No.
female insert with USB 2.0 female - female connector	CUK 2FT	
female insert with USB 3.0 female - female connector,	CUK 3FT	
patch cable USB-A / USB-A, 2 m [1]		CW 2 UAM

[1] 5 m on request

USB connector features:
- USB-A / USB-A Hi-Speed - 2.0 or 3.0 insert
- temperature range: from -25 °C to +80 °C

- c UL us (UL for USA and Canada) certified

CUK 2FT



CUK 3FT



inserts already supplied with stainless steel fixing screw with gasket, which ensures IP66/IP67/IP69 degree of protection

CW UAM

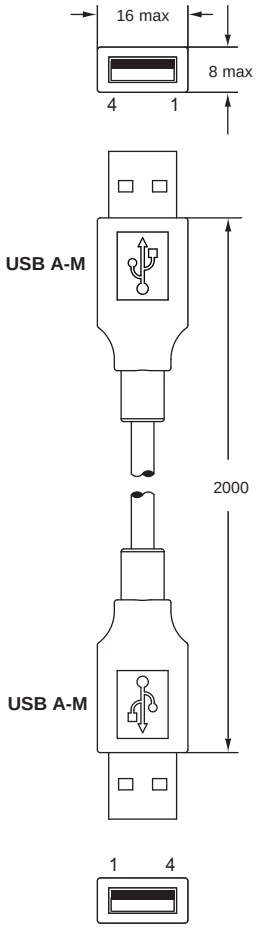



dimensions shown in mm are not binding and may be changed without notice

ATR cover for boxes for unit Ø 22 mm

cover for RJ45/USB/LC connectors

RJ45/USB/LC connectors for ATR C22

description	part No.	part No.
communication interface bulkhead IP65	**ATR C22**	
RJ45 jack A Cat.6A [1] RJ45 coupler Cat.6		**AT 8IFT** **AT 8FT**
USB 2.0 coupler F-F Type A USB 3.0 coupler F-F Type A		**AT U2F** **AT U3F**
LC-Duplex adapter MM LC-Duplex adapter SM		**AT LCMM** **AT LCSM**

[1] jack B and jack P on request

Technical Data

Mechanical Characteristics

Materials

Housing	PA UL94V-0 - black
Nut	PA UL94V-0 - black
Bulkhead protective cap	EPDM
Elastic band / Seal	EPDM
EU Directive 2011/65/EU (RoHS)	RoHS-compliant

Environmental Requirements

Protection against ingress

Particulate ingress	IP6X
Water / Immersion	IPX5
Degrees of protection provided by enclosures (IP code)	IEC 60529

Climatical and chemical

Ambient temperature	-40 °C ... + 70 °C

Mounting dimensions
wall thickness 1-5 mm (0,039-0,197 in.)

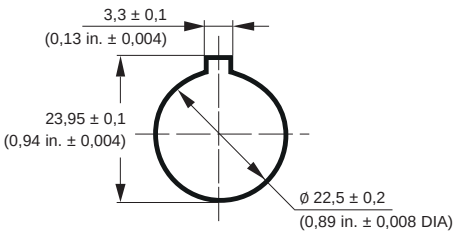

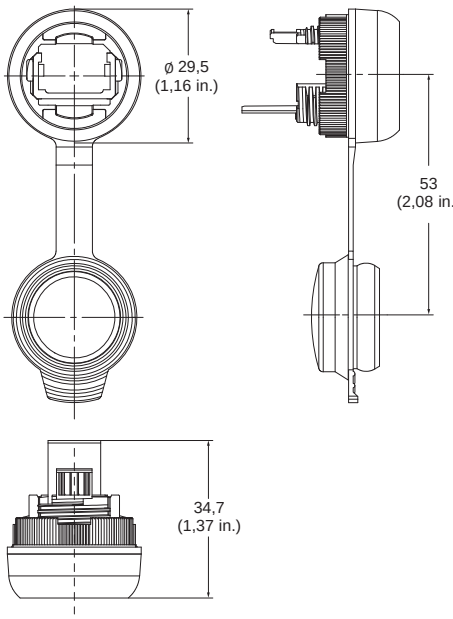



AT 8IFT (RJ45 IDC-FEMALE)



AT 8FT (RJ45 FEMALE-FEMALE)



AT U2F (USB 2.0)



AT U3F (USB 3.0)



AT LCMM - AT LCSM (LC DUPLEX)



CLK 04 SC adapters
TECHNICAL FEATURES

The new adapter CLK 04 SC enables use of fibre optic SC contacts, up to 4 SC contacts per connector, for indoor or outdoor heavy duty industrial applications, with ILME connector enclosures size “21.21” series CKA (IP66/IP67/IP69, metallic, both C-TYPE, grey-painted, for normal environments, and W-TYPE black-painted, for aggressive environments, only the hood models provided with sealing gasket), series CGK/MGK (IP66/IP68/IP69, metallic, either Pg or metric-threaded cable outlet) and series CK (IP66/IP67/IP69, insulating, only the hood models provided with sealing gasket).

The fibre optic SC contacts (genderless, to be purchased separately) are available both for multi-mode fibres (50/125 µm or 62,5/125 µm) and single-mode fibre (9/125 µm).
The fibre optic SC contacts are also available for the hard-clad silica (HCS) or polymer-clad fibre (PCF) 200/230 µm fibre optic cables and for the less demanding, with shorter transmission distance covered, but more cost effective POF Ø 1 mm applications, available with crimp technique version (crimping tool required).

NOTE
Due to the higher skill and training required to produce an effectively performing fibre optic junction for a single-mode type fibre-optic cable than for a multi-mode one, dedicated contacts for single-mode are available only upon request. Contact our Commercial Department for a quotation. It is more practical in such case to equip the CLK 04 SC adaptor with ready-to-use fibre optic patch cords.
Quick assembly technique version (tool-less) for POF Ø 1 mm cables are also available only upon request, please send inquiry to our Commercial Department.

The female adapter inserts are provided with 4 ceramic (zirconia) type split alignment sleeves, for minimal insertion loss (e.g. critical network connections) and best suitable for single-mode F/O cable connections. As optional accessory, metallic (phosphor bronze) split alignment sleeves are also available for more durable (less prone to cracking) applications, but less demanding precision alignment, thus most suitable for multi-mode fibre applications.

Part No. of adapter	CLK 04 SC
No. of seats/poles for optical contacts	4
Ambient temperature limit (°C)	min -40 / max +70
Degree of protection with enclosures (according to type)	IP66/IP67/IP69, IP66/IP68/IP69
Conductor connections	crimp
Mechanical endurance (rating cycles)	≥ 500
Self-extinguishing capacity UL 94	V0

CLK 04 SC Assembling instructions

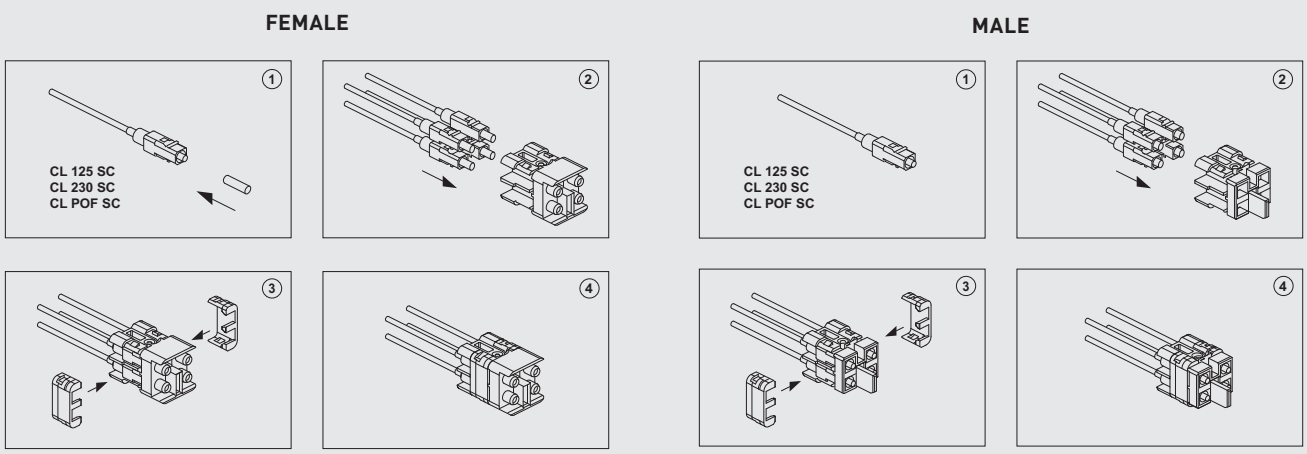

CLK adapters 4 seats for fibre optic SC contacts

enclosures:	page:
size “21.21”	
insulating type (CK IN, CKG/MKG VN)	346 - 348
metallic type (CKAX I, CKAX/MKAX IAP/AP/VG)	349 and 353
(CKAG/MKAG V)	354 - 355
IP68 (CKG I, CKG/MKG IAP, CKG/MKG V)	628 - 631

adapter insert for SC connectors

crimp FO contacts

description	part No.	part No.
adapter insert with seats for 4 SC contacts		
female insert, with ceramic sleeve	**CLK 04 SCF**	
female insert, with metallic sleeve	**CLK 04 SCF-H**	
male insert	**CLK 04 SCM**	
SC contact for GI FIBRE 50/125 µm or 62.5/125 µm		**CL 125 SC**
SC contact for 1 mm ø POF		**CL POF SC**

- inserts already supplied with stainless steel fixing screw with gasket, which ensures IP66/IP67/IP69 degree of protection
- adapter insert designed to be used with SC contacts
- SC contact for SI FIBRE (HCS®) 200/230 µm: **CL 230 SC** (on request)

- base equipment for SC contact GI FIBRE: **CLKZ 125 SC** If this application is required, please contact ILME S.p.A.

- supplementary set for POF: **CLKZ POF** (to be ordered with CLKZ 125 SC) If this application is required, please contact ILME S.p.A.

- c UL us (UL for USA and Canada), CSA, DNV-GL, BUREAU VERITAS certified
- insulation resistance: ≥ 10 GΩ
- temperature range: from -40 °C to +70 °C

CLK 04 SCF, CLK 04 SCM

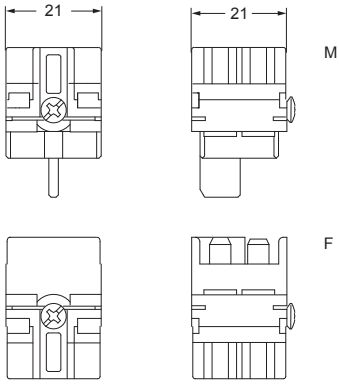

contacts side (front view)



CL 125 SC



CL POF SC



CW SC patch cord FO SC duplex patch cords

SC duplex patch cord

SC duplex patch cord

description	part No.	(L) meter	part No.	(L) meter
SC duplex patch cord, GL fibre E9/125 (YELLOW)	**CW 1 SC9**	1		
	CW 2 SC9	2		
	CW 3 SC9	3		
	CW 5 SC9	5		
	CW 10 SC9	10		
SC duplex patch cord, GL fibre G50/125 (ORANGE)			**CW 1 SC50**	1
			CW 2 SC50	2
			CW 3 SC50	3
			CW 5 SC50	5
			CW 10 SC50	10
SC duplex connector, GL fibre G62,5/125 (ORANGE)			**CW 1 SC62**	1
			CW 2 SC62	2
			CW 3 SC62	3
			CW 5 SC62	5
			CW 10 SC62	10

- operating temperature: from -5 °C ÷ +55 °C
- storage temperature: from -30 °C ÷ +70 °C
- installation temperature: from -5 °C ÷ +50 °C
- flame retardancy: IEC 60332-1
- halogen-free acc. to: IEC 60754-2

CX BD adapter insert

TECHNICAL FEATURES

To be able to use circular shielded connectors series **MIXO BUS** (multiaxial, for balanced cables with multiple pairs) or coaxial connectors (for coaxial cables) even in compact enclosures size “21.21” **CK/MK**, **CKA/MKA** or **CGK/MGK**, it is necessary to purchase the adapter insert **CX 1/2 BD**. This insert can be used to assemble MIXO coaxial connectors part No. **CX 01 BM/BF** for coaxial cables with a characteristic impedance of 75 Ω and **CX 01 BCM/BCF** for coaxial cables with a characteristic impedance of 50 Ω, or MIXO BUS **CX 04 BM/BF** multiaxial shielded connectors with 4 poles + shield and the new **CX 08 BM/BF** shielded connectors with 8 poles + shield, in addition to providing seats for 2 additional optional contacts series CD for the connection of a SELV (safety extra-low voltage) supply line.

The connector portion of this adaptor has rated values compliant with standard EN 61984 and equivalent to 10A 50V 0,8kV 3.

Adaptor insert **CX 1/2 BDM/BDF** is fitted with multiaxial and coaxial MIXO BUS shielded connectors and is designed to be used only with the models specified below of the following enclosures: **CK/MK** or **CKA/MKA** (IP66/IP67/IP69) or **CGK/MGK** (IP66/IP68/IP69) with glued gasket on hoods and covers. The cable shielding is electrically separated from the earthing connection of the metal enclosure. If used with MIXO BUS **CX 04 BM/BF** shielded connectors, the connector is able to support all field bus protocols with 4 conductors.

Part No. of adapter		**CX 1/2 BD**
No. of seats/poles	seats for shielded connector [1]	1
	seats for auxiliary contacts	2
Rated current [2]	shielded connector	depending on type: 5A, 10A, 16A
	auxiliary contacts	10A
EN 61984	rated voltage	50V
	rated impulse withstand voltage	0,8kV
	pollution degree	3
UL 1977 / CSA C22.2 - N°187.3	rated voltage (a.c./d.c.)	50V
Contact resistance	shielded connector	depending on the type of contact used
	auxiliary contacts	≤ 3 mΩ
Insulation resistance		≥ 10 GΩ
Ambient temperature limit (°C)	min	-40
	max	+70
Degree of protection	with enclosures (according to type)	IP66/IP67/IP69, IP66/IP68/IP69
	without enclosures	IP20
Conductor connections		crimp
Conductor section	shielded connector (mm^2/AWG)	depending on the type of contact used
	auxiliary contacts (mm^2)	0,14÷2,5
	auxiliary contacts (AWG)	26÷14
Conductors stripping lenght		depending on contact
Mechanical endurance (mating cycles)		≥ 500
Self-extinguishing capacity UL 94		V0

[1] Depending on the selected shielded connector, which must be ordered separately, the number of poles + shield could be 1 (coaxial connectors), 4 (4-way multiaxial connector for 2 pairs) or 8 (8-way multiple connector, for example for 4 pairs).

[2] It is generally necessary to refer to the loading curves of the inserts to determine the actual operating current limit for a specific ambient temperature. These curves are not required for MIXO BUS / coaxial shielded connectors, because these are signal connectors designed to be used by the transmission protocols to transmit currents in fractions of amperes. The current capacity specified is the maximum current traditionally assigned to contacts, not the one assigned to the shielded connector when in use.

CX 04 BF/BM Assembling instructions

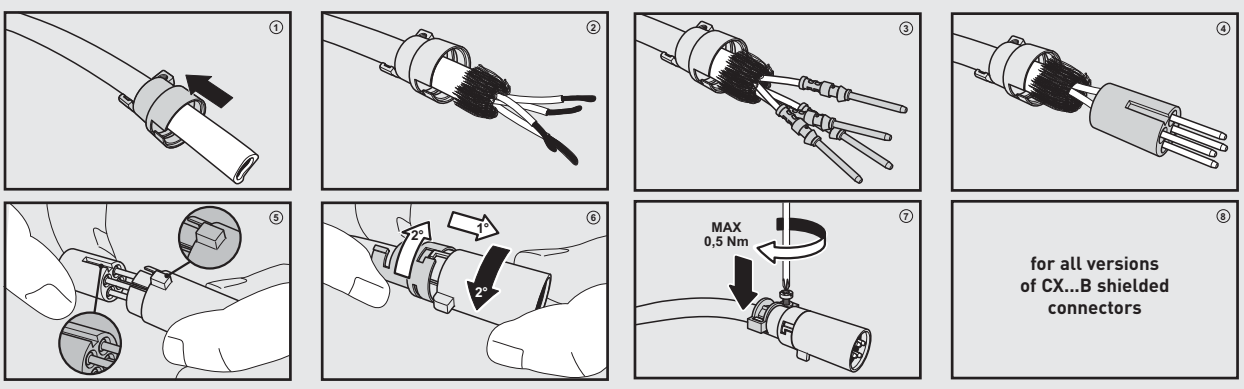

CX BD adapter insert 1 seat for shielded connector + 2 aux contacts 10A - 50V

enclosures:	page:
size “21.21”	
insulating type (CK IN, CKG/MKG VN)	346 - 348
metallic type (CKAX I, CKAX/MKAX IAP/AP/VG)	349 and 353
(CKAG/MKAG V)	354 - 355
IP68 (CKG I, CKG/MKG IAP, CKG/MKG V)	628 - 631

adapter insert for shielded connectors

10A crimp contacts, silver or gold plated

description	part No.	part No.
adapter insert with seats for 1 shielded connector + 2 aux contacts 10A		
female insert, 1 seat for BUS connector and 2 seats for 10A female contacts (CDF)	**CX 1/2 BDF**	
male insert, 1 seat for BUS connector and 2 seats for 10A male contacts (CDM)	**CX 1/2 BDM**	

10A female contacts			silver plated	gold plated✣
0,14-0,37 mm²	AWG 26-22	identification No. 1	**CDFA 0.3**	**CDFD 0.3**
0,5 mm²	AWG 20	identification No. 2	**CDFA 0.5**	**CDFD 0.5**
0,75 mm²	AWG 18	identification No. ②	**CDFA 0.7**	**CDFD 0.7**
1 mm²	AWG 18	identification No. 3	**CDFA 1.0**	**CDFD 1.0**
1,5 mm²	AWG 16	identification No. 4	**CDFA 1.5**	**CDFD 1.5**
2,5 mm²	AWG 14	identification No. 5	**CDFA 2.5**	**CDFD 2.5**
10A male contacts				
0,14-0,37 mm²	AWG 26-22	identification No. 1	**CDMA 0.3**	**CDMD 0.3**
0,5 mm²	AWG 20	identification No. 2	**CDMA 0.5**	**CDMD 0.5**
0,75 mm²	AWG 18	identification No. ②	**CDMA 0.7**	**CDMD 0.7**
1 mm²	AWG 18	identification No. 3	**CDMA 1.0**	**CDMD 1.0**
1,5 mm²	AWG 16	identification No. 4	**CDMA 1.5**	**CDMD 1.5**
2,5 mm²	AWG 14	identification No. 5	**CDMA 2.5**	**CDMD 2.5**

- characteristics according to EN 61984:
  adapter insert CX 1/2 BD (2 aux contacts)
  10A 50V 0,8kV 3
- c UL us (UL for USA and Canada), CSA, DNV·GL, BUREAU VERITAS certified
- both the female and the male inserts may accept any of the above shielded connectors of any gender, as far as the correct specular assignment is set on the mating connector
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)
- extraction tool for BUS/coax shielded connectors from adaptor insert **CX 1/2 BD** part No. **CX BES** see page 703
- contact resistance adaptor insert, 2 aux contacts: ≤ 3 mΩ
- inserts already supplied with stainless steel fixing screw with gasket, which ensures IP66/IP67/IP69 degree of protections
- adapter insert designed to be used with **CX01 BCF/M CX 01 BF/M**, **CX 04 BF/M** and **CX 08 BF/M** shielded connectors see pages 289, 291, 293

CX 1/2 BDF, CX 1/2 BDM

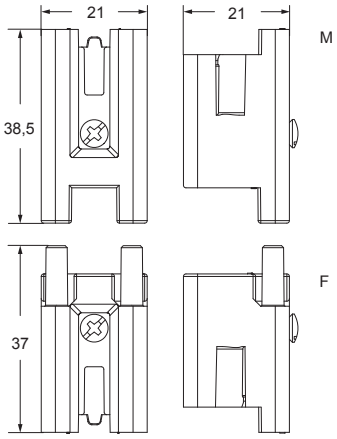

contacts side (front view)



CDF and **CDM**



CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

✣ for basic or high thickness gold plating, please refer to page 674

TECHNICAL FEATURES

DESINA® (which stands for **DE**centralised and **S**tandardised **IN**stAllation technology) is an innovative installation concept behind a study headed by the German manufacturers of machine tools association (VDW), with the co-operation of users (including German automotive manufacturers) and component manufacturers, which has led to the introduction of a specification aimed to standardise electrical, hydraulic and pneumatic components and their interconnection on common platform for CNC controlled machine tools and manufacturing lines.

In the last few years, the DESINA® specification has been successfully endorsed by the ISO TC 184/SC 1 "Industrial automation systems and integration / Physical device control" as an ISO standard.

This work has been completed, and the following standards have become available:

ISO 23570-1 Industrial automation systems and integration – Distributed installation in industrial applications:
Part 1 – Sensors and actuators.

ISO 23570-2 Industrial automation systems and integration – Distributed installation in industrial applications:
Part 2 – Hybrid communication bus.

ISO 23570-3 Industrial automation systems and integration – Distributed installation in industrial applications:
Part 3 – Power distribution bus.

Normally, production systems are controlled by various field buses available on the market such as PROFIBUS, CAN, INTERBUS, etc. DESINA® decentralised approach and interface and connector standardisation, which allows a single distributed control system to be independent from the bus communication protocol selected by the final user, ensure lower installation costs.

The availability of diagnostic capabilities in all the system components ensures a speedier diagnosis in the event of faults and an easier and quicker reset operation, which may be carried out by less specialised staff. DESINA® connection topology requires a **control bus** and a **power bus.**

The hybrid (optical/electrical) control bus provides a serial connection for the devices by using a cable consisting of two fibre optics and four power lines. The devices are fitted with 2 hybrid connectors (and matching flush mounted enclosures) for bus entry and exit.

The hybrid connectors include an interface circuit which turns the TX electrical signal to optical signal with TTL levels and the RX signal from optical to electrical signal with TTL levels.

In other words, **the interface is independent from the selected field bus protocol,** and simply converts the electrical signals into optical signals and vice versa; by doing so, the physical connection between the devices can be used for different bus protocols and can reach a 50 m range by using POF plastic fibres or 300 m by using HCS® fibreglass (Hard Clad Silica – Spectran Corporation registered trademark). The highest baud rate is 12 Mbit/s, compatible with the most advanced field buses.

ISO 23570-3 standard and DESINA® specification compliant

Another variant is also available, which is based on transmitting data on a pair of screened copper cables (instead of fibre optics); in this case, however, the system can only be used for PROFIBUS or CAN buses with RS 485 TX signals.

In both cases, the connector is fitted with housings for 5, 10A auxiliary contacts (**CD** series crimp contacts), which allow all connected devices to receive a permanent direct voltage of 24V (to supply circuits) and a 24V non permanent power supply (only used to open the contactors after operating an emergency switch or a safety switch), as well as a contact available for an optional earth.

The power bus provides a serial connection for drives, controls and power supplies and, more specifically, is suitable to supply power to motors and to their control units.

The standard connector to control motors is the **CQM/F 08** which, with 8 poles + ⏚ 16A 500V, and **CC** series crimp contacts, not only provides a power connection, but also connects the motor brake and safety thermistor.

Another variant is available in the same sizes as the enclosure: **CQM/F 04/2** featuring 4 poles + ⏚ 40A 400/690V and 2, 10A 250V auxiliaries.

For the motor side connection, the connector **CNEM/F 10** (10P + ⏚ 16A 500V 6kV 3, with screw terminals) should be used; with the option to make a star or a delta connection on the connector, the **CSSM/F 10** connector (10P + ⏚ 16A 500V 6kV 3, with spring terminals, two per pole) should be used.

ILME connectors are manufactured to DESINA® specifications and in compliance with ISO 23570-2 and 23570-3 standards.

Hybrid socket and plug connectors for field buses compliant with DESINA® specifications and with ISO 23570-2 standard

	electrical auxiliary female contacts	**electrical auxiliary male contacts**
The hybrid connectors for field buses are listed below:		
- optical field bus **plug**	**CXL 2/4 PF** (for plastic fibre optics POF)	**CXL 2/4 PM** (for plastic fibre optics POF)
	CXL 2/4 PFH (for glass fibre optics HCS®)	**CXL 2/4 PMH** (for glass fibre optics HCS®)
- optical field bus **socket**	**CXL 2/4 SF**	**CXL 2/4 SM**

The hybrid inserts for **socket** type optical field buses can only be fitted inside **fixed enclosures**.
The **plug** types, on the other hand, can only be fitted inside **free enclosures (hoods)**.

The enclosures and matching accessories available are listed below:

Construction details	Material: **PLASTIC**	Material: **METAL**
- fixed, flush mounted enclosure:	**CK 03 IN**	**CKAX 03 I**
- free enclosures (hoods), top entry:	**CKG 03 VN** (Pg 11)	**CKAG 03 V** (Pg 11)
	MKG VN20 (M 20)	**MKAG V20** (M 20)
- free enclosures (hoods), side entry:	**CKG 03 VAN** (Pg 11)	**CKAG 03 VA** (Pg 11)
	MKG VAN20 (M 20)	**MKAG VA20** (M 20)
- cover:	**CKG 03 CN**	**CKAG 03 C**

The portable enclosures and the covers are fitted with an additional seal in order to achieve the versatile **IP65/IP67** degree of protection according to IEC/EN 60529. With these accessories the enclosures also achieve the **IP69** degree of protection (tightness to high pressure and temperature water jets) according to the same standard. The full versatile degree of protection becomes therefore **IP65/IP67/IP69**. The **IPX9** test is identical with that of former German standard DIN 40050-9 (IP69K) currently specified by **ISO 20653** for use on board road vehicles.

Specifications

Interface

Hybrid electrical-optical connector insert consisting of 2 connectors for fibre optics and 4 contacts for electrical wires; an interface circuit built into the optical socket converts the electrical signals into optical signals and vice versa.

Optical parts

transmitter (T):	Agilent (HP) Versatile Link HFBR-1525, or equivalent
receiver (R):	Agilent (HP) Versatile Link HFBR-2525, or equivalent
male optical contact:	Agilent (HP) Versatile Link HFBR-4531, or equivalent, Simplex snap-in type (without crimping) for POF plastic fibre optics; HFBR-4521, or equivalent, crimp contact, for HCS® glass fibre optics
note:	POF is a plastic fibre optic with a 1000 µm diameter for red light and wavelength = 660 nm. HCS® is a Hard Clad Silica glass fibre optic with a 200 µm diameter for red light with wavelength = 660 nm.
Optical parts:	laser class I
Electrical contacts	4 maximum current 10A, gold or silver plated brass crimp contacts, cable section 0,14...2,5 mm² (CD series); live wire end female. Nominal voltage 24V. Electrical data in compliance with EN 61984: **10A 25V 0,8kV 3**
Degrees of protection:	IP65/IP67/IP69 according to EN 60529 (if a cable clamp with IP67/IP69 rating is used).
Temperature range:	-40 °C / +70 °C

Data transmission/reception rate (Data rate): up to 12 Mbit/s

Designation of auxiliary electrical contacts

Designation of auxiliary electrical contacts (male and female) in the hybrid socket connector with optical TX system:

Socket connector with male auxiliary electrical contacts CXL 2/4 SM

Pos.	Function
1:	+ 24V not switched
2:	0V (reference for contact 1)
3:	0V (reference for contact 4)
4:	+ 24V switched

optical →
electrical →

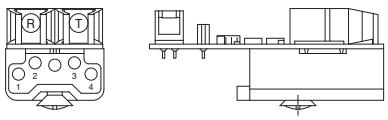

Socket connector with female auxiliary electrical contacts CXL 2/4 SF

Pos.	Function
1:	+ 24V not switched
2:	0V (reference for contact 1)
3:	0V (reference for contact 4)
4:	+ 24V switched

optical →
electrical →



Insulation displacement connector (IDC) for ribbon flat cable on printed circuit

Pos.	Function	Pos.	Function
1:	earth	6:	TXD
2:	RXD	7:	earth
3:	RXD	8:	+5V DC
4:	earth	9:	+5V DC
5:	TXD	10:	earth



The contacts in the hybrid socket connector are numbered in a clockwise direction.
With reference to this, the contacts in the field bus hybrid plug connector are numbered anticlockwise.
"R" Data reception (beam exit) - "T" Data transmission (beam entry).

Socket and plug connectors for power buses compliant with DESINA® specifications and with ISO 23570-3 standard

The connector inserts on the power bus for a motor controller are as follows:
- **CQM 08** plug
- **CQF 08** socket

The connector inserts for the motor controller may be fitted inside the following enclosures:

Construction details
Material: **PLASTIC**

- bulkhead mounting, straight, fixed enclosure:	**CQ 08 I**
- bulkhead mounting, angled, fixed enclosure:	**CQ 08 IA**
- bulkhead mounting, angled, fixed enclosure, rear entry:	**CQ 08 IAP**
- free enclosure (hood), top entry:	**CQ 08 V**
- free enclosure (hood), side entry:	**CQ 08 VA**
- free enclosure (hood), top entry and lever:	**CQ 08 VG**
- free enclosure (hood), side and top entry:	**MQ 08 V0225**
- socket cover:	**CQ 08 C**
- plug cover:	**CQ 08 CA**

The **CQ/MQ 08** enclosures and covers once complete and fitted with suitably rated cable gland or conduit fitting ensure the versatile **IP65/IP67** degree of protection according to IEC/EN 60529. With these accessories the enclosures also achieve the **IP69** degree of protection (tightness to high pressure and temperature water jets) according to the same standard. The full versatile degree of protection becomes therefore **IP65/IP67/IP69**. The **IPX9** test is identical with that of former German standard DIN 40050-9 currently specified by **ISO 20653** for use on board road vehicles.

Specifications

Connection:	**9 contacts (8 + ⏚)** The male connectors (plugs) are used for termination of connecting cables; the female connectors (sockets) are fitted on the motor controller
Electrical contacts:	9 maximum current 10A, gold or silver plated crimp contacts, cable section 0,5...2,5 mm² (20 AWG -14 AWG) CC series
Degrees of protection:	IP65/IP67/IP69 according to EN 60529 (if a cable clamp with IP67/IP69 rating is used)
Temperature range:	40 °C / +125 °C
Electrical data:	compliant with EN 61984: **16A 500V 6kV 3**
Self extinguishing properties:	94V-0 compliant with UL 94 standard; glow-wire 960 °C compliant with IEC/EN 60695-2-11 standard

Designation of contacts

The designation of contacts for motor controller outlet is as follows:

contact	designation
1	line L1
2	
3	line L3
4	brake (0 V)
5	temperature sensor
6	brake (+24V c.c.)
7	line L2
8	temperature sensor
PE	protective earth

F



M



The connector inserts on the power bus for a motor controller are as follows:
- **CQM 04/2** plug
- **CQF 04/2** socket

These connector inserts can be fitted inside the following enclosures:

Construction details
Material: **PLASTIC**

- bulkhead mounting, straight, fixed enclosure:	**CQ 08 I**
- bulkhead mounting, angled, fixed enclosure:	**CQ 08 IA**
- bulkhead mounting, angled, fixed enclosure, rear entry:	**CQ 08 IAP**
- free enclosure (hood), top entry:	**CQ 08 V**
- free enclosure (hood), side entry:	**CQ 08 VA**
- free enclosure (hood), top entry and lever:	**CQ 08 VG**
- free enclosure (hood), side and top entry:	**MQ 08 V0225**
- socket cover:	**CQ 08 C**
- plug cover:	**CQ 08 CA**

The **CQ/MQ 08** enclosures and covers once complete and fitted with suitably rated cable gland or conduit fitting ensure the versatile **IP65/IP67** degree of protection according to IEC/EN 60529. With these accessories the enclosures also achieve the **IP69** degree of protection (tightness to high pressure and temperature water jets) according to the same standard. The full versatile degree of protection becomes therefore **IP65/IP67/IP69**. The **IPX9** test is identical with that of former German standard DIN 40050-9 (IP69K) currently specified by **ISO 20653** for use on board road vehicles.

Specifications

Connection:	**5 (4 + ⏚) power contacts + 2 auxiliary contacts** The male connectors (plugs) are used for termination of connecting cables; the female connectors (sockets) are fitted on the motor controller
Electrical contacts:	5 maximum current 40A (3P+N+⏚) gold or silver plated crimp contacts, cable section 1,5...6 mm² (16 AWG -10 AWG) CX series; 2 maximum current 10A, gold or silver plated crimp contacts, cable section 0,14...2,5 mm² (26 AWG -14 AWG) CD series
Degrees of protection:	IP65/IP67/IP69 according to EN 60529 (if a cable clamp with IP67/IP69 rating is used)
Temperature range:	-40 °C / +125 °C
Electrical data:	compliant with EN 61984: **40A 400/690V 6kV 3**
Self extinguishing properties:	94V-0 compliant with UL 94 standard glow-wire 960 °C compliant with IEC/EN 60695-2-11 standard

Designation of contacts

The designation of contacts for motor controller outlet is as follows:

contact	designation
1	line L1
2	line L2
3	line L3
4	neutral
PE	protective earth
11	aux
12	aux

F

M



The connector inserts on the power bus for a motor controller are as follows:

	screw type with cover	spring type dual terminal for pole
- plug	**CNEM 10 T**	**CSSM 10**
- socket	**CNEF 10 T**	**CSSF 10**

To be installed in the enclosures illustrated in this catalogue or equivalent, with single lever (directed towards the motor).

The enclosures once complete and fitted with suitably rated cable gland or conduit fitting ensure the versatile **IP65/IP67** degree of protection according to IEC/EN 60529. With these accessories the enclosures also achieve the **IP69** degree of protection (tightness to high pressure and temperature water jets) according to the same standard. The full versatile degree of protection becomes therefore **IP65/IP67/IP69**. The **IPX9** test is identical with that of former German standard DIN 40050-9 (IP69K) currently specified by **ISO 20653** for use on board road vehicles.

Specifications

Connection:	**10 contacts +** ⏚
Electrical contacts:	10 screw type contacts (CNE series) or spring type (CSS series), maximum current 16A, silver plated, wire section 0,5...2,5 mm² (20 AWG -14 AWG)
Degrees of protection:	IP65/IP67/IP69 according to EN 60529 (if a cable clamp with IP67/IP69 rating is used).
Temperature range:	-40 °C / +125 °C
Electrical data	compliant with EN 61984: **16A 500V 6kV 3**
Self extinguishing properties	94V-0 compliant with UL 94 standard glow-wire 960 °C compliant with IEC/EN 60695-2-11 standard

Designation of contacts

The designation of contacts for motor connector is as follows:

contact	designation
1	winding U1 - L1
2	winding V1 - L2
3	winding W1 - L3
4	brake (0 V)
5	brake (+24V cc)
6	winding W2
7	winding U2
8	winding V2
9	temperature sensor
10	temperature sensor
PE	protective earth
7	line L2
8	temperature sensor
PE	protective earth

F



M



Inserts series	No. of poles		EN 61984 (2001-11) pollution degree 3			EN 61984 (2001-11) pollution degree 2			Certification UL/CSA
Code	main contacts	aux. contacts	rated voltage	rated impulse withstand voltage	pollution degree	rated voltage	rated impulse withstand voltage	pollution degree	rated voltage AC or DC
CXL 2/4	**2**	—	contacts for plastic fibre optics (POF) Ø 1mm						—
		4 (+⏚)	25V	0,8kV	3	—	—	—	50V
CXL 2/4...H	**2**	—	contacts for HCS® fibre optics Ø 200 µm						—
		4 (+⏚)	25V	0,8kV	3	—	—	—	50V
CQ 08	**8 (+⏚)**	—	500V	6kV	3	400/690V	6kV	2	600V
CQ 04/2	**4 (+⏚)**	—	400/690V	6kV	3	—	—	—	600V
		2	250V	4kV	3	—	—	—	600V
CQ 12	**10 (+⏚)**	—	500V	6kV	3	400/690V	6kV	2	600V
CNE	**12 (+⏚)**	—	400V	6kV	3	400/690V	6kV	2	600V

Nominal Data

Nominal data complies with requirements of EN 61984 standard.

Marking example to be applied only in a mains power supply with insulated neutral or with neutral to earth in a corner (see Table 5, EN 61984):

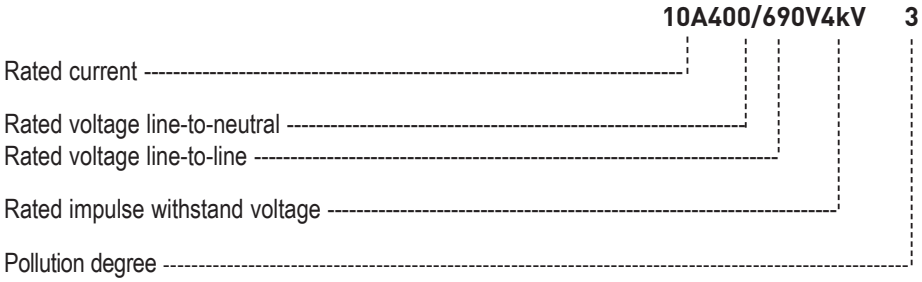

Marking example to be applied in any mains power supplies, including those with insulated neutral and the delta power supplies with earth in a corner (see Table 5, EN 61984):

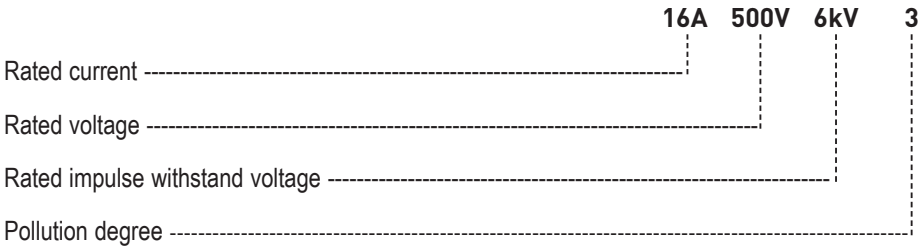

Insert series	max. rated current [1]	contact resistance ≤	insulatiion resistance ≥	Ambient temperature limit (° C)		Protection rating		Wire connection [2]					Certifications
Code				min	max	with enclosures	without enclosures	screw	spring	connection block at 45°	crimp	snap-in	
CXL 2/4	—	—	—	-40	+70	IP65/IP67	IP20	—				●	—
	10A	3 mΩ	10 GΩ	-40	+70	IP65/IP67	IP20	—			●	—	UL, CSA, DNV-GL, BV, EAC
CXL 2/4...H	—	—	—	-40	+70	IP65/IP67	IP20	—			●	—	—
	10A	3 mΩ	10 GΩ	-40	+70	IP65/IP67	IP20	—			●	—	UL, CSA, DNV-GL, BV, EAC
CQ 08	16A	1 mΩ	10 GΩ	-40	+125	IP65/IP67	IP20	—			●	—	cUL$_{A)}$, CSA, CQC, DNV-GL, BV, EAC
CQ 04/2	40A	0,3 mΩ	10 GΩ	-40	+125	IP65/IP67	IP20	—			●	—	cUL$_{A)}$, CSA, CQC, DNV-GL, BV, EAC
	10A	3 mΩ	10 GΩ										
CQ 12	10A	3 mΩ	10 GΩ	-40	+125	IP66/IP67	IP20	—			●	—	cUL$_{A)}$, CSA, CQC, DNV-GL, BV, EAC
CNE	16A	1 mΩ	10 GΩ	-40	+125	IP65	IP20	●	—				cUL$_{A)}$, CSA, CQC, DNV-GL, BV, EAC

1) See the insert load curves to establish the actual maximum operating current according to the ambient temperature
2) For the wire electrical connection data, see from page 22
A) UL for USA and Canada

Contacts series

10A max contacts - CD series

Conductor section		Number Identification
(mm²)	AWG	
0,14 - 0,37	26 - 22	
0,5	20	
0,75	18	
1	18	
1,5	16	
2,5	14	

Contacts supplied in both silver/gold plated versions

16A max contacts - CC series

Conductor section		Throat Identification
(mm²)	AWG	
0,14 - 0,37	26 - 22	
0,5	20	
0,75	18	
1	18	
1,5	16	
2,5	14	
3,0	12	
4	12	

Contacts supplied in both silver/gold plated versions; male contacts can also be supplied in the "advanced" version and iron/constantan contacts fro thermocouples J type.

40A max contacts - CX series

Conductor section		Number hole
(mm²)	AWG	
1,5	16	Ø 1,75 mm
2,5	14	Ø 2,25 mm
4	12	Ø 2,85 mm
6	10	Ø 3,5 mm

Contacts supplied in both silver/gold plated versions

CXL 2 p fibre optics + 4 p 10A max - 25V/0,8kV/3 + ⏚ opt. DESINA®

enclosures:	page:
size “21.21”	
insulating type	346 - 348
metallic type	353

inserts, crimp connections

10A crimp contacts silver and gold plated

description	part No.	part No.
inserts for fixed enclosures, complete with electro-optical interface [1]		
without contacts (to be ordered separately)		
socket inserts for female contacts	**CXL 2/4 SF**	
plug inserts for male contacts	**CXL 2/4 SM**	
without electro-optical interface for housings		
without contacts (to be ordered separately)		
socket inserts for female contacts	**CXL SF**	
plug inserts for male contacts	**CXL SM**	

			silver plated	gold plated ✢
10A female contacts				
0,14-0,37 mm²	AWG 26-22	identification No. 1	**CDFA 0.3**	**CDFD 0.3**
0,5 mm²	AWG 20	identification No. 2	**CDFA 0.5**	**CDFD 0.5**
0,75 mm²	AWG 18	identification No. ②	**CDFA 0.7**	**CDFD 0.7**
1 mm²	AWG 18	identification No. 3	**CDFA 1.0**	**CDFD 1.0**
1,5 mm²	AWG 16	identification No. 4	**CDFA 1.5**	**CDFD 1.5**
2,5 mm²	AWG 14	identification No. 5	**CDFA 2.5**	**CDFD 2.5**
10A male contacts				
0,14-0,37 mm²	AWG 26-22	identification No. 1	**CDMA 0.3**	**CDMD 0.3**
0,5 mm²	AWG 20	identification No. 2	**CDMA 0.5**	**CDMD 0.5**
0,75 mm²	AWG 18	identification No. ②	**CDMA 0.7**	**CDMD 0.7**
1 mm²	AWG 18	identification No. 3	**CDMA 1.0**	**CDMD 1.0**
1,5 mm²	AWG 16	identification No. 4	**CDMA 1.5**	**CDMD 1.5**
2,5 mm²	AWG 14	identification No. 5	**CDMA 2.5**	**CDMD 2.5**

[1] fitted with IDC connector for TTL to bus connection ribbon cable

- characteristics according to EN 61984:
  10A 25V 0,8kV 3
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- data baud rate: up to 12 MBit/s
- temperature range: from -40 °C to +70 °C
- contact resistance: ≤ 3 mΩ
- inserts already supplied with stainless steel fixing screw with gasket, which ensures IP66/IP67/IP69 degree of protection
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)

CXL 2/4 SM

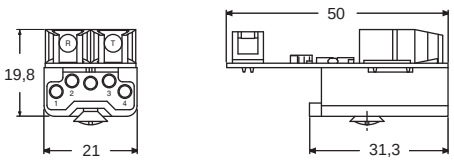

CXL 2/4 SF

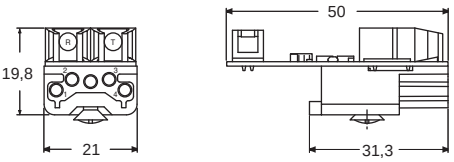

CDF and **CDM**

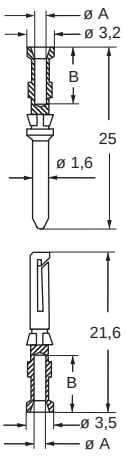

CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

✢ for basic or high thickness gold plating, please refer to page 674

dimensions shown in mm are not binding and may be changed without notice

CXL 2 p fibre optics + 4 p 10A max - 25V/0,8kV/3 + ⏚ opt. DESINA®

enclosures:	page:
size “21.21”	
insulating type	347 - 348
metallic type	354 - 355

inserts, snap-in (POF)
or crimp (HCS®) optical connection
electrical crimp connection

10A crimp contacts
silver and gold plated

description	part No.	part No.
inserts for portable enclosures with: 4 + 1 crimp 1,5 mm² contacts (included) + 2 snap on contacts for 1 mm [1] plastic (POF) fibre optics		
socket inserts with CDFA 1.5 female contacts	**CXL 2/4 PF**	
plug inserts with CDMA 1.5 male contacts	**CXL 2/4 PM**	
inserts for hoods with: 4 + 1 crimp 1,5 mm² contacts (included) + 2 crimp contacts for 0,2 mm [2] HCS® fibre optics		
socket inserts with CDFA 1.5 female contacts	**CXL 2/4 PFH**	
plug inserts with CDMA 1.5 male contacts	**CXL 2/4 PMH**	
inserts for hoods with: 4 + 1 crimp contacts (not included – CDF and CDM series) + 2 snap on or HCS® fibre optic contacts (not included) [3]		
socket inserts with female contacts	**CXL PF**	
plug inserts with male contacts	**CXL PM**	

10A female contacts				silver plated	gold plated ✢
0,14-0,37 mm²	AWG 26-22	identification No. 1	**CDFA 0.3**		**CDFD 0.3**
0,5 mm²	AWG 20	identification No. 2	**CDFA 0.5**		**CDFD 0.5**
0,75 mm²	AWG 18	identification No. ②	**CDFA 0.7**		**CDFD 0.7**
1 mm²	AWG 18	identification No. 3	**CDFA 1.0**		**CDFD 1.0**
1,5 mm²	AWG 16	identification No. 4	**CDFA 1.5**		**CDFD 1.5**
2,5 mm²	AWG 14	identification No. 5	**CDFA 2.5**		**CDFD 2.5**
10A male contacts					
0,14-0,37 mm²	AWG 26-22	identification No. 1	**CDMA 0.3**		**CDMD 0.3**
0,5 mm²	AWG 20	identification No. 2	**CDMA 0.5**		**CDMD 0.5**
0,75 mm²	AWG 18	identification No. ②	**CDMA 0.7**		**CDMD 0.7**
1 mm²	AWG 18	identification No. 3	**CDMA 1.0**		**CDMD 1.0**
1,5 mm²	AWG 16	identification No. 4	**CDMA 1.5**		**CDMD 1.5**
2,5 mm²	AWG 14	identification No. 5	**CDMA 2.5**		**CDMD 2.5**

[1] for POF fibre preparation, the polishing kit Agitent HFBR-4593 (CXL POL) is available on request

[2] for HCS® (Hard Clad Silica - SpecTran Corporation registered ™) connection preparation, the Crimp & Clear cabling kit (without glue or polishing kit) for simplex connectors for 200/300 µm HCS® fibre optics is available on request.
The (CXL KCC) kit consists of:
- No. 1 scissors for kevlar cutting
- No. 1 cable stripper
- No. 1 fibre stripper
- No. 1 calibrated pliers
- No. 1 precision fibre optics cutter with diamond blade.
- All accessories are stored in a hard carrying case

[3] see data on page 245

- characteristics according to EN 61984:
  10A 25V 0,8kV 3
- cULus CSA DNV·GL BUREAU VERITAS certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- temperature range: from -40 °C to +70 °C
- contact resistance: ≤ 3 mΩ
- inserts already supplied with stainless steel fixing screw with gasket, which ensures IP66/IP67/IP69 degree of protection
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series on pages 708 - 741)

CXL 2/4 PM and **PMH**

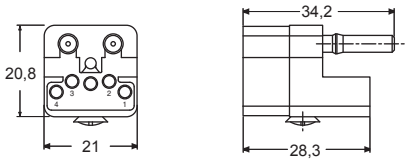

CXL 2/4 PF and **PFH**

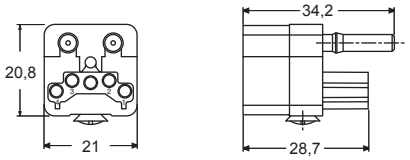

- 8 mm wire stripping
- POF 7 mm fibre stripping

CDF and **CDM**

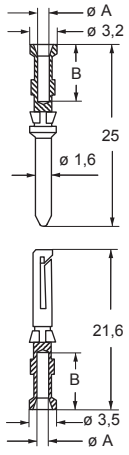

✢ for basic or high thickness gold plating, please refer to page 674

CDF and CDM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

MIXO INSERTS

MIXO

- Crimp
  4A/5A/10A/16A/40A/70A/100A/200A

From page..... 262

- Screw terminal
  40A

From page..... 268

- Spring
  16A

From page..... 273

- Dummy module - Pneumatic contacts

From page..... 309

- Frames

From page..... 316

- PE terminal adapters for MIXO frames

From page..... 319

MIXO DATA

- Gigabit - BUS - USB - D-SUB
- POF/MOST® - Coaxial - Optic - RJ45

From page..... 286



MIXO HNM

- Crimp
  10A/16A/40A

From page..... 321

- HNM frames

From page..... 333

BUILD YOUR CONNECTOR

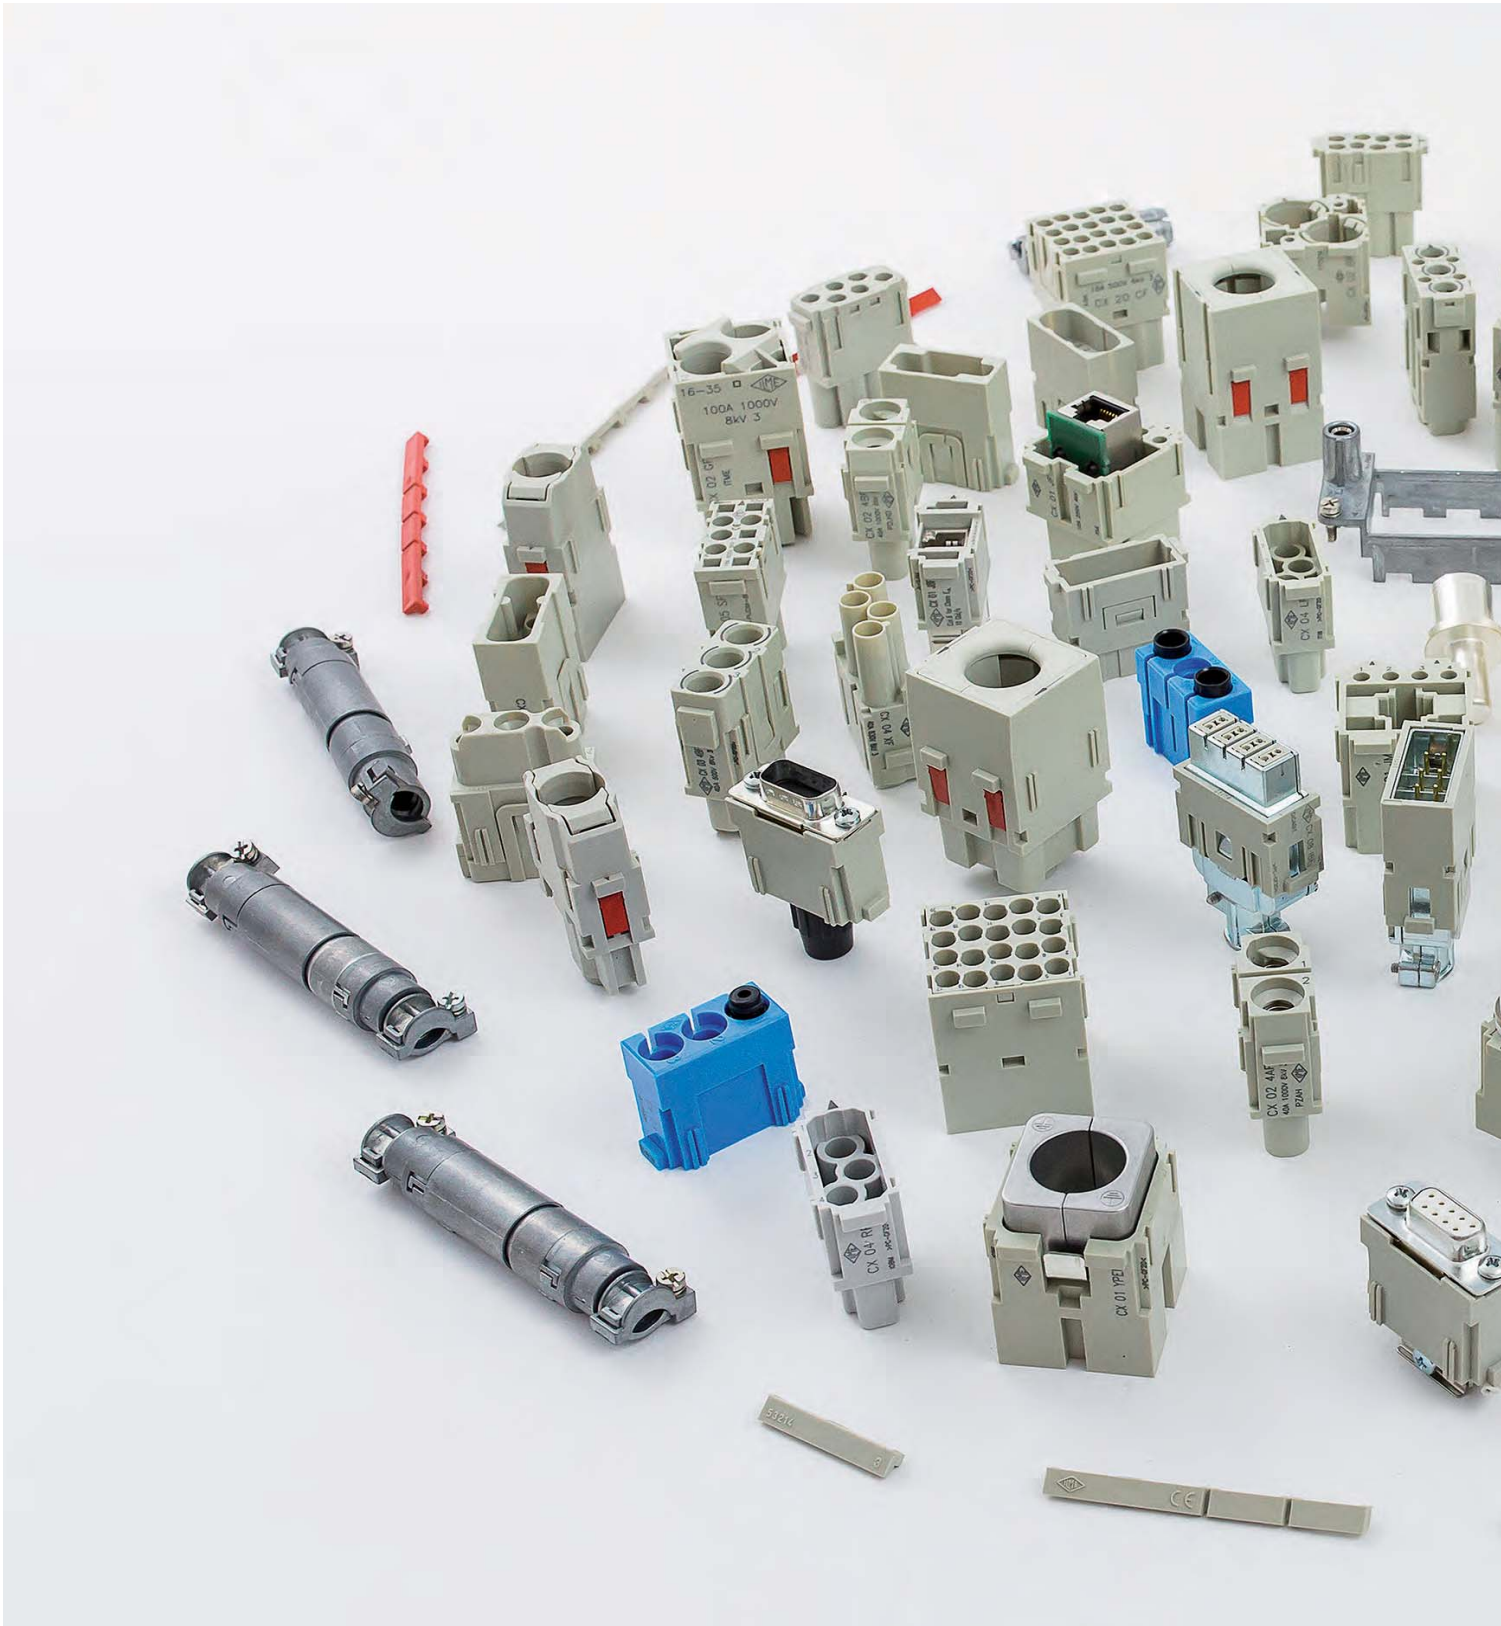

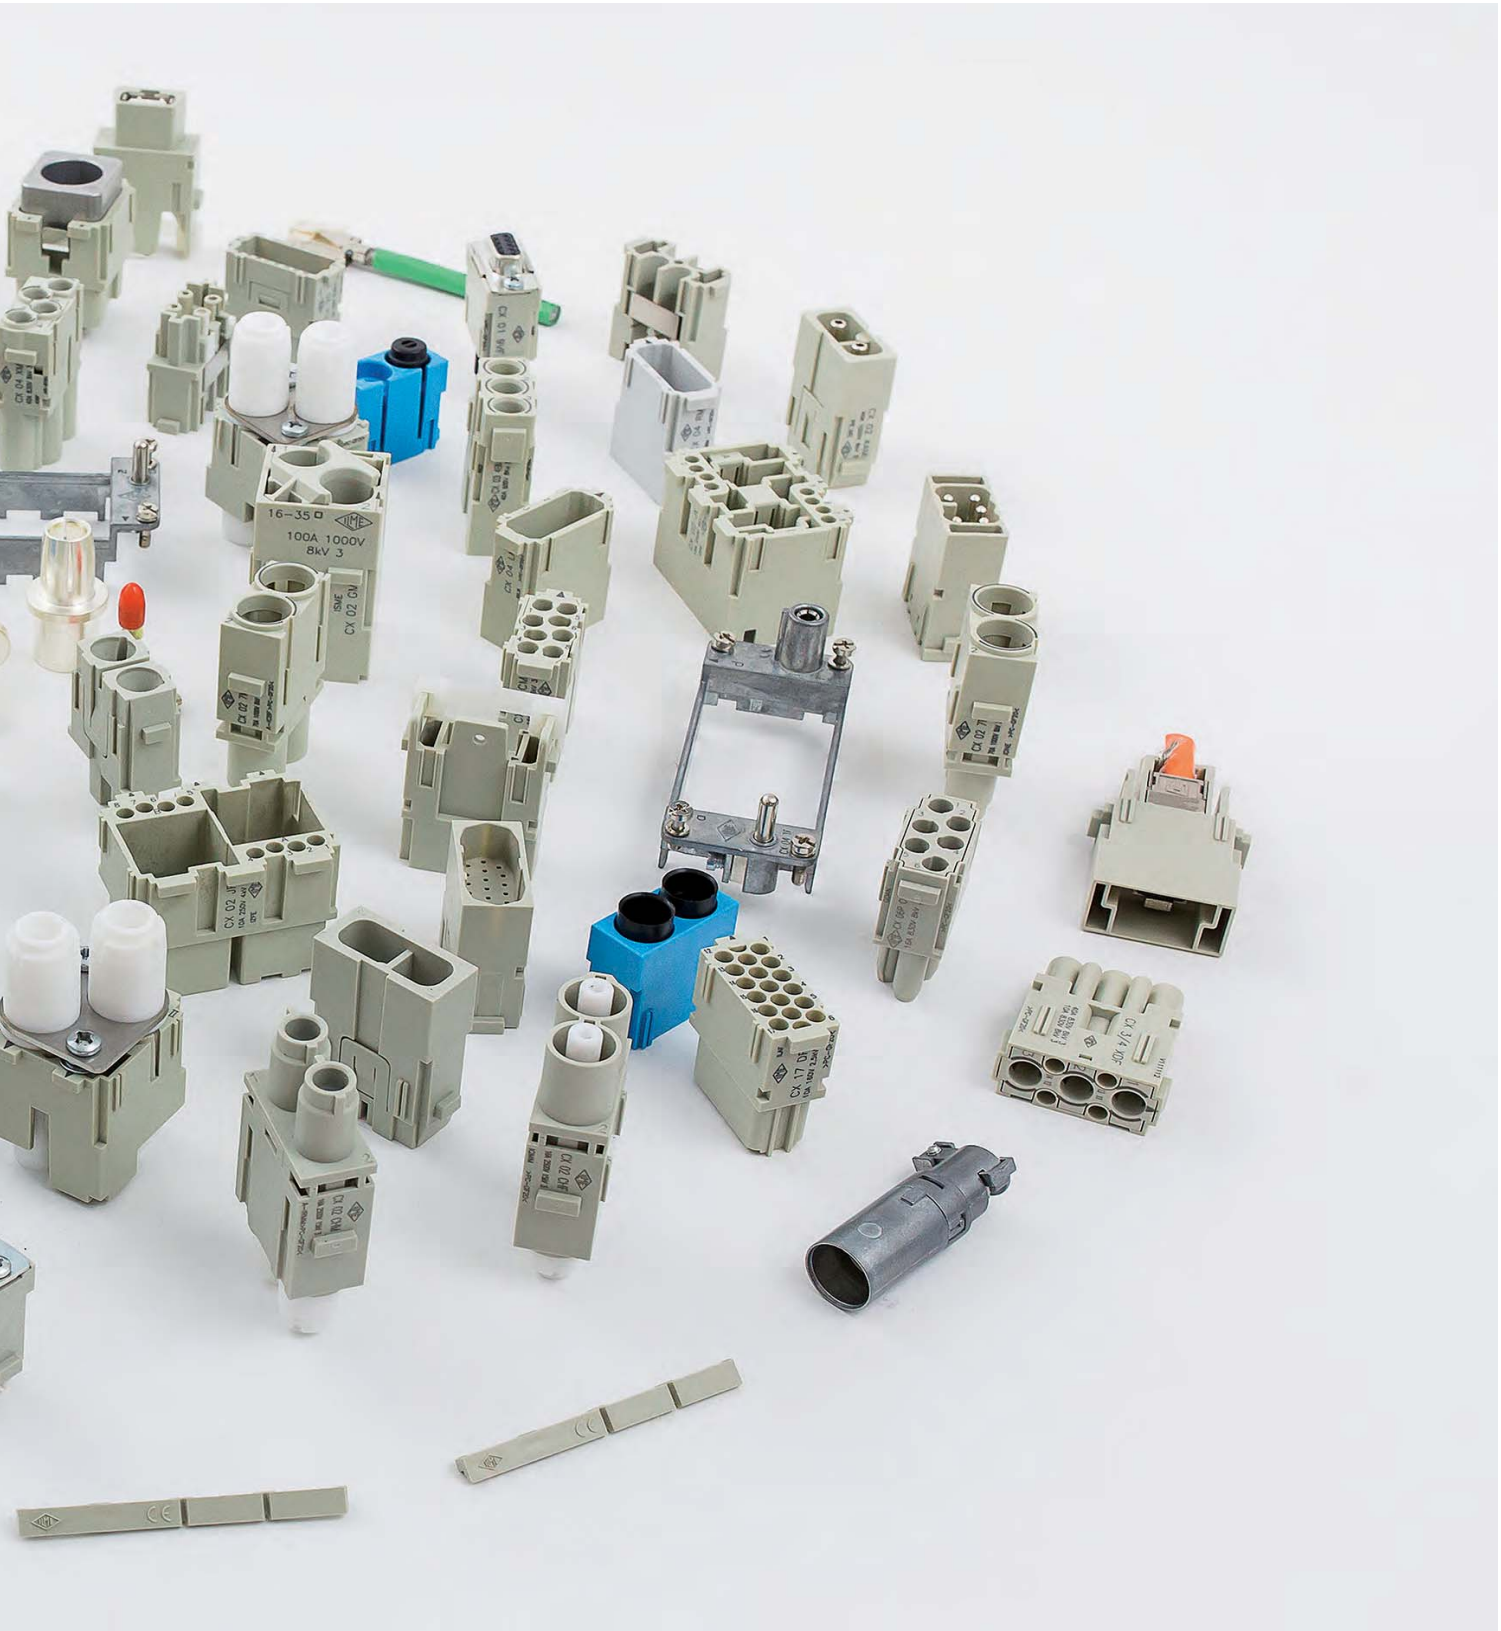
16-35 D
100A 1000V
8kV 3

MIXO SERIES

GENERAL OVERVIEW

The MIXO series is a system of modular units for special applications that uses the traditional ILME enclosures. Each enclosure can house different types of connections such as: electric signals and contacts for the conduction of compressed air with pressure values of up to 8 bars.

The inserts are arranged side by side to form a single **compact block** which is inserted into metallic frames with mandatory housings. Once the modules have been inserted and locked with the special tabs, the connector can be placed into the enclosure.

The modular system makes it easy to access a series of contacts inserted in the frame (e.g., for substitution, check or the addition of signals with new inserts for needs not foreseen during the initial installation) without having to disassemble the entire connector.

ILME MIXO series of modular connectors is an open connector system that provides versatile configuration to the users' individual requirements, giving the **freedom to assemble a customized connector** from a range of over 40 modules for power electrical, data transmission, optical signals or air. The module range is continuously expanded, allowing new configurations to be realised.

The use of enclosures provides the possibility of innumerable **applications.**

POWER/ SIGNAL

POWER

DATA TRANSMISSION

FIBRE OPTIC

PNEUMATIC

The MIXO series can be used with **5 different frame sizes:**

Frames	one or two-lever metallic enclosures
CX 01 T	size “49.16”
CX 02 TM/TF	size “44.27”
CX 03 TM/TF	size “57.27”
CX 04 TM/TF	size “77.27”
CX 06 TM/TF	size “104.27”
CX 04 TM/TF (x 2)	size “77.62”
CX 06 TM/TF (x 2)	size “104.62”

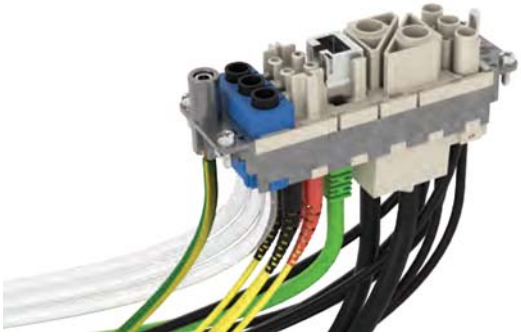

CX 01 T
1 module



CX 02 TF/TM
2 modules

CX 03 TF/TM
3 modules

CX 04 TF/TM
4 modules

CX 06 TF/TM
6 modules

Possibility – to be verified case-by-case – to use the recently added MIXO **HNM frames** (provided with special gold plated PE contacts) together with R series of crimp contacts and the relevant connector hoods and housings, to produce, where required, an **HNM connector** (High Number of Matings, up to 10.000 cycles of operation). For more information refer to page 333

Fill the unused frame slots with CX FM dummy module

In addition, the MIXO series can be used with the **COB series panel supports.**

Frames	COB panel supports part No.	
CX 02 TM/TF	fixed:	**COB 06 BC** and **COB TCQ**
	mobile:	**COB TSF, COB TSFS** and **COB 06 CMS**
CX 03 TM/TF	fixed:	**COB 10 BC** and **COB TCQ**
	mobile:	**COB TSF, COB TSFS** and **COB 10 CMS**

Frames	COB panel supports part No.	
CX 04 TM/TF	fixed:	**COB 16 BC** and **COB TCQ**
	mobile:	**COB TSF, COB TSFS** and **COB 16 CMS**
CX 06 TM/TF	fixed:	**COB 24 BC** and **COB TCQ**
	mobile:	**COB TSF, COB TSFS** and **COB 24 CMS**

THE COMPLETE RANGE

Inserts	Contact type	Signal type	Kind of connection	Rated current (A)	Rated voltage (V)	No. of frame slots	HNM suitable
CX 01 YF/M	main	electric	crimp	200	1000	2	—
CX 01 YPEF/M	PE	—	crimp	200	—	2	—
CX 01 GF/M	main	electric	crimp	100	830	1	—
CX 02 GF/M	main	electric	crimp	100	1000	2	—
CX 02 7F/M	main	electric	crimp	70	1000	1	—
CX 02 4AF/M	main	electric	axial screw	40	1000	1	—
CX 02 4BF/M	main	electric	axial screw	40	1000	1	—
CX 02 4F/M	main	electric	crimp	40	1000	1	—
CX 03 4F/M	main	electric	crimp	40	400/690	1	**yes**
CX 03 4BF/BM	main	electric	crimp	40	500	1	**yes**
CX 3/4 XDF/M	main	electric	crimp	40/10	830	1	—
CX 04 XF/M	main	electric	crimp	40	830	1	**yes**
CX 05 SF/M ▲	main	electric	spring	16	400	1	—
CX 05 SHF/M	main	electric	SQUICH®-spring	16	400	1	—
CX 06 CF/M	main	electric	crimp	16	500	1	yes
CX 06P CF/M	main	electric	crimp	16	830	1	yes
CX 08 CF/M	main	electric	crimp	16	400	1	yes
CX 08 I6F/M	main	electric	crimp	5	50	1	—
CX 20 CF/M	main	electric	crimp	16	500	2	yes
CX 12 DF/M	main / auxiliary	electric	crimp	10	250	1	yes
CX 17 DF/M	main / auxiliary	electric	crimp	10	160	1	yes
CX 42 DF/M	main / auxiliary	electric	crimp	10	150	2	yes
CX 25 IBF/M	main / auxiliary	electric	crimp	4	50	1	—
CX 25 IF/M ▲	main / auxiliary	electric	crimp	4	50	1	—
CX 02 CHF/M	main	electric	crimp	16	2500	1	—
CX 02 HF/M	main	electric	crimp	16	2900/5000	2	—
CX 02 BF/M	seat for two shielded connectors (refer to CX 04 B, CX 01 B, CX 01 BC, CX 08 B)					2	—
CX 01 BCF/M	main / auxiliary + shield	electric	crimp	16	50	—	—
CX 01 BF/M	main / auxiliary + shield	electric	crimp	10	50	—	—
CX 04 BF/M	main / auxiliary + shield	electric	crimp	10	50	—	—
CX 08 BF/M	main / auxiliary + shield	electric	crimp	5	50	—	—
CX 03 P	pneumatic Ø 1,6 - 3,0 - 4,0 mm	air	snap-in	—	—	1	—
CX 02 P	pneumatic Ø 6,0 mm	air	snap-in	—	—	1	—
CX FM	none (dummy module)	—	—	—	—	1	yes
CX 01 J8F/M/IM	RJ45	electric	crimp/IDC	---	—	1	—
CX 01 JF/M	RJ45 + auxiliary	electric	crimp	10	250	2	—
CX 02 JF/M	RJ45 + auxiliary	electric	crimp	10	250	3	—
CX 01 UF/M	USB	electric	—	—	—	1	—
CX 01 9VF/M	D-SUB	electric	crimp	5	50	1	—
CX 01 9VTF	D-SUB	electric	screw	5	50	1	—
CX 04 LF/M	POF / MOST	optic	crimp	—	—	1	—
CX 04 RF/M	coaxial	electric	crimp	—	—	1	—
CX 04 SCF/M	SC fibre optic	optic	crimp/glue	—	—	1	—

▲ **Available upon request**

Calculate the number of frame slots taken up by the required inserts (frame slot 1, 2 or 3 modules) and select the right frame according to the number of required modules (available 1, 2, 3, 4 and 6 modules).

size: 1 frame slot



size: 2 frame slots



size: 3 frame slots

THE 41-VARIANT RANGE OF CHOICE

ILME MIXO portfolio includes a series of key modular units being continuously widened:

23 modules		**for electric power and signal transmission** with contacts for rated current up to:
- 2 module	for 200A	with CX 01 YF/YM and CX 01 YPEF/YPEM (for PE connection) (crimp)
- 2 modules	for 100A	with CX 02 GF/GM and CX 01 GF/GM (crimp)
- 1 module	for 70A	with CX 02 7F/7M (crimp)
- 7 modules	for 40A	with CX 02 4F/4M (crimp), CX 02 4AF/4AM and CX 02 4BF/4BM (axial screw), with CX 03 4F/4M and CX 03 4BF/4BM (crimp), CX 3/4 XDF/XDM (crimp), CX 04 XF/XM (crimp)
- 6 modules	for 16A	with CX 05 SF/SM ▲ (spring clamp), CX 05 SHF/SHM (SQUICH®), CX 06P CF/CM, CX 06 CF/CM, CX 08 CF/CM, CX 20 CF/CM
- 3 modules	for 10A	with CX 12 DF/DM (crimp), CX 17 DF/DM (crimp), CX 42 DF/DM (crimp)
- 2 modules	for 4A	with CX 25 IF/IM ▲ and CX 25 IBF/IBM (crimp)
2 modules		**for high voltage connections** 16A – 2,9/5,0 kV with CX 02 HF/HM and 2,5 kV with CX 02 CHF/ CHM
4 MIXO-BUS		**shielded connectors for bus data transmission:**
- 1 module CX 02 BF/BM		for two shielded connectors to be chosen among the following 4 options:
1. CX 01 BF/BM		coaxial, 10A (crimp) – 75 Ω characteristic impedance
2. CX 01 BCF/BCM		coaxial, 16A (crimp) – 50 Ω characteristic impedance
3. CX 04 BF/BM		quad-axial 10A (crimp)
4. CX 08 BF/BM		8-ways 5A (crimp)
3 modules/adapters		**for RJ-45:**
- CX 01 J8F/J8M/J8IM		single-sized module for 1 RJ-45 patch cord, female module is a "gender changer"
- CX 01 JF/JM		double-sized module for 1 RJ-45 patch cord + 4 auxiliary 10A (crimp) contacts
- CX 02 JF/JM		triple-sized module for 2 RJ-45 patch cords + 8 auxiliary 10A (crimp) contacts
1 module		**for Gigabit Ethernet,** with CX 08 I6F/ I6M, 5A (crimp) and relevant accessories
1 module/adapter		**for USB:** male adapter for USB patch cord; female adapter is a F/F "gender changer", for rear connection to a male USB patch cord with CX 01 UF/UM
2 modules		**with D-Sub 9-pole** with CX 01 9VF/9VM, 5A (crimp) and CX 01 9VTF (for RS-485 T-connection)
2 modules		**for pneumatic quick-couplings** with CX 02 P and CX 03 P
3 modules		**for fibre optic** (POF or MOST® or SC) or coaxial crimp contacts (50 Ω or 75 Ω characteristic impedance) with CX 04 LF/LM, CX 04 RF/RM and CX 04 SCF/SCM

In addition to:

5 frames	for the build-up of a modular connector. The connector consists of a multiple number of the above listed single-sized and/or double-sized modular units and/or triple-sized modules; 4 +1 frames in particular fit the main housing sizes: - **"44.27"** for 2 single-sized modules or 1 double-sized module; - **"57.27"** for 3 single-sized modules or a combination of 1 single-sized module or 1 double-sized module, or 1 triple-sized module; - **"77.27"** for 4 single-sized modules, 2 double-sized modules, 1 triple-sized module and 1 single-sized module, or a combination of 2 single-sized modules or 1 double-sized module; - **"104.27"** for 6 single-sized modules, 4 single-sized modules and 1 double-sized module, 2 single-sized modules and 2 double-sized modules,3 double-sized modules, 2 triple-sized modules, 1 triple-sized module and 1 double-sized module and 1 single-sized module, or 1 triple-sized module and 3 single-sized modules.
1 frame	for the build-up of 1 single-sized module in connector housings size "49.16".

The frame range allows the build-up of 7 different sizes of multipole modular connectors (this because 2 frames each of sizes "77.27" and "104.27" may be additionally combined in the double-sized "77.62" and "104.62" connector housings).

8kV 3
100A 1000V
16–35

TECHNICAL CHARACTERISTICS

1. Pneumatic contacts in plastic with hose barb connection.
2. Fibre optic contacts SC type.
3. Electric contacts in silver-plated or gold-plated brass with connections to the conductors via crimping, spring clamp or axial screw.
4. Modular inserts of identical size with insertion system for forming the complete module and frame lock tab.
5. Inserts in self-extinguishing thermoplastic material, reinforced with glass fibre, UL 94V-0 approved, with a working temperature range of -40 °C to +125 °C.
6. Inserts in conformance with the requirements of the EN 61984 standard and certified and marked with the UL, CSA, CQC, DNV-GL, BV, EAC marks.
7. Inserts with patented “swallowtails” to prevent incorrect coupling.
8. Position of contacts identified with numbers or codes on both sides of every insert.
9. Male/female module carrier frames with mandatory housings and polarity, in die-cast zinc alloy.
10. Module lock tab, may be divided according to the number of modules used; it guarantees a perfect stability of the modules during wiring and coupling/uncoupling of the connectors.
11. Asymmetric protective earth contacts (two per frame) with wide contact surface to prevent incorrect coupling; when two or more identical connectors of the MIXO series are used, coded pins may prevent incorrect coupling (refer to pages 684, 685 and 689).
12. Captive frame fastening screws, with spring washer.
13. Dummy module for unused frame slots.

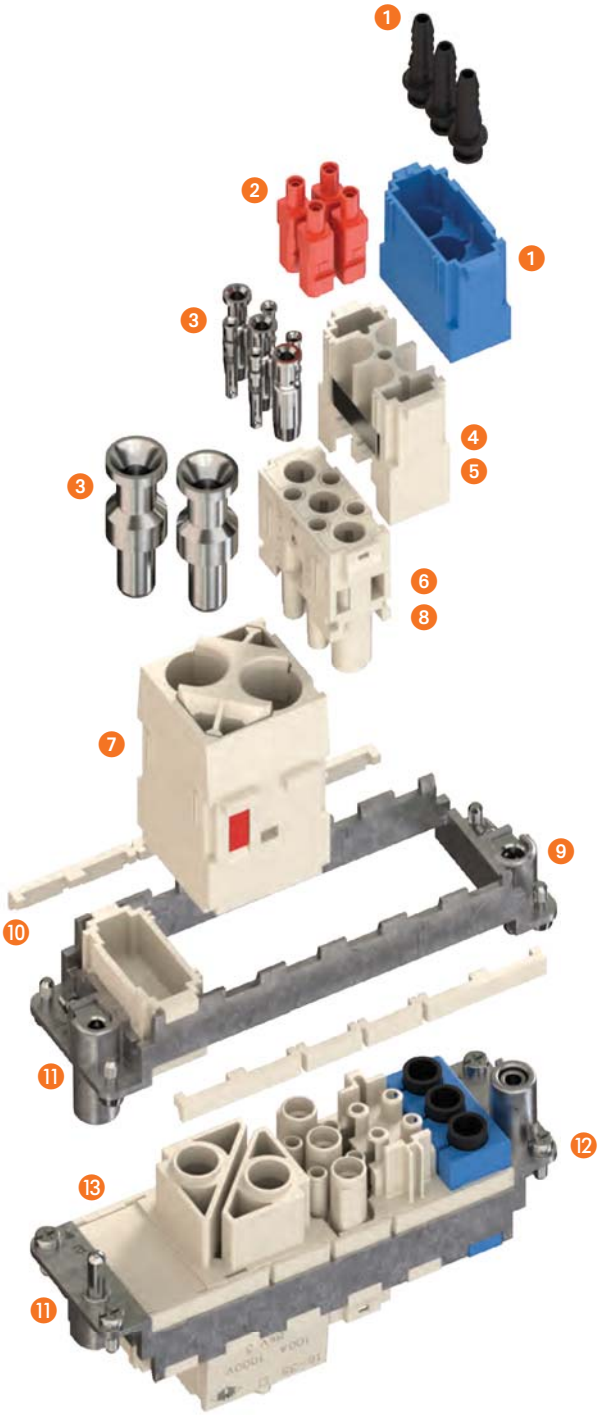

ADVANTAGES

- **Easy and user-friendly assembly of the complete multi-module insert before fixing it on the relevant sized metal frame;**
- **use of proprietary ILME technology providing each module with “swallowtails” (lateral keys/keyways), for reciprocal locking of modules and overall assembly of the insert into rigid (non hinged) frames with snap-in locking strips;**
- **faster and easier assembly compared with competitor solutions (easier handling of modules as a complete block than e.g. 6 independent parts);**
- **intermateability at “complete connector” (modules in frame) with other industry standard products;**
- **robust and long lasting prevailing crimp connection technology (largely preferred over screw type technology in high vibration and shock environments).**

Watch our video

CX 01 YF/YM 1 pole 200A - 1000V

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures* or in COB panel supports.

page:
frames for modular units* **317**

* enclosures: housings or high construction hoods

modular units, crimp connections

200A silver plated crimp contacts heat shrink tube

description			part No.	part No
without contacts (to be ordered separately)				
female inserts for female contacts			**CX 01 YF**	
male inserts for male contacts			**CX 01 YM**	
200A female crimp contacts				
16 mm²	AWG 6	one groove (back side)		**CYFA 16**
25 mm²	AWG 4	with no grooves		**CYFA 25**
35 mm²	AWG 2	one groove		**CYFA 35**
50 mm²	AWG 1	two grooves		**CYFA 50**
70 mm²	AWG 2/0	with no grooves		**CYFA 70**
200A male crimp contacts				
16 mm²	AWG 6	one groove (back side)		**CYMA 16**
25 mm²	AWG 4	with no grooves		**CYMA 25**
35 mm²	AWG 2	one groove		**CYMA 35**
50 mm²	AWG 1	two grooves		**CYMA 50**
70 mm²	AWG 2/0	with no grooves		**CYMA 70**
heat shrink tube for CYFA/CYMA 16 contacts or for conductor with total external Ø < 10 mm				**CR TT**

silver plated

- characteristics according to EN 61984:
  200A 1000V 8kV 3
  200A 920/1600V 8kV 2
- cULus (UL for USA and Canada), SA, CEC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplasticresin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,2 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 200A contacts, CYF and CYM series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 01 Y, 1 pole connector inserts (MIXO 200A)
Maximum current load derating diagram

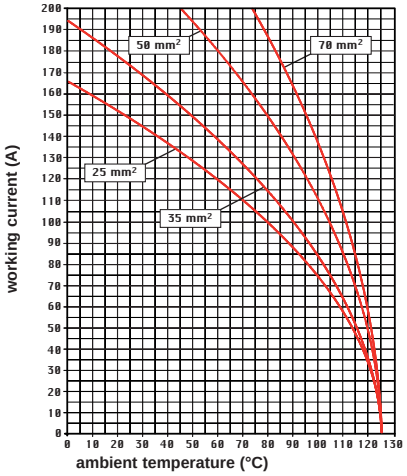

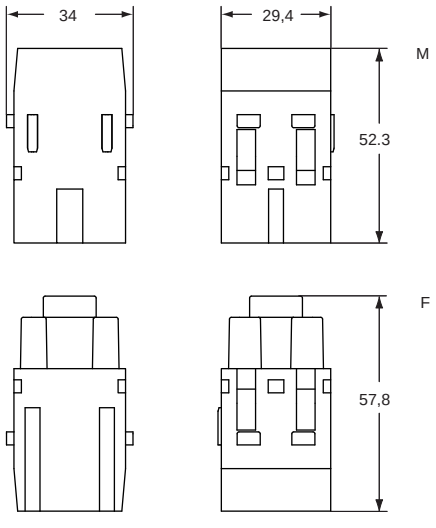

contacts side (front view)

side with reference arrow ▲



- 2 frame slots

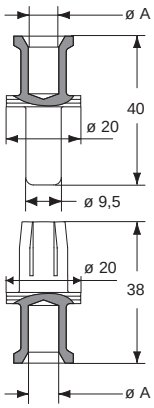

CYF and CYM contacts

conductor section ø A (mm²)	conductor slot (mm)	conductor stripping length (mm)
16	6,1	15
25	7,0	15
35	8,2	15
50	9,8	15
70	11,8	15

dimensions shown in mm are not binding and may be changed without notice

CX 01 YPEF/YPEM 1 PE pole 200A

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures* or in COB panel supports.

page:
frames for modular units* **317**

* enclosures: housings or high construction hoods

modular units, crimp connections
PE module for earth termination

200A silver plated crimp contacts

description	part No.	part No
without contacts (to be ordered separately)		
PE female inserts for female contacts	**CX 01 YPEF**	
PE male inserts for male contacts	**CX 01 YPEM**	
200A female crimp contacts		
16 mm² AWG 6 one groove (back side)		**CYFA 16**
25 mm² AWG 4 with no grooves		**CYFA 25**
35 mm² AWG 2 one groove		**CYFA 35**
50 mm² AWG 1 two grooves		**CYFA 50**
70 mm² AWG 2/0 with no grooves		**CYFA 70**
200A male crimp contacts		
16 mm² AWG 6 one groove (back side)		**CYMA 16**
25 mm² AWG 4 with no grooves		**CYMA 25**
35 mm² AWG 2 one groove		**CYMA 35**
50 mm² AWG 1 two grooves		**CYMA 50**
70 mm² AWG 2/0 with no grooves		**CYMA 70**

silver plated

- c UL us (UL for USA and Canada), CSA, CQC, DNV-GL, BUREAU VERITAS, EAC certified
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 200A contacts, CYF and CYM series) on pages 708 - 741

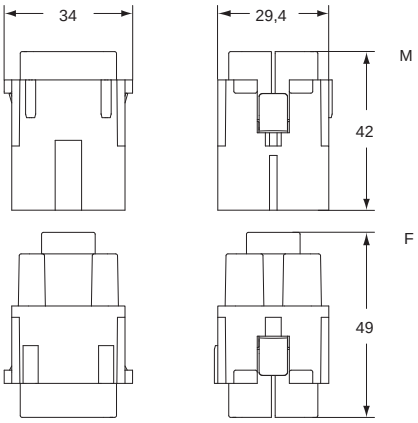

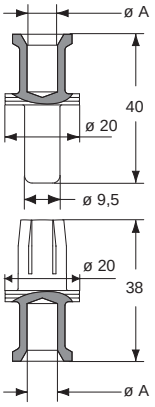

contacts side (front view)

side with reference arrow ▲

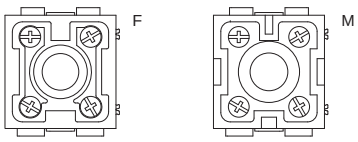

- 2 frame slots

CYF and CYM contacts

conductor section ø A (mm²)	conductor slot (mm)	conductor stripping length (mm)
16	6,1	15
25	7,0	15
35	8,2	15
50	9,8	15
70	11,8	15

CX 01 GF/GM 1 pole 100A - 830V

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures* or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:
frames for modular units* **316 - 317**

MIXO ONE enclosures **369**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

modular units, crimp connections

100A silver plated crimp contacts, PE adapter

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CX 01 GF**	
male inserts for male contacts	**CX 01 GM**	
100A female crimp contacts		
8-10 mm² AWG 8-7		**CGFA 10**
16 mm² AWG 6-5		**CGFA 16**
25 mm² AWG 4-3		**CGFA 25**
35 mm² AWG 2		**CGFA 35**
100A male crimp contacts		
8-10 mm² AWG 8-7		**CGMA 10**
16 mm² AWG 6-5		**CGMA 16**
25 mm² AWG 4-3		**CGMA 25**
35 mm² AWG 2		**CGMA 35**
cable earthing adapter 16 mm² (AWG 6-5)		**CGT 16**

silver plated

- characteristics according to EN 61984:
  100A 830V 8kV 3
- DNV-GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,3 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 100A contacts, CGF and CGM series) on pages 708 - 741
- contact removal only using a screwdriver
- for max. current load see the connector inserts derating diagram below; for more information see page 28

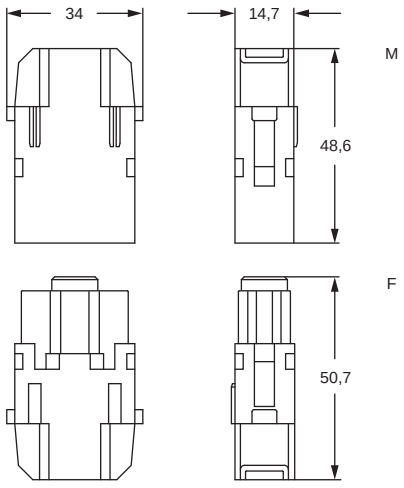

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

CGF and CGM

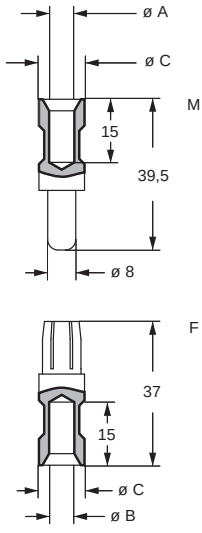

CGT 16



CGF and CGM contacts

conductor section (mm²)	conductor slot ø A (mm)	ø B (mm)	ø C (mm)	conductor stripping length (mm)
8-10	4,3	4,3	13	15
16	5,5	5,5	13	15
25	7,0	7,0	13	15
35	7,9	8,2	12,5	15

How to use the PE adapter (CGT 16):
1) Strip 15 mm of flexible PE protective cable
2) Crimp the cable on the CGT 16 adapter by using the CGPZ pliers with the CGD 16 C matrix
3) Fix the adapter tip in the larger earth terminal (6 mm²) of frames CX...TM/TF
4) To be used with bulkhead mounting housings or high construction hoods
5) Cannot be used with T-TYPE series

CX 01 G, 1 pole connector inserts
Maximum current load derating diagram

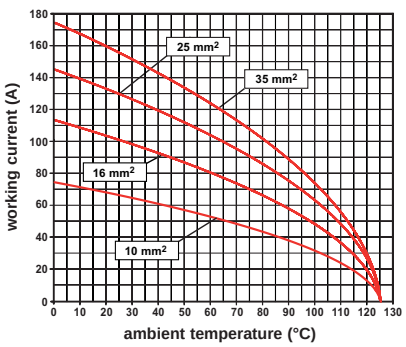

Watch our online tutorial

dimensions shown in mm are not binding and may be changed without notice

CX 02 GF/GM 2 poles 100A - 1000V

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures* or in COB panel supports.

page:
frames for modular units* **317**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

modular units, crimp connections



100A silver plated crimp contacts, PE adapter

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts [1]	**CX 02 GF**	
male inserts for male contacts [1]	**CX 02 GM**	
100A female crimp contacts		
8-10 mm² AWG 8-7		**CGFA 10**
16 mm² AWG 6-5		**CGFA 16**
25 mm² AWG 4-3		**CGFA 25**
35 mm² AWG 2		**CGFA 35**
100A male crimp contacts		
8-10 mm² AWG 8-7		**CGMA 10**
16 mm² AWG 6-5		**CGMA 16**
25 mm² AWG 4-3		**CGMA 25**
35 mm² AWG 2		**CGMA 35**
cable earthing adapter 16 mm² (AWG 6-5)		**CGT 16**

silver plated

[1] on request, version with pole 3/4 numbering, references: **CX 02 GFN, CX 02 GMN**

- characteristics according to EN 61984:
  100A 1000V 8kV 3
  100A 920/1600V 8kV 2
- c UL us (UL for USA and Canada), CSA, cec, DNV·GL
  EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,3 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 100A contacts, CGF and CGM series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 02 G, 2 poles connector inserts
Maximum current load derating diagram

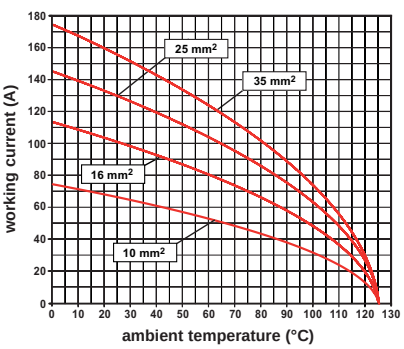

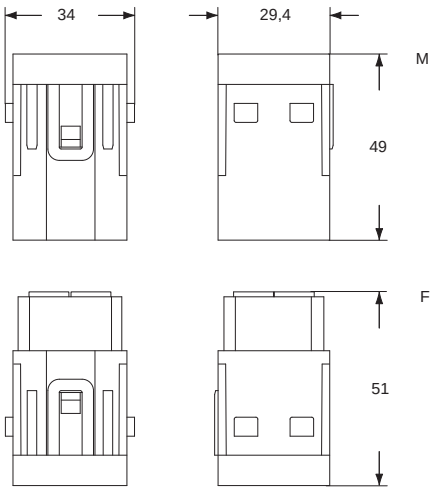

contacts side (front view)

side with reference arrow ▲

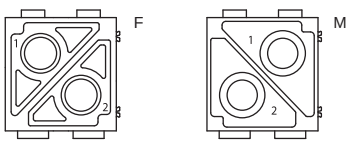

- 2 frame slots

CGF and CGM





CGT 16



CGF and CGM contacts

conductor section (mm²)	conductor slot ø A (mm)	ø B (mm)	ø C (mm)	conductor stripping length (mm)
8-10	4,3	4,3	13	15
16	5,5	5,5	13	15
25	7,0	7,0	13	15
35	7,9	8,2	12,5	15

How to use the PE adapter (CGT 16):
1) Strip 15 mm of flexible PE protective cable
2) Crimp the cable on the CGT 16 adapter by using the CGPZ pliers with the CGD 16 C matrix
3) Fix the adapter tip in the larger earth terminal (6 mm²) of frames CX...TM/TF
4) To be used with bulkhead mounting housings or high construction hoods
5) Cannot be used with T-TYPE series

CX 02 7F/7M 2 poles 70A - 1000V

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures* or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:
frames for modular units* **317**
MIXO ONE enclosures **369**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

modular units, crimp connections

70A silver plated crimp contacts

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts	**CX 02 7F**	
male inserts for male contacts	**CX 02 7M**	
70A female crimp contacts		
10 mm² AWG 8 - 7		**CX7FA 10**
16 mm² AWG 6 - 5		**CX7FA 16**
25 mm² AWG 4 - 3		**CX7FA 25**
70A male crimp contacts		
10 mm² AWG 8 - 7		**CX7MA 10**
16 mm² AWG 6 - 5		**CX7MA 16**
25 mm² AWG 4 - 3		**CX7MA 25**

silver plated

- characteristics according to EN 61984:
  70A 1000V 8kV 3
  70A 1600V 12kV 2
- cULus (UL for USA and Canada), cec, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,5 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 70A contacts, CX7F and CX7M series) on pages 708 - 741
- **C7ES** removal tool
- for max. current load see the connector inserts derating diagram below; for more information see page 28

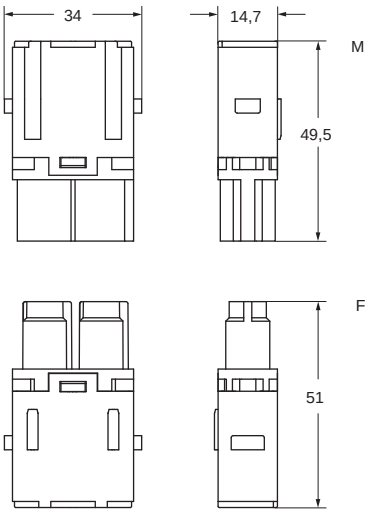

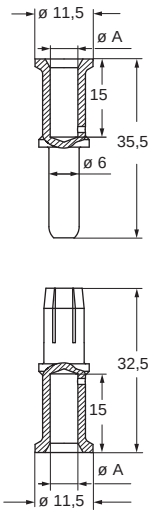

CX 02 7, 2 poles connector inserts
Maximum current load derating diagram

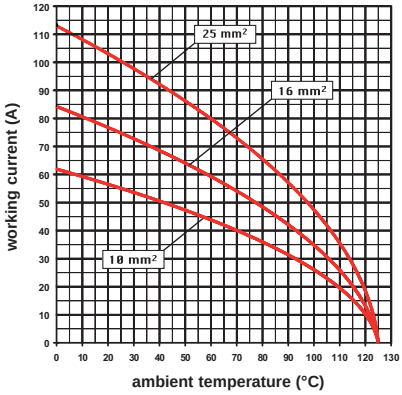

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

CX7F and CX7M contacts

conductor section (mm²)	conductor slot ø A (mm)	conductor stripping length (mm)
10	4,3	15
16	5,5	15
25	7,0	15

dimensions shown in mm are not binding and may be changed without notice

CX 02 4F/4M 2 poles 40A - 1000V

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures* or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:
frames for modular units* **316 - 317**

MIXO ONE enclosures **369**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

modular units, crimp connections

40A silver plated crimp contacts

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts [1]	**CX 02 4F**	
male inserts for male contacts [1]	**CX 02 4M**	
40A female crimp contacts		
1,5 mm² AWG 16		**CXFA 1.5**
2,5 mm² AWG 14		**CXFA 2.5**
4 mm² AWG 12		**CXFA 4.0**
6 mm² AWG 10		**CXFA 6.0**
10 mm² AWG 8		**CXFA 10**
40A male crimp contacts		
1,5 mm² AWG 16		**CXMA 1.5**
2,5 mm² AWG 14		**CXMA 2.5**
4 mm² AWG 12		**CXMA 4.0**
6 mm² AWG 10		**CXMA 6.0**
10 mm² AWG 8		**CXMA 10**

silver plated

[1] **cable diameter up to 7,5 mm**
contact size up to 10 mm²

- characteristics according to EN 61984:
  40A 1000V 8kV 3
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,3 mΩ
- can be mated with CX 02 A/B modules
- **it is recommended to crimp the contacts** (1,5 - 10 mm²), **with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts, CXF and CXM series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

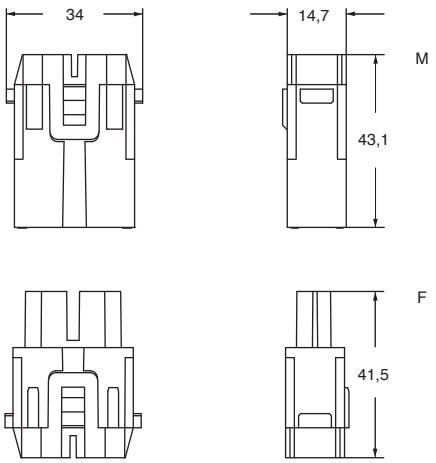

contacts side (front view)

side with reference arrow ▲



- 1 frame slot



CXF and CXM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductor stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6
10	4,3	15

CX 02 4, 2 poles connector inserts
Maximum current load derating diagram

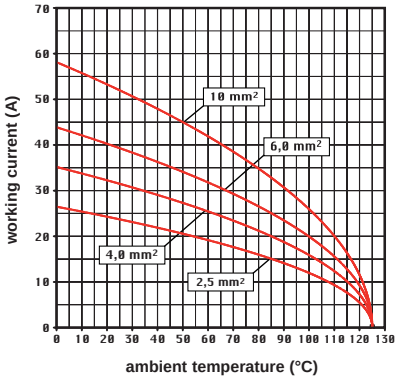

CX 02 4AF/4AM - CX 02 4BF/4BM 2 poles 40A - 1000V

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:

frames for modular units **316 - 317**

MIXO ONE enclosures **369**

modular units,
screw terminal connection
2,5 - 8 mm²



modular units,
screw terminal connection
6 - 10 mm²

description	part No.	part No
female inserts with female contacts male inserts with male contacts	**CX 02 4AF** **CX 02 4AM**	
female inserts with female contacts male inserts with male contacts		**CX 02 4BF** **CX 02 4BM**

MIXO INSERTS

- use flexible cables with sections from 2,5 to 10 mm² or extra flexible cables with sections from 2,5 to 6 mm²
- do not twist the cables
- fully insert the braids in the rear section of the contact

conductor section (mm²)	conductor stripping length (mm)	tightening torque (Nm)
2,5	5+1	1,5
4	5+1	1,5
6	8+1	2
10	8+1	2

- insert a 2 mm hexagonal key in the front section of the contact and tighten by keeping the cable held down in position
- a 2 mm hexagonal key can be supplied on request, reference **CX AS**

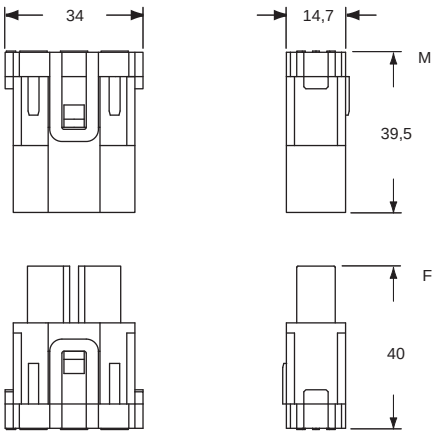

contacts side (front view)

side with reference arrow ▲



- characteristics according to EN 61984:
  40A 1000V 8kV 3
  40A 1600V 12kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,5 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 02 4A/B, 2 poles connector inserts
Maximum current load derating diagram

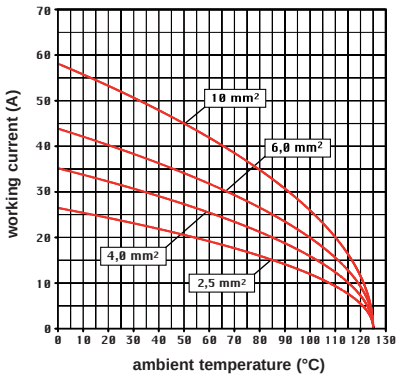

- inserts for Ø 4mm cables, section:
  2,5-8 mm² - AWG 14-8
- 1 frame slot

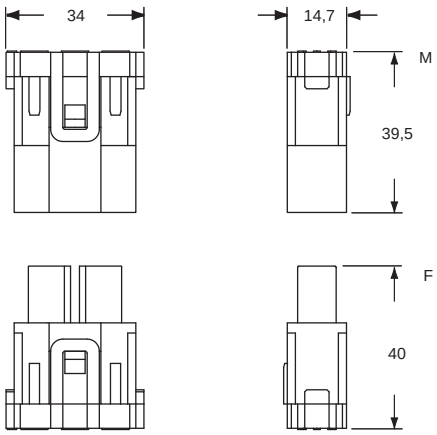

contacts side (front view)

side with reference arrow ▲



- inserts for Ø 4,8 mm cables, section:
  6-10 mm² - AWG 10-8
- 1 frame slot

dimensions shown in mm are not binding and may be changed without notice

CX 03 4F/4M 3 poles 40A - 400/690V

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:
frames for modular units **316 - 317**
MIXO ONE enclosures **369**

modular units, crimp connections

40A silver plated crimp contacts

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts [1]	**CX 03 4F**	
male inserts for male contacts [1]	**CX 03 4M**	
40A female crimp contacts		
1,5 mm² AWG 16		**CXFA 1.5**
2,5 mm² AWG 14		**CXFA 2.5**
4 mm² AWG 12		**CXFA 4.0**
6 mm² AWG 10		**CXFA 6.0**
40A male crimp contacts		
1,5 mm² AWG 16		**CXMA 1.5**
2,5 mm² AWG 14		**CXMA 2.5**
4 mm² AWG 12		**CXMA 4.0**
6 mm² AWG 10		**CXMA 6.0**

silver plated

[1] **cable diameter up to 5 mm**

- characteristics according to EN 61984:
  40A 400/690V 6kV 3
- c UL us (UL for USA and Canada), CSA, CQC, RINA, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,3 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts, CXF and CXM series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

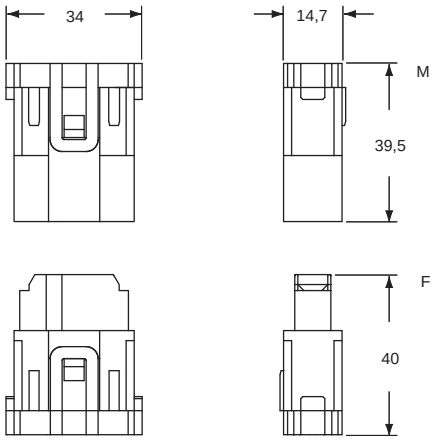

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

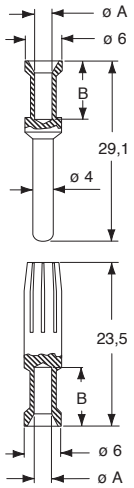

CXF and CXM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductor stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6

CX 03 4, 3 poles connector inserts
Maximum current load derating diagram

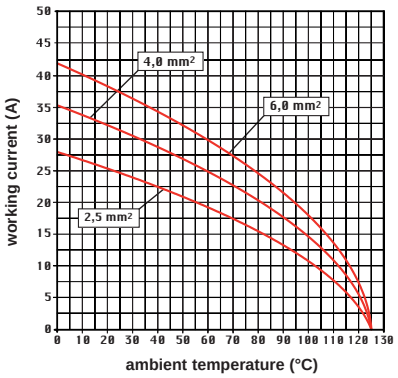

CX 03 4BF/4BM 3 poles 40A - 500V

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures* or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:
frames for modular units* **316 - 317**

MIXO ONE enclosures **369**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

modular units, crimp connections

40A silver plated crimp contacts

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts [1]	**CX 03 4BF**	
male inserts for male contacts [1]	**CX 03 4BM**	
40A female crimp contacts		
1,5 mm² AWG 16		**CXFA 1.5**
2,5 mm² AWG 14		**CXFA 2.5**
4 mm² AWG 12		**CXFA 4.0**
6 mm² AWG 10		**CXFA 6.0**
10 mm² AWG 8		**CXFA 10**
40A male crimp contacts		
1,5 mm² AWG 16		**CXMA 1.5**
2,5 mm² AWG 14		**CXMA 2.5**
4 mm² AWG 12		**CXMA 4.0**
6 mm² AWG 10		**CXMA 6.0**
10 mm² AWG 8		**CXMA 10**

silver plated

[1] **cable diameter up to 7,5 mm**
contact size up to 10 mm²

- characteristics according to EN 61984:
  40A 500V 6kV 3
- c UL us (UL for USA and Canada), CSA, cec, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,3 mΩ
- can be mated with CX 02 A/B modules
- **it is recommended to crimp the contacts** (1,5 - 10 mm²), **with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts, CXF and CXM series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 03 4B, 3 poles connector inserts
Maximum current load derating diagram

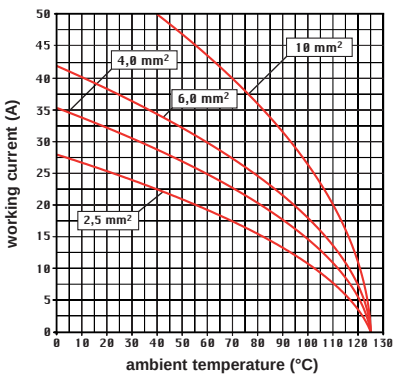

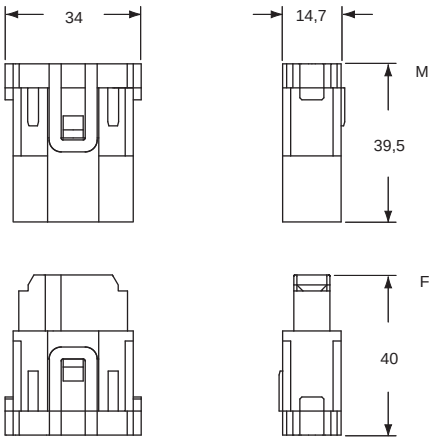

contacts side (front view)

side with reference arrow ▲



- 1 frame slot



CXF and CXM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductor stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6
10	4,3	15

dimensions shown in mm are not binding and may be changed without notice

CX 3/4 XDF/XDM 3 poles (40A - 830V) + 4 poles (10A - 830V)

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures or in COB panel support. Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:

frames for modular units **316 - 317**
MIXO ONE enclosures **369**

- male and female contacts finger proof
- their key characteristic **lies in the fact that they guarantee maximum safety even in case of accidental contact with fingers (IP2X or IPXXB)**. Safety is guaranteed as standard on female contacts, but also on male contacts. This feature is important as it ensures full compliance with the recent safety standard **EN 60204-1**, concerning electric equipment fitted on machines and in particular with the requirements of Article 6.2.4 concerning protection against residual voltage. ***In the case of plugs or similar devices, the withdrawal of which results in the exposure of conductors (for example pins), the discharge time shall not exceed 1 s, otherwise such conductors shall be protected against direct contact to at least an IP2X or IPXXB.***

modular units, crimp connections

40A and 10A crimp contacts silver and gold plated

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts	**CX 3/4 XDF**	
male inserts for male contacts	**CX 3/4 XDM**	
40A female crimp contacts		
1,5 mm² AWG 16		**CXFA 1.5**
2,5 mm² AWG 14		**CXFA 2.5**
4 mm² AWG 12		**CXFA 4.0**
6 mm² AWG 10		**CXFA 6.0**
40A male crimp contacts		
1,5 mm² AWG 16		**CXMA 1.5**
2,5 mm₂ AWG 14		**CXMA 2.5**
4 mm² AWG 12		**CXMA 4.0**
6 mm² AWG 10		**CXMA 6.0**
10A female crimp contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3** / **CDFD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5** / **CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7** / **CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0** / **CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5** / **CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5** / **CDFD 2.5**
10A male crimp contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3** / **CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5** / **CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7** / **CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0** / **CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5** / **CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5** / **CDMD 2.5**

silver plated | **gold plated+**

+ for basic or high thickness gold plating, please refer to page 674

- characteristics according to EN 61984:
  3 poles 40A 830V 8kV 3
  4 poles 10A 830V 8kV 3
- c UL us (UL for USA and Canada), CSA, cec, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,3 mΩ (3 poles), ≤ 3 mΩ (4 poles)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 3/4 XD, 3/4 poles connector inserts
Maximum current load derating diagram

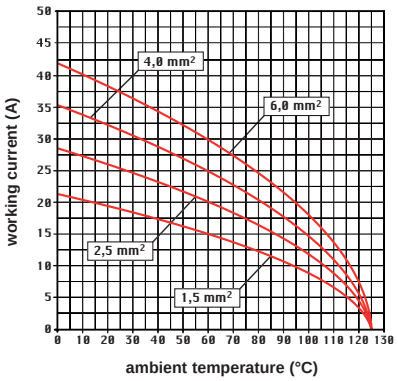

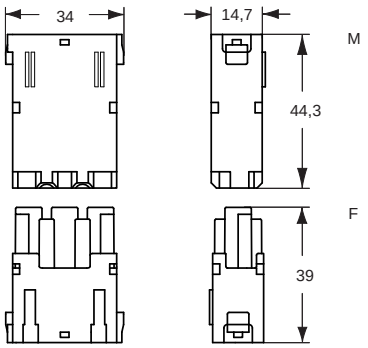

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts, CXF, CXM series and 10A contacts CDF, CDM series) on pages 708 - 741

CXF and CXM

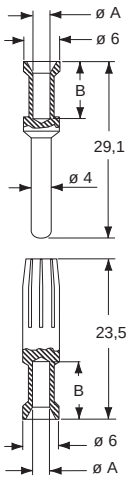

CDF and CDM



CXF and CXM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6

CDF and CDM contacts

0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CX 04 XF/XM 4 poles 40A - 830V

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures* or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:
frames for modular units* **316 - 317**

MIXO ONE enclosures **369**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

modular units, crimp connections with red lock-in tab (included)

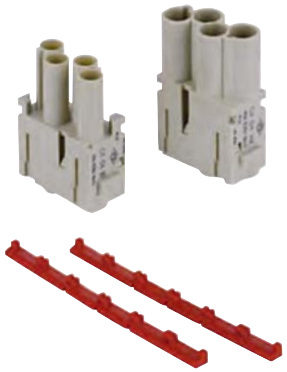

40A silver plated crimp contacts

description	part No.	part No
without contacts (to be ordered separately) (module red lock-in tab included)		
female inserts for female contacts	**CX 04 XF**	
male inserts for male contacts	**CX 04 XM**	
40A female crimp contacts		
1,5 mm² AWG 16		**CXFA 1.5**
2,5 mm² AWG 14		**CXFA 2.5**
4 mm² AWG 12		**CXFA 4.0**
6 mm² AWG 10		**CXFA 6.0**
40A male crimp contacts		
1,5 mm² AWG 16		**CXMA 1.5**
2,5 mm² AWG 14		**CXMA 2.5**
4 mm² AWG 12		**CXMA 4.0**
6 mm² AWG 10		**CXMA 6.0**

silver plated

- characteristics according to EN 61984:
  40A 830V 8kV 3
  40A 1000V 8kV 2
- c UL us (UL for USA and Canada), SP, CQC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 0,3 mΩ
- for spare lock-in tab **CX CFMX** see SPARE SPARTS catalogue
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts, CXF and CXM series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

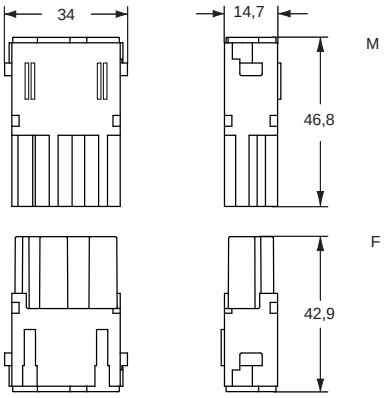

contacts side (front view)c
side with reference arrow ▲



- 1 frame slot

Female inserts are supplied with two red lock tab that must be used instead of those supplied with the frames.



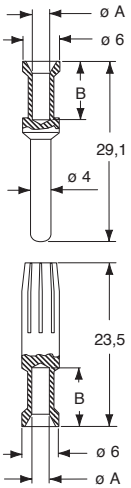

CXF and CXM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductor stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6

- male and female contacts finger proof
- their key characteristic **lies in the fact that they guarantee maximum safety even in case of accidental contact with fingers (IP2X or IPXXB)**. Safety is guaranteed as standard on female contacts, but also on male contacts. This feature is important as it ensures full compliance with the recent safety standard **EN 60204-1**, concerning electric equipment fitted on machines and in particular with the requirements of Article 6.2.4 concerning protection against residual voltage. ***In the case of plugs or similar devices, the with drawal of which results in the exposure of conductors (for example pins), the discharge time shall not exceed 1 s, otherwise such conductors shall be protected against direct contact to at least an IP2X or IPXXB.***

CX 04 X. 4 poles connector inserts
Maximum current load derating diagram

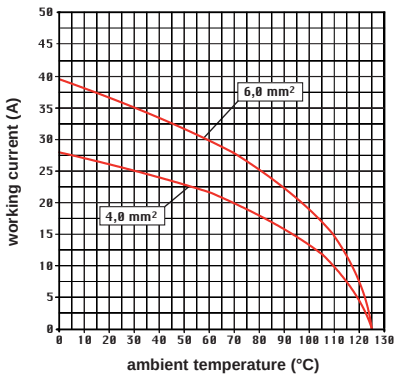

dimensions shown in mm are not binding and may be changed without notice

CX 05 SHF/SHM

MIXO - SQUICH®

SQUICH® technology has now been applied to the ILME MIXO series of modular connectors. Main aim is to make wiring an installation easier and safer on every possible connector.

On this purpose, the new MIXO SQUICH® 5 poles is the improved version of the CX 05 SF/SM spring clamp module:

- **consistently reduced wiring time,** as the actuator buttons are supplied lifted, in “open terminal” position, so that the stripped wires can be directly inserted;
- **operator skill independence:** thanks to the SQUICH® proprietary technology a simple pressure on the top of the actuator button triggers the locking of the conductor in the terminal, avoiding the need of a specific screwdriver and the relevant skill in its correct choice and application;
- **great resistance to strong vibrations** inherent to self-compensating spring-clamp technology;
- **no special wire preparation** (only stripping at the correct length);
- it allows the **use of both rigid and flexible** copper conductors, with a range of cross-sectional area between 0,14 mm^2 and 2,5 mm^2 (26 AWG to 14 AWG);
- for conductors prepared with **crimped ferrules,** the maximum cross-sectional area is 1,5 mm^2;
- possibility to insert the **test probe** of a measurement instrument in the dedicated cavity on the actuator button (proprietary design);
- **silver plated** contacts;
- simple re-opening of a terminal (if needed) using a 0,5 x 3 mm flat blade screwdriver on the actuator button dedicated side window (on terminal #3 use the same screwdriver under any of the two lateral projections of the actuator button head; after removing the wire from the relevant terminal #1 or #4).

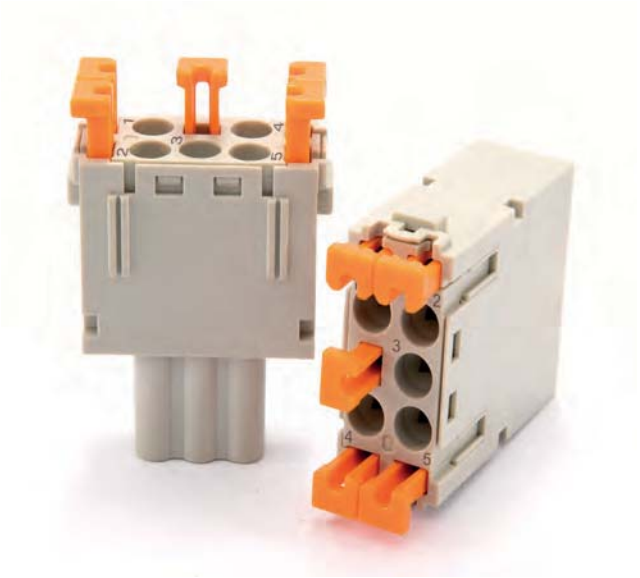

Watch our SQUICH® video

CX 05 SHF/SHM 5 poles + ⏚ 16A - 400V SQUICH®

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:

frames for modular units **316**

MIXO ONE enclosures **369**

Suitable for every conductor type (prepared with ferrule, unprepared and solid) up to cross-sectional area 2,5 mm²

modular units,
SQUICH®-spring terminal connection

description	part No.
spring terminals with actuator button female inserts with female contacts male inserts with male contacts	**CX 05 SHF** **CX 05 SHM**

- characteristics according to EN 61984:
  16A 400V 6kV 3
  16A 500V 6kV 2
- cURus, CSA, CQC, DNV-GL, BV, EAC pending
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

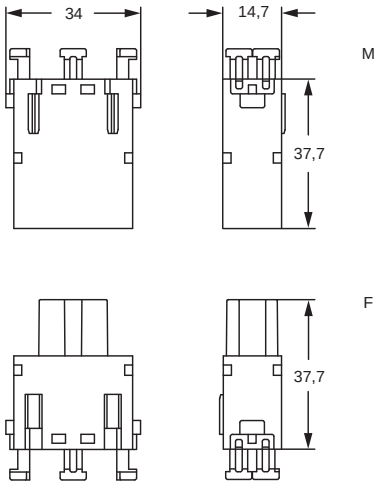

contacts side (front view)

rear view, side with reference arrow ▲



- 1 frame slot

- inserts for cables with the following cross-sectional area: 0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

CX 05 SH, 5 power poles connector inserts
Maximum current load derating diagram

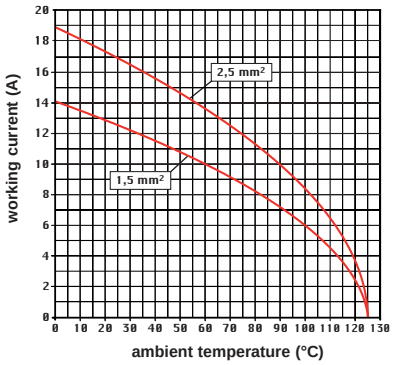

MIXO CX 05 SHF/M
SQUICH®-spring connection technology

WIRING

1

Deeply insert a stripped conductor into a round seat.

2

Push the actuator button to close the terminal.

RE-OPENING

3 

SIDE (#1 – #2 – #4 – #5)

Insert a **0,5 x 3 mm** flat blade screwdriver in the actuator button side window and pull it up by levering down.

4 Ⓐ

CENTRE (#3)

Free and re-close (per 3 above) terminal #1 or #4.

4 Ⓑ

Insert the screwdriver under the projection of actuator button head #3 and pull it up by levering down.

dimensions shown in mm are not binding and may be changed without notice

CX 06 CF/CM 6 poles 16A - 500V

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:

frames for modular units **316 - 317**

MIXO ONE enclosures **369**

- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series) on pages 708 - 741

modular units, crimp connections

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No	
without contacts (to be ordered separately)			
female inserts for female contacts	**CX 06 CF**		
male inserts for male contacts	**CX 06 CM**		
16A female crimp contacts			
0,14-0,37 mm² AWG 26-22 one groove		**CCFA 0.3**	**CCFD 0.3**
0,5 mm² AWG 20 with no grooves		**CCFA 0.5**	**CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCFA 0.7**	**CCFD 0.7**
1 mm² AWG 18 one groove		**CCFA 1.0**	**CCFD 1.0**
1,5 mm² AWG 16 two grooves		**CCFA 1.5**	**CCFD 1.5**
2,5 mm² AWG 14 three grooves		**CCFA 2.5**	**CCFD 2.5**
3 mm² AWG 12 one wide groove		**CCFA 3.0**	**CCFD 3.0**
4 mm² AWG 12 with no grooves		**CCFA 4.0**	**CCFD 4.0**
16A male crimp contacts			
0,14-0,37 mm² AWG 26-22 one groove		**CCMA 0.3**	**CCMD 0.3**
0,5 mm² AWG 20 with no grooves		**CCMA 0.5**	**CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCMA 0.7**	**CCMD 0.7**
1 mm² AWG 18 one groove		**CCMA 1.0**	**CCMD 1.0**
1,5 mm² AWG 16 two grooves		**CCMA 1.5**	**CCMD 1.5**
2,5 mm² AWG 14 three grooves		**CCMA 2.5**	**CCMD 2.5**
3 mm² AWG 12 one wide groove		**CCMA 3.0**	**CCMD 3.0**
4 mm² AWG 12 with no grooves		**CCMA 4.0**	**CCMD 4.0**
16A male crimp contacts for advanced opening			
0,5 mm² AWG 20 with no grooves		**CC 0.5 AN**	
0,75 mm² AWG 18 one groove (back side)		**CC 0.7 AN**	
1 mm² AWG 18 one groove		**CC 1.0 AN**	
1,5 mm² AWG 16 two grooves		**CC 1.5 AN**	
2,5 mm² AWG 14 three grooves		**CC 2.5 AN**	

silver plated

gold plated✣

✣ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 06 C, 6 poles connector inserts
Maximum current load derating diagram

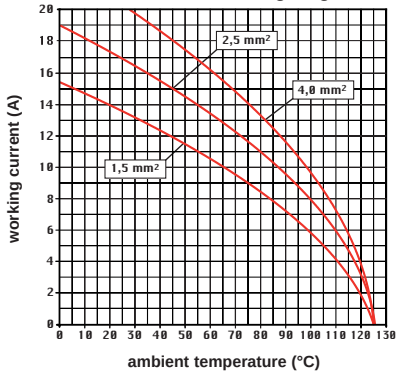

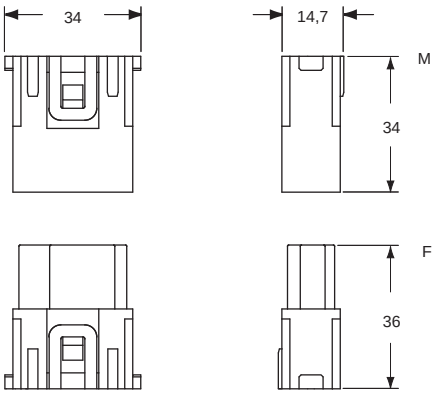

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

CCF and CCM

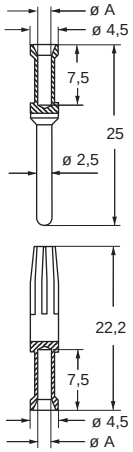

CC...AN



CCF, CCM and CC..AN contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CX 06P CF/CM 6 poles protected 16A - 830V

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:

frames for modular units **316 - 317**

MIXO ONE enclosures **369**

- we recommend the use of CRF / CRM code pins together with relevant MIXO frame
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series) on pages 708 - 741

modular units, crimp connections

RATING 830V

16A crimp contacts standard or for advanced opening silver and gold plated

STANDARD

ADVANCED OPENING

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CX 06P CF**	
male inserts for male contacts	**CX 06P CM**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCFA 0.3** (silver plated) / **CCFD 0.3** (gold plated✣)
0,5 mm² AWG 20 with no grooves		**CCFA 0.5** / **CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCFA 0.7** / **CCFD 0.7**
1 mm² AWG 18 one groove		**CCFA 1.0** / **CCFD 1.0**
1,5 mm² AWG 16 two grooves		**CCFA 1.5** / **CCFD 1.5**
2,5 mm² AWG 14 three grooves		**CCFA 2.5** / **CCFD 2.5**
3 mm² AWG 12 one wide groove		**CCFA 3.0** / **CCFD 3.0**
4 mm² AWG 12 with no grooves		**CCFA 4.0** / **CCFD 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCMA 0.3** / **CCMD 0.3**
0,5 mm² AWG 20 with no grooves		**CCMA 0.5** / **CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCMA 0.7** / **CCMD 0.7**
1 mm² AWG 18 one groove		**CCMA 1.0** / **CCMD 1.0**
1,5 mm² AWG 16 two grooves		**CCMA 1.5** / **CCMD 1.5**
2,5 mm² AWG 14 three grooves		**CCMA 2.5** / **CCMD 2.5**
3 mm² AWG 12 one wide groove		**CCMA 3.0** / **CCMD 3.0**
4 mm² AWG 12 with no grooves		**CCMA 4.0** / **CCMD 4.0**
16A male crimp contacts for advanced opening		
0,5 mm² AWG 20 with no grooves		**CC 0.5 AN**
0,75 mm² AWG 18 one groove (back side)		**CC 0.7 AN**
1 mm² AWG 18 one groove		**CC 1.0 AN**
1,5 mm² AWG 16 two grooves		**CC 1.5 AN**
2,5 mm² AWG 14 three grooves		**CC 2.5 AN**

✣ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:

16A 830V 8kV 3

- DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 06P C, 6 poles connector inserts
Maximum current load derating diagram

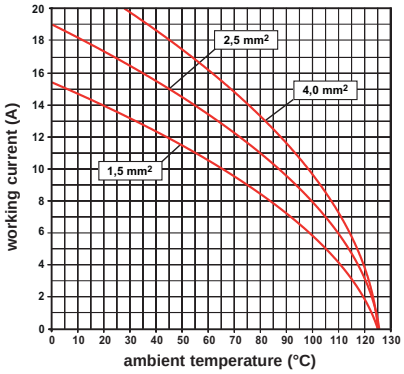

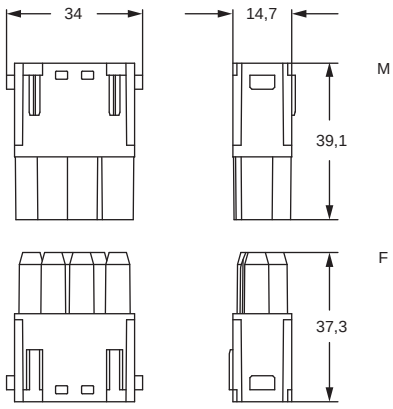

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

CCF and CCM

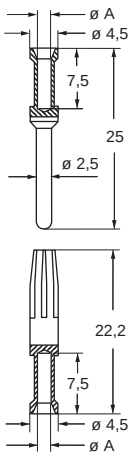

CC...AN



CCF, CCM and CC..AN contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

CX 08 CF/CM 8 poles 16A - 400V

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:
frames for modular units **316 - 317**

MIXO ONE enclosures **369**

- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series) on pages 708 - 741

modular units, crimp connections

16A crimp contacts
standard or for advanced opening
silver and gold plated

STANDARD

ADVANCED OPENING

description			part No.	part No		part No	
without contacts (to be ordered separately)							
female inserts for female contacts			**CX 08 CF**				
male inserts for male contacts			**CX 08 CM**				
16A female crimp contacts							
0,14-0,37 mm²	AWG 26-22	one groove		**CCFA 0.3**	silver plated	**CCFD 0.3**	gold plated+
0,5 mm²	AWG 20	with no grooves		**CCFA 0.5**		**CCFD 0.5**	
0,75 mm²	AWG 18	one groove (back side)		**CCFA 0.7**		**CCFD 0.7**	
1 mm²	AWG 18	one groove		**CCFA 1.0**		**CCFD 1.0**	
1,5 mm²	AWG 16	two grooves		**CCFA 1.5**		**CCFD 1.5**	
2,5 mm²	AWG 14	three grooves		**CCFA 2.5**		**CCFD 2.5**	
3 mm²	AWG 12	one wide groove		**CCFA 3.0**		**CCFD 3.0**	
4 mm²	AWG 12	with no grooves		**CCFA 4.0**		**CCFD 4.0**	
16A male crimp contacts							
0,14-0,37 mm²	AWG 26-22	one groove		**CCMA 0.3**		**CCMD 0.3**	
0,5 mm²	AWG 20	with no grooves		**CCMA 0.5**		**CCMD 0.5**	
0,75 mm²	AWG 18	one groove (back side)		**CCMA 0.7**		**CCMD 0.7**	
1 mm²	AWG 18	one groove		**CCMA 1.0**		**CCMD 1.0**	
1,5 mm²	AWG 16	two grooves		**CCMA 1.5**		**CCMD 1.5**	
2,5 mm²	AWG 14	three grooves		**CCMA 2.5**		**CCMD 2.5**	
3 mm²	AWG 12	one wide groove		**CCMA 3.0**		**CCMD 3.0**	
4 mm²	AWG 12	with no grooves		**CCMA 4.0**		**CCMD 4.0**	
16A male crimp contacts for advanced opening							
0,5 mm²	AWG 20	with no grooves		**CC 0.5 AN**			
0,75 mm²	AWG 18	one groove (back side)		**CC 0.7 AN**			
1 mm²	AWG 18	one groove		**CC 1.0 AN**			
1,5 mm²	AWG 16	two grooves		**CC 1.5 AN**			
2,5 mm²	AWG 14	three grooves		**CC 2.5 AN**			

✢ for basic or high thickness gold plating, please refer to page 675

- characteristics according to EN 61984:
  16A 400V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 08 C, 8 poles connector inserts
Maximum current load derating diagram

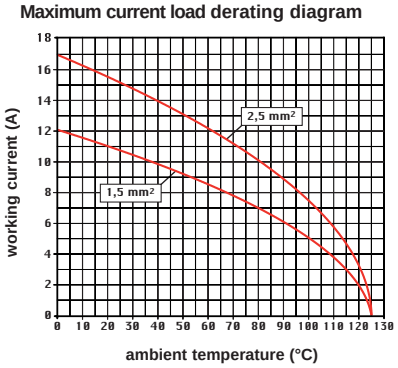

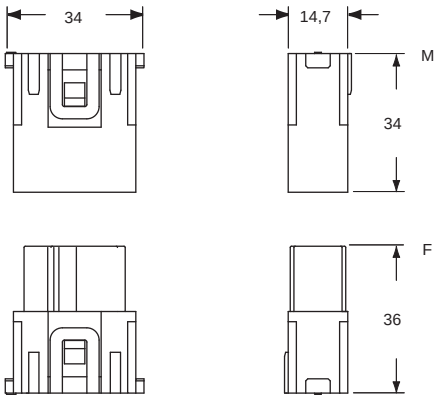

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

CCF and CCM



CC...AN



CCF, CCM and CC..AN contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CX 20 CF/CM 20 poles 16A - 500V

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures or in COB panel supports.

page:
frames for modular units **316 - 317**

- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF, CCM and CC...AN series) on pages 708 - 741

modular units, crimp connections

16A crimp contacts standard or for advanced opening silver and gold plated

STANDARD

ADVANCED OPENING

description			part No.	part No. silver plated	part No. gold plated ✣
without contacts (to be ordered separately)					
female inserts for female contacts [1]			**CX 20 CF**		
male inserts for male contacts [1]			**CX 20 CM**		
16A female crimp contacts					
0,14-0,37 mm²	AWG 26-22	one groove		**CCFA 0.3**	**CCFD 0.3**
0,5 mm²	AWG 20	with no grooves		**CCFA 0.5**	**CCFD 0.5**
0,75 mm²	AWG 18	one groove (back side)		**CCFA 0.7**	**CCFD 0.7**
1 mm²	AWG 18	one groove		**CCFA 1.0**	**CCFD 1.0**
1,5 mm²	AWG 16	two grooves		**CCFA 1.5**	**CCFD 1.5**
2,5 mm²	AWG 14	three grooves		**CCFA 2.5**	**CCFD 2.5**
3 mm²	AWG 12	one wide groove		**CCFA 3.0**	**CCFD 3.0**
4 mm²	AWG 12	with no grooves		**CCFA 4.0**	**CCFD 4.0**
16A male crimp contacts					
0,14-0,37 mm²	AWG 26-22	one groove		**CCMA 0.3**	**CCMD 0.3**
0,5 mm²	AWG 20	with no grooves		**CCMA 0.5**	**CCMD 0.5**
0,75 mm²	AWG 18	one groove (back side)		**CCMA 0.7**	**CCMD 0.7**
1 mm²	AWG 18	one groove		**CCMA 1.0**	**CCMD 1.0**
1,5 mm²	AWG 16	two grooves		**CCMA 1.5**	**CCMD 1.5**
2,5 mm²	AWG 14	three grooves		**CCMA 2.5**	**CCMD 2.5**
3 mm²	AWG 12	one wide groove		**CCMA 3.0**	**CCMD 3.0**
4 mm²	AWG 12	with no grooves		**CCMA 4.0**	**CCMD 4.0**
16A male crimp contacts for advanced opening					
0,5 mm²	AWG 20	with no grooves		**CC 0.5 AN**	
0,75 mm²	AWG 18	one groove (back side)		**CC 0.7 AN**	
1 mm²	AWG 18	one groove		**CC 1.0 AN**	
1,5 mm²	AWG 16	two grooves		**CC 1.5 AN**	
2,5 mm²	AWG 14	three grooves		**CC 2.5 AN**	

✣ for basic or high thickness gold plating, please refer to page 675

[1] on request, version with 3 fastened CX 20 CF/CM inserts with poles numbered from 1 – 60 references: **CX 60 CF**, **CX 60 CM**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 830V 8kV 2
- cULus (UL for USA and Canada), CSA, CQC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 20 C, 20 poles connector inserts
Maximum current load derating diagram

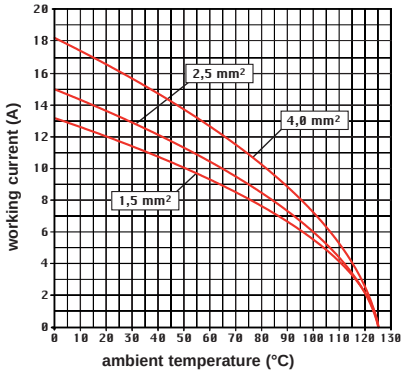

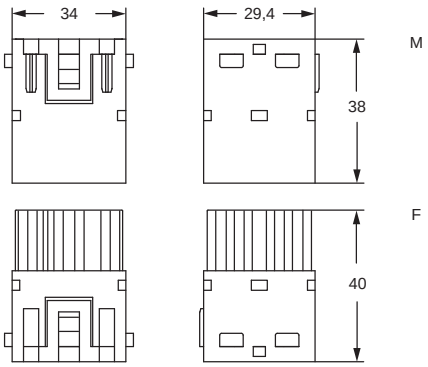

contacts side (front view)

side with reference arrow ▲



- 2 frame slots

CCF and CCM



CC...AN



CCF, CCM and CC..AN contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

HT 2 poles single module 16A - 2500V

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures* or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:
frames for modular units* **316 - 317**

MIXO ONE enclosures **369**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

high voltage modular units, crimp connections

16A crimp contacts silver and gold plated

description			part No.	part No		part No	
without contacts (to be ordered separately)							
high voltage female inserts for female contacts			**CX 02 CHF**				
high voltage male inserts for male contacts			**CX 02 CHM**				
contact holder removal tool			**CH1ES**				
16A female crimp contacts							
0,5 mm²	AWG 20	with no grooves		**CCFA 0.5**	silver plated	**CCFD 0.5**	gold plated✣
0,75 mm²	AWG 18	one groove (back side)		**CCFA 0.7**		**CCFD 0.7**	
1 mm²	AWG 18	one groove		**CCFA 1.0**		**CCFD 1.0**	
1,5 mm²	AWG 16	two grooves		**CCFA 1.5**		**CCFD 1.5**	
2,5 mm²	AWG 14	three grooves		**CCFA 2.5**		**CCFD 2.5**	
3 mm²	AWG 12	one wide groove		**CCFA 3.0**		**CCFD 3.0**	
4 mm²	AWG 12	with no grooves		**CCFA 4.0**		**CCFD 4.0**	
16A male crimp contacts							
0,5 mm²	AWG 20	with no grooves		**CCMA 0.5**		**CCMD 0.5**	
0,75 mm²	AWG 18	one groove (back side)		**CCMA 0.7**		**CCMD 0.7**	
1 mm²	AWG 18	one groove		**CCMA 1.0**		**CCMD 1.0**	
1,5 mm²	AWG 16	two grooves		**CCMA 1.5**		**CCMD 1.5**	
2,5 mm²	AWG 14	three grooves		**CCMA 2.5**		**CCMD 2.5**	
3 mm²	AWG 12	one wide groove		**CCMA 3.0**		**CCMD 3.0**	
4 mm²	AWG 12	with no grooves		**CCMA 4.0**		**CCMD 4.0**	

- characteristics according to EN 61984 [1]:
  16A 2500V 15kV 3
  [1] used for guidance as applicable
- cURus, CSA, CQC, DNV-GL, BV, EAC pending
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section16A contacts, CCF and CCM series) on pages 708 - 741
- contact holder removal tool: **CH1ES**

CH1ES

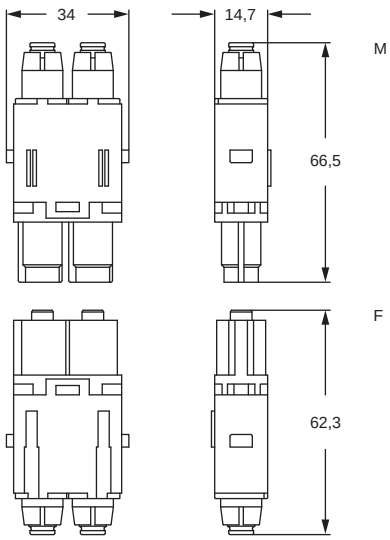

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

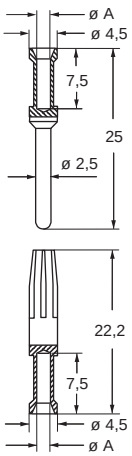

CCF and CCM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length (mm)
0,5	1,1	9,5
0,75	1,3	9,5
1,0	1,45	9,5
1,5	1,8	9,5
2,5	2,2	9,5
3	2,55	9,5
4	2,85	9,5

✣ for basic or high thickness gold plating, please refer to page 675

Watch our online tutorial

HT 2 poles 16A - 2900/5000V

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures* or in COB panel supports.

page:
frames for modular units* **316**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

high voltage modular units, crimp connections contact holder removal tool

16A crimp contacts silver and gold plated

description	part No.	part No.
without contacts (to be ordered separately)		
high voltage female inserts for female contacts	**CX 02 HF**	
high voltage male inserts for male contacts	**CX 02 HM**	
contact holder removal tool	**CHES**	
16A female crimp contacts		
0,5 mm² AWG 20 with no grooves		**CCFA 0.5** (silver plated) / **CCFD 0.5** (gold plated✢)
0,75 mm² AWG 18 one groove (back side)		**CCFA 0.7** / **CCFD 0.7**
1 mm² AWG 18 one groove		**CCFA 1.0** / **CCFD 1.0**
1,5 mm² AWG 16 two grooves		**CCFA 1.5** / **CCFD 1.5**
2,5 mm² AWG 14 three grooves		**CCFA 2.5** / **CCFD 2.5**
3 mm² AWG 12 one wide groove		**CCFA 3.0** / **CCFD 3.0**
4 mm² AWG 12 with no grooves		**CCFA 4.0** / **CCFD 4.0**
16A male crimp contacts		
0,5 mm² AWG 20 with no grooves		**CCMA 0.5** / **CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCMA 0.7** / **CCMD 0.7**
1 mm² AWG 18 one groove		**CCMA 1.0** / **CCMD 1.0**
1,5 mm² AWG 16 two grooves		**CCMA 1.5** / **CCMD 1.5**
2,5 mm² AWG 14 three grooves		**CCMA 2.5** / **CCMD 2.5**
3 mm² AWG 12 one wide groove		**CCMA 3.0** / **CCMD 3.0**
4 mm² AWG 12 with no grooves		**CCMA 4.0** / **CCMD 4.0**

- characteristics according to EN 61984 [1]:
  16A 2900/5000V 15kV 3
  [1] used for guidance as applicable
- cURus, CSA, CQC, DNV-GL, BV, EAC pending
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 1 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section16A contacts, CCF and CCM series) on pages 708 - 741
- contact holder removal tool: **CHES**

CHES

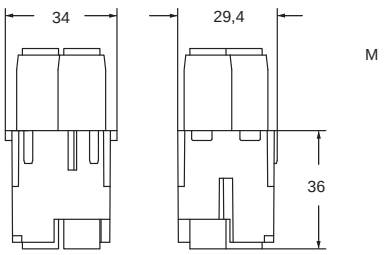

contacts side (front view)

side with reference arrow ▲



- 2 frame slots

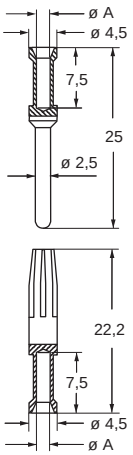

CCF and CCM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	9,5
0,5	1,1	9,5
0,75	1,3	9,5
1,0	1,45	9,5
1,5	1,8	9,5
2,5	2,2	9,5
3	2,55	9,5
4	2,85	9,5

✢ for basic or high thickness gold plating, please refer to page 675

dimensions shown in mm are not binding and may be changed without notice

CX 12 DF/DM 12 poles 10A - 250V

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures* or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:
frames for modular units* **316 - 317**

MIXO ONE enclosures **369**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

modular units, crimp connections



RATING 250V

10A crimp contacts, silver and gold plated

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts	**CX 12 DF**	
male inserts for male contacts	**CX 12 DM**	
10A female crimp contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3** / **CDFD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5** / **CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7** / **CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0** / **CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5** / **CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5** / **CDFD 2.5**
10A male crimp contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3** / **CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5** / **CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7** / **CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0** / **CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5** / **CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5** / **CDMD 2.5**

silver plated | **gold plated+**

- characteristics according to EN 61984:
  10A 250V 4kV 3
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- PCBs interface, refer to article CIF 2.4 on page 670
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

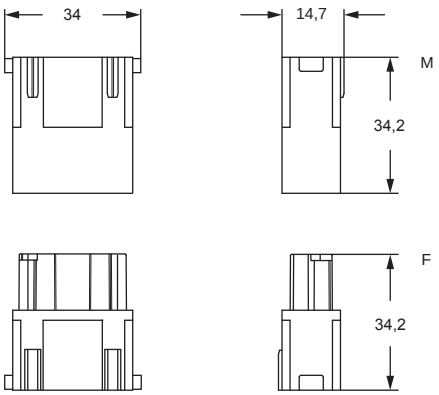

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

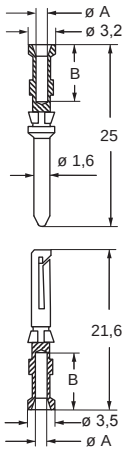

CDF and CDM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CX 12 D, 12 poles connector inserts
Maximum current load derating diagram

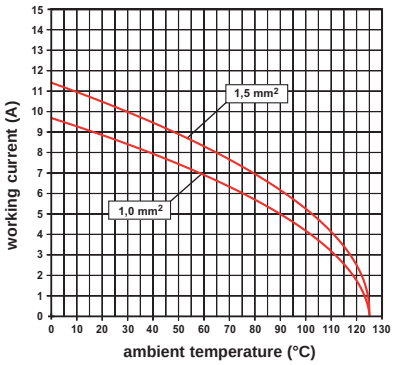

✢ for basic or high thickness gold plating, please refer to page 674

CX 17 DF/DM 17 poles 10A - 160V

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:
frames for modular units **316 - 317**

MIXO ONE enclosures **369**

modular units, crimp connections



10A crimp contacts, silver and gold plated

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts	**CX 17 DF**	
male inserts for male contacts	**CX 17 DM**	
10A female crimp contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3** / **CDFD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5** / **CDFD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7** / **CDFD 0.7**
1 mm² AWG 18 identification No. 3		**CDFA 1.0** / **CDFD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5** / **CDFD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5** / **CDFD 2.5**
10A male crimp contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3** / **CDMD 0.3**
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5** / **CDMD 0.5**
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7** / **CDMD 0.7**
1 mm² AWG 18 identification No. 3		**CDMA 1.0** / **CDMD 1.0**
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5** / **CDMD 1.5**
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5** / **CDMD 2.5**

silver plated | **gold plated÷**

- characteristics according to EN 61984:
  10A 160V 2,5kV 3
  10A 250V 4kV 2
- c UL us (UL for USA and Canada), SEV cec DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 250V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

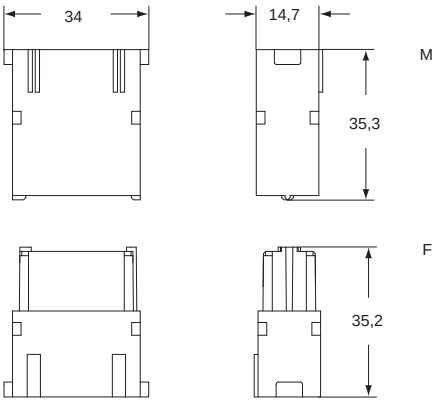

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

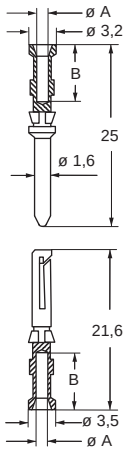

CDF and CDM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

÷ for basic or high thickness gold plating, please refer to page 674

CX 17 D, 17 poles connector inserts
Maximum current load derating diagram

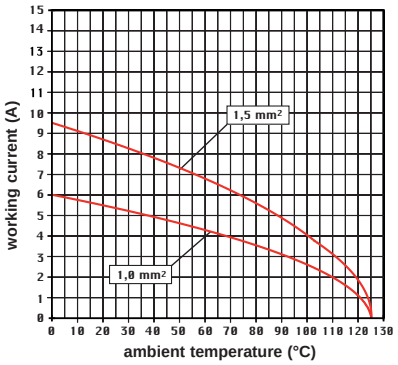

dimensions shown in mm are not binding and may be changed without notice

CX 42 DF/DM 42 poles 10A - 150V

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures* or in COB panel supports.

page:
frames for modular units* **316**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

modular units, crimp connections

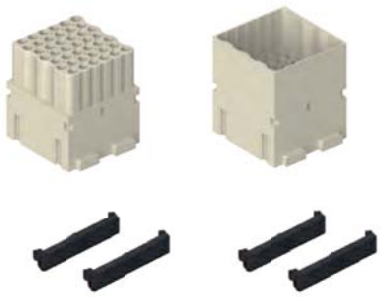

10A crimp contacts, silver and gold plated

description	part No.	part No		part No	
without contacts (to be ordered separately), supplied with 2 dedicated black coloured 2-slot sized lock-in tab female inserts for female contacts	**CX 42 DF**				
male inserts for male contacts	**CX 42 DM**				
10A female crimp contacts					
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDFA 0.3**	silver plated	**CDFD 0.3**	gold plated✢
0,5 mm² AWG 20 identification No. 2		**CDFA 0.5**		**CDFD 0.5**	
0,75 mm² AWG 18 identification No. ②		**CDFA 0.7**		**CDFD 0.7**	
1 mm² AWG 18 identification No. 3		**CDFA 1.0**		**CDFD 1.0**	
1,5 mm² AWG 16 identification No. 4		**CDFA 1.5**		**CDFD 1.5**	
2,5 mm² AWG 14 identification No. 5		**CDFA 2.5**		**CDFD 2.5**	
10A male crimp contacts					
0,14-0,37 mm² AWG 26-22 identification No. 1		**CDMA 0.3**		**CDMD 0.3**	
0,5 mm² AWG 20 identification No. 2		**CDMA 0.5**		**CDMD 0.5**	
0,75 mm² AWG 18 identification No. ②		**CDMA 0.7**		**CDMD 0.7**	
1 mm² AWG 18 identification No. 3		**CDMA 1.0**		**CDMD 1.0**	
1,5 mm² AWG 16 identification No. 4		**CDMA 1.5**		**CDMD 1.5**	
2,5 mm² AWG 14 identification No. 5		**CDMA 2.5**		**CDMD 2.5**	

- characteristics according to EN 61984:
  10A 150V 2,5kV 3
- cURus, CSA, CQC, DNV-GL, BV, EAC pending
- rated voltage according to UL/CSA: 250V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series) on pages 708 - 741

- supplied with dedicated black coloured 2-slot sized lock-in tab (2, one per each side).
- for spare lock-in tab **CX CFMD** see SPARE SPARTS catalogue

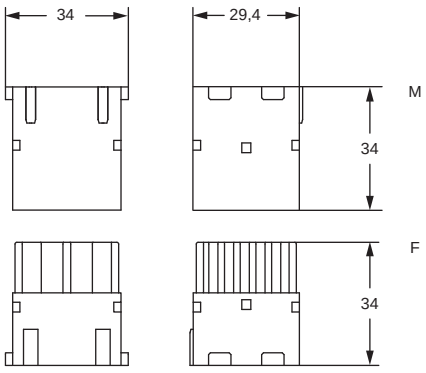

contacts side (front view)

rear view, side with reference arrow ▲

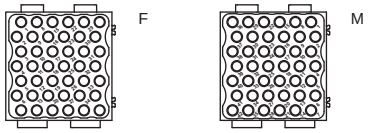

- 2 frame slots

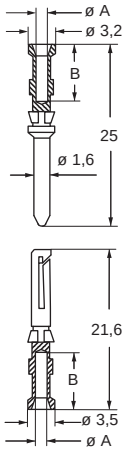

CDF and CDM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

✢ for basic or high thickness gold plating, please refer to page 674

MIXO INSERTS

CX 25 IBF/IBM 25 poles 4A - 50V

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:
frames for modular units **316 - 317**

MIXO ONE enclosures **369**

- max insulating diameter 2,1 mm
- we recommend the use of CRF / CRM code pins

modular units, crimp connections

CI (4A) crimp contacts, silver and gold plated

description	part No.	part No
without contacts (to be ordered separately) female inserts for female contacts male inserts for male contacts	**CX 25 IBF** **CX 25 IBM**	
CI (4A) female crimp contacts 0,08-0,21 mm² AWG 28-24 0,13-0,33 mm² AWG 26-22 0,33-0,52 mm² AWG 22-20 0,52-0,75 mm² AWG 20-18		**CIFA 0.2** **CIFA 0.3** **CIFA 0.5** **CIFA 0.7** **silver plated** **CIFD 0.2** **CIFD 0.3** **CIFD 0.5** **CIFD 0.7** **gold plated**
CI (4A) male crimp contacts 0,08-0,21 mm² AWG 28-24 0,13-0,33 mm² AWG 26-22 0,33-0,52 mm² AWG 22-20 0,52-0,75 mm² AWG 20-18		**CIMA 0.2** **CIMA 0.3** **CIMA 0.5** **CIMA 0.7** **silver plated** **CIMD 0.2** **CIMD 0.3** **CIMD 0.5** **CIMD 0.7** **gold plated**

- characteristics according to EN 61984:
  4A 50V 0,8kV 3
  4A 160V 2,5kV 2
- BUREAU VERITAS certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 4 mΩ
- for crimp contacts CI series use, on page 716 - 719
  CIPZ D crimping tool
  CITP D turret head
  CIES insertion / removal tool for contacts 0,2 - 0,5 mm²
  CIES B insertion / removal tool for contacts 0,75 mm²
- for max. current load see the connector inserts derating diagram below; for more information see page 28

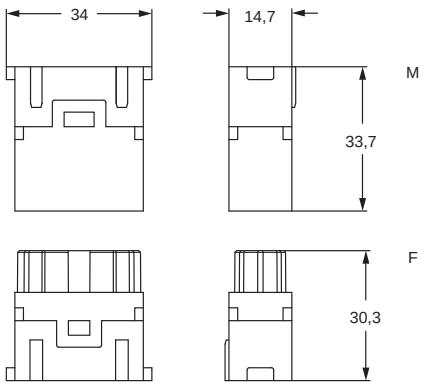

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

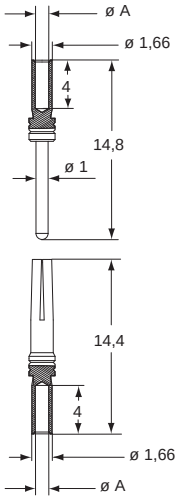

CIF and CIM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length (mm)
0,08-0,21	0,64	4
0,13-0,33	0,90	4
0,33-0,52	1,12	4
0,52-0,75	1,12	4

CX 25 IB, 25 poles connector inserts
Maximum current load derating diagram

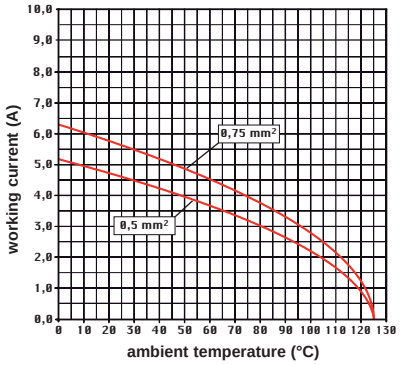

dimensions shown in mm are not binding and may be changed without notice

Gigabit 8 poles 5A - 50V

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:

frames for modular units **316 - 317**

MIXO ONE enclosures **369**

- we recommend the use of CRF / CRM code pins together with relevant MIXO frame

modular units, crimp connections

cable clamp

description	part No.	part No.
without contacts (to be ordered separately)		
female insert for female contacts	**CX 08 I6F**	
male insert for male contacts	**CX 08 I6M**	
cable clamp for 5-7 mm cable diameter		**CX 5/7 CA**
cable clamp for 7-10 mm cable diameter		**CX 7/10 CA**
cable clamp for 10-12 mm cable diameter		**CX 10/12 CA**

- characteristics according to EN 61984:
  5A 50V 0,8kV 3
- UL, CSA, CQC, DNV-GL, BV pending
- rated voltage according to UL/CSA: 50V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +85 °C
- suitable for bus signals, in particular for Ethernet Cat. 6A (Gigabit)
- shield electrically separated from the PE of the housings
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 4 mΩ
- for crimp contacts CI series use:
  CIPZ D crimping tool
  CITP D turret head

CX 08 I6F, CX 08 I6M

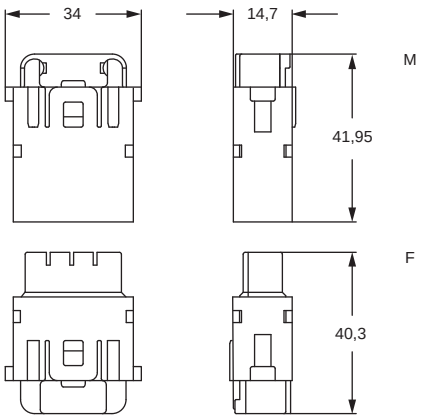

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

CX 5/7 CA, CX 7/10 CA, CX 10/12 CA



part No.	A	B	C
CX 5/7 CA	19,1	18	12,95
CX 7/10 CA	19,1	18	12,95
CX 10/12 CA	19,1	20,8	12,95

Watch our online tutorial

dimensions shown in mm are not binding and may be changed without notice

CI (5A) crimp contacts gold plated

description		part No.	
CI (5A) female crimp contacts			
0,08-0,21 mm²	AWG 28-24	**CIFD 0.2**	gold plated
0,13-0,33 mm²	AWG 26-22	**CIFD 0.3**	
0,33-0,52 mm²	AWG 22-20	**CIFD 0.5**	
CI (5A) male crimp contacts			
0,08-0,21 mm²	AWG 28-24	**CIMD 0.2**	
0,13-0,33 mm²	AWG 26-22	**CIMD 0.3**	
0,33-0,52 mm²	AWG 22-20	**CIMD 0.5**	

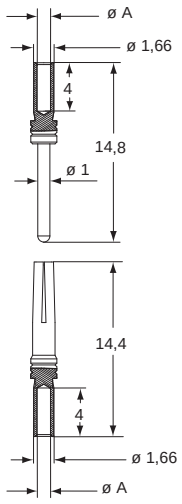

CIF and CIM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length (mm)
0,08-0,21	0,64	4
0,13-0,33	0,90	4
0,33-0,52	1,12	4

CX 02 BF/BM 2 seats for connector 1 pole + shield

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures* or in COB panel supports.

page:
frames for modular units* **316**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

modular units,
2-seat holder for shielded connectors

earthing adapter

description	part No.	part No
2-seat holder for shielded connectors female insert, two seats for BUS connectors male insert, two seats for BUS connectors	**CX 02 BF** **CX 02 BM**	
earthing adapter (optional)		**CR GND**

- characteristics according to EN 61984:
  50V 0,8kV 3
- certified
- rated voltage according to UL/CSA: 50V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- suitable to hold in place any combination of up to two shielded connectors **CX 01 BC** (page 289), **CX 01 B** (page 291), **CX 04 B** (page 291) or **CX 08 B** (page 293)
- both the female and the male inserts may accept a combination of up to two shielded connectors of any gender, as far as the correct specular assignment is set on the mating connector
- extraction tool for BUS shielded connectors from MIXO BUS insert part No. **CX BES** see page 703

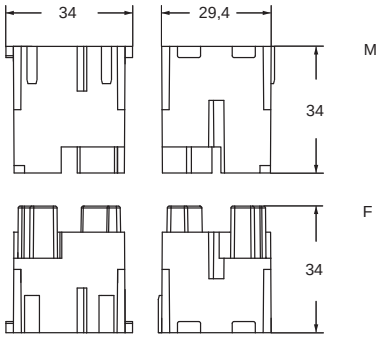

contacts side (front view)

side with reference arrow ▲



- 2 frame slots



USE OF THE CR GND EARTHING ADAPTER

Note:
The shielded connectors have their shield insulated from the enclosure's earthing point.
If you wish to earth-connect the shield, install on the panel an anchorage for shielded cables **CR..ST** (see page 678) or the **CR GND** earthing adapter.

Watch our online tutorial

MIXO DATA

dimensions shown in mm are not binding and may be changed without notice

CX 01 BCF/BCM 1 pole + shield (each connector) 16A - 50V

- characteristics according to EN 61984:
  CX 01 BC shielded connector
  16A 50V 0,8kV 3
- certified
- rated voltage according to UL/CSA: 50V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +70 °C
- contact resistance: ≤ 1 mΩ
- mechanical life: ≥ 500 cycles
- for information on the crimping of contacts series CC (CX 01 BC shielded connector) and on the insertion/ removal tools, see the section related to crimping tools (16A contacts, CCF and CCM series) on pages 708 - 741
- CX 01 BC shielded connector for **cable with a typical impedance of 50 Ω** (atténuation see below)
- suitable for **CX 02 B** (MIXO 2-seat holder) or **CX 1/2 BD** ("21.21" 1-seat adapter insert)
- female and male shielded connectors fit both in female and in male holder / adapter insert

shielded connectors

16A crimp contacts, silver and gold plated

description	part No.	part No.
shielded BUS coaxial connectors, 1 pole + shield		
female insert, one contact seat 16A (CCF) + shield	**CX 01 BCF**	
male insert, one contact seat 16A (CCM) + shield	**CX 01 BCM**	
16A female crimp contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCFA 0.3** (silver plated) / **CCFD 0.3** (gold plated✣)
0,5 mm² AWG 20 with no grooves		**CCFA 0.5** / **CCFD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCFA 0.7** / **CCFD 0.7**
1 mm² AWG 18 one groove		**CCFA 1.0** / **CCFD 1.0**
1,5 mm² AWG 16 two grooves		**CCFA 1.5** / **CCFD 1.5**
2,5 mm² AWG 14 three grooves		**CCFA 2.5** / **CCFD 2.5**
3 mm² AWG 12 one wide groove		**CCFA 3.0** / **CCFD 3.0**
4 mm² AWG 12 with no grooves		**CCFA 4.0** / **CCFD 4.0**
16A male crimp contacts		
0,14-0,37 mm² AWG 26-22 one groove		**CCMA 0.3** / **CCMD 0.3**
0,5 mm² AWG 20 with no grooves		**CCMA 0.5** / **CCMD 0.5**
0,75 mm² AWG 18 one groove (back side)		**CCMA 0.7** / **CCMD 0.7**
1 mm² AWG 18 one groove		**CCMA 1.0** / **CCMD 1.0**
1,5 mm² AWG 16 two grooves		**CCMA 1.5** / **CCMD 1.5**
2,5 mm² AWG 14 three grooves		**CCMA 2.5** / **CCMD 2.5**
3 mm² AWG 12 one wide groove		**CCMA 3.0** / **CCMD 3.0**
4 mm² AWG 12 with no grooves		**CCMA 4.0** / **CCMD 4.0**

CX 01 BCF, CX 01 BCM

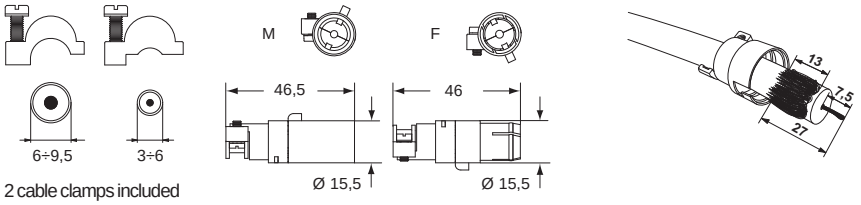

2 cable clamps included in the package



Test performed in accordance with IEC/EN 60512-25-2 (2002), 4.1.3.2 (coaxial cable only) and 4.2.2.2 (coaxial cable and connector).

Attenuation (insertion loss) 50 ohm coaxial connector (CX 01 BCF / BCM)

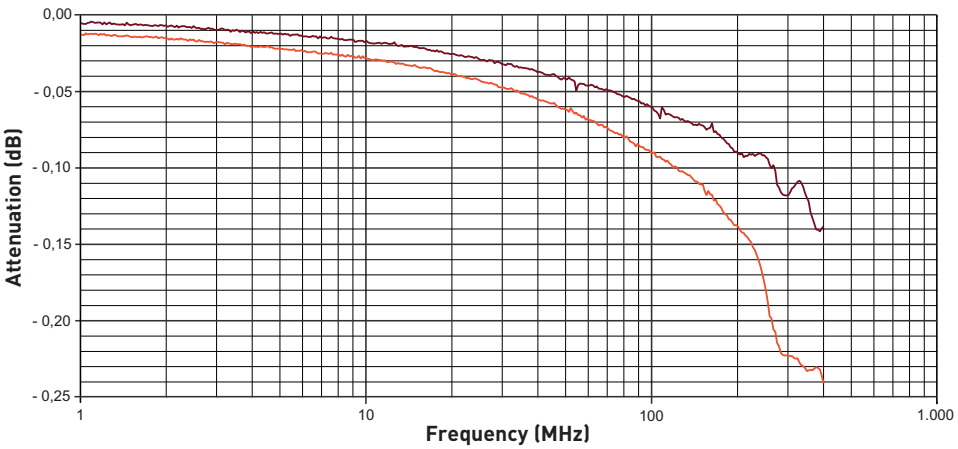

— **RG 213/U cable and CX 01 BC connector (50 ohm)**
— **RG 213/U cable (50 ohm)**

CCF and CCM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

✣ for basic or high thickness gold plating, please refer to page 675

CX 02 BF/BM 2 seats for connector 1 or 4 poles + shield

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures* or in COB panel supports.

page:
frames for modular units* **316**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

modular units,
2-seat holder for shielded connectors

earthing adapter

description	part No.	part No
2-seat holder for shielded connectors female insert, two seats for BUS connectors male insert, two seats for BUS connectors	 **CX 02 BF** **CX 02 BM**	
earthing adapter (optional)		**CR GND**

- characteristics according to EN 61984:
  50V 0,8kV 3
- certified
- rated voltage according to UL/CSA: 50V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- suitable to hold in place any combination of up to two shielded connectors **CX 01 BC** (page 289), **CX 01 B** (page 291), **CX 04 B** (page 291) or **CX 08 B** (page 293)
- both the female and the male inserts may accept a combination of up to two shielded connectors of any gender, as far as the correct specular assignment is set on the mating connector
- extraction tool for BUS shielded connectors from MIXO BUS insert part No. **CX BES** see page 703

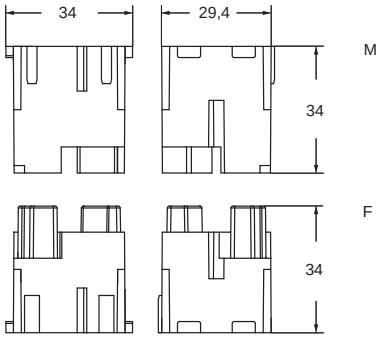

contacts side (front view)

side with reference arrow ▲



- 2 frame slots



USE OF THE CR GND EARTHING ADAPTER

Note:
The shielded connectors have their shield insulated from the enclosure's earthing point.
If you wish to earth-connect the shield, install on the panel an anchorage for shielded cables **CR..ST** (see page 678) or the **CR GND** earthing adapter.

dimensions shown in mm are not binding and may be changed without notice

CX 01 BF/BM - CX 04 BF/BM 1 or 4 poles + shield (each connector) 10A - 50V

- characteristics according to EN 61984:
  CX 04 B / CX 01 B shielded connector
  10A 50V 0,8kV 3
- certified
- rated voltage according to UL/CSA: 50V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +85 °C
- mechanical life: ≥ 500 cycles
- contact resistance:
  shielded connector CX 04 B: ≤ 3 mΩ
  coaxial connector CX 01 B: ≤ 3 mΩ
- for contact crimping instructions, refer to the crimping tool section (10A contacts, CDF and CDM series) on pages 708 - 741
- coaxial connector CX 01 B **cables with a typical impedance of 75 Ω** (atténuation see below)
- CX 04 B multiaxial connector for STP cables with 2 pairs and terminations compliant with EN 50173-1 Cat. 5 (100 MHz), compatible with 4-wire field bus protocols
- suitable for **CX 02 B** (MIXO 2-seat holder) or **CX 1/2 BD** ("21.21" 1-seat adapter insert)
- female and male shielded connectors fit both in female and in male holder / adapter insert

shielded connectors

10A crimp contacts, silver and gold plated

description	part No.	part No.
shielded BUS coaxial connectors, 1 pole + shield		
female insert, one contact seat 10A (CDF) + shield	**CX 01 BF**	
male insert, one contact seat 10A (CDM) + shield	**CX 01 BM**	
shielded BUS multi axial connectors, 4 poles + shield		
female insert, four contact seats 10A (CDF) + shield	**CX 04 BF**	
male insert, four contact seats 10A (CDM) + shield	**CX 04 BM**	

10A female crimp contacts			silver plated	gold plated÷
0,14-0,37 mm²	AWG 26-22	identification No. 1	CDFA 0.3	CDFD 0.3
0,5 mm²	AWG 20	identification No. 2	CDFA 0.5	CDFD 0.5
0,75 mm²	AWG 18	identification No. ②	CDFA 0.7	CDFD 0.7
1 mm²	AWG 18	identification No. 3	CDFA 1.0	CDFD 1.0
1,5 mm²	AWG 16	identification No. 4	CDFA 1.5	CDFD 1.5
2,5 mm²	AWG 14	identification No. 5	CDFA 2.5	CDFD 2.5
10A male crimp contacts				
0,14-0,37 mm²	AWG 26-22	identification No. 1	CDMA 0.3	CDMD 0.3
0,5 mm²	AWG 20	identification No. 2	CDMA 0.5	CDMD 0.5
0,75 mm²	AWG 18	identification No. ②	CDMA 0.7	CDMD 0.7
1 mm²	AWG 18	identification No. 3	CDMA 1.0	CDMD 1.0
1,5 mm²	AWG 16	identification No. 4	CDMA 1.5	CDMD 1.5
2,5 mm²	AWG 14	identification No. 5	CDMA 2.5	CDMD 2.5

CX 01 BF, CX 01 BM

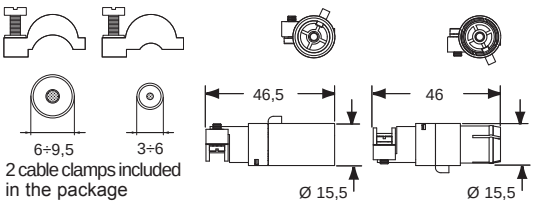

CX 04 BF, CX 04 BM

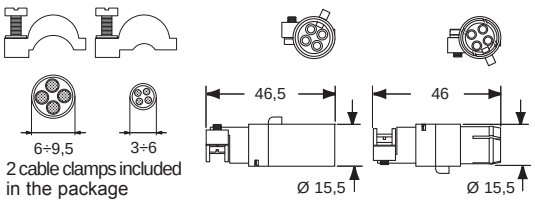





cable clamp	C (mm)
3-6	20
6-9,5	25

Test performed in accordance with IEC/EN 60512-25-2 (2002), 4.1.3.2 (coaxial cable only) and 4.2.2.2 (coaxial cable and connector).

Attenuation (insertion loss) 75 ohm coaxial connector (CX 01 BF / BM)

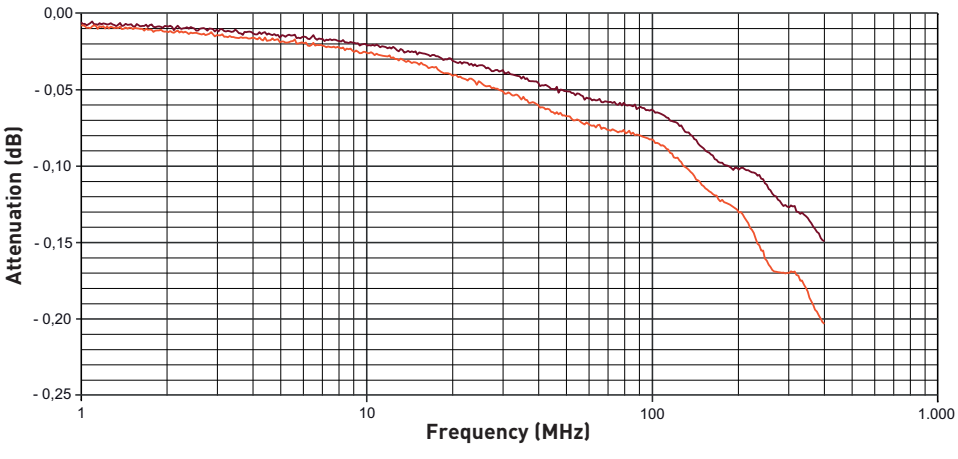

— **RG 11 A/U cable and CX 01 B connector (75 ohm)**
— **RG 11 A/U cable (75 ohm)**

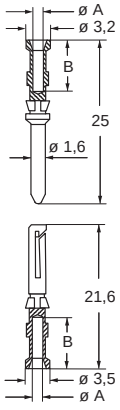

CDF and CDM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

÷ for basic or high thickness gold plating, please refer to page 674

CX 02 BF/BM 2 seats for connector 8 poles + shield

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures* or in COB panel supports.

page:
frames for modular units* **316**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

modlar units,
2-seat holder for shielded connectors

earthing adapter

description	part No.	part No
2-seat holder for shielded connectors female insert, two seats for BUS connectors male insert, two seats for BUS connectors	**CX 02 BF** **CX 02 BM**	
earthing adapter (optional)		**CR GND**

- characteristics according to EN 61984:
  50V 0,8kV 3
- certified
- rated voltage according to UL/CSA: 50V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- suitable to hold in place any combination of up to two shielded connectors **CX 01 BC** (page 289), **CX 01 B** (page 291), **CX 04 B** (page 291) or **CX 08 B** (page 293)
- both the female and the male inserts may accept a combination of up to two shielded connectors of any gender, as far as the correct specular assignment is set on the mating connector
- extraction tool for BUS shielded connectors from MIXO BUS insert part No. **CX BES** see page 703

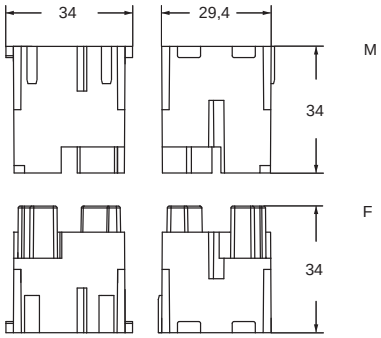

contacts side (front view)

side with reference arrow ▲



- 2 frame slots



USE OF THE CR GND EARTHING ADAPTER

Note:
The shielded connectors have their shield insulated from the enclosure's earthing point.
If you wish to earth-connect the shield, install on the panel an anchorage for shielded cables **CR..ST** (see page 678) or the **CR GND** earthing adapter.

dimensions shown in mm are not binding and may be changed without notice

CX 08 BF/BM 8 poles + shield (each connector) 5A - 50V

shielded connectors

CI (5A) crimp contacts, silver and gold plated

description	part No.	part No.
shielded BUS multi axial connectors, 8 poles + shield		
female insert, eight contact seats 5A (CIF) + shield	**CX 08 BF**	
male insert, eight contact seats 5A (CIM) + shield	**CX 08 BM**	
CI (5A) female crimp contacts		
0,08-0,21 mm² AWG 28-24		**CIFA 0.2** (silver plated) / **CIFD 0.2** (gold plated)
0,13-0,33 mm² AWG 26-22		**CIFA 0.3** / **CIFD 0.3**
0,33-0,52 mm² AWG 22-20		**CIFA 0.5** / **CIFD 0.5**
CI (5A) male crimp contacts		
0,08-0,21 mm² AWG 28-24		**CIMA 0.2** / **CIMD 0.2**
0,13-0,33 mm² AWG 26-22		**CIMA 0.3** / **CIMD 0.3**
0,33-0,52 mm² AWG 22-20		**CIMA 0.5** / **CIMD 0.5**

- characteristics according to EN 61984:
  CX 08 B shielded connector
  5A 50V 0,8kV 3
- certified
- rated voltage according to UL/CSA: 50V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +85 °C
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 4 mΩ
- max. Ø of insulation for contacts CI series: 2,4 mm
- maximum Ø of the insulator: 2,4 mm
- suitable for **CX 02 B** (MIXO 2-seat holder) or **CX 1/2 BD** (“21.21” 1-seat adapter insert)
- female and male shielded connectors fit both in female and in male holder / adapter insert
- for crimp 5A contacts CI series using:
  CIPZ D crimping tool
  CITP D turret head
  CIES insertion / removal tool



2 cable clamps included in the package





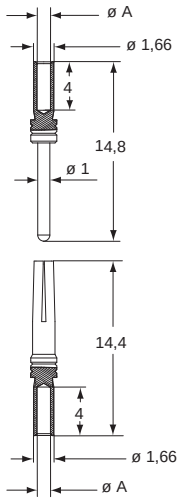

CIF and CIM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length (mm)
0,08-0,21	0,64	4
0,13-0,33	0,90	4
0,33-0,52	1,12	4

CX 01 UF/UM for 1 USB connector

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:

frames for modular units **316 - 317**

MIXO ONE enclosures **369**

WARNING
enclosures: bulkhead mounting housings, high construction housings or high construction hoods

housing for USB male connectors, USB female - female connectors

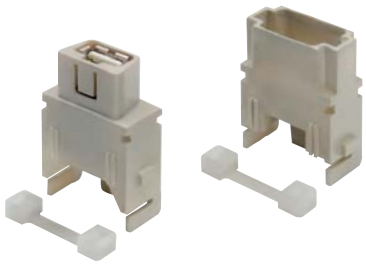

patch cable USB

description	part No.	part No.
female insert with USB female - female connector [1] male insert without USB male connector (patch cable to be ordered separately) [1]	**CX 01 UF** **CX 01 UM**	
patch cable USB-A / USB-A, 2 m [2]		**CW 2 UAM**

[2] 5 m on request

- characteristics according to EN 61984:
  1A 50V 0,8kV 3
- c UL us (UL for USA and Canada), SA DNV·GL BUREAU VERITAS EAC certified [1]
- insulation resistance: ≥ 10 GΩ
- contact resistance: ≤ 3 mΩ

USB connector features:
- USB-A / USB-A Hi-Speed - 2.0 insert
- temperature range: from -25 °C to +80 °C

FIXING

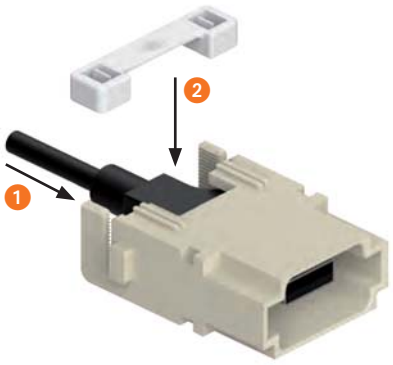

REOPENING

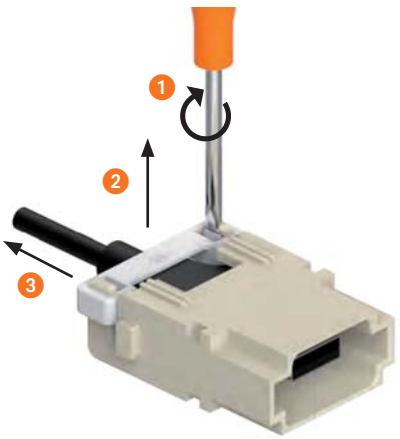

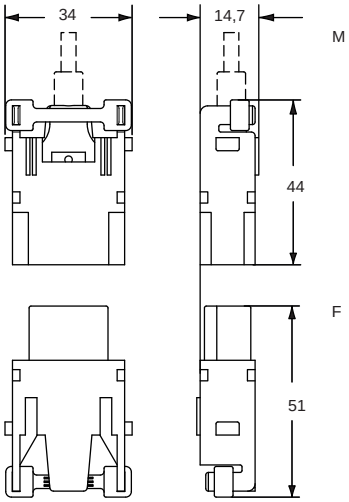

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

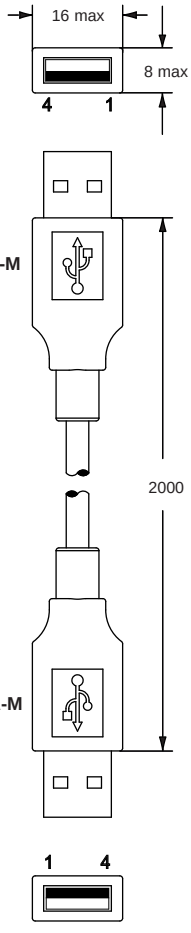



dimensions shown in mm are not binding and may be changed without notice

CX 08 16M
GIGABIT

CX 01 9VF/9VM for 9-pole crimp D-SUB connector

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures* or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:
frames for modular units* **316 - 317**

MIXO ONE enclosures **369**

* enclosures:
housings or high construction hoods

module adapter for 1 D-SUB connector

CI (5A) crimp contacts for D-SUB gold plated

description	part No.	part No
seat for 1 D-SUB crimp contacts connector and shield (included)		
female insert with connector	**CX 01 9VF**	
male insert with connector	**CX 01 9VM**	
CI (5A) female crimp contacts		
0.08-0.13 mm² AWG 28-26		**CIVFD 0.1**
0.20-0.52 mm² AWG 24-20		**CIVFD 0.5**
CI (5A) male crimp contacts		
0.08-0.13 mm² AWG 28-26		**CIVMD 0.1**
0.20-0.52 mm² AWG 24-20		**CIVMD 0.5**

gold plated

- characteristics according to EN 61984:
  5A 50V 0,8kV 3
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +70 °C
- for crimp 5A contacts CI series use, on page 717:
  CIPZ D crimping tool
  CIVTP D turret head
  CIVES insertion / removal tool

Warnings:
We recommend the use of code pins **CRF CX** / **CRM CX**.

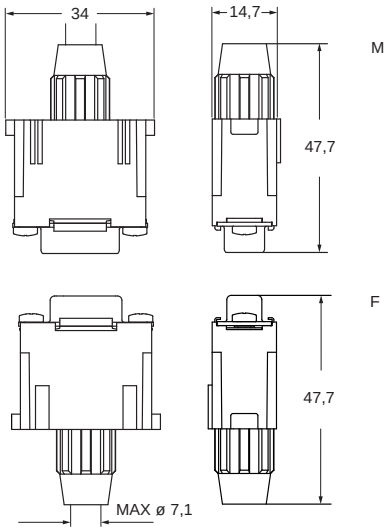

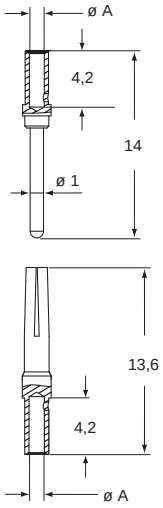

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

dimensions shown in mm are not binding and may be changed without notice

ALTERNATIVELY

- Seats for 1 D-SUB screw connectors (without shield):

  CX 01 9VFS (with female connectors)
  CX 01 9VMS (with male connectors)



- Seat for 1 D-SUB connector
  (without connector and shield):

  CX 01 VM (for male connector)
  CX 01 VF (for female connector)

Can also be used with 15-pole D-SUB Hi-Density connectors.
For further information, please contact ILME S.p.A.

- CR CX VS shield
  for CX 01 VM/VF inserts

- Special version with cable contacts section
  0,32-0,82 mm² AWG 22-18

  CIVFD 0.8 female
  CIVMD 0.8 male

9-POLE FEMALE CRIMP D-SUB CONNECTOR (CAN BE USED WITH CX 01 VF)

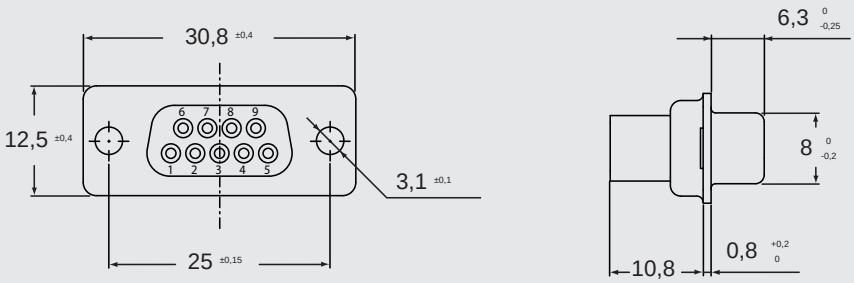

9-POLE MALE CRIMP D-SUB CONNECTOR (CAN BE USED WITH CX 01 VM)

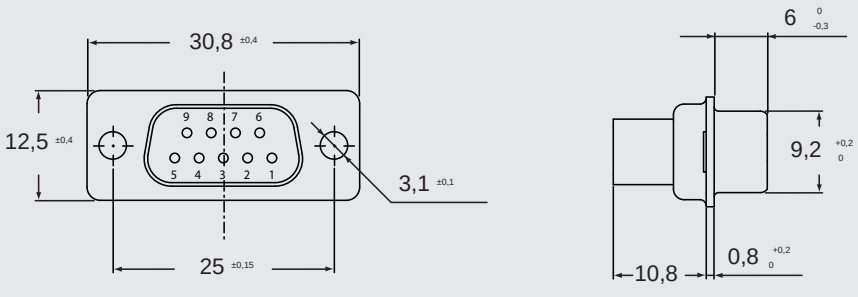

CX 01 9VTF 9-pole crimp D-SUB RS-485 BUS connector

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures* or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:
frames for modular units* **316 - 317**

MIXO ONE enclosures **369**

* enclosures:
housings or high construction hoods

module adapter for 1 D-SUB RS-485 connector

module adapter for 1 D-SUB connector

description	part No.	part No
MIXO D-Sub 9-pole female module for RS-485 T-connection, with cable clamp accommodation for 2 cables	**CX 01 9VTF**	
seat for 1 D-SUB crimp contacts connector and shield (included) male insert with connector		**CX 01 9VM**

- characteristics according to EN 61984:
  5A 50V 0,8kV 3
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +70 °C
- "T" functionality with connection of two RS-485 bus cables (screw terminal)
- to be coupled with CX 01 9VM module
- for wires 0,14-0,5 mm² - 26-20 AWG
- cable screen max outer diameter 6 mm

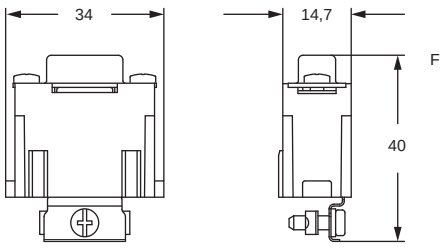

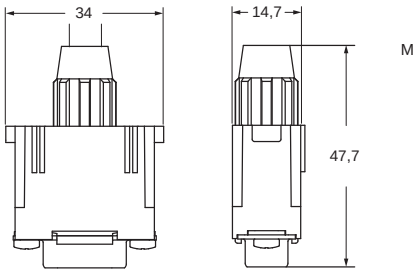

Warnings:
We recommend the use of code pins **CRF CX / CRM CX**.

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

Watch our online tutorial

MIXO DATA

dimensions shown in mm are not binding and may be changed without notice

for 4 POF or MOST® [3] contacts (DIN 41626-3)

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:

frames for modular units **316 - 317**

MIXO ONE enclosures **369**

modular units, crimp connections



POF / MOST crimp contacts

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts [1]	**CX 04 LF**	
male inserts for male contacts [1]	**CX 04 LM**	
female contacts POF [2] 1,0 mm		**CX PLF**
male contacts POF [2] 1,0 mm		**CX PLM**
female contacts MOST® [3] 1/1,5 mm		**CX MLF**
male contacts MOST® [3] 1/1,5 mm		**CX MLM**

[2] **POF = POLYMER OPTICAL FIBRE**

[3] **MOST® = MEDIA ORIENTED SYSTEM TRANSPORT**
MOST® = is a registered trade mark of Microchip Technology Inc.

- cULus (UL for USA and Canada), SEV, DNV-GL, BUREAU VERITAS, EAC certified [1]
- insulation resistance: ≥ 1 GΩ
- ambient temperature limit: -40 °C ... +85 °C
- inserts made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 30 mΩ
- for crimp contacts CI series use:
  CIPZ D crimping tool
  CITP D turret head
- max external diameter: 2,2 mm (POF)
  2,3 mm (MOST)
- polymer fibre diameter: 1,0 mm (POF)
  1/1,5 mm (MOST)
- attenuation: < 2.5 dB
- to crimp contacts CX PLF / PLM and CX MLF / MLM please use tool CLPZ R (see the crimping tool section on page 730)

We recommend to use CLASS enclosures with two levers or V-TYPE enclosures (with one or two levers) that provides a higher coupling depth due to the higher locking force they produce. We further suggest the use of code pins CRF CX / CRM CX.

CX 04 LF / LM

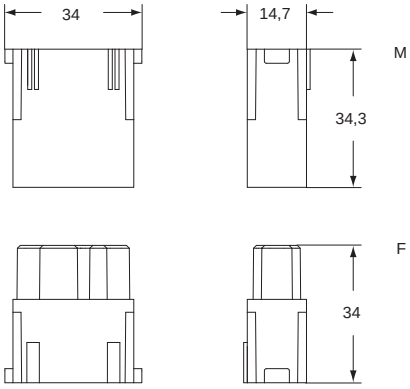

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

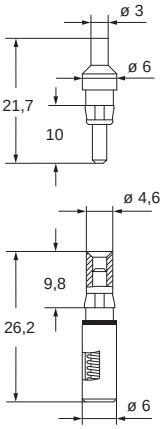

cable stripping for fibre optic



male contact



female contact

for 4 coaxial contacts DIN 41626-T2

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:

frames for modular units **316 - 317**

MIXO ONE enclosures **369**

modular units, crimp connections

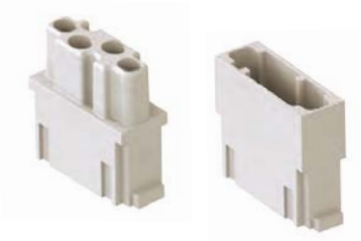

crimp coaxial contacts

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts	**CX 04 RF**	
male inserts for male contacts	**CX 04 RM**	
female coaxial contacts 50Ω		**CX 50 RF**
male coaxial contacts 50Ω		**CX 50 RM**
female coaxial contacts 75Ω		**CX 75 RF**
male coaxial contacts 75Ω		**CX 75 RM**

- characteristics according to EN 61984:
  1,5A 50V 0,8kV 3
- DNV·GL BUREAU VERITAS certified
- insulation resistance: ≥ 5 GΩ
- temperature range: -40 °C ... +125 °C
- inserts are made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- in accordance with standard DIN 41626-T2
- finishing:
  contact surfaces, body, back end and ferrule gold plated
- impedance: 50 Ω
- frequency: DC to 6 GHz
- return loss: ≥ 21 dB, DC to 2 GHz
  ≥ 19 dB, 2 to 6 GHz
- insertion loss: ≤ 0,1 x √f(GHz) dB
- center contact resistance: ≤ 10 mΩ
- outer contact resistance: ≤ 3 mΩ
- test voltage: 750V rms
- working voltage: 250V rms
- RF-leakage: ≥ 80 dB up to 0,5 GHz
  ≥ 65 dB up to 1,5 GHz
- to crimp contacts CX 50 RM/RF, CX 75 RM/RF use tool COPZ R (see the crimping tool section on page 734)

Warnings:
We recommend the use of code pins **CRF CX** / **CRM CX**.

CX 04 RF / RM

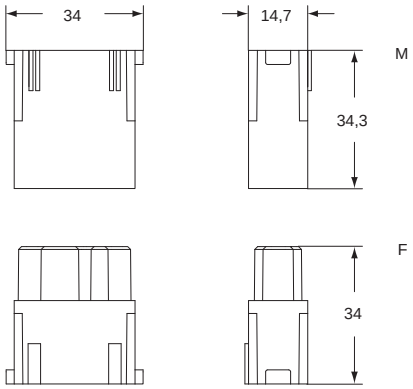



M (**CX 50 RM / CX 75 RM**)



F (**CX 50 RF / CX 75 RF**)

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

conductor stripping



coaxial contacts	for cables	ø external	part No.
50Ω	RG 316/U	2,49 ±0,1	CX 50 RF
	RG 174/U	2,79 ±0,127	CX 50 RM
	RG 188 A/U	2,79 max	
75Ω	RG 179 B/U	2,54 ±0,127	CX 75 RF
	RG 187 A/U	2,79 max	CX 75 RM
	TZC 75 101	2,79 max	

dimensions shown in mm are not binding and may be changed without notice

4 seats for fibre optic SC contacts

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:

frames for modular units **316 - 317**

MIXO ONE enclosures **369**

WARNING:
inserts can be used on high enclosures or bulkhead housings only.

module adaptor for SC connectors



crimp FO contacts

description	part No.	part No.
module insert with seats for 4 SC contacts (metal fixing plate included)		
female insert, with ceramic sleeve	**CX 04 SCF**	
female insert, with metallic sleeve	**CX 04 SCF-H**	
male insert	**CX 04 SCM**	
SC contact for GI FIBRE 50/125 µm or 62.5/125 µm		**CL 125 SC**
SC contact for ø POF 1 mm		**CL POF SC**

- DNV·GL BUREAU VERITAS certified
- insulation resistance: ≥ 10 GΩ
- temperature range: from -40 °C to +85 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- adaptor insert fitted with metal plate and sleeve (female only) fixing

CX 04 SC

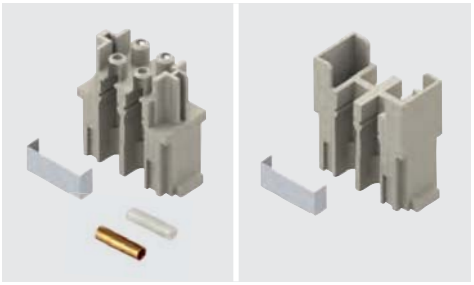

- adaptor insert designed to be used with SC contacts
- SC contact for SI FIBRE (HCS®) 200/230 µm:
  CL 230 SC (on request)
- base equipment for SC contact GI FIBRE:
  CLKZ 125 SC
  If this application is required, please contact ILME S.p.A.
- supplementary set for POF:
  CLKZ POF
  (to be ordered with CLKZ 125 SC)
  If this application is required, please contact ILME S.p.A.

SC duplex patch cord

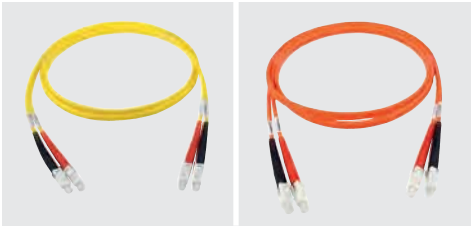

CW SC from page 240

CX 04 SCF, CX 04 SCF-H, CX 04 SCM

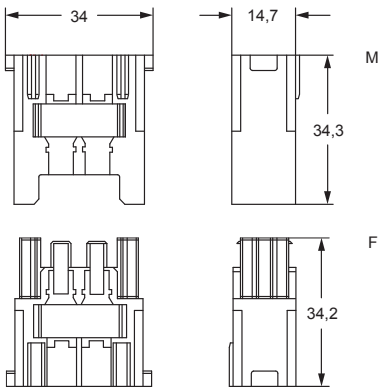

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

CL 125 SC



CL POF SC



for 1 RJ45 Cat. 6 Class E_A

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures or in COB panel supports.

page:

frames for modular units 316 - 317

MIXO ONE enclosures 369

- characteristics according to EN 61984:
  1A 50V 0,8kV 3
- c UL us (UL for USA and Canada), DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 50V
- insulation resistance: ≥ 10 GΩ
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≥ 3 mΩ
- temperature range: from -40 °C to +70 °C
- we recommend to fix the cable with cable tie
- for contact crimping instructions, please see the crimping tool section on page 736 and 737

housing for RJ45 male connectors, RJ45 female connectors

crimp and IDC termination, RJ45 male connectors

description	part No.	part No.
- female insert with 1 RJ45 female connector	**CX 01 J8F**	
- male insert for 1 RJ45 male crimp connector, (without RJ45 connector, to be ordered separately) or connecting cables	**CX 01 J8M**	
- male insert for 1 RJ45 male IDC connector, 8 data contacts (without RJ45 connector, to be ordered separately) [1]	**CX 01 J8IM**	
RJ45 male crimp connector, 8 data contacts		**CX 8 J6M**
RJ45 male IDC connector, 8 data contacts		**CX 8 J6IM**

CX 01 J8F technical data:
- RJ45 female insert, Cat. 6 Class E_A
- shielding housing: zinc diecast
- housing finish: nickel-plated
- current carrying capacity at 50 °C: 1A
- adequate for Power over Ethernet: PoE according to IEEE 802.3af
- connectors: IEC 60603-7-5
- adequate for 10 Gigabit Ethernet: 10 Gigabit Ethernet acc. to IEEE 802.3an
- custom-designed cabling systems: PROFINET Installation Guideline
- generic cabling systems: ANSI/TIA/EIA-568-C.2 ISO/IEC 11801 EN 50173-1 ISO/IEC 24702 EN 61918
- Class E_A (channel): ISO/IEC 11801, EN 50173-1

CX 8 J6M technical data:
- RJ45 male crimp connectors Cat. 6_A
- crimp pliers: **CJPZ T**
- screened cable stripper: **CJST**
- current carrying capacity at 50 °C: 1A
- Cu-conductor diameter solid: 0,40 - 0,51 mm (AWG 26/1 - 24/1) stranded: 0,46 - 0,61 mm (AWG 27/7 - 24/7)
- insulation diameter: 0,85 - 1,05 mm
- cable diameter: 5,0 - 6,6 mm
- connectors: IEC 60603-7-51
- 10 Gigabit Ethernet acc. to IEEE 802.3an: adequate for 10 Gigabit Ethernet
- category 6_A: ISO/IEC 11801; EN 50173-1
- Class E_A: ISO/IEC 11801; EN 50173-1
- Category 6_A: ANSI/TIA/EIA-568-C.2

CX 8 J6IM technical data:
- RJ45 male IDC connectors Cat. 6 Class E_A
- Cu-conductor diameter solid: 0,41 - 0,64 mm (AWG 26/1 - 22/1) stranded: 0,48 - 0,76 mm (AWG 26/7 - 22/7)
- insulation diameter: 0,85 - 1,6 mm
- current carrying capacity at 50 °C: 1A
- cable diameter: 5,5 - 7,3 mm
- connectors: IEC 60603-7-5
- category 6_A: ISO/IEC 11801; DIN EN 50173-1
- wrenches pliers for CX 8 J6IM: **CJPW K**
- 10 Gigabit Ethernet acc. to IEEE 802.3an: adequate for 10 Gigabit Ethernet
- Class E_A: ISO/IEC 11801; EN 50173-1
- Category 6: ANSI/TIA/EIA-568-C.2
- custom-designed cabling systems: according to PROFINET Installation Guideline

WARNING:
inserts can be used on high enclosures or bulkhead housings only.

[1] CX 01 J8IM: to be used with high enclosures (T-TYPE hood M32 / M40 only and CZAV/MZAV top entry hood only), bulkhead housings or COB ... BC/TCQ/TSF/ TSFS only.

CX 01 J8F

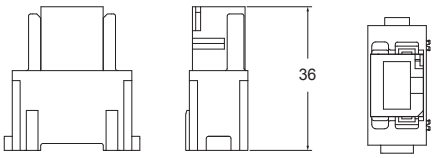

CX 01 J8M
can be used with connecting cables CW series (RJ45 and M12x1)

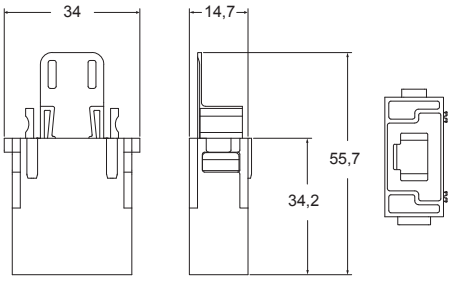

CX 01 J8IM

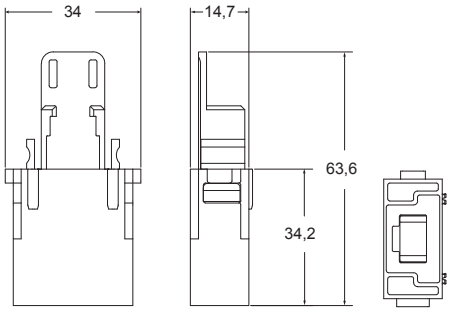

CX 8 J6M
can be used with CX 01 J8M

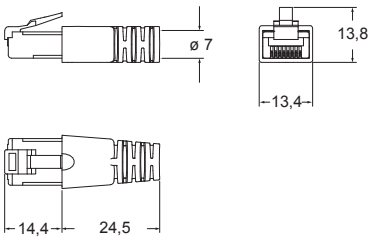

for free cable end X-coded DTW X...W (M12x1)

CX 8 J6IM
can be used with CX 01 J8IM



for free cable end X-coded DTW...W (M12x1)

MIXO DATA

dimensions shown in mm are not binding and may be changed without notice

CW RJ45 patch cord

with 2 RJ45 male connectors

description	part No.	(L) meter
RJ45 male connector with 8 data contacts	**CW 1 J2M87**	1
	CW 2 J2M87	2
	CW 3 J2M87	3
	CW 5 J2M87	5
	CW 7.5J2M87	7,5
	CW 10 J2M87	10
	CW 15 J2M87	15

RJ45 patch cord technical data:
- S/FTP Cat. 7 PUR
- temperature range: from -40 °C ÷ +75 °C
- nickel plated brass screening
- green RAL 6018 colour

Can be used with:
- MIXO RJ45 **CX 01 J8M** male inserts
- **CJK 8MT** adapters (see page 226)

CW...J2M87

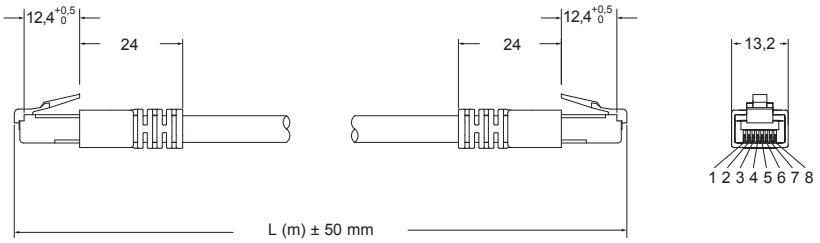

Wiring Diagram

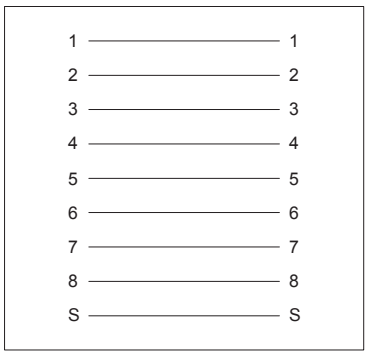

for 1 RJ45 + 4 poles connector 10A - 250V

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures or in COB panel supports.

page:
frames for modular units **316**

- characteristics according to EN 61984:
  10A 250V 4kV 3
- c UL us (UL for USA and Canada), SP cQc DNV·GL BUREAU VERITAS EAC certified
- insulation resistance: ≥ 10 GΩ
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≥ 3 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series) on pages 708 - 741

housing for RJ45 connectors

RJ45 connectors

description	part No.	part No. data contacts only	part No. data contacts/+2 power contacts
without RJ45 connector and without contacts (to be ordered separately)			
- female inserts for 1 RJ45 female connector and for 4 10A (CDF) female contacts [1]	**CX 01 JF**		
- male inserts for 1 RJ45 male connector and for 4 10A (CDM) male contacts	**CX 01 JM**		
RJ45 coupler jack, 8 data contacts [2]		**CX 8 JF**	
RJ45 coupler jack, 8 data contacts / 2 power contacts [2]			**CX 8/2 JF**
RJ45 plug, 4 data contacts		**CX 4 JM**	
RJ45 plug, 4 data contacts / 2 power contacts			**CX 4/2 JM**
RJ45 plug, 6 data contacts / 2 power contacts			**CX 6/2 JM**
RJ45 plug, 8 data contacts **Cat. 5e**		**CX 8 JM**	
RJ45 plug, 4 data contacts **Cat. 5e ProfiNET®**		**CX 4E JM**	

RJ45 connector features:
- RJ45 insert, **Cat. 5 Ethernet**
- rated current: 2,1A at 70 °C
- rated voltage: 50VDC / 35VAC
- IDC terminals:
  for 0,22 mm² (AWG 24/7) data contacts **CX 4 JM**
  for 0,14 mm² (AWG 26/7) or 0,22 mm² (AWG 24/7) data contacts **CX 4/2 JM**
  for 0,34 mm² (AWG 22/7) or 0,38 mm² (AWG 22/19) power contacts **CX 4/2 JM**
  for 0,14 mm² (AWG 26/7) data contacts **CX 6/2 JM**
  for 0,25 mm² (AWG 23/19) power contacts **CX 6/2 JM**
  for 0,14 mm² (AWG 26/7) data contacts **CX 8 JM**
  for 0,34 mm² (AWG 22/7) data contacts **CX 4E JM**
- /7 = 7-strands wire
  /19 = 19-strands wire
- insulation diameter: 1 mm (data), 1,4 mm (power and CX 4E JM)
- $Ø_{max}$ complete cable 7 mm (CX 8 JM: 6,9 mm)
- temperature range: from -40°C to 120 °C
- nickel plated brass screening
- crimp pliers: **CJPZ Y**
- screened cable stripper: **CJST**

[1] **WARNING:**
the female inserts can only be used on high or flush mounting enclosures

[2] 4-pole version on request, part No. **CX 4 JF** and **CX 4/2 JF** with "**crossover**" link

CX 01 JF, CX 01 JM

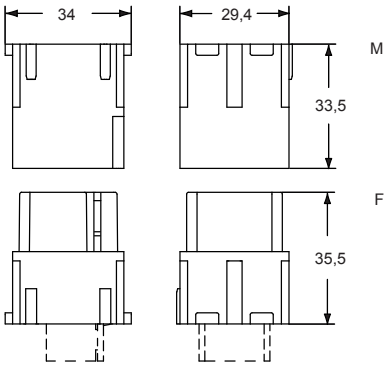

CX 4 JF, CX 4/2 JF, CX 8 JF, CX 8/2 JF

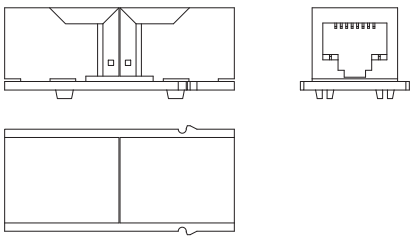

CW patch cord RJ45

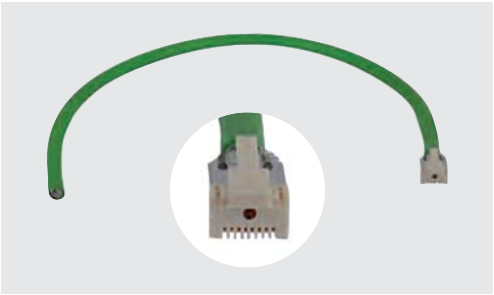

CW JM from page 308

contacts side (front view)

side with reference arrow ▲

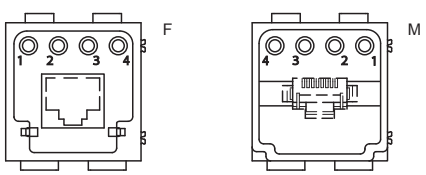

- 2 frame slots

CX 4 JM, CX 4/2 JM, CX 6/2 JM, CX 8 JM, CX 4E JM



dimensions shown in mm are not binding and may be changed without notice

10A crimp contacts, silver and gold plated

description			part No.			
10A female crimp contacts				silver plated		gold plated✢
0,14-0,37 mm²	AWG 26-22	identification No. 1	**CDFA 0.3**		**CDFD 0.3**	
0,5 mm²	AWG 20	identification No. 2	**CDFA 0.5**		**CDFD 0.5**	
0,75 mm²	AWG 18	identification No. ②	**CDFA 0.7**		**CDFD 0.7**	
1 mm²	AWG 18	identification No. 3	**CDFA 1.0**		**CDFD 1.0**	
1,5 mm²	AWG 16	identification No. 4	**CDFA 1.5**		**CDFD 1.5**	
2,5 mm²	AWG 14	identification No. 5	**CDFA 2.5**		**CDFD 2.5**	
10A male crimp contacts						
0,14-0,37 mm²	AWG 26-22	identification No. 1	**CDMA 0.3**		**CDMD 0.3**	
0,5 mm²	AWG 20	identification No. 2	**CDMA 0.5**		**CDMD 0.5**	
0,75 mm²	AWG 18	identification No. ②	**CDMA 0.7**		**CDMD 0.7**	
1 mm²	AWG 18	identification No. 3	**CDMA 1.0**		**CDMD 1.0**	
1,5 mm²	AWG 16	identification No. 4	**CDMA 1.5**		**CDMD 1.5**	
2,5 mm²	AWG 14	identification No. 5	**CDMA 2.5**		**CDMD 2.5**	



CDF and CDM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

✢ for basic or high thickness gold plating, please refer to page 674

for 2 RJ45 + 8 poles connector 10A - 250V

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures or in COB panel supports.

page:
frames for modular units **316**

- characteristics according to EN 61984:
  10A 250V 4kV 3
- c UL us (UL for USA and Canada), certified
- insulation resistance: ≥ 10 GΩ
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≥ 3 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series) on pages 708 - 741

housing for RJ45 connectors

RJ45 connectors

description	part No.	part No. data contacts only	part No. data contacts/+2 power contacts
without RJ45 connector and without contacts (to be ordered separately)			
- female insert for 2 RJ45 female connectors and for 8 10A (CDF) female contacts [1]	**CX 02 JF**		
- male insert for 2 RJ45 male connectors and for 8 10A (CDM) male contacts	**CX 02 JM**		
RJ45 coupler jack, 8 data contacts [2]		**CX 8 JF**	
RJ45 coupler jack, 8 data contacts / 2 power contacts [2]			**CX 8/2 JF**
RJ45 plug, 4 data contacts		**CX 4 JM**	
RJ45 plug, 4 data contacts / 2 power contacts			**CX 4/2 JM**
RJ45 plug, 6 data contacts / 2 power contacts			**CX 6/2 JM**
RJ45 plug, 8 data contacts **Cat. 5e**		**CX 8 JM**	
RJ45 plug, 4 data contacts **Cat. 5e ProfiNET®**		**CX 4E JM**	

RJ45 connector features:
- RJ45 insert, **Cat. 5 Ethernet**
- rated current: 2,1A at 70 °C
- rated voltage: 50VDC / 35VAC
- IDC terminals:
  for 0,22 mm² (AWG 24/7) data contacts **CX 4 JM**
  for 0,14 mm² (AWG 26/7) or 0,22 mm² (AWG 24/7) data contacts **CX 4/2 JM**
  for 0,34 mm² (AWG 22/7) or 0,38 mm² (AWG 22/19) power contacts **CX 4/2 JM**
  for 0,14 mm² (AWG 26/7) data contacts **CX 6/2 JM**
  for 0,25 mm² (AWG 23/19) power contacts **CX 6/2 JM**
  for 0,14 mm² (AWG 26/7) data contacts **CX 8 JM**
  for 0,34 mm² (AWG 22/7) data contacts **CX 4E JM**
- /7 = 7-strands wire
  /19 = 19-strands wire
- insulation diameter: 1 mm (data), 1,4 mm (power and CX 4E JM)
- $Ø_{max}$ complete cable 7 mm (CX 8 JM: 6,9 mm)
- temperature range: from -40°C to 120 °C
- nickel plated brass screening
- crimp pliers: **CJPZ Y**
- screened cable stripper: **CJST**

[1] **WARNING:**
the female inserts can only be used on high or flush mounting enclosures

[2] 4-pole version on request, part No. **CX 4 JF** and **CX 4/2 JF** with "**crossover**" link

CX 02 JF, CX 02 JM

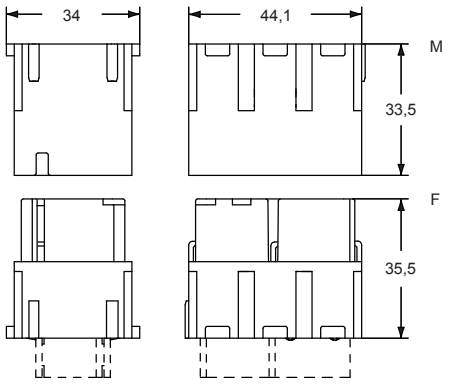

CX 4 JF, CX 4/2 JF, CX 8 JF, CX 8/2 JF

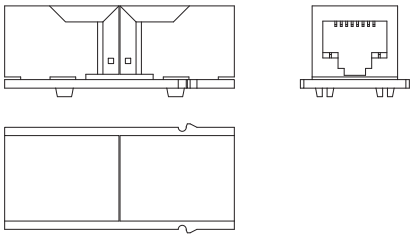

CW patch cord RJ45

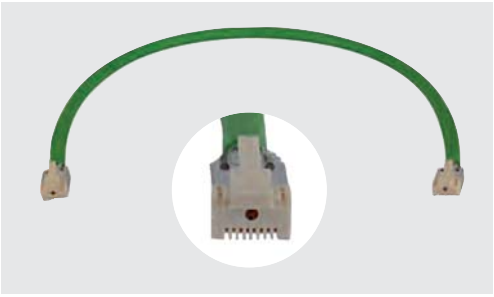

CW J2M from page 308

contacts side (front view)

side with reference arrow ▲

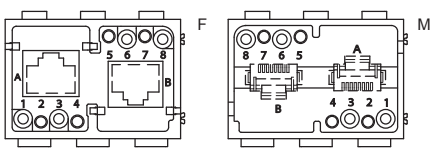

- 3 frame slots

CX 4 JM, CX 4/2 JM, CX 6/2 JM, CX 8 JM, CX 4E JM



dimensions shown in mm are not binding and may be changed without notice

10A crimp contacts, silver and gold plated

description			part No.			
10A female crimp contacts						
0,14-0,37 mm²	AWG 26-22	identification No. 1	**CDFA 0.3**	silver plated	**CDFD 0.3**	gold plated✢
0,5 mm²	AWG 20	identification No. 2	**CDFA 0.5**		**CDFD 0.5**	
0,75 mm²	AWG 18	identification No. ②	**CDFA 0.7**		**CDFD 0.7**	
1 mm²	AWG 18	identification No. 3	**CDFA 1.0**		**CDFD 1.0**	
1,5 mm²	AWG 16	identification No. 4	**CDFA 1.5**		**CDFD 1.5**	
2,5 mm²	AWG 14	identification No. 5	**CDFA 2.5**		**CDFD 2.5**	
10A male crimp contacts						
0,14-0,37 mm²	AWG 26-22	identification No. 1	**CDMA 0.3**		**CDMD 0.3**	
0,5 mm²	AWG 20	identification No. 2	**CDMA 0.5**		**CDMD 0.5**	
0,75 mm²	AWG 18	identification No. ②	**CDMA 0.7**		**CDMD 0.7**	
1 mm²	AWG 18	identification No. 3	**CDMA 1.0**		**CDMD 1.0**	
1,5 mm²	AWG 16	identification No. 4	**CDMA 1.5**		**CDMD 1.5**	
2,5 mm²	AWG 14	identification No. 5	**CDMA 2.5**		**CDMD 2.5**	



CDF and CDM contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

✢ for basic or high thickness gold plating, please refer to page 674

CW patch cord RJ45

with 1 RJ45 male connector

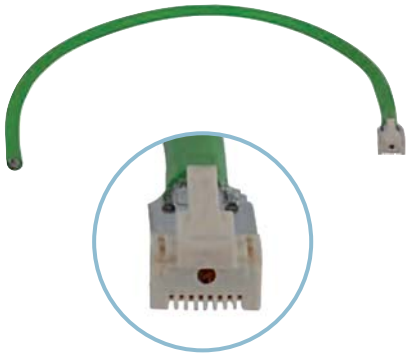

with 2 RJ45 male connectors

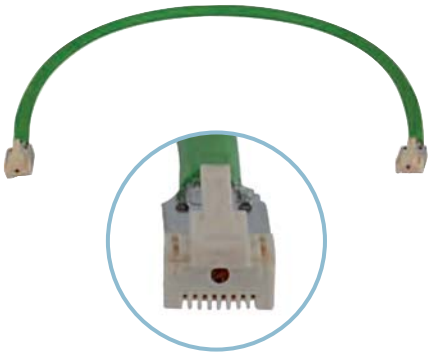

description	part No.	(L) metre	part No.	(L) metre
RJ45 male connector with 4 data contacts / 2 power contacts	**CW 0.5 JM4/2**	0.5		
	CW 2 JM4/2	2		
	CW 5 JM4/2	5		
	CW 10 JM4/2	10		
RJ45 male connector with 8 data contacts	**CW 0.5 JM8**	0.5	**CW 0.5 J2M8**	0.5
	CW 2 JM8	2	**CW 2 J2M8**	2
	CW 5 JM8	5	**CW 5 J2M8**	5
	CW 10 JM8	10	**CW 10 J2M8**	10
RJ45 male connector with 4 data contacts, **Cat. 5e**	**CW 0.5 JM4E**	0.5	**CW 0.5 J2M4E**	0.5
	CW 2 JM4E	2	**CW 2 J2M4E**	2
	CW 5 JM4E	5	**CW 5 J2M4E**	5
	CW 10 JM4E	10	**CW 10 J2M4E**	10

RJ45 connector features:
- insert RJ45, Cat. 5 Ethernet
- nominal current: 2,1A at 70 °C
- nominal voltage: 50V DC / 35V AC
- temperature range: from -40 °C to +120 °C
- nickel plated brass screening

Can be used with:
- MIXO RJ45: CX 01 JM and CX 02 JM male inserts
  see pages 304 and 306

CW JM 4/2, 8, 4E and CW J2M 4/2, 8, 4E

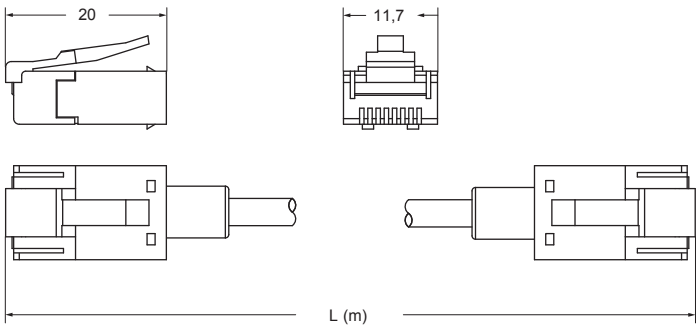

Wiring Diagram

dimensions shown in mm are not binding and may be changed without notice

CX FM

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures or in COB panel supports.
Alternatively, individual modules with a width of 14,7 mm can be installed in plastic supports.

page:
frames for modular units **316**

dummy module

description	part No.
dummy module for unused frame seats	**CX FM**

Remark:
The new version is formed by a single piece and has a reduced height.
It allows the mating of a MIXO insert including it with a corresponding MIXO insert even having - in front of the dummy module - a regular male or female module equipped with contacts, which obviously will not work.
The sole exceptions to this feature are that an insert with this dummy module cannot mate an insert showing in front a CX 3/4 XDF/M, CX 04 XF/M or CX 02 HF module.

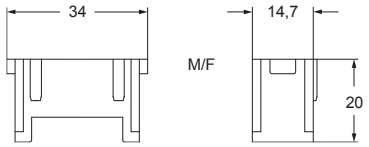

- 1 frame slot

MIXO units

MIXO a-f frame for housings

Enclosures

RJ45 MIXO CONNECTOR Cat 6$_A$

RJ45 female/female coupler

CX 01 J8F

RJ45 MIXO CONNECTOR Cat 5-5$_e$

1x RJ45 female/female coupler
+ 4x 10A crimp contacts

CX 01 JF+ CX 8 JF
or
CX 8/2 JF

2x RJ45 female/female coupler
+ 8x 10A crimp contacts



CX 02 JF + 2x CX 8 JF
or
2x CX 8/2 JF

CX 01 T

CX 02 TF

CX 03 TF

CX 04 TF

CX 06 TF

- MIXO ONE
- CZ IL-BRID
- C-TYPE
- C7 IP68
- V-TYPE
- T-TYPE
- W-TYPE
- EMC
- LS-TYPE
- COB
- IP68
- Central lever
- BIG

Enclosures

MIXO ONE

CZ IL-BRID

C-TYPE

C7 IP68

V-TYPE

T-TYPE

W-TYPE

EMC

LS-TYPE

COB

IP68

Central lever

BIG

MIXO A-F frame for hoods

CX 01 T

CX 02 TM

CX 03 TM

CX 04TM

CX 06 TM

MIXO units

RJ45 male crimp plug

CX 01 J8M + CX 8 J6M

RJ45 male IDC plug

CX 01 J8IM + CX 8 J6IM

RJ45 MIXO CONNECTOR Cat 6A

1x RJ45 male crimp plug
+ 4x 10A crimp contacts

CX 01 JM +
CX 4 JM
(4 data contacts) **or**
CX 8 JM
(8 data contacts) **or**
CX 4/2 JM
(4 data + 2 power contacts) **or**
CX 6/2 JM
(6 data + 2 power contacts) **or**
CX 4E JM
(4 data cont. cat.5e PROFINET)

2x RJ45 male crimp plug
+ 8x 10A crimp contacts

CX 02 JM +
2x CX 4 JM
(4 data contacts) **or**
2x CX 8 JM
(8 data contacts) **or**
2x CX 4/2 JM
(4 data + 2 power contacts) **or**
2x CX 6/2 JM
(6 data + 2 power contacts) **or**
2x CX 4E JM
(4 data cont. cat.5e PROFINET)

RJ45 MIXO CONNECTOR Cat 5-5e

CX 03 P - CX 02 P for pneumatic contacts

The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

page:
frames for modular units **316 - 317**

MIXO ONE enclosures **369**

modular units with 3 seats

modular units with 2 seats

description	part No.	part No.
without contacts (to be ordered separately) inserts with 3 housings for tube Ø 1,6 - 4,0	**CX 03 P**	
without contacts (to be ordered separately) inserts with 2 housings for tube Ø 6,0		**CX 02 P**

- certified
- insulation resistance: ≥ 10 GΩ
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles

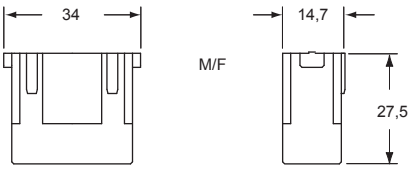

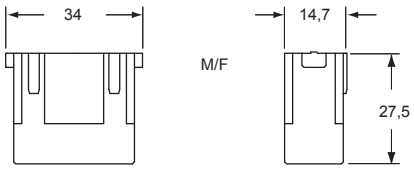

Use of units for pneumatic contacts

- identical male and female modular units
- pneumatic contacts for pressure values up to 8 bar, for use with clean and dry compressed air
- use of tubes with Ø 1,6 - 3 - 4 and 6 mm, and possible replacement of tubes with assembled units
- possibility of using tubes with different diameters in the same modular unit
- female contacts with or without closing valve
- working temperature range - 40 °C ÷ + 80 °C

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

Warnings:

CRM/F CX code pins and guides must be used for pneumatic contacts modules.
These pins also provide coding if pneumatic contacts modules are used exclusively.

The use of pneumatic contacts requires an appropriate filtering and dehydration system to prevent dangerous condensation.
Contacts may be used for pressure values of up to a maximum of 8 bars/116 psi.

dimensions shown in mm are not binding and may be changed without notice

pneumatic contacts
with or without closing valve

description	part No.
female contacts without closing valve	
- for tubes with internal ø 1,6 mm	**CX 1.6 PF**
- for tubes with internal ø 3 mm	**CX 3.0 PF**
- for tubes with internal ø 4 mm	**CX 4.0 PF**
- for tubes with internal ø 6 mm	**CX 6.0 PF**
male contacts without closing valve	
- for tubes with internal ø 1,6 mm	**CX 1.6 PM**
- for tubes with internal ø 3 mm	**CX 3.0 PM**
- for tubes with internal ø 4 mm	**CX 4.0 PM**
- for tubes with internal ø 6 mm	**CX 6.0 PM**
female contacts with closing valve	
- for tubes with internal ø 1,6 mm	**CX 1.6 VC**
- for tubes with internal ø 3 mm	**CX 3.0 VC**
- for tubes with internal ø 4 mm	**CX 4.0 VC**
- for tubes with internal ø 6 mm	**CX 6.0 VC**
male contact (use contacts without closing valve)	

CX 1.6 PF/PM/VC



CX 3.0 PF/PM/VC

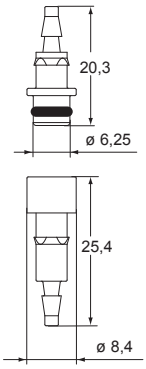

CX 4.0 PF/PM/VC

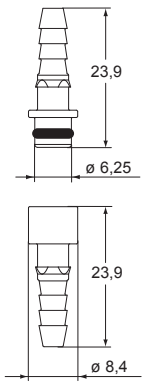

CX 6.0 PF/PM/VC

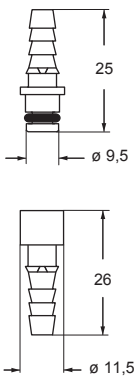

MIXO INSERTS

MIXO FRAMES

Made of die-cast zinc alloy

with protective earth (PE) contacts

SUM UP

- Die-cast zinc alloy frames
- Protective earth (PE)
- Possibility of mounting female and male modular units on the same frame
- Polarisation on frames
- When two or more identical connectors of the MIXO series are used, use of coding pins (CR...CX series) may prevent incorrect coupling

TECHNICAL FEATURES

MIXO FRAMES

HOW TO SELECT FRAMES

1 **Calculate** the number of frame slots taken up by the required inserts (frame slot 1, 2 or 3 modules).

size: 1 frame slot

	No. of frame slots
CX 01 9VF/M	1
CX 01 9VTF	1
CX 01 GF/M	1
CX 01 J8	1
CX 01 UF/M	1
CX 02 4AF/M	1
CX 02 4BF/M	1
CX 02 4F/M	1
CX 02 7F/M	1
CX 02 CHF/M	1
CX 02 P	1
CX 03 4F/M	1
CX 03 4BF/M	1
CX 03 P	1
CX 3/4 XDF/M	1
CX 04 LF/M	1
CX 04 RF/M	1
CX 04 SCF/M	1
CX 04 XF/M	1
CX 05 SF/M	1
CX 05 SHF/M	1
CX 06 CF/M	1
CX 06P CF/M	1
CX 08 CF/M	1
CX 08 I6F/M	1
CX 12 DF/M	1
CX 17 DF/M	1
CX 25 IBF/M	1
CX 25 IF/M	1
CX FM	1

Fill the unused frame slots with CX FM dummy module

size: 2 frame slots

	No. of frame slots
CX 01 JF/M	2
CX 01 YF/M	2
CX 01 YPEF/M	2
CX 02 BF/M	2
CX 02 GF/M	2
CX 02 HF/M	2
CX 20 CF/M	2
CX 42 DF/M	2



size: 3 frame slots

	No. of frame slots
CX 02 JF/M	3

2 **Select** the right frame according to the number of required modules (available 1, 2, 3, 4 and 6 modules).

CX 01 T
1 module

CX 02 TF/TM
2 modules

CX 03 TF/TM
3 modules

CX 04 TF/TM
4 modules

CX 06 TF/TM
6 modules

Possibility to use the MIXO **HNM frames** (provided with special gold plated PE contacts) together with R series of crimp contacts and the relevant connector hoods and housings, to produce where required an **HNM** connector (High Number of Matings, up to 10.000 cycles of operation).

CX 01 T

enclosures:
size “49.16” **page:**

IL-BRID	**374 - 377, 382**
CZ7 IP67, single lever	**384**
W-TYPE for aggressive environments	**519**
E-Xtreme® corrosion proof	**540**
EMC	**576**

panel supports: **page:**

COB + adaptor	**652 - 654**

frames for modular units

description	part No.
for CZ enclosures	**CX 01 T**

- die-cast zinc alloy frames
- protective earth (PE)
- polarisation on frames
- coding pins **CR..CX**

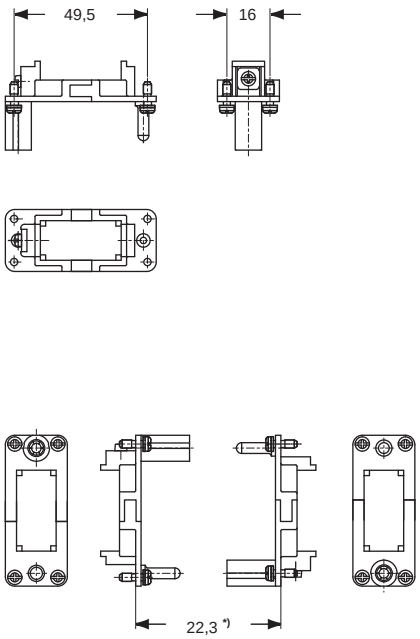

***)** distance for electric contacts: max 24 mm
distance for pneumatic contacts: max 23,5 mm

- small earth terminal for cables from 1-2,5 mm², AWG 18-14

MIXO INSERTS

dimensions shown in mm are not binding and may be changed without notice

CX 02 TM/TF, CX 03 TM/TF, CX 04 TM/TF, CX 06 TM/TF

enclosures:	page:
C-TYPE IP65/IP66	387 - 430
C7 IP67	436 - 442
V-TYPE IP65/IP66	444 - 463
BIG hoods	466 - 473
T-TYPE IP65 insulating	480 - 487
T-TYPE / W IP66/IP69 insulating	489 - 492
HYGIENIC T-TYPE / H IP66/IP69	501 - 504
HYGIENIC T-TYPE / C IP66/IP69, -50 °C	506 - 509
W-TYPE for aggressive environments	521 - 526
E-Xtreme® corrosion proof	530-537, 542-547, 550-557
EMC	578 - 581
Central lever	603 - 614
LS-TYPE	618 - 625
IP68	632 - 647

panel supports:	page:
COB	652 - 653

frames for modular units with lock-in tab (included)

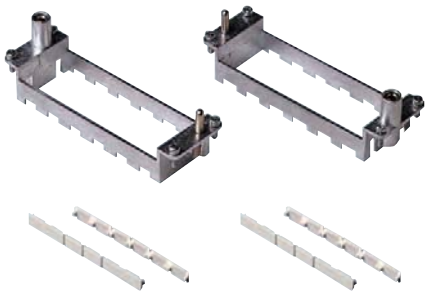

description	part No.	
-frames for modular units with lock-in tab included	type for hoods	type for housings
for 2 modular units - for housing size 44.27	**CX 02 TM**	**CX 02 TF**
for 3 modular units - for housing size 57.27	**CX 03 TM**	**CX 03 TF**
for 4 modular units - for housing size 77.27 and 77.62	**CX 04 TM**	**CX 04 TF**
for 6 modular units - for housing size 104.27 and 104.62	**CX 06 TM**	**CX 06 TF**

- die-cast zinc alloy frames
- protective earth (PE)
- possibility of mounting female and male modular units on the same frame
- frames supplied with lock-in tab to attach units
- polarisation on frames
- coding pins **CR..CX**
- for spare lock-in tab **CX CFM** see SPARE SPARTS catalogue

CX TM / TF

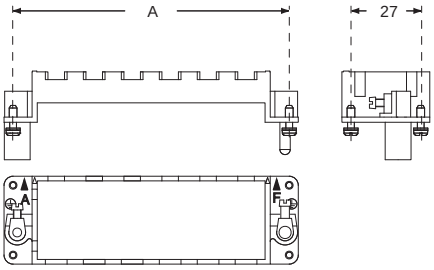

part No.	A (mm)	for housings size
CX 02 TM / TF	44	44,27
CX 03 TM / TF	57	57,27
CX 04 TM / TF	77,5	77,27 and 77,62
CX 06 TM / TF	104	104,27 and 104,62

Earth terminal
- large: for cables from 4-6 mm², AWG 12-10
- small: for cables from 1-2,5 mm², AWG 18-14

In order to accomodate larger PE conductor cross-sectional area, use CGT PE adapters, see page 319.

position of modules (contact side view)



CX CFM (lock-in tab)

Polarisation of frames with relative identification letters and couplings

frame for hoods [1] **frames for housings** [1]

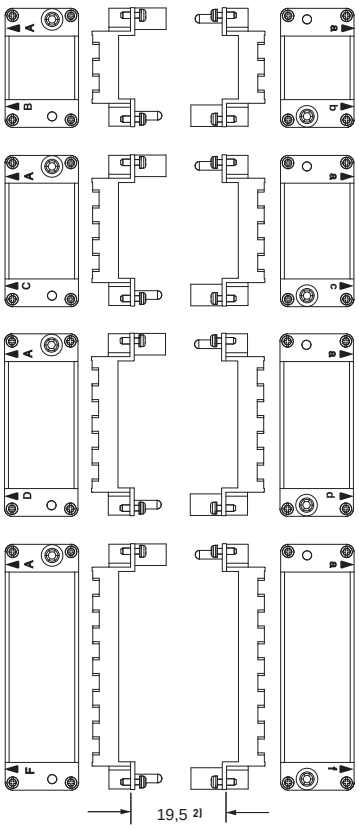

[1] **Warning:**
The module support frames are marked:
- FOR HOODS: **upper-case A-B, A-C, A-D and A-F**
- FOR HOUSINGS: **lower-case a-b, a-c, a-d and a-f**

Positioning the modules in the frames according to the respective letters is ensuring the specular assembly of modules, for which the hood will be coupled correctly to the housing.

[2] Distance for:
- electric and fibre optic contacts: max 21 mm
- pneumatic contacts: max 20,5 mm

CGT 6.0 – CGT 10 – CGT 25

PE terminal adapters for MIXO frames

- **PE terminal adapter CGT 6.0** made of nickel plated brass that allows to connect by crimping a 6 mm² / 10 AWG flexible copper conductor **to the small PE terminal** (2,5 mm² / 14 AWG) of a MIXO frame, in case the connector needs a second PE line sized 6 mm²/10 AWG when the large PE terminal (6 mm²/10 AWG) of the MIXO frame is already occupied by a large size PE conductor, by using the existing PE terminal adapter **CGT 16,** or the new ones for the large PE terminal, **CGT 10 or CGT 25.**

CGT 6.0

- **PE terminal adapters CGT 10 and CGT 25** made of nickel plated brass that allow to connect by crimping respectively a 10 mm² / 8 AWG or a 25 mm² / 4 AWG flexible copper conductor **to the large PE terminal** (6 mm²/10 AWG) of a MIXO frame.

CGT 10

- They are offered in addition to the existing PE terminal adapter **CGT 16** for 16 mm² / 6 AWG protective earth conductor – introduced with MIXO 100A modules **CX 02 G and CX 01 G** – to give more flexibility for the combination of MIXO 100A and 70A high power modules with **multi-core cables,** that have the PE conductor of the same size of the phase conductors.

- Crimping is achieved by using the already available manual hydraulic crimping tool **CGPZ** (Cembre HT 45) with hexagonal crimping dies **CGD 10 C** (for **CGT 10** with 10 mm² / 8 AWG and for **CGT 6.0** with 6 mm² / 10 AWG flexible copper conductors) and **CGD 25 C** (for **CGT 25** with 25 mm² / 4 AWG flexible copper conductors).

CGT 25

CGT 6.0 - CGT 10 - CGT 25

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures or in COB panel supports.

page:
frames for modular units **316 - 317**

PE terminal adapter

headless screw M4X6

description	part No.	part No.
PE wire terminal adapter 6 mm² (10 AWG)	**CGT 6.0**	
PE wire terminal adapter 10 mm² (8 AWG)	**CGT 10**	
PE wire terminal adapter 16 mm² (6 AWG) [1]	**CGT 16**	
PE wire terminal adapter 25 mm² (4 AWG)	**CGT 25**	
headless screw M4X6, stainless steel, kit of 10 pcs. (see point 5 below)		**CR VGM4**

[1] CGT 16 already available

How to use the PE terminal adapter

1) Strip 15 mm of flexible PE wire.
2) Crimp the cable on the CGT adapter by using the CGPZ pliers with the dies as follows:
   - **CGD 10 C** for 6 mm² and 10 mm²
   - **CGD 16 C** for 16 mm²
   - **CGD 25 C** for 25 mm²
3) Fix the adapter tip in the larger earth terminal (6 mm²) for CGT 10, CGT 16, CGT 25 or in the smaller earth terminal (2,5 mm²) for CGT 6.0 of frames CX...TM/TF.
4) To be used with bulkhead mounting housings or high construction hoods.
5) Cannot be used with T-TYPE surface mounting housings and horizontal cable outlet hoods. For the use within bulkhead housings and vertical entry hoods it is needed to replace the M4 screw of the 6 mm² PE contact of the frame with the headless screw **CR VGM4**.

cURus pending

CGT 6.0



CGT 10



CGT 16



CGT 25



MODULES
FOR HIGH NUMBER OF MATINGS

Within the range of **series HNM**, for High Number of Matings, all MIXO modules for crimp contacts 40A, 16A and/or 10A, combined with the use of especially high thickness gold-plated/lubricated crimp contacts of:

- series **RX** (40A HNM variant of series CX),
- series **RC** (16A HNM variant of series CC), and
- series **RD** (10A HNM variant of series CD)

mounted in the dedicated **MIXO HNM frames** cat. nos. **RX 02 /03 /04 /06 TF /TM**, also employing especially gold-plated PE contacts, allow the creation of **HNM** modular connector inserts.

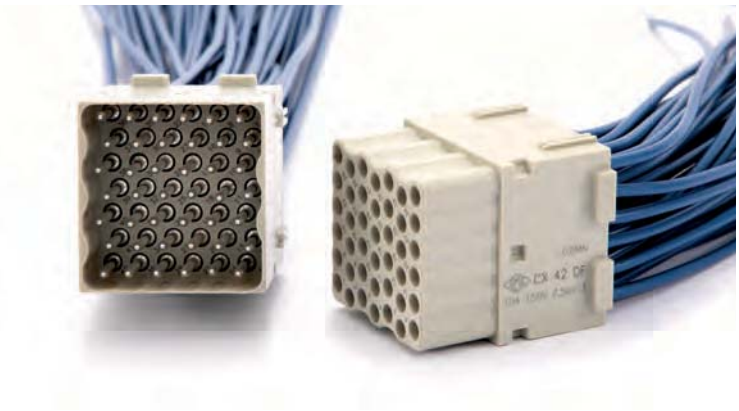

The connector modules of series MIXO that by using HNM 40A contacts series **RX**, HNM 16A contacts series **RC** and/or HNM 10A contacts series **RD** toghether with **MIXO HNM frames** RX 02...06 TF/M can create MIXO HNM modular connector inserts are:

- **CX 02 4F/M**, **CX 03 4F/M**, **CX 03 4BF/M** and **CX 04 XF/XM** (with **RX** HNM contacts)
- **CX 3/4 XDF/M** (with **RX** and **RD** HNM contacts)
- **CX 06 CF/M**, **CX 06P CF/M**, **CX 08 CF/M** and **CX 20 CF/M** (with **RC** HNM contacts)
- **CX 12 DF/M**, **CX 17 DF/M** and **CX 42 DF/M** (with **RD** HNM contacts)

SUM UP

- **Up to 10.000 matings in combination with HNM enclosures**
- **Up to 5.000 matings with standard hoods with single lever**

CX 02 4F/4M 2 poles 40A - 1000V HNM (High Number of Matings)

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures* or in COB panel supports.

page:
frames for modular units* **333**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

modular units, crimp connections

10.000 MATINGS WITH HNM FRAMES AND HNM ENCLOSURES

5.000 MATINGS WITH HNM FRAMES AND STANDARD ENCLOSURES, SINGLE LEVER

40A crimp contacts gold plated

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts [1]	**CX 02 4F**	
male inserts for male contacts [1]	**CX 02 4M**	
40A female crimp contacts		
1,5 mm² AWG 16		**RXF2D 1.5**
2,5 mm² AWG 14		**RXF2D 2.5**
4 mm² AWG 12		**RXF2D 4.0**
6 mm² AWG 10		**RXF2D 6.0**
10 mm² AWG 8		**RXF2D 10**
40A male crimp contacts		
1,5 mm² AWG 16		**RXM2D 1.5**
2,5 mm² AWG 14		**RXM2D 2.5**
4 mm² AWG 12		**RXM2D 4.0**
6 mm² AWG 10		**RXM2D 6.0**
10 mm² AWG 8		**RXM2D 10**

gold plated

[1] **cable diameter up to 7,5 mm contact size up to 10 mm²**

- characteristics according to EN 61984:
  40A 1000V 8kV 3
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 0,3 mΩ
- can be mated with CX 02 A/B modules
- **it is recommended to crimp the contacts** (1,5 - 10 mm²), **with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts, RXF2D and RXM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 02 4, 2 poles connector inserts
Maximum current load derating diagram

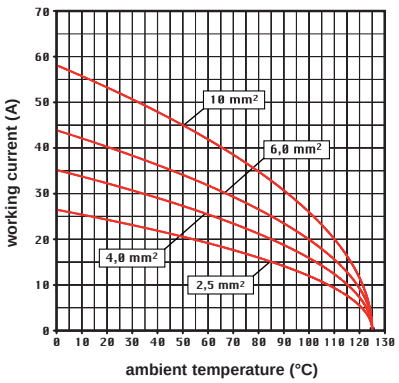

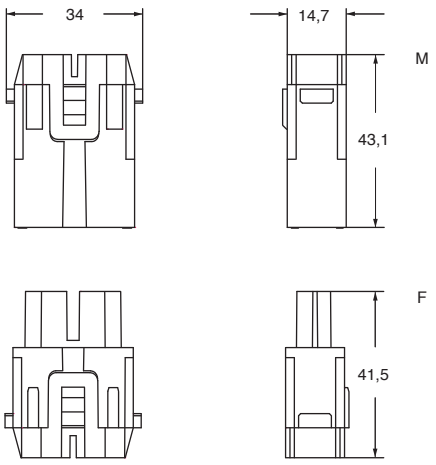

contacts side (front view)

side with reference arrow ▲



- 1 frame slot



RXF2D and RXM2D contacts

conductor section (mm²)	conductor slot ø A (mm)	conductor stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6
10	4,3	15

CX 03 4F/4M 3 poles 40A - 400/690V HNM (High Number of Matings)

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures or in COB panel supports.

page:
frames for modular units **333**

modular units, crimp connections

- **10.000 MATINGS WITH HNM FRAMES AND HNM ENCLOSURES**
- **5.000 MATINGS WITH HNM FRAMES AND STANDARD ENCLOSURES, SINGLE LEVER**

40A crimp contacts gold plated

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts [1]	**CX 03 4F**	
male inserts for male contacts [1]	**CX 03 4M**	
40A female crimp contacts		
1,5 mm² AWG 16		**RXF2D 1.5**
2,5 mm² AWG 14		**RXF2D 2.5**
4 mm² AWG 12		**RXF2D 4.0**
6 mm² AWG 10		**RXF2D 6.0**
40A male crimp contacts		
1,5 mm² AWG 16		**RXM2D 1.5**
2,5 mm² AWG 14		**RXM2D 2.5**
4 mm² AWG 12		**RXM2D 4.0**
6 mm² AWG 10		**RXM2D 6.0**

gold plated

[1] **cable diameter up to 5 mm**

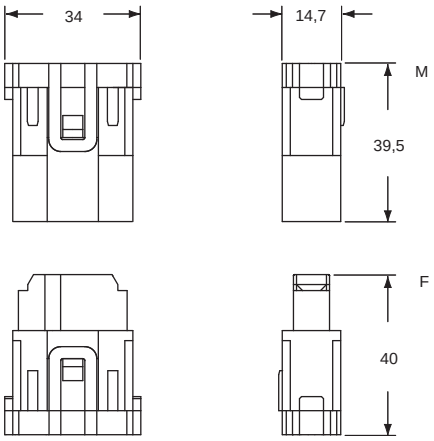



- characteristics according to EN 61984:
  40A 400/690V 6kV 3
- c UL us (UL for USA and Canada), SP CQC DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 0,3 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts, RXF2D and RXM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 03 poles connector inserts
Maximum current load derating diagram

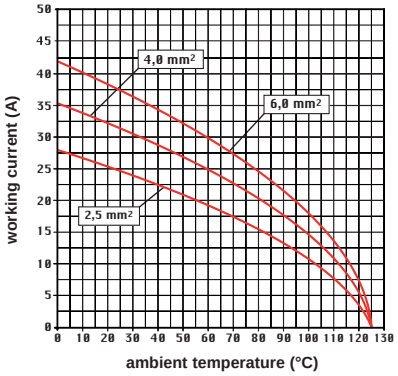

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

RXF2D and RXM2D contacts

conductor section (mm²)	conductor slot ø A (mm)	conductor stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6

dimensions shown in mm are not binding and may be changed without notice

CX 03 4BF/4BM 3 poles 40A - 500V HNM (High Number of Matings)

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures* or in COB panel supports.

page:
frames for modular units* **333**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

modular units, crimp connections



10.000 MATINGS WITH HNM FRAMES AND HNM ENCLOSURES

5.000 MATINGS WITH HNM FRAMES AND STANDARD ENCLOSURES, SINGLE LEVER

40A crimp contacts gold plated

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts [1]	**CX 03 4BF**	
male inserts for male contacts [1]	**CX 03 4BM**	
40A female crimp contacts		
1,5 mm² AWG 16		**RXF2D 1.5**
2,5 mm² AWG 14		**RXF2D 2.5**
4 mm² AWG 12		**RXF2D 4.0**
6 mm² AWG 10		**RXF2D 6.0**
10 mm² AWG 8		**RXF2D 10**
40A male crimp contacts		
1,5 mm² AWG 16		**RXM2D 1.5**
2,5 mm² AWG 14		**RXM2D 2.5**
4 mm² AWG 12		**RXM2D 4.0**
6 mm² AWG 10		**RXM2D 6.0**
10 mm² AWG 8		**RXM2D 10**

gold plated

[1] **cable diameter up to 7,5 mm contact size up to 10 mm²**

- characteristics according to EN 61984:
  40A 500V 6kV 3
- cULus (UL for USA and Canada), CSA, CQC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 0,3 mΩ
- can be mated with CX 02 A/B modules
- **it is recommended to crimp the contacts** (1,5 - 10 mm²), **with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts, RXF2D and RXM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 03 4B, 3 poles connector inserts
Maximum current load derating diagram

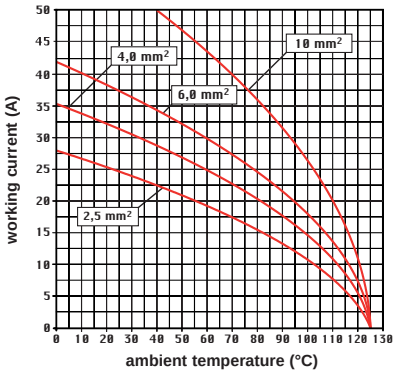

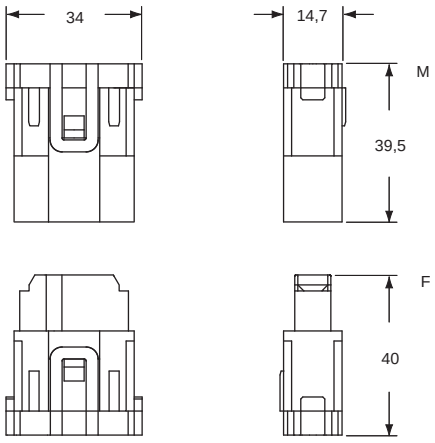

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

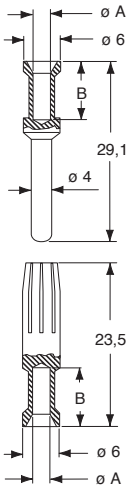

RXF2D and RXM2D contacts

conductor section (mm²)	conductor slot ø A (mm)	conductor stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6
10	4,3	15

CX 3/4 XDF/M 3 p (40A - 830V) + 4 p (10A - 830V) HNM (High Number of Matings)

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures or in COB panel supports.

page:

frames for modular units **333**

- male and female contacts finger proof
- their key characteristic **lies in the fact that they guarantee maximum safety even in case of accidental contact with fingers (IP2X or IPXXB)**. Safety is guaranteed as standard on female contacts, but also on male contacts. This feature is important as it ensures full compliance with the recent safety standard **EN 60204-1**, concerning electric equipment fitted on machines and in particular with the requirements of Article 6.2.4 concerning protection against residual voltage. ***In the case of plugs or similar devices, the with drawal of which results in the exposure of conductors (for example pins), the discharge time shall not exceed 1 s, otherwise such conductors shall be protected against direct contact to at least an IP2X or IPXXB.***

modular units, crimp connections

10.000 MATINGS WITH HNM FRAMES AND HNM ENCLOSURES

5.000 MATINGS WITH HNM FRAMES AND STANDARD ENCLOSURES, SINGLE LEVER

40A and 10A crimp contacts gold plated

40A

10A

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts	**CX 3/4 XDF**	
male inserts for male contacts	**CX 3/4 XDM**	
40A female crimp contacts		
1,5 mm² AWG 16		**RXF2D 1.5**
2,5 mm² AWG 14		**RXF2D 2.5**
4 mm² AWG 12		**RXF2D 4.0**
6 mm² AWG 10		**RXF2D 6.0**
40A male crimp contacts		
1,5 mm² AWG 16		**RXM2D 1.5**
2,5 mm₂ AWG 14		**RXM2D 2.5**
4 mm² AWG 12		**RXM2D 4.0**
6 mm² AWG 10		**RXM2D 6.0**
10A female crimp contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDF2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDF2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDF2D 0.7**
1 mm² AWG 18 identification No. 3		**RDF2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDF2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDF2D 2.5**
10A male crimp contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDM2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDM2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDM2D 0.7**
1 mm² AWG 18 identification No. 3		**RDM2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDM2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDM2D2.5**

gold plated

- characteristics according to EN 61984:
  3 poles 40A 830V 8kV 3
  4 poles 10A 830V 8kV 3
- cULus (UL for USA and Canada), SP, CQC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 0,3 mΩ (3 poles), ≤ 3 mΩ (4 poles)
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 3/4 poles connector inserts
Maximum current load derating diagram

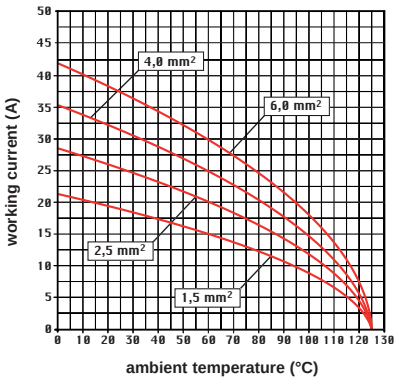

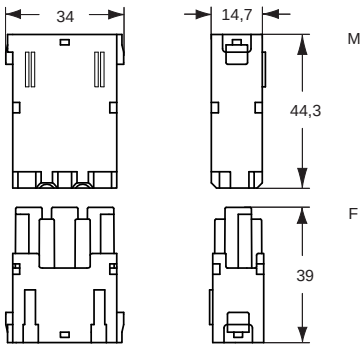

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts, RXF2D, RXM2D series and 10A contacts RDF2D, RDM2D series) on pages 708 - 741

RXF2D and RXM2D



RDF2D and RDM2D



RXF2D and RXM2D contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6

RDF2D and RDM2D contacts

0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

dimensions shown in mm are not binding and may be changed without notice

CX 04 XF/XM 4 poles 40A - 830V HNM (High Number of Matings)

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures* or in COB panel supports.

page:
frames for modular units* **333**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

modular units, crimp connections with red lock-in tab (included)

10.000 MATINGS WITH HNM FRAMES AND HNM ENCLOSURES

5.000 MATINGS WITH HNM FRAMES AND STANDARD ENCLOSURES, SINGLE LEVER

40A crimp contacts gold plated

description	part No.	part No
without contacts (to be ordered separately) (module red lock-in tab included) female inserts for female contacts male inserts for male contacts	 **CX 04 XF** **CX 04 XM**	
40A female crimp contacts 1,5 mm² AWG 16 2,5 mm² AWG 14 4 mm² AWG 12 6 mm² AWG 10		**RXF2D 1.5** **RXF2D 2.5** **RXF2D 4.0** **RXF2D 6.0**
40A male crimp contacts 1,5 mm² AWG 16 2,5 mm² AWG 14 4 mm² AWG 12 6 mm² AWG 10		**RXM2D 1.5** **RXM2D 2.5** **RXM2D 4.0** **RXM2D 6.0**

gold plated

- characteristics according to EN 61984:
  40A 830V 8kV 3
  40A 1000V 8kV 2
- c UL us (UL for USA and Canada), CSA, CEC, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 0,3 mΩ
- for spare lock-in tab **CX CFMX** see SPARE SPARTS catalogue
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 40A contacts, RXF2D and RXM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX 04 poles connector inserts
Maximum current load derating diagram

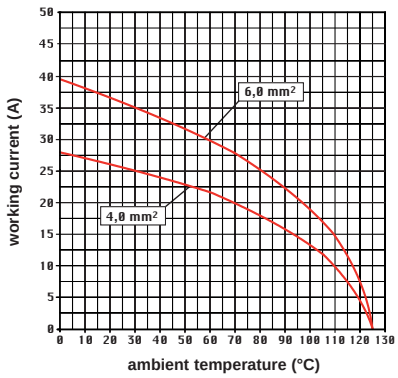

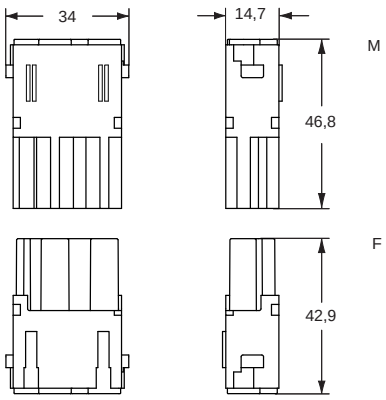

contacts side (front view)c
side with reference arrow ▲



- 1 frame slot

Female inserts are supplied with two red lock tab that must be used instead of those supplied with the frames.



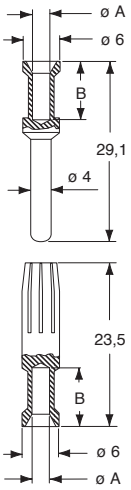

RXF2D and RXM2D contacts

conductor section (mm²)	conductor slot ø A (mm)	conductor stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6

- male and female contacts finger proof
- their key characteristic **lies in the fact that they guarantee maximum safety even in case of accidental contact with fingers (IP2X or IPXXB)**. Safety is guaranteed as standard on female contacts, but also on male contacts. This feature is important as it ensures full compliance with the recent safety standard **EN 60204-1**, concerning electric equipment fitted on machines and in particular with the requirements of Article 6.2.4 concerning protection against residual voltage. ***In the case of plugs or similar devices, the with drawal of which results in the exposure of conductors (for example pins), the discharge time shall not exceed 1 s, otherwise such conductors shall be protected against direct contact to at least an IP2X or IPXXB.***

CX 06P CF/CM 6 poles protected 16A - 830V HNM (High Number of Matings)

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures or in COB panel supports.

page:
frames for modular units **333**

- we recommend the use of CRF / CRM code pins

modular units, crimp connections

RATING 830V

10.000 MATINGS WITH HNM FRAMES AND HNM ENCLOSURES

5.000 MATINGS WITH HNM FRAMES AND STANDARD ENCLOSURES, SINGLE LEVER

16A crimp contacts gold plated

description			part No.	part No.
without contacts (to be ordered separately)				
female inserts for female contacts			**CX 06P CF**	
male inserts for male contacts			**CX 06P CM**	
16A female contacts				
0,14-0,37 mm²	AWG 26-22	one groove		**RCF2D 0.3**
0,5 mm²	AWG 20	with no grooves		**RCF2D 0.5**
0,75 mm²	AWG 18	one groove (back side)		**RCF2D 0.7**
1 mm²	AWG 18	one groove		**RCF2D 1.0**
1,5 mm²	AWG 16	two grooves		**RCF2D 1.5**
2,5 mm²	AWG 14	three grooves		**RCF2D 2.5**
3 mm²	AWG 12	one wide groove		**RCF2D 3.0**
4 mm²	AWG 12	with no grooves		**RCF2D 4.0**
16A male contacts				
0,14-0,37 mm²	AWG 26-22	one groove		**RCM2D 0.3**
0,5 mm²	AWG 20	with no grooves		**RCM2D 0.5**
0,75 mm²	AWG 18	one groove (back side)		**RCM2D 0.7**
1 mm²	AWG 18	one groove		**RCM2D 1.0**
1,5 mm²	AWG 16	two grooves		**RCM2D 1.5**
2,5 mm²	AWG 14	three grooves		**RCM2D 2.5**
3 mm²	AWG 12	one wide groove		**RCM2D 3.0**
4 mm²	AWG 12	with no grooves		**RCM2D 4.0**

gold plated

- characteristics according to EN 61984:
  16A 830V 8kV 3
- DNV·GL BUREAU VERITAS EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 1 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, RCF2D and RCM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

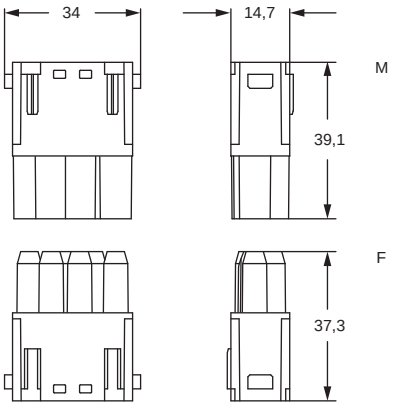

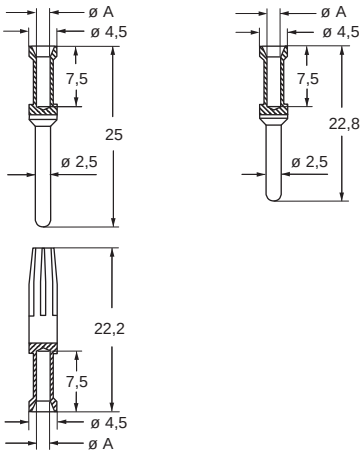

CX 06 poles connector inserts
Maximum current load derating diagram

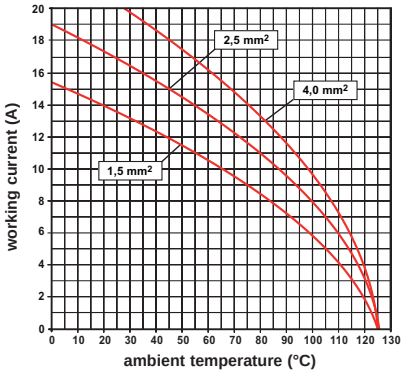

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

RCF2D and RCM2D contacts

conductor section (mm²)	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

CX 06 CF/CM 6 poles 16A - 500V HNM (High Number of Matings)

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures or in COB panel supports.

page:
frames for modular units **333**

modular units, crimp connections



- **10.000 MATINGS WITH HNM FRAMES AND HNM ENCLOSURES**
- **5.000 MATINGS WITH HNM FRAMES AND STANDARD ENCLOSURES, SINGLE LEVER**

16A crimp contacts gold plated

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts	**CX 06 CF**	
male inserts for male contacts	**CX 06 CM**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCF2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCF2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCF2D 0.7**
1 mm² AWG 18 one groove		**RCF2D 1.0**
1,5 mm² AWG 16 two grooves		**RCF2D 1.5**
2,5 mm² AWG 14 three grooves		**RCF2D 2.5**
3 mm² AWG 12 one wide groove		**RCF2D 3.0**
4 mm² AWG 12 with no grooves		**RCF2D 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCM2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCM2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCM2D 0.7**
1 mm² AWG 18 one groove		**RCM2D 1.0**
1,5 mm² AWG 16 two grooves		**RCM2D 1.5**
2,5 mm² AWG 14 three grooves		**RCM2D 2.5**
3 mm² AWG 12 one wide groove		**RCM2D 3.0**
4 mm² AWG 12 with no grooves		**RCM2D 4.0**

gold plated

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 1 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, RCF2D and RCM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

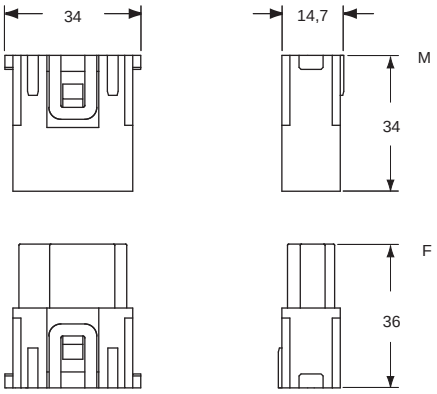

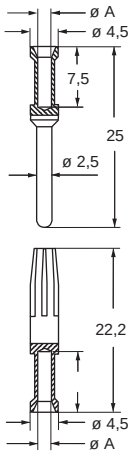

CX 06 poles connector inserts
Maximum current load derating diagram

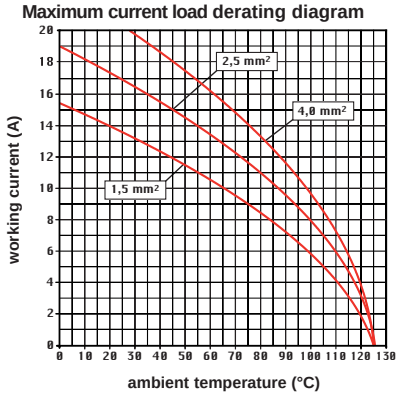

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

RCF2D and RCM2D contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CX 08 CF/CM 8 poles 16A - 400V HNM (High Number of Matings)

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures or in COB panel supports.

page:
frames for modular units **333**

modular units, crimp connections



16A crimp contacts gold plated

- **10.000 MATINGS WITH HNM FRAMES AND HNM ENCLOSURES**
- **5.000 MATINGS WITH HNM FRAMES AND STANDARD ENCLOSURES, SINGLE LEVER**

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts	**CX 08 CF**	
male inserts for male contacts	**CX 08 CM**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCF2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCF2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCF2D 0.7**
1 mm² AWG 18 one groove		**RCF2D 1.0**
1,5 mm² AWG 16 two grooves		**RCF2D 1.5**
2,5 mm² AWG 14 three grooves		**RCF2D 2.5**
3 mm² AWG 12 one wide groove		**RCF2D 3.0**
4 mm² AWG 12 with no grooves		**RCF2D 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCM2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCM2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCM2D 0.7**
1 mm² AWG 18 one groove		**RCM2D 1.0**
1,5 mm² AWG 16 two grooves		**RCM2D 1.5**
2,5 mm² AWG 14 three grooves		**RCM2D 2.5**
3 mm² AWG 12 one wide groove		**RCM2D 3.0**
4 mm² AWG 12 with no grooves		**RCM2D 4.0**

gold plated

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 400/690V 6kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 1 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, RCF2D and RCM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

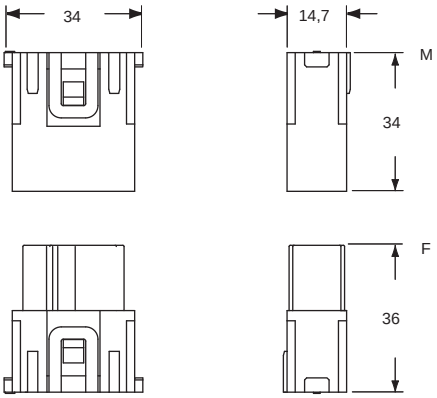

contacts side (front view)

side with reference arrow ▲



- 1 frame slot



CX 08 poles connector inserts
Maximum current load derating diagram

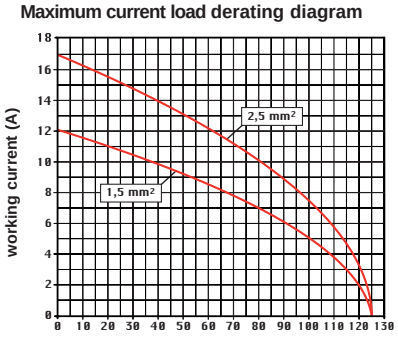

RCF2D and RCM2D contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

dimensions shown in mm are not binding and may be changed without notice

CX 20 CF/CM 20 poles 16A - 500V HNM (High Number of Matings)

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures or in COB panel supports.

page:
frames for modular units **333**

modular units, crimp connections

- **10.000 MATINGS WITH HNM FRAMES AND HNM ENCLOSURES**
- **5.000 MATINGS WITH HNM FRAMES AND STANDARD ENCLOSURES, SINGLE LEVER**

16A crimp contacts gold plated

description	part No.	part No.
without contacts (to be ordered separately)		
female inserts for female contacts [1]	**CX 20 CF**	
male inserts for male contacts [1]	**CX 20 CM**	
16A female contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCF2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCF2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCF2D 0.7**
1 mm² AWG 18 one groove		**RCF2D 1.0**
1,5 mm² AWG 16 two grooves		**RCF2D 1.5**
2,5 mm² AWG 14 three grooves		**RCF2D 2.5**
3 mm² AWG 12 one wide groove		**RCF2D 3.0**
4 mm² AWG 12 with no grooves		**RCF2D 4.0**
16A male contacts		
0,14-0,37 mm² AWG 26-22 one groove		**RCM2D 0.3**
0,5 mm² AWG 20 with no grooves		**RCM2D 0.5**
0,75 mm² AWG 18 one groove (back side)		**RCM2D 0.7**
1 mm² AWG 18 one groove		**RCM2D 1.0**
1,5 mm² AWG 16 two grooves		**RCM2D 1.5**
2,5 mm² AWG 14 three grooves		**RCM2D 2.5**
3 mm² AWG 12 one wide groove		**RCM2D 3.0**
4 mm² AWG 12 with no grooves		**RCM2D 4.0**

gold plated

[1] on request, version with 3 fastened CX 20 CF/CM inserts with poles numbered from 1 – 60 references: **CX 60 CF**, **CX 60 CM**

- characteristics according to EN 61984:
  16A 500V 6kV 3
  16A 830V 8kV 2
- cULus (UL for USA and Canada), CSA, cec, DNV·GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 1 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, RCF2D and RCM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

CX20 poles connector inserts
Maximum current load derating diagram

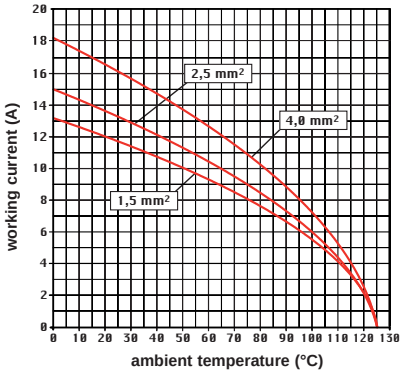

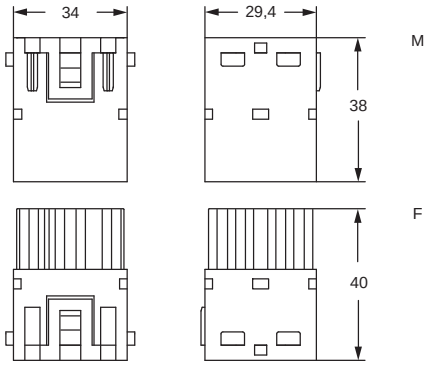

contacts side (front view)

side with reference arrow ▲



- 2 frame slots



RCF2D and RCM2D contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5

CX 12 DF/DM 12 poles 10A - 250V HNM (High Number of Matings)

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures* or in COB panel supports.

page:
frames for modular units* **333**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

modular units, crimp connections



RATING 250V

10.000 MATINGS WITH HNM FRAMES AND HNM ENCLOSURES

5.000 MATINGS WITH HNM FRAMES AND STANDARD ENCLOSURES, SINGLE LEVER

10A crimp contacts gold plated

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts	**CX 12 DF**	
male inserts for male contacts	**CX 12 DM**	
10A female contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDF2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDF2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDF2D 0.7**
1 mm² AWG 18 identification No. 3		**RDF2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDF2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDF2D 2.5**
10A male contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDM2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDM2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDM2D 0.7**
1 mm² AWG 18 identification No. 3		**RDM2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDM2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDM2D 2.5**

gold plated

- characteristics according to EN 61984:
  10A 160V 2,5kV 3
  10A 250V 4kV 2
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 3 mΩ
- PCBs interface, refer to article CIF 2.4 on page 670
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, RDF2D and RDM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

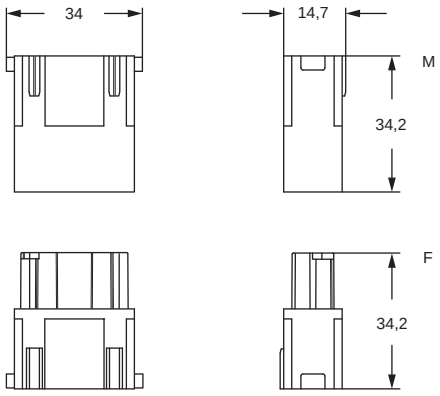

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

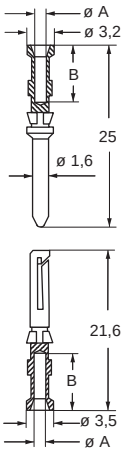

RDF2D and RDM2D contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CX 12 poles connector inserts
Maximum current load derating diagram

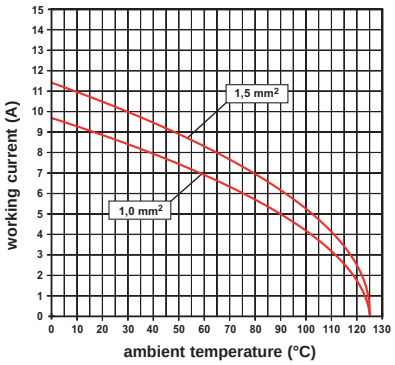

dimensions shown in mm are not binding and may be changed without notice

CX 17 DF/DM 17 poles 10A - 160V HNM (High Number of Matings)

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures or in COB panel supports.

page:
frames for modular units **333**

modular units, crimp connections



- 10.000 MATINGS WITH HNM FRAMES AND HNM ENCLOSURES
- 5.000 MATINGS WITH HNM FRAMES AND STANDARD ENCLOSURES, SINGLE LEVER

10A crimp contacts, gold plated

description	part No.	part No
without contacts (to be ordered separately)		
female inserts for female contacts	**CX 17 DF**	
male inserts for male contacts	**CX 17 DM**	
10A female contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDF2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDF2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDF2D 0.7**
1 mm² AWG 18 identification No. 3		**RDF2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDF2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDF2D 2.5**
10A male contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDM2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDM2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDM2D 0.7**
1 mm² AWG 18 identification No. 3		**RDM2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDM2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDM2D 2.5**

gold plated

- characteristics according to EN 61984:
  10A 160V 2,5kV 3
  10A 250V 4kV 2
- cULus (UL for USA and Canada), SEV, cec, DNV-GL, BUREAU VERITAS, EAC certified
- rated voltage according to UL/CSA: 250V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 3 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, RDF2D and RDM2D series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

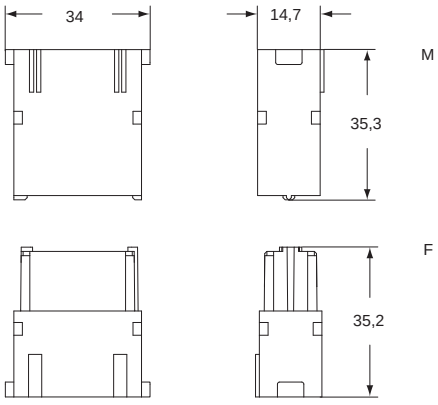

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

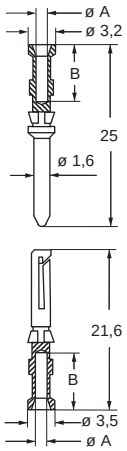

RDF2D and RDM2D contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

CX 17 poles connector inserts
Maximum current load derating diagram

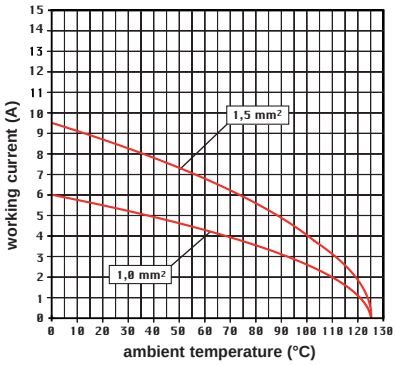

CX 42 DF/DM 42 poles 10A - 150V HNM (High Number of Matings)

The modular inserts must be installed in suitable frames, which are then mounted in traditional enclosures* or in COB panel supports.

page:
frames for modular units* **333**

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

modular units, crimp connections



Q **10.000 MATINGS WITH HNM FRAMES AND HNM ENCLOSURES**

Q **5.000 MATINGS WITH HNM FRAMES AND STANDARD ENCLOSURES, SINGLE LEVER**

10A crimp contacts gold plated

description	part No.	part No.
without contacts (to be ordered separately), supplied with 2 dedicated black coloured 2-slot sized lock-in tab		
female inserts for female contacts	**CX 42 DF**	
male inserts for male contacts	**CX 42 DM**	
10A female contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDF2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDF2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDF2D 0.7**
1 mm² AWG 18 identification No. 3		**RDF2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDF2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDF2D 2.5**
10A male contacts		
0,14-0,37 mm² AWG 26-22 identification No. 1		**RDM2D 0.3**
0,5 mm² AWG 20 identification No. 2		**RDM2D 0.5**
0,75 mm² AWG 18 identification No. ②		**RDM2D 0.7**
1 mm² AWG 18 identification No. 3		**RDM2D 1.0**
1,5 mm² AWG 16 identification No. 4		**RDM2D 1.5**
2,5 mm² AWG 14 identification No. 5		**RDM2D 2.5**

gold plated✢

- characteristics according to EN 61984:
  10A 150V 2,5kV 3
- cURus, CSA, CQC, DNV-GL, BV, EAC pending
- rated voltage according to UL/CSA: 250V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 10.000 cycles
- contact resistance: ≤ 3 mΩ
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, RDF2D and RDM2D series) on pages 708 - 741

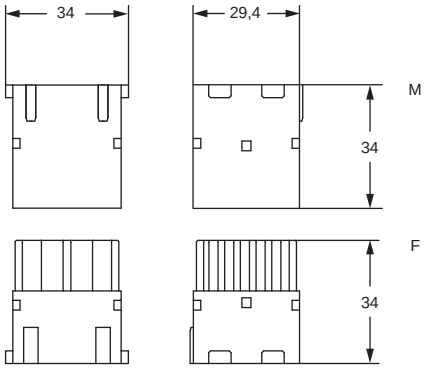

contacts side (front view)

rear view, side with reference arrow ▲

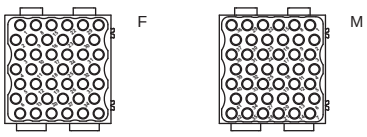

- 2 frame slots

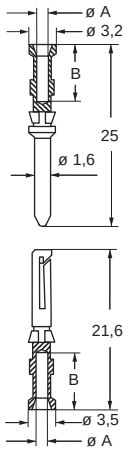

- supplied with dedicated black coloured 2-slot sized lock-in tab (2, one per each side).
- for spare lock-in tab **CX CFMD** see SPARE SPARTS catalogue

RDF2D and RDM2D contacts

conductor cross-sectional area mm²	conductor slot ø A (mm)	conductor stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

✢ for basic or high thickness gold plating, please refer to page 480 of CN.16 catalogue

dimensions shown in mm are not binding and may be changed without notice

RX 02 TM/TF, RX 03 TM/TF, RX 04 TM/TF, RX 06 TM/TF HNM (High Number of Matings)

enclosures size:		page:
"44.27"	HNM	592 - 593
	C-TYPE IP65/IP66, single lever	387 - 392
	V-TYPE IP65/IP66, single lever	444 - 447
	E-Xtreme® corrosion proof	530-531, 542, 550-551
"57.27"	HNM	594 - 595
	C-TYPE IP65/IP66, single lever	393 - 401
	V-TYPE IP65/IP66, single lever	448 - 453
	E-Xtreme® corrosion proof	532 - 533, 543, 552 - 553
"77.27"	HNM	596 - 597
	C-TYPE IP65/IP66, single lever	402 - 411
	V-TYPE IP65/IP66, single lever	454 - 458
	E-Xtreme® corrosion proof	534 - 535, 544, 554 - 555
"104.27"	HNM	598 - 599
	C-TYPE IP65/IP66, single lever	412 - 423
	V-TYPE IP65/IP66, single lever	459 - 463
	E-Xtreme® corrosion proof	536 - 537, 545, 556 - 557
"77.62"	C-TYPE IP65/IP66, single lever	424 - 429
	E-Xtreme® corrosion proof	546
"104.62"	C-TYPE IP65/IP66, single lever	430
	E-Xtreme® corrosion proof	547

C-TYPE and V-TYPE 2-lever versions cannot be used to reach 5.000 matings.

frames for modular units with lock-in tab (included)

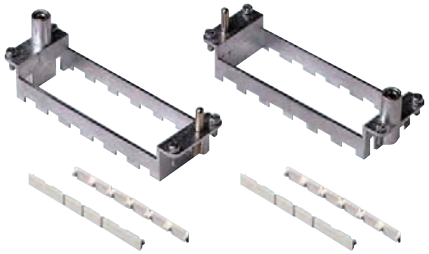

10.000 MATINGS WITH HNM FRAMES AND HNM ENCLOSURES

5.000 MATINGS WITH HNM FRAMES AND STANDARD ENCLOSURES, SINGLE LEVER

description	part No.	
-frames for modular units with lock-in tab included	type for hoods	type for housings
for 2 modular units - for housing size 44.27	**RX 02 TM**	**RX 02 TF**
for 3 modular units - for housing size 57.27	**RX 03 TM**	**RX 03 TF**
for 4 modular units - for housing size 77.27 and 77.62	**RX 04 TM**	**RX 04 TF**
for 6 modular units - for housing size 104.27 and 104.62	**RX 06 TM**	**RX 06 TF**

- die-cast zinc alloy frames
- protective earth (PE)
- possibility of mounting female and male modular units on the same frame
- frames supplied with lock-in tab to attach units
- polarisation on frames
- coding pins **CR..CX**
- for spare lock-in tab **CX CFM** see SPARE SPARTS catalogue

RX TM / TF

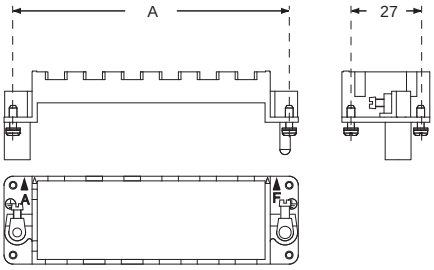

part No.	A (mm)	for housings size
RX 02 TM / TF	44	44,27
RX 03 TM / TF	57	57,27
RX 04 TM / TF	77,5	77,27 and 77,62
RX 06 TM / TF	104	104,27 and 104,62

Earth terminal
- large: for cables from 4-6 mm², AWG 12-10
- small: for cables from 1-2,5 mm², AWG 18-14

In order to accomodate larger PE conductor cross-sectional area, use CGT PE adapters, see page 319.

position of modules (contact side view)

side with reference arrow ▲

side with reference arrow ▲

CX CFM (lock-in tab)

Polarisation of frames with relative identification letters and couplings

frame for hoods [1] **frames for housings** [1]

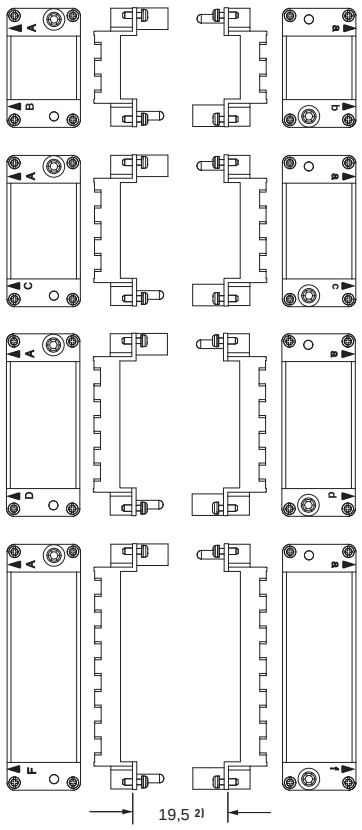

[1] **Warning:**
The module support frames are marked:
- FOR HOODS: **upper-case A-B, A-C, A-D and A-F**
- FOR HOUSINGS: **lower-case a-b, a-c, a-d and a-f**

Positioning the modules in the frames according to the respective letters is ensuring the specular assembly of modules, for which the hood will be coupled correctly to the housing.

[2] Distance for:
- electric and fibre optic contacts: max 21 mm
- pneumatic contacts: max 20,5 mm

ENCLOSURES

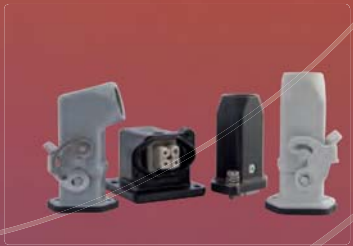

CK - MK
• Size 21.21 ..... 339 - 343

CKX
• Size 21.21 ..... 344 - 345

CK - CKG - MKG DESINA.
• Size 21.21 ..... 346 - 348

CKA - MKA
• Size 21.21 ..... 349 - 352

CKA - MKA DESINA.
• Size 21.21 ..... 353 - 354

MKAG DESINA.
• Size 21.21 355

CKAX
• Size 21.21 356

CKA - CKAXX
• Size 21.21 357

MKAX
• Size 21.21 ..... 358, 360, 362

MKA - MKAXX
• Size 21.21 ..... 359, 361, 363

CQ - MQ
• Size 32.13 ..... 365 - 367

MIXO ONE CXA - MXA
• Pages ..... 368 - 371

IL-BRID CZ - MZ
• Size 49.16 ..... 374 - 377, 382
• Size 66.16 ..... 378 -382

RIGID LEVER CZ7 - MZ7
• Size 49.16 384
• Size 66.16 385

C-TYPE

- Size 44.27 ..... 387 - 392
- Size 57.27 ..... 393 - 401
- Size 77.27 ..... 402 - 411
- Size 104.27 ..... 412 - 423
- Size 77.62 ..... 424 - 429
- Size 104.62 430
- Size 66.40 ..... 431 - 434

V-TYPE IP67
V-TYPE IP65/IP66

- Size 44.27 ..... 436 - 437 (IP67), 444 - 447 (IP65/IP66)
- Size 57.27 ..... 438 (IP67), 448 - 453 (IP65/IP66)
- Size 77.27 ..... 439 - 440 (IP67), 454 - 458 (IP65/IP66)
- Size 104.27 ..... 441 - 442 (IP67), 459 - 463 (IP65/IP66)

BIG

- Size 44.27 ..... 466 - 467
- Size 57.27 ..... 468 - 469
- Size 77.27 ..... 470 - 471
- Size 104.27 ..... 472 - 473

T-TYPE
T-TYPE/W

- Size 44.27 ..... 480 - 481, 489 (W)
- Size 57.27 ..... 482 - 483, 490 (W)
- Size 77.27 ..... 484 - 485, 491 (W)
- Size 104.27 ..... 486 - 487, 492 (W)

HYGIENIC T-TYPE/H

- Size 44.27 501
- Size 57.27 502
- Size 77.27 503
- Size 104.27 504

HYGIENIC T-TYPE/C

- Size 44.27 506
- Size 57.27 507
- Size 77.27 508
- Size 104.27 509

W-TYPE

- Size 21.21 ..... 512 - 518
- Size 49.16 519
- Size 66.16 520
- Size 44.27 521
- Size 57.27 522
- Size 77.27 523
- Size 104.27 524
- Size 77.62 525
- Size 104.62 526
- Size 66.40 527

E-Xtreme® IP67 V-TYPE lever / standard

- Size 44.27 ..... 530 - 531
- Size 57.27 ..... 532 - 533
- Size 77.27 ..... 534 - 535
- Size 104.27 ..... 536 - 537

E-Xtreme® for aggressive environments

- Size 21.21 ..... 538 - 539
- Size 49.16 540
- Size 66.16 541
- Size 44.27 542
- Size 57.27 543
- Size 77.27 544
- Size 104.27 545
- Size 77.62 546
- Size 104.62 547
- Size 66.40 548

E-Xtreme® IP68

- Size 44.27 ..... 550 - 551
- Size 57.27 ..... 552 - 553
- Size 77.27 ..... 554 - 555
- Size 104.27 ..... 556 - 557

EMC

- Size 21.21 ..... 564 - 572
- Size 32.13 ..... 573 - 575
- Size 49.16 576
- Size 66.16 577
- Size 44.27 578
- Size 57.27 579
- Size 77.27 580
- Size 104.27 581

180 °C

- Size 21.21 ..... 583 - 585
- Size 44.27 586
- Size 57.27 587
- Size 77.27 588
- Size 104.27 589
- Size 104.62 590

HNM

- Size 44.27 ..... 592 - 593
- Size 57.27 ..... 594 - 595
- Size 77.27 ..... 596 - 597
- Size 104.27 ..... 598 - 599
- Dummy hoods, self-centring floating frame ..... 600 - 601

CENTRAL LEVER

- Size 44.27 ..... 603 - 605
- Size 57.27 ..... 606 - 608
- Size 77.27 ..... 609 - 611
- Size 104.27 ..... 612 - 614
- Locking device ..... 615 - 616

LS-TYPE

- Size 44.27 ..... 618 - 619
- Size 57.27 ..... 620 - 621
- Size 77.27 ..... 622 - 623
- Size 104.27 ..... 624 - 625

IP68

- Size 21.21 ..... 628 - 631
- Size 44.27 ..... 632 - 635
- Size 57.27 ..... 636 - 639
- Size 77.27 ..... 640 - 643
- Size 104.27 ..... 644 - 647



COB for inserts

- Size 44.27 ..... 652 - 653
- Size 57.27 ..... 652 - 653
- Size 77.27 ..... 652 - 653
- Size 104.27 ..... 652 - 653
- Size 49.16 654
- Size 66.16 654

SPECIAL ENCLOSURES

CVI/MVI angled bulkhead mounting (Motor connection)

- Size 57.27 450

CH bulkhead

- Size 44.27 656
- Size 57.27 656
- Size 77.27 656
- Size 104.27 656

CA bottom entry

- Size 104.27 657

CYR cable passing hoods 658

CYG for in-line joints 659

T-BOX branch couplings ..... 660 - 661

Thermoplastic and metallic enclosures size “21.21” for standard or aggressive environments

SUM-UP

- **For use with all size “21.21” connector inserts**
- **Connector inserts for use at SELV are prevented to be installed in metallic enclosures CKA-MKA, CGK-MGK (as they would not provide protective earth connection for the enclosure) thanks to a special key and keyway system in all “21.21” metallic enclosure. Insulating “21.21” enclosures accept all “21.21” inserts**
- **CGK-MGK IP68 enclosures (actually IP66/IP68/IP69) available both with 2-screw locking or by 2-bayonet locking (types with suffix B)**

UL certified for USA and Canada for Type 4, 4X and 12 degrees of protection (enclosure type ratings, equivalent to NEMA rating), printed on the packaging.
IP44 degree of protection, IP66/IP67/IP69 by using the special fixing screw + gasket kit CKR 65(D) separately available, and suitable cable outlet device.
IP66/IP68/IP69 degree of protection for CGK-MGK enclosures equipped with CKR 65(D) kit.

Characteristics of materials for CK and MK series

- Insulating enclosures in self-extinguishing light grey RAL 7035 or jet black RAL 9005 thermoplastic material;
- metal enclosures in die cast zinc or aluminium alloy, according to model;
- metal enclosures with epoxy-polyester thermosetting powder coating grey RAL 7040;
- gaskets in anti-aging, oil-resistant, grease-resistant and fuel-resistant NBR vinyl nitrile elastomer provided on the “21.21” male inserts (according to model), glued on some hood models and some cover models, or provided as flange gasket (according to model);
- metallic enclosures with block locking lever in stainless or galvanized steel;
- insulating enclosures with single-block locking lever in self-extinguishing thermoplastic material (CK-MK) or with stainless steel lever (CKX- MKX).

CK - MK standard insulating version

inserts		page:
CK	3 poles + ⏚	**58**
CK	4 poles + ⏚	**58**
CKS	3 poles + ⏚	**-**
CKS	4 poles + ⏚	**-**
CKSH	3 poles + ⏚	**63**
CKSH	4 poles + ⏚	**63**
CD	7 poles + ⏚	**66**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

only for I (straight) housings (if the counterpart has glued gasket):

CJ KF/M	**223**
CJK 8FT/8MT	**226**
CJK 8IFT/8IMT	**226, 228**
CJK 8M	**233**
CUK 2FT	**236**
CUK 3FT	**236**
CLK 04 SC	**239**
CX 1/2 BD	**243**

bulkhead mounting housings

angled bulkhead mounting housings

description	part No.	part No. (entry Pg 11)	part No. (entry M20)
with lever with lever	**CK 03 I** (light grey RAL 7035) **CK 03 IN** (jet black RAL 9005)		
without cable entry, with lever without cable entry, with lever		**CK 03 IA** (light grey RAL 7035) **CK 03 IAN** (jet black RAL 9005)	
with cable entry and lever with cable entry and lever		**CK 03 IAPS** (light grey RAL 7035) **CK 03 IAPNS** (jet black RAL 9005)	**MK IAP20** (light grey RAL 7035) **MK IAPN20** (jet black RAL 9005)
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**	**CKR 65**	
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 07/08 inserts	**CKR 65 D**	**CKR 65 D**	

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type and colour may vary upon specific part No.

panel cut-out for enclosures



CK I - CK IN



CK IA - CK IAN

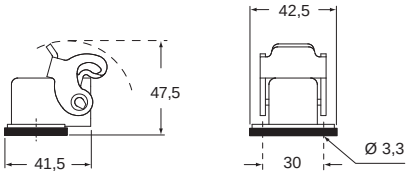

CK IAPS - CK IAPSN and **MK IAP - MK IAPN**

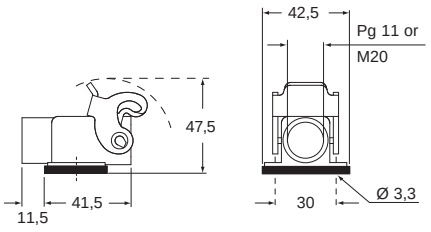

Type 12
Type 4/4X only
with CKR 65 (D)

IP66/IP67/IP69 with CKR 65 (D) [1]

CK - MK standard insulating version

inserts		page:
CK	3 poles + ⏚	**58**
CK	4 poles + ⏚	**58**
CKS	3 poles + ⏚	**-**
CKS	4 poles + ⏚	**-**
CKSH	3 poles + ⏚	**63**
CKSH	4 poles + ⏚	**63**
CD	7 poles + ⏚	**66**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

hoods

covers

description	part No. (entry Pg 11)	part No. (entry M20)	part No. (with eyelet)	part No. (with loop)
with pegs, top entry	**CK 03 VS** (light grey RAL 7035)	**MK V20** (light grey RAL 7035)		
with pegs, top entry	**CK 03 VNS** (jet black RAL 9005)	**MK VN20** (jet black RAL 9005)		
with pegs, side entry	**CK 03 VAS** (light grey RAL 7035)	**MK VA20** (light grey RAL 7035)		
with pegs, side entry	**CK 03 VANS** (jet black RAL 9005)	**MK VAN20** (jet black RAL 9005)		
with lever, top entry	**CK 03 VGS** (light grey RAL 7035)	**MK VG20** (light grey RAL 7035)		
with lever, top entry	**CK 03 VGNS** (jet black RAL 9005)	**MK VGN20** (jet black RAL 9005)		
with pegs and gasket, for female inserts			**CK 03 C** (light grey RAL 7035)	**CK 03 CS** (light grey RAL 7035)
with pegs and gasket, for female inserts			**CK 03 CN** (jet black RAL 9005)	
with pegs, for male inserts			**CK 03 CA** (light grey RAL 7035)	**CK 03 CAS** (light grey RAL 7035)
with pegs, for male inserts			**CK 03 CAN** (jet black RAL 9005)	
with lever and gasket, for female inserts				**CK 03 CX** (light grey RAL 7035)
with lever and gasket, for female inserts				**CK 03 CXN** (jet black RAL 9005)
with lever, for male inserts				**CK 03 CXA** (light grey RAL 7035)
with lever, for male inserts				**CK 03 CXAN** (jet black RAL 9005)
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**			
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 07/08 inserts	**CKR 65 D**			

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type and colour may vary upon specific part No.

Type 12
Type 4/4X only
with CKR 65 (D)

IP66/IP67/IP69 with CKR 65 (D) [1]

CK VS - CK VNS and **MK V - MK VN**

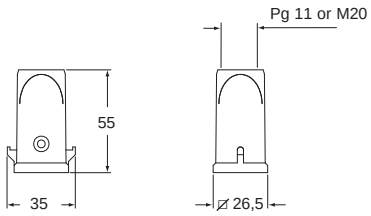

CK VAS - CK VANS and **MK VA - MK VAN**



CK VGS - CK VGNS and **MK VG - MK VGN**



CK C - CK CN - CK CS



CK CA - CK CAN - CK CAS



CK CX - CK CXN



CK CXA - CK CXAN



For fixing on housings

eyelet



For fixing on hoods

loop



MK standard insulating version

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD	7 poles + ⏚	**66**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

hood

hood

description	part No. (entry M25)		part No. (entry M25)	
with pegs, top entry with pegs, top entry	**MK V25**	(light grey RAL 7035)	**MK VN25**	(jet black RAL 9005)
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**		**CKR 65**	
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 07/08 inserts	**CKR 65 D**		**CKR 65 D**	

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection.

NOTE: Housing colour may vary upon specific part No.





cURus
Type 12 / Type 4/4X only with CKR 65 (D) pending

EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) [1]

MK standard insulating version

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD	7 poles + ⏚	**66**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**
CJ KM		**223**
CJK 8MT		**226**
CJK 8IMT		**226, 228**
CJK 8M		**233**
CUK 2FT, CUK 3FT		**236**
CLK 04 SC		**239**
CX 1/2 BD		**243**
CXL 2/4 SF, CXL 2/4 SM		**250**
CXL SF, CXL SM		**250**
CXL 2/4 PF, CXL 2/4 PFH		**251**
CXL 2/4 PM, CXL 2/4 PMH		**251**
CXL PF, CXL PM		**251**

hood

description	part No. (entry M25)	
with lever, top entry	**MK VG25**	(light grey RAL 7035)
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**	
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 07/08 inserts	**CKR 65 D**	

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M



NOTE: Housing type may vary upon specific part No.

cURus
Type 12 / Type 4/4X only with CKR 65 (D) pending

EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) [1]

MK

MK standard insulating version

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD	7 poles + ⏚	**66**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**
CJ KM		**223**
CJK 8MT		**226**
CJK 8IMT		**226, 228**
CJK 8M		**233**
CUK 2FT, CUK 3FT		**236**
CLK 04 SC		**239**
CX 1/2 BD		**243**
CXL 2/4 SF, CXL 2/4 SM		**250**
CXL SF, CXL SM		**250**
CXL 2/4 PF, CXL 2/4 PFH		**251**
CXL 2/4 PM, CXL 2/4 PMH		**251**
CXL PF, CXL PM		**251**

hood

description	part No. (entry M25)	
with lever, top entry	**MK VGN25**	(jet black RAL 9005)
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**	
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 07/08 inserts	**CKR 65 D**	

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M



NOTE: Housing type may vary upon specific part No.

cURus
Type 12 / Type 4/4X only with CKR 65 (D) pending

EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) [1]

CKX standard insulating version

inserts		page:
CK	3 poles + ⏚	**58**
CK	4 poles + ⏚	**58**
CKS	3 poles + ⏚	**-**
CKS	4 poles + ⏚	**-**
CKSH	3 poles + ⏚	**63**
CKSH	4 poles + ⏚	**63**
CD	7 poles + ⏚	**66**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

only for I (straight) housings (if the counterpart has glued gasket):

CJ KF/M	**223**
CJK 8FT/8MT	**226**
CJK 8IFT/8IMT	**226, 228**
CJK 8M	**233**
CUK 2FT	**236**
CUK 3FT	**236**
CLK 04 SC	**239**
CX 1/2 BD	**243**

bulkhead mounting housings

angled bulkhead mounting housings

description	part No.	part No. (entry Pg 11)
with stainless steel lever	**CKX 03 I** (light grey RAL 7035)	
with stainless steel lever	**CKX 03 IN** (jet black RAL 9005)	
without cable entry, with stainless steel lever		**CKX 03 IA**
with cable entry and stainless steel lever		**CKX 03 IAP**
with cable entry and stainless steel lever		**CKX 03 IAPS**
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 07/08 inserts	**CKR 65 D**	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type and colour may vary upon specific part No.

CKX I - CKX IN



CKX IA

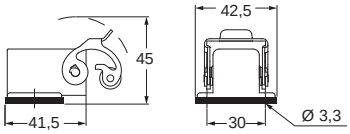

CKX IAP - CKX IAPS

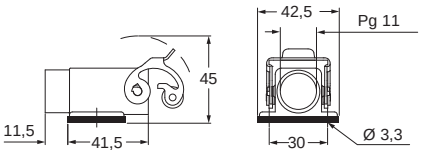

panel cut-out for enclosures



IP66/IP67/IP69 with CKR 65 (D) [1]

CKX standard insulating version

inserts		page:
CK	3 poles + ⏚	**58**
CK	4 poles + ⏚	**58**
CKS	3 poles + ⏚	**-**
CKS	4 poles + ⏚	**-**
CKSH	3 poles + ⏚	**63**
CKSH	4 poles + ⏚	**63**
CD	7 poles + ⏚	**66**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

hoods

description	part No. (entry Pg 11)
with stainless steel lever, top entry	**CKX 03 VG**
without cable gland and stainless steel lever, top entry	**CKX 03 VGS**
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 07/08 inserts	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type and colour may vary upon specific part No.

CKX VG - CKX VGS



IP66/IP67/IP69 with CKR 65 (D) [1]

CK standard insulating version DESINA® ▲

inserts	page:
CJ KF	223
CJK 8FT	226
CJK 8IFT	228
CUK 2FT	236
CUK 3FT	236
CLK 04 SC	239
CX 1/2 BD	243
CXL 2/4 SF	250
CXL 2/4 SM	250
CXL SF	250
CXL SM	250

bulkhead mounting housings

cover

description	part No.		part No.	
with lever	**CK 03 I**	(light grey RAL 7035)		
with lever	**CK 03 IN**	(jet black RAL 9005)		
with pegs and glued gasket			**CKG 03 C**	(light grey RAL 7035)
with pegs and glued gasket			**CKG 03 CN**	(jet black RAL 9005)

▲ **suitable for DESINA® CXL inserts and male inserts without gasket**

panel cut-out for enclosures



CK I - CK IN



CKG C - CKG CN



Type 4/4X/12

IP66 IP67 IP69

dimensions shown in mm are not binding and may be changed without notice

CKG - MKG standard insulating version with glued gasket DESINA® ▲

inserts	page:
CJ KM	223
CJK 8MT	226
CJK 8IMT *	226, 228
CUK 2FT	236
CUK 3FT	236
CLK 04 SC *	239
CX 1/2 BD	243
CXL 2/4 SF	250
CXL 2/4 SM	250
CXL SF	250
CXL SM	250
CXL 2/4 PF	251
CXL 2/4 PFH	251
CXL 2/4 PM	251
CXL 2/4 PMH	251
CXL PF	251
CXL PM	251

* cannot be used with angled enclosures (part No. CKG 03 VA / MKG VA20)

hoods with glued gasket

description	part No. (entry Pg 11)	part No. (entry M20)
with pegs and glued gasket, top entry	**CKG 03 V** (light grey RAL 7035)	**MKG V20** (light grey RAL 7035)
with pegs and glued gasket, side entry	**CKG 03 VA** (light grey RAL 7035)	**MKG VA20** (light grey RAL 7035)
with pegs and glued gasket, top entry	**CKG 03 VN** (jet black RAL 9005)	**MKG VN20** (jet black RAL 9005)
with pegs and glued gasket, side entry	**CKG 03 VAN** (jet black RAL 9005)	**MKG VAN20** (jet black RAL 9005)

▲ **suitable for DESINA® CXL inserts and male inserts without gasket**

CKG V - CKG VN and **MKG V - MKG VN**

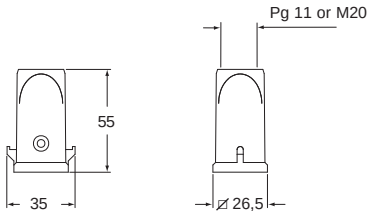

CKG VA - CKG VAN and **MKG VA - MKG VAN**



Type 4/4X/12

EN 60529 IP66 IP67 IP69 IEC 60529

MKG standard insulating version with glued gasket DESINA® ▲

inserts	page:
CJ KM	223
CJK 8MT	226
CJK 8IMT	226, 228
CJK 8M	233
CUK 2FT	236
CUK 3FT	236
CLK 04 SC	239
CX 1/2 BD	243
CXL 2/4 SF	250
CXL 2/4 SM	250
CXL SF	250
CXL SM	250
CXL 2/4 PF	251
CXL 2/4 PFH	251
CXL 2/4 PM	251
CXL 2/4 PMH	251
CXL PF	251
CXL PM	251

hood

hood

description	part No. (entry M25)	part No. (entry M25)
with pegs, top entry	**MKG V25** (light grey RAL 7035)	
with pegs, top entry		**MKG VN25** (jet black RAL 9005)

▲ **suitable for DESINA® CXL inserts and male inserts without gasket**





cURus
Type 12 / Type 4/4X pending

EN 60529 IP66 IP67 IP69 IEC 60529

MKG DESINA®

dimensions shown in mm are not binding and may be changed without notice

CKA - MKA standard metallic version

inserts		page:
CK	3 poles + ⏚	58
CK	4 poles + ⏚	58
CKS	3 poles + ⏚	-
CKS	4 poles + ⏚	-
CKSH	3 poles + ⏚	63
CKSH	4 poles + ⏚	63
CD	8 poles	67
CQ4	2 poles + ⏚	182
CQ4 H	2 poles + ⏚	183
CQ4	3 poles + ⏚	184
CQ	5 poles + ⏚	186
CQ	7 poles + ⏚	187
CQ	12 poles + ⏚	189
CQ	21 poles + ⏚	190

only for I (straight) housings (if the counterpart has glued gasket):

CJ KF/M	223
CJK 8FT/8MT	226
CJK 8IFT/8IMT	226, 228
CJK 8M	233
CUK 2FT	236
CUK 3FT	236
CLK 04 SC	239
CX 1/2 BD	243

bulkhead mounting housings

angled bulkhead mounting housings

description	part No.	part No. (entry Pg 11)	part No. (entry M20)
with galvanized steel lever	CKA 03 I		
with stainless steel lever	CKAX 03 I		
without cable entry, galvanized steel lever		CKA 03 IA	
without cable entry, stainless steel leverr		CKAX 03 IA	
with cable entry, galvanized steel lever		CKA 03 IAPS	MKA IAP20
with cable entry, stainless steel lever		CKAX 03 IAPS	MKAX IAP20
with cable entry, galvanized steel lever, bulkhead hole closed		CKA 03 APS	MKA AP20
with cable entry, stainless steel lever, bulkhead hole closed		CKAX 03 APS	MKAX AP20
gasket and screw kit for IP66/IP67/IP69 [1]	CKR 65	CKR 65	
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 08 inserts	CKR 65 D	CKR 65 D	

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type and colour may vary upon specific part No.

panel cut-out for enclosures



Type 12
Type 4/4X only
with CKR 65 (D)

IP66/IP67/IP69 with CKR 65 (D) [1]

CKA I



CKAX I



CKA IA

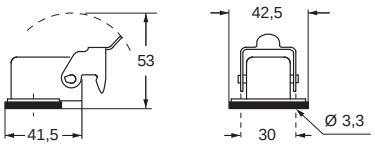

CKAX IA

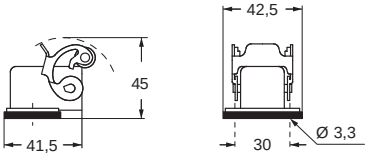

CKA IAPS (CKA APS) and **MKA IAP (MKA AP)**

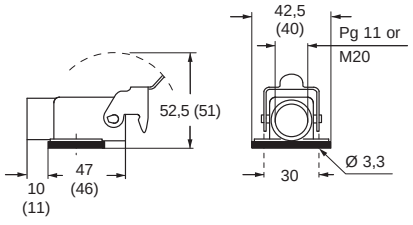

CKAX IAPS (CKAX APS) and **MKAX IAP (MKAX AP)**

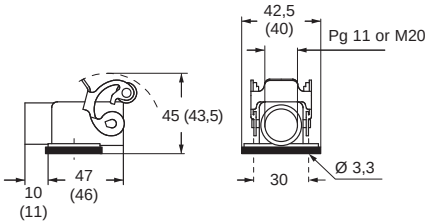

CKA - MKA and CKAX - MKAX standard metallic version

inserts		page:
CK	3 poles + ⏚	58
CK	4 poles + ⏚	58
CKS	3 poles + ⏚	-
CKS	4 poles + ⏚	-
CKSH	3 poles + ⏚	63
CKSH	4 poles + ⏚	63
CD	8 poles	67
CQ4	2 poles + ⏚	182
CQ4 H	2 poles + ⏚	183
CQ4	3 poles + ⏚	184
CQ	5 poles + ⏚	186
CQ	7 poles + ⏚	187
CQ	12 poles + ⏚	189
CQ	21 poles + ⏚	190

only for ILS/ILSA housings (if the counterpart has glued gasket):

CJ KF/M	223
CJK 8FT/8MT	226
CJK 8IFT/8IMT	226, 228
CJK 8M	233
CUK 2FT	236
CUK 3FT	236
CLK 04 SC	239
CX 1/2 BD	243

angled bulkhead mounting housings

bulkhead mounting housings with SELF-CLOSING cover

description	part No. (entry M20 / M25)	part No.
galvanized steel lever, M20 fixing thread (•) 1) stainless steel lever, M20 fixing thread (•) 1)	**MKA IAF20** **MKAX IAF20**	
galvanized steel lever, M25 fixing thread (•) 1) stainless steel lever, M25 fixing thread (•) 1)	**MKA IAF25** **MKAX IAF25**	
with stainless steel lever and gasket, for female inserts with stainless steel lever, for male inserts		**CKAX 03 ILS** **CKAX 03 ILSA**
with galvanized steel lever and gasket, for female inserts with galvanized steel lever, for male inserts		**CKA 03 ILS** **CKA 03 ILSA**
gasket and screw kit for IP66/IP67/IP69 1)	**CKR 65**	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 1) specific for CD 08 inserts	**CKR 65 D**	**CKR 65 D**

1) To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M.

NOTE: Housing type and colour may vary upon specific part No.

panel cut-out for enclosures CKA ILS/ILSA



MKA IAF

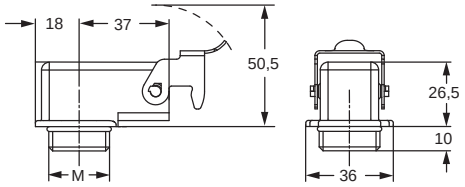

MKAX IAF

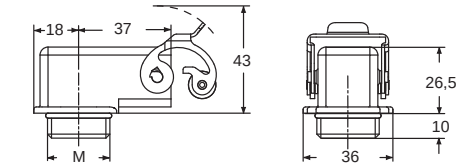

panel cut-out



USE OF THE LOCKNUT

CKA ILS

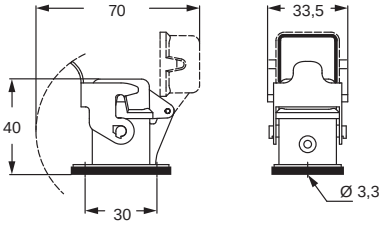

CKA ILSA

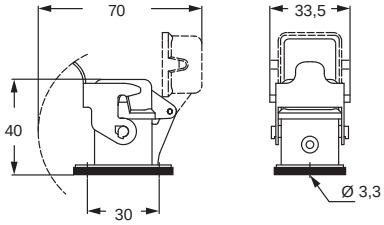

CKAX ILS

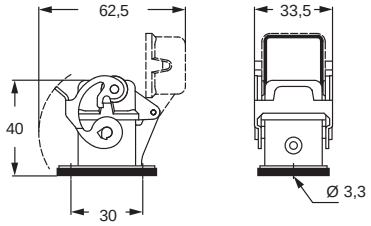

CKAX ILSA

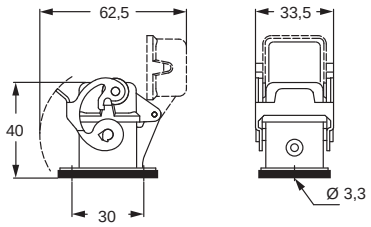

Type 12
Type 4/4X only with CKR 65 (D)

IP66/IP67/IP69 with CKR 65 (D) 1)

dimensions shown in mm are not binding and may be changed without notice

CKA - MKA and CKAX - MKAX standard metallic version

inserts		page:
CK	3 poles + ⏚	**58**
CK	4 poles + ⏚	**58**
CKS	3 poles + ⏚	**-**
CKS	4 poles + ⏚	**-**
CKSH	3 poles + ⏚	**63**
CKSH	4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

hoods

covers



description	part No. (entry Pg 11)	part No. (entry M20)	part No. (with eyelet)	part No. (with loop)
with pegs, top entry angled hoods, with pegs, side entry	**CKA 03 VS** **CKA 03 VAS**	**MKA V20** **MKA VA20**		
with galvanized steel lever, top entry with stainless steel lever, top entry	**CKA 03 VGS** **CKAX 03 VGS**	**MKA VG20** **MKAX VG20**		
with pegs and gasket, for female inserts [1] with pegs, for male inserts [1]			**CKA 03 C** **CKA 03 CA**	**CKA 03 CS** **CKA 03 CAS**
with stainless steel lever and gasket, for female inserts with stainless steel lever, for male inserts				**CKAX 03 CX** **CKAX 03 CXA**
gasket and screw kit for IP66/IP67/IP69 [2]	**CKR 65**		**CKR 65**	
gasket and screw kit for IP66/IP67/IP69 [2] specific for CD 08 inserts	**CKR 65 D**		**CKR 65 D**	

[1] Preferably be used with enclosures CKAX (stainless steel lever).

[2] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type and colour may vary upon specific part No.

Type 12
Type 4/4X only
with CKR 65 (D)

IP66/IP67/IP69 with CKR 65 (D) [1]

CKA VS and **MKA V**



CKA VAS and **MKA VA**



CKA VGS and **MKA VG**



CKAX VGS and **MKAX VG**



CKA C - CKA CS



CKA CA - CKA CAS



CKAX CX



CKAX CXA



For fixing on housings

eyelet



For fixing on hoods

loop



MKA standard metallic version

inserts		page:
CK	3 poles + ⏚	**58**
CK	4 poles + ⏚	**58**
CKS	3 poles + ⏚	**-**
CKS	4 poles + ⏚	**-**
CKSH	3 poles + ⏚	**63**
CKSH	4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

hoods

description	part No. (entry M25)
with pegs, top entry	**MKA V25**
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 08 inserts	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M



NOTE: Housing colour may vary upon specific part No.

Type 12
Type 4/4X only
with CKR 65 (D)

IP66/IP67/IP69 with CKR 65 (D) [1]

dimensions shown in mm are not binding and may be changed without notice

CKAX standard metallic version DESINA® ▲

inserts	page:
CJ KF	223
CJK 8FT	226
CJK 8IFT	228
CUK 2FT	236
CUK 3FT	236
CLK 04 SC	239
CX 1/2 BD	243
CXL 2/4 SF	250
CXL 2/4 SM	250
CXL SF	250
CXL SM	250

bulkhead mounting housings cover

bulkhead mounting housings with SELF-CLOSING cover

description	part No.	part No.
with stainless steel lever	**CKAX 03 I**	
with pegs and glued gasket	**CKAG 03 C**	
with stainless steel lever, for female inserts, with glued gasket on the cover		**CKAX 03 ILS**

▲ **suitable for DESINA® CXL inserts and male inserts without gasket**

panel cut-out for enclosures



CKAX I



CKAG C



CKAX ILS

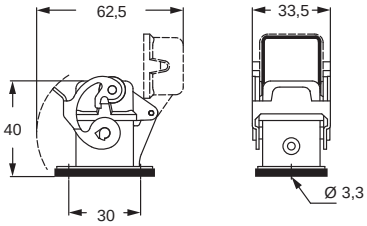

Type 4/4X/12

EN 60529 IP66 IP67 IP69 IEC 60529

CKAG - MKAG standard metallic version with glued gasket DESINA® ▲

inserts	page:
CJ KM	223
CJK 8MT	226
CJK 8IMT *	226, 228
CUK 2FT	236
CUK 3FT	236
CLK 04 SC *	239
CX 1/2 BD	243
CXL 2/4 PF	251
CXL 2/4 PFH	251
CXL 2/4 PM	251
CXL 2/4 PMH	251
CXL PF	251
CXL PM	251

* cannot be used with angled enclosures (part No. CKAG 03 VA / MKAG VA20)

hoods with glued gasket

description	part No. (entry Pg 11)	part No. (entry M20)
with pegs and glued gasket, top entry	**CKAG 03 V**	**MKAG V20**
with pegs and glued gasket, side entry	**CKAG 03 VA**	**MKAG VA20**

▲ **suitable for DESINA® CXL inserts and male inserts without gasket**

CKAG V and **MKAG V**

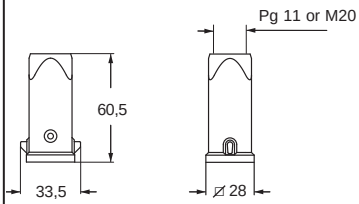

CKAG VA and **MKAG VA**



c UL us Type 4/4X/12

EN 60529 IP66 IP67 IP69 IEC 60529

dimensions shown in mm are not binding and may be changed without notice

MKAG standard metallic version with glued gasket DESINA®▲

inserts	page:
CJ KM	223
CJK 8MT	226
CJK 8IMT	226, 228
CJK 8M	233
CUK 2FT	236
CUK 3FT	236
CLK 04 SC	239
CX 1/2 BD	243
CXL 2/4 PF	251
CXL 2/4 PFH	251
CXL 2/4 PM	251
CXL 2/4 PMH	251
CXL PF	251
CXL PM	251

hoods with glued gasket

description	part No. (entry M25)
with pegs and glued gasket, top entry	**MKAG V25**

▲ **suitable for DESINA® CXL inserts and male inserts without gasket**



Type 4/4X/12

EN 60529 IP66 IP67 IP69 IEC 60529

CKAX standard metallic version

inserts		page:
CK	3 poles + ⏚	**58**
CK	4 poles + ⏚	**58**
CKS	3 poles + ⏚	**-**
CKS	4 poles + ⏚	**-**
CKSH	3 poles + ⏚	**63**
CKSH	4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

angled bulkhead mounting housings

STAINLESS STEEL LEVER

description	part No.
without cable entry, fixing by 4 screws	**CKAX 03 IA4**
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 08 inserts	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

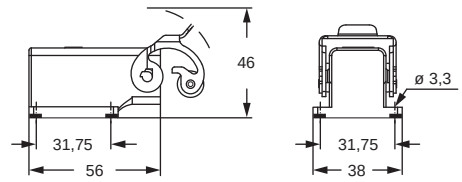

panel cut-out for enclosures



NOTE: Housing type and colour may vary upon specific part No.

EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) [1]

CKAX

dimensions shown in mm are not binding and may be changed without notice

CKA - CKAXX standard metallic version

inserts		page:
CK	3 poles + ⏚	**58**
CK	4 poles + ⏚	**58**
CKS	3 poles + ⏚	**-**
CKS	4 poles + ⏚	**-**
CKSH	3 poles + ⏚	**63**
CKSH	4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

angled bulkhead mounting housings

GALVANIZED STEEL RIGID LEVER

angled bulkhead mounting housings

STAINLESS STEEL RIGID LEVER

description	part No.	part No.
without cable entry, fixing by 4 screws	**CKA 03 IA4**	
without cable entry, fixing by 4 screws		**CKAXX 03 IA4**
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 08 inserts	**CKR 65 D**	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type and colour may vary upon specific part No.

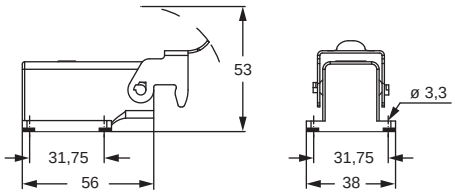

panel cut-out for enclosures



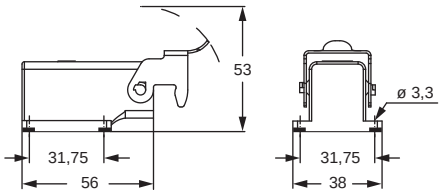

panel cut-out for enclosures



EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) [1]

MKAX standard metallic version

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

if the counterpart has glued gasket:

CJ KM	**223**
CJK 8MT	**226**
CJK 8IMT	**226, 228**
CLK 04 SC	**239**
CX 1/2 BD	**243**
CXL 2/4 SF/SM	**250**
CXL SF/SM	**250**
CXL 2/4 PF/PM	**251**
CXL 2/4 PFH/PMH	**251**
CXL PF/PM	**251**

angled surface mounting housings

STAINLESS STEEL LEVER

angled surface mounting housings

STAINLESS STEEL LEVER

description	part No. (entry M25)	part No. (entry M25)
with cable entry, fixing by 4 screws	**MKAX IAP25**	
with cable entry, fixing by 4 screws, bulkhead hole closed (without gasket)		**MKAX AP25**
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 08 inserts	**CKR 65 D**	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type and colour may vary upon specific part No.

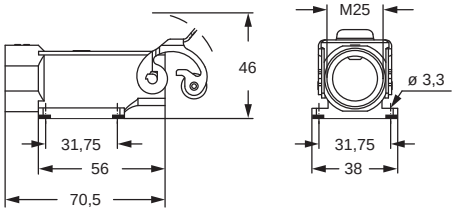

panel cut-out for enclosures



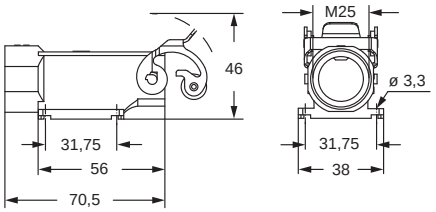

panel cut-out for enclosures



EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) [1]

MKA - MKAXX standard metallic version

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

if the counterpart has glued gasket:

CJ KM	**223**
CJK 8MT	**226**
CJK 8IMT	**226, 228**
CLK 04 SC	**239**
CX 1/2 BD	**243**
CXL 2/4 SF/SM	**250**
CXL SF/SM	**250**
CXL 2/4 PF/PM	**251**
CXL 2/4 PFH/PMH	**251**
CXL PF/PM	**251**

angled surface mounting housings

GALVANIZED STEEL RIGID LEVER

angled surface mounting housings

STAINLESS STEEL RIGID LEVER

description	part No. (entry M25)	part No. (entry M25)
with cable entry, fixing by 4 screws	**MKA IAP25**	
with cable entry, fixing by 4 screws, bulkhead hole closed (without gasket)	**MKA AP25**	
with cable entry, fixing by 4 screws		**MKAXX IAP25**
with cable entry, fixing by 4 screws, bulkhead hole closed (without gasket)		**MKAXX AP25**
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 08 inserts	**CKR 65 D**	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type and colour may vary upon specific part No.

MKA IAP

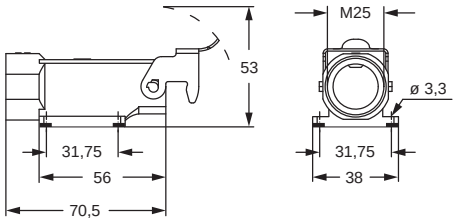

panel cut-out for enclosures



MKAXX IAP

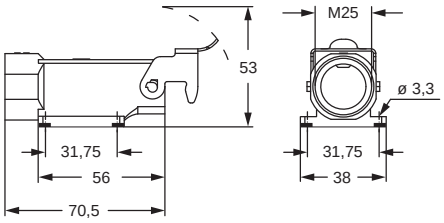

panel cut-out for enclosures



MKA AP

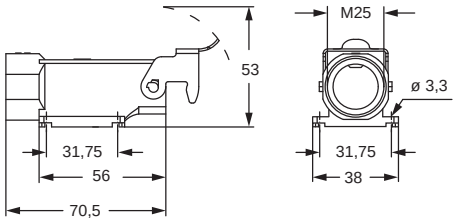

panel cut-out for enclosures



MKAXX AP

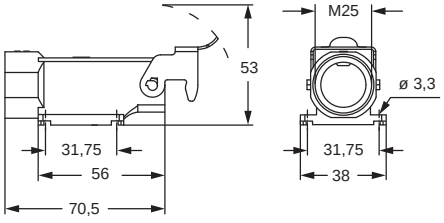

panel cut-out for enclosures



EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) [1]

MKAX standard metallic version

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**
CJ KM		**223**
CJK 8MT		**226**
CJK 8IMT		**226, 228**
CLK 04 SC		**239**
CX 1/2 BD		**243**
CXL 2/4 SF/SM		**250**
CXL SF/SM		**250**
CXL 2/4 PF/PM		**251**
CXL 2/4 PFH/PMH		**251**
CXL PF/PM		**251**

hoods

STAINLESS STEEL LEVER

description	part No. (entry M25)
top entry	**MKAX VG25**
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 08 inserts	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M



NOTE: Housing type and colour may vary upon specific part No.

cURus
Type 12 / Type 4/4X only with CKR 65 (D) pending

EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) [1]

dimensions shown in mm are not binding and may be changed without notice

MKA - MKAXX standard metallic version

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**
CJ KM		**223**
CJK 8MT		**226**
CJK 8IMT		**226, 228**
CLK 04 SC		**239**
CX 1/2 BD		**243**
CXL 2/4 SF/SM		**250**
CXL SF/SM		**250**
CXL 2/4 PF/PM		**251**
CXL 2/4 PFH/PMH		**251**
CXL PF/PM		**251**

hoods

GALVANIZED STEEL RIGID LEVER

hoods

STAINLESS STEEL RIGID LEVER

description	part No. (entry M25)	part No. (entry M25)
top entry	**MKA VG25**	
top entry		**MKAXX VG25**
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 08 inserts	**CKR 65 D**	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M





NOTE: Housing type and colour may vary upon specific part No.

cURus
Type 12 / Type 4/4X only with CKR 65 (D) pending

EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) [1]

MKAX standard metallic version

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**
CJ KF		**223**
CJK 8FT		**228**
CJK 8IFT		**228**
CLK 04 SC		**239**
CX 1/2 BD		**243**
CXL 2/4 SF/SM		**250**
CXL SF/SM		**250**
CXL 2/4 PF/PM		**251**
CXL 2/4 PFH/PMH		**251**
CXL PF/PM		**251**

bulkhead mounting housings

STAINLESS STEEL LEVER

description	part No. (entry M32)
M32 fixing thread [1] [•]	**MKAX IF**
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 08 inserts	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M.

NOTE: Housing type and colour may vary upon specific part No.

panel cut-out for enclosures



[•] Locknut supplied on request, see Cable glands catalogue (article AS M32N metallic).

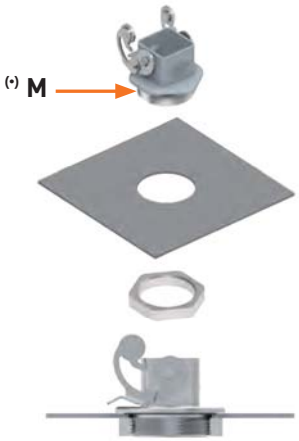

cURus
Type 4/4X/12 pending

IP66/IP67/IP69 with CKR 65 (D) [1]

dimensions shown in mm are not binding and may be changed without notice

MKA - MKAXX standard metallic version

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**
CJ KF		**223**
CJK 8FT		**228**
CJK 8IFT		**228**
CLK 04 SC		**239**
CX 1/2 BD		**243**
CXL 2/4 SF/SM		**250**
CXL SF/SM		**250**
CXL 2/4 PF/PM		**251**
CXL 2/4 PFH/PMH		**251**
CXL PF/PM		**251**

bulkhead mounting housings

GALVANIZED STEEL RIGID LEVER

bulkhead mounting housings

STAINLESS STEEL RIGID LEVER

description	part No. (entry M32)	part No. (entry M32)
M32 fixing thread [1] [(•)]	**MKA IF**	
M32 fixing thread [1] [(•)]		**MKAXX IF**
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 08 inserts	**CKR 65 D**	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M.

NOTE: Housing type and colour may vary upon specific part No.

[(•)] Locknut supplied on request, see Cable glands catalogue (article AS M32N metallic).

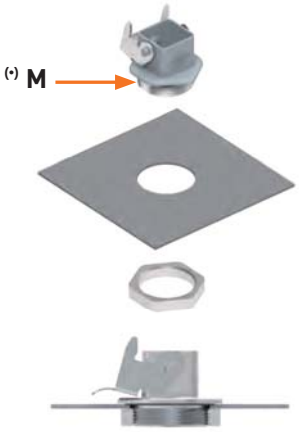

NOTE: Lever colour may vary upon specific part No.

cURus
Type 4/4X/12 pending

EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) [1]



panel cut-out for enclosures





panel cut-out for enclosures



Thermoplastic enclosures
size “32.13” standard or EMC versions

SUM-UP

For use with all size “32.13” connector inserts

Characteristics of materials
for CQ - MQ series

- In self-extinguishing grey RAL 7035 or jet black RAL 9005 thermoplastic material;
- gaskets in anti-aging, oil-resistant, grease-resistant and fuel-resistant NBR vinyl nitrile elastomer;
- with single-block locking lever in self-extinguishing thermoplastic material.

UL certified for USA and Canada for Type 4, 4X and 12 degrees of protection (enclosure type ratings, equivalent to NEMA rating), printed on the packaging.

IP66/IP67/IP69 degree of protection.

CQ insulating version

inserts		page:
CQ 04/2	4 poles + 2 poles + ⏚	191
CQ 08	8 poles + ⏚	192
CQ 17	17 poles + ⏚	193

bulkhead mounting housings with single lever

angled bulkhead mounting housings with single lever

description	part No.	part No.	entry Pg
with lever	**CQ 08 I**		
without cable entry, angled, with lever		**CQ 08 IA**	
with cable entry, angled, with lever		**CQ 08 IAP**	21

CQ I

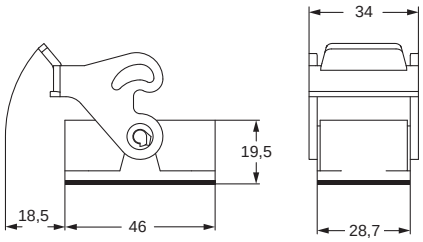

CQ IA

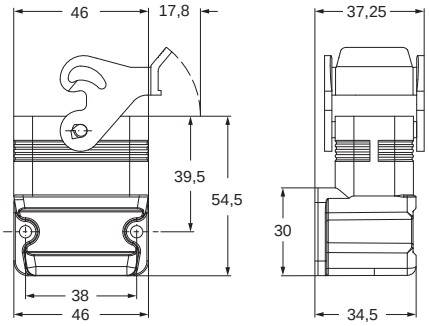

CQ IAP

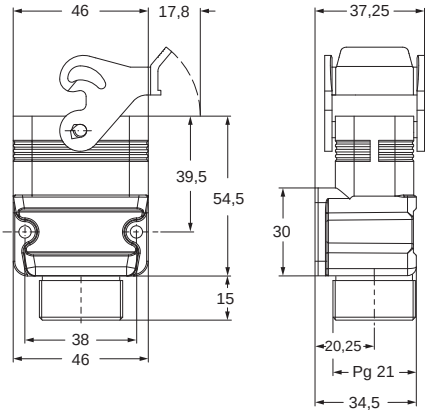

panel cut-out for CQ I enclosure



panel cut-out for CQ IA - CQ IAP enclosure



Type 4/4X/12

EN 60529 IP66 IP67 IP69 IEC 60529

CQ

CQ - MQ insulating version

inserts		page:
CQ 04/2	4 poles + 2 poles + ⏚	**191**
CQ 08	8 poles + ⏚	**192**
CQ 17	17 poles + ⏚	**193**

hoods with 2 pegs

hoods with 2 pegs

description	part No.	entry Pg	part No.	entry M
with pegs, side entry [1]	**CQ 08 VA**	16		
with pegs, top entry [1]	**CQ 08 V**	21		
with pegs, side and top entry [2]			**MQ 08 VO225**	25 x 2

[1] Pg male thread on enclosure exterior

[2] metric thread on the internal enclosure;
accessories to be ordered separately:
- **AL M25DN** insulating black sealing plug M25
- **AL M25IN** insulating black cable gland M25

CQ VA

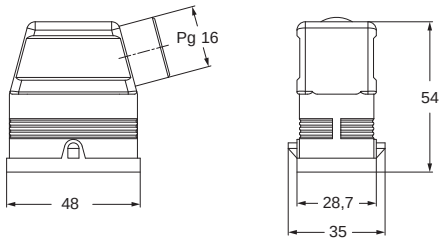

CQ V

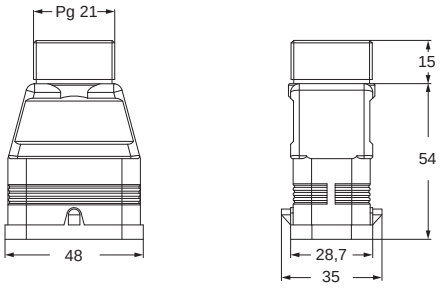

MQ VO

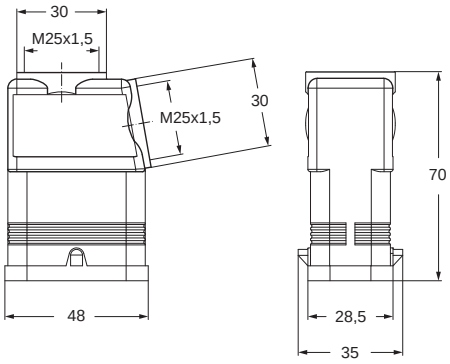

cULus Type 4/4X/12
(pending for MQ 08 VO225)

EN 60529 IP66 IP67 IP69 IEC 60529

dimensions shown in mm are not binding and may be changed without notice

CQ insulating version

inserts		page:
CQ 04/2	4 poles + 2 poles + ⏚	**191**
CQ 08	8 poles + ⏚	**192**
CQ 17	17 poles + ⏚	**193**

hoods with single lever

covers with 2 pegs
thermoplastic resin cable glands

description	part No.	entry Pg	part No.
with lever, top entry [1]	**CQ 08 VG**	21	
cover with 2 pegs for female inserts			**CQ 08 C**
cover with 2 pegs for male inserts			**CQ 08 CA**
cable gland head and gasket for CQ 08 VA enclosure			**CRQ 16**
cable gland head and gasket for CQ 08 V and VG enclosure			**CRQ 21**

[1] Pg male thread on enclosure exterior

cable diameters for cable glands:
- **CRQ 16**: 10 - 14,5 mm
- **CRQ 21**: 14 - 18 mm

CQ VG

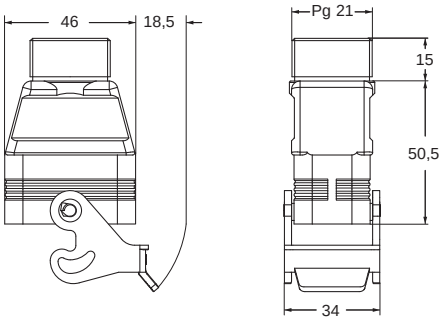

CQ C and **CQ CA**



CRQ 16 and **CRQ 21**

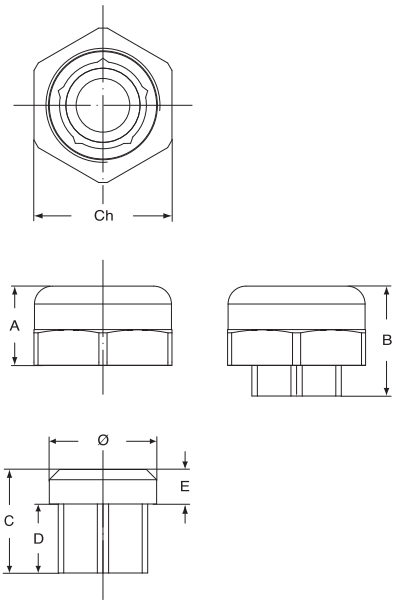

part No.	A	B	C	D	E	Ø	Ch
CRQ 16	15,5	21,5	20,25	13,5	6,75	21	27
CRQ 21	18,2	27,5	25	15,5	9	26,5	33

Type 4/4X/12

EN 60529 IP66 IP67 IP69 IEC 60529

MIXO ONE - CXA - MXA
TECHNICAL FEATURES

MIXO ONE is the aluminium housings system designed by ILME to accept the wide range of MIXO series single-sized modules.

- These robust connector enclosures (3 hood variants and 1 bulkhead mounting housing) transform each single MIXO module into a completely independent connector;
- the enclosures allow mounting of single MIXO module only in one guided way, to avoid incorrect match with the mating connector;
- the enclosures incorporate a pre-leading (first-make, last-break) PE connection terminal and contact, for the safest connector operation;
- the pins protruding from the bulkhead mounting housing act also as key guide, in cooperation with the corresponding keyway sockets in the hoods, to avoid incorrect 180° reversed mating with corresponding connector;
- the rigid locking lever is releasably mounted on moulded pegs that include a stopping teeth;
- the hoods are split in two parts (front, rear), to allow MIXO module mounting and simplify the enclosure's PE connection. Supplied with four self-threading screws and self-retaining sealing gasket;
- the bulkhead mounting housing is supplied with the module locking frame and self-retaining flange gasket;
- four optional coding pins available for up to 16 different codings, as a provision against mismatching when identical connectors are installed side by side;
- protection covers for hoods and housings , either with pegs (for enclosures with locking lever and sealing gasket) or with locking lever and sealing gasket (for enclosures with pegs) available either with eyelet-terminated string (for fastening to housings) or with loop-terminated cord (for fastening to hoods, around the incoming cable).

SUM-UP

- **Aluminium die cast alloy, nickel plated**
- **Rigid stainless steel locking lever**
- **Hoods split in two parts (front, rear), to simplify the PE connection. Supplied with four self-threading screws and sealing gasket**
- **Four optional coding pins for up to 16 different codings, as a provision against mismatching when identical connectors are installed side by side**
- **Protection covers for hoods and housings made in shock-proof thermoplastic material, either with pegs (for enclosures with locking lever and sealing gasket) or with locking lever and sealing gasket (for enclosures with pegs) both with eyelet-terminated string (for fastening to housings) or with loop-terminated cord (for fastening to hoods, around the incoming cable)**

Watch our video

dimensions shown in mm are not binding and may be changed without notice

MIXO ONE CXA - MXA

inserts MIXO		page:
CX 01 G	1 module	264
CX 02 7	1 module	266
CX 02 4	1 module	267
CX 02 4A, CX 02 4B	1 module	268
CX 03 4	1 module	269
CX 03 4B	1 module	270
CX 3/4 XD	1 module	271
CX 04 X	1 module	272
CX 05 S	1 module	-
CX 05 SH	1 module	274
CX 06 C, CX 06P C	1 module	275, 276
CX 08 C	1 module	277
CX 02 CH *)	1 module	279
CX 12 D, CX 17 D	1 module	281, 282
CX 25 IB	1 module	284
CX 25 I	1 module	-
CX 08 I6	1 module	286
CX 01 9V, CX 01 9VT	1 module	296, 298
CX 04 L	1 module	299
CX 04 R	1 module	300
CX 04 SC	1 module	301
CX 01 J8, CX 01 J8I	1 module	302
CX 03 P, CX 02 P	1 module	312

*) can be used only with CXA 01 I and MXA 01 V32 enclosures

bulkhead mounting housing with single lever

hoods with 2 pegs

description	part No.	part No.	entry M
with lever	**CXA 01 I**		
with pegs, side entry (in 2 parts)		**MXA 01 O25**	25
with pegs, top entry (in 2 parts)		**MXA 01 V25**	25
with pegs, top entry (in 2 parts)		**MXA 01 V32**	32

PE terminal
On both the bulkhead mounting housing and on the hood front part, PE screw terminal without protection plate, zinc plated steel terminal screw with rounded tip.
Connecting capacity:
0,5 mm² (20 AWG) – 10 mm² (8 AWG) both unprepared and prepared stranded copper wire.
PE terminal screw head footprint:
for Ph1 or 1,0x5,5 mm flat screwdriver, recommended torque 1,2 Nm (10.6 lb.in)
NOTE:
Some regulations may require conductor preparation with a crimped end sleeve.
Recommended crimp shape: square, e.g. by using Rennsteig ferrule crimping pliers PEW 8.85 (610 1853).

CXA I

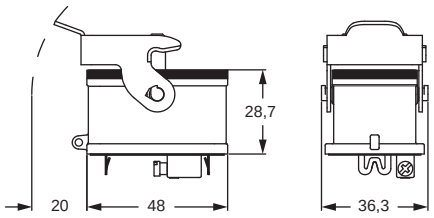



* for M3 fixing screws (not supplied) with maximum 6 mm head diameter

panel cut-out for bulkhead mounting housings



MXA O25

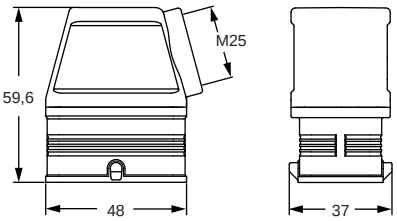

MXA V25

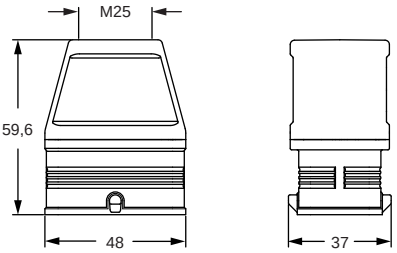

MXA V32

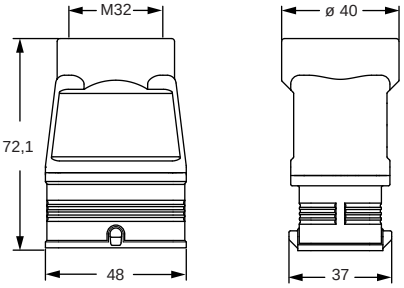

cURus
Type 4/4X/12 pending

IP65 according to IEC/EN 60529

MIXO ONE

MIXO ONE CXP covers

plastic covers

plastic covers with lever and gasket

description	part No. (with eyelet)	part No. (with loop)
with 2 pegs (for enclosures with 1 lever with gasket)	**CXP 01 C**	
with 1 lever and gasket (for hoods with 2 pegs)		**CXP 01 CLG**

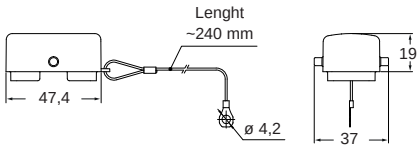

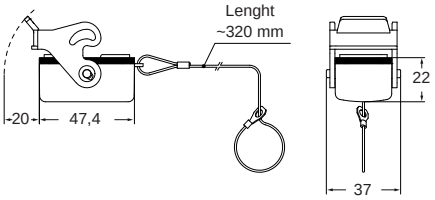

For fixing on housings

eyelet



For fixing on hoods

loop



cURus
Type 4/4X/12 pending

IP65 according to IEC/EN 60529

dimensions shown in mm are not binding and may be changed without notice

MIXO ONE CR CX coding pins

description	part No.	part No.
	coding pins	coding pins
red coding pin (#1)	**CR CX01R**	
blue coding pin (#2)	**CR CX01B**	
yellow coding pin (#3)		**CR CX01G**
black coding pin (#4)		**CR CX01N**

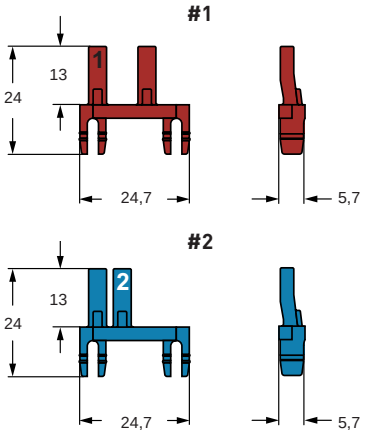

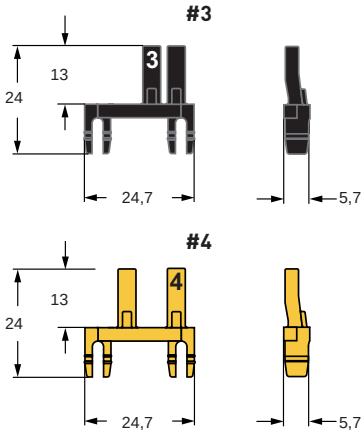

CR CX01 CODING OPTIONS

Example of coding option 6 of 16 different codings possible (4 coding pins per each connector coupling)

IL-BRID

IL-BRID

Soft closing, strong hold

Through its original design, the IL-BRID locking lever combines the smoothness of the thermoplastic material with the sturdiness of the stainless steel spring; it has also a linear design which favours a quick wash without retaining external elements.

SUM-UP

- **Soft closing: in the first phase, the thermoplastic locking lever component comes into play: sliding the new locking lever on the pin reduces friction and wear. It is suitable in all applications with frequent opening and closing**
- **Strong hold: after the first closing phase involving the plastic component, the stainless steel hook intervenes to guarantee higher resistance to mechanical stress**

- IP66/IP69 degree of protection.
- IP65 degree of protection versions with hinged cover.

Characteristics of materials for CZ and MZ series

- Made of die cast aluminium alloy;
- with epoxy-polyester powder coating;
- gaskets in anti-aging, oil-resistant, grease-resistant and fuel-resistant vinyl nitrile elastomer;
- locking device with levers and springs in stainless steel;
- lever handles in self-extinguishing thermoplastic material reinforced with glass fibres, UL approved (for CZ and MZ enclosures).

CZ - MZ IL-BRID standard version

inserts		page:
CD	15 poles + ⏚	**68**
CDA	10 poles + ⏚	**98**
CSAH	10 poles + ⏚	**99**
CDC	10 poles + ⏚	**104**
MIXO	1 module	**264 - 316**

bulkhead mounting housings with single lever

surface mounting housings with single lever

description	part No.	part No.	entry Pg	part No.	entry M
with single lever	**CZI 15 L**				
with single lever and cover	**CZI 15 LS**				
with single lever		**CZP 15 L**	16		
with single lever		**CZP 15 L2**	16 x 2		
with single lever		**CZP 15 L21**	21	**MZP 15 L25**	25
with single lever		**CZP 15 L221**	21 x 2	**MZP 15 L225**	25 x 2
with single lever and cover		**CZP 15 LS**	16		
with single lever and cover		**CZP 15 LS2**	16 x 2		
with single lever and cover		**CZP 15 LS21**	21	**MZP 15 LS25**	25
with single lever and cover		**CZP 15 LS221**	21 x 2	**MZP 15 LS225**	25 x 2

The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers.

panel cut-out for bulkhead mounting housings

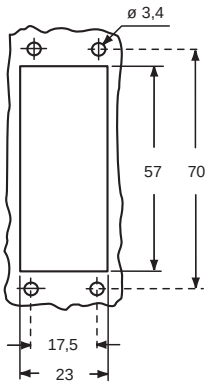

CZI L ▲

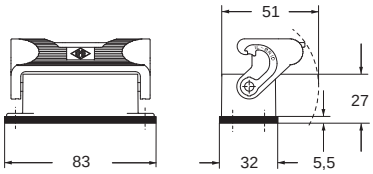

CZP L and **MZP L** ▲

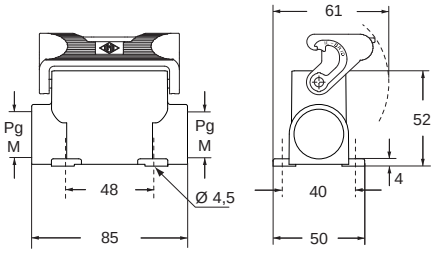

CZI LS ●

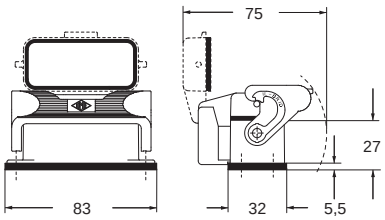

CZP LS and **MZP LS** ●

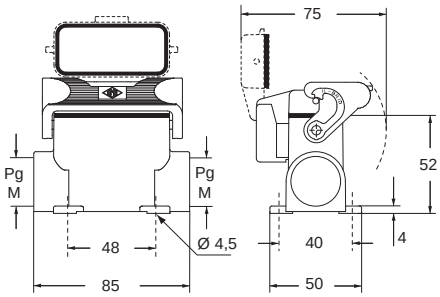

Type 4/4X/12

EN 60529 IP66 IP69 IEC 60529 ▲

EN 60529 IP65 IEC 60529 ●

dimensions shown in mm are not binding and may be changed without notice

CZ - MZ IL-BRID lever standard version SIMPLEX self-closing covers

inserts		page:
CD	15 poles + ⏚	**68**
CDA	10 poles + ⏚	**98**
CSAH	10 poles + ⏚	**99**
CDC	10 poles + ⏚	**104**
MIXO	1 module	**264 - 316**

bulkhead mounting housings with single lever

surface mounting housings with single lever

description	part No.	part No.	entry Pg	part No.	entry M
with single lever and cover	**CZI 15 LSP**				
with lever and cover		**CZP 15 LSP16**	16	**MZP 15 LSP20**	20
with lever and cover		**CZP 15 LSP21**	21	**MZP 15 LSP25**	25

The enclosures ensure IP65 degree of protection when mated and locked with the closing lever, or IP44 protection when not mated and locked with lever, thanks to the SIMPLEX self-closing cover.

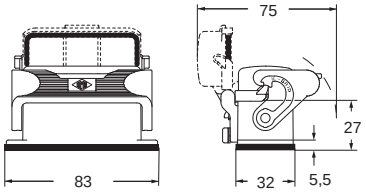

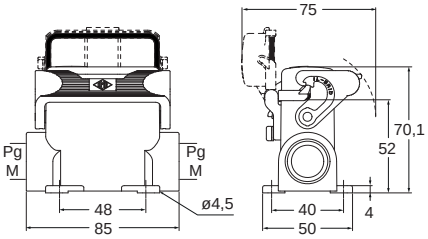

panel cut-out for bulkhead mounting housings

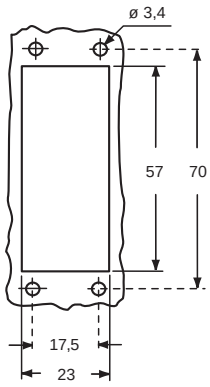

c UL us Type 4/4X/12

EN 60529 IP65 IEC 60529

c UL us Type 4/4X/12 pending

EN 60529 IP65 IEC 60529

IL-BRID

CZ - CZA - CZF and MZ - MZA - MZF IL-BRID standard version

inserts		page:
CD	15 poles + ⏚	**68**
CDA	10 poles + ⏚	**98**
CSAH	10 poles + ⏚	**99**
CDC	10 poles + ⏚	**104**
MIXO	1 module	**264 - 316**

hoods with 2 pegs

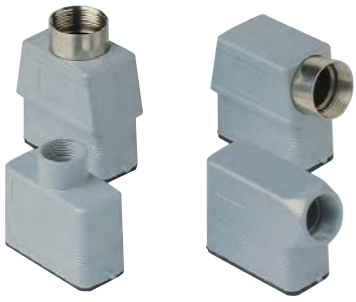

hoods with single lever

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs, side entry	**CZO 15 L**	16	**MZO 15 L20**	20				
with pegs, side entry			**MZO 15 L25**	25				
with pegs, side entry, high construction	**CZAO 15 L16**	16	**MZAO 15 L20**	20				
with pegs, side entry, high construction	**CZAO 15 L21**	21	**MZAO 15 L25**	25				
with pegs, top entry	**CZV 15 L**	13,5	**MZV 15 L20**	20				
with pegs, top entry, high construction	**CZAV 15 L16**	16	**MZAV 15 L20**	20				
with pegs, top entry, high construction	**CZAV 15 L21**	21	**MZAV 15 L25**	25				
with pegs, side entry, high construction, without adapter [1]	**CZFO 15 L16**	16	**MZFO 15 L20**	20				
with pegs, side entry, high construction, without adapter [1]	**CZFO 15 L21**	21	**MZFO 15 L25**	25				
with pegs, top entry, high construction, without adapter [1]	**CZFV 15 L16**	16	**MZFV 15 L20**	20				
with pegs, top entry, high construction, without adapter [1]	**CZFV 15 L21**	21	**MZFV 15 L25**	25				
with single lever, top entry					**CZV 15 LG**	13,5	**MZV 15 LG20**	20

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

CZO L and **MZO L** ▲



CZAO L - MZAO L and **CZAV L - MZAV L** ▲

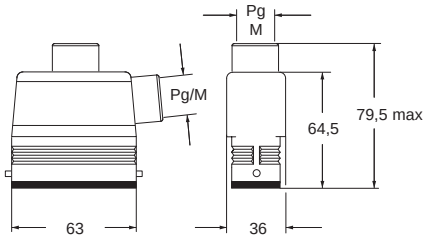

CZV L and **MZV L** ▲



CZFO L - MZFO L and **CZFV L - MZFV L** ●

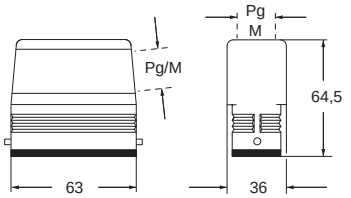

CZV LG and **MZV LG** ▲

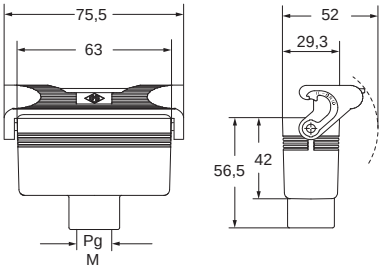

Type 4/4X/12

▲ ● insulating cable gland or fittings without gasket

▲ cable gland with O-Ring gasket

● cable gland with O-Ring gasket
IP67 if hoods with fused pegs and without adapters, coupled with IP67 housings

dimensions shown in mm are not binding and may be changed without notice

CZ IL-BRID standard version

inserts		page:
CD	15 poles + ⏚	**68**
CDA	10 poles + ⏚	**98**
CSAH	10 poles + ⏚	**99**
CDC	10 poles + ⏚	**104**
MIXO	1 module	**264 - 316**

covers

description	part No. (with eyelet)	part No. (with loop)
with pegs and gasket (for 1 lever enclosures)	**CZC 15 L**	**CZC 15 SL**
with lever (for enclosures with pegs)		**CZC 15 LG**

Cover versions L and LG cannot be used together with coding pins. If this application is required, please contact ILME S.p.A.

CZC L (SL) ●



CZC LG ▲



For fixing on housings

eyelet



For fixing on hoods

loop



Type 4/4X/12

IP66 IP69 ▲

● IP67 if coupled with CZ7 - MZ7 housings (see page 384)

CZ - CZA and MZA IL-BRID standard version

inserts		page:
CD	25 poles + ⏚	69
CDD	38 poles + ⏚	77
CDA	16 poles + ⏚	100
CSAH	16 poles + ⏚	101
CDC	16 poles + ⏚	105

bulkhead mounting housings with single lever

surface mounting housings with single lever

description	part No.	part No.	entry Pg	part No.	entry M
with single lever	**CZI 25 L**				
with single lever and cover	**CZI 25 LS**				
with single lever, high construction		**CZAP 25 L**	16		
with single lever, high construction		**CZAP 25 L2**	16 x 2		
with single lever, high construction		**CZAP 25 L21**	21	**MZAP 25 L25**	25
with single lever, high construction		**CZAP 25 L221**	21 x 2	**MZAP 25 L225**	25 x 2
with single lever and cover, high construction		**CZAP 25 LS**	16		
with single lever and cover, high construction		**CZAP 25 LS2**	16 x 2		
with single lever and cover, high construction		**CZAP 25 LS21**	21	**MZAP 25 LS25**	25
with single lever and cover, high construction		**CZAP 25LS221**	21 x 2	**MZAP 25LS225**	25 x 2

The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers.

panel cut-out for bulkhead mounting housings

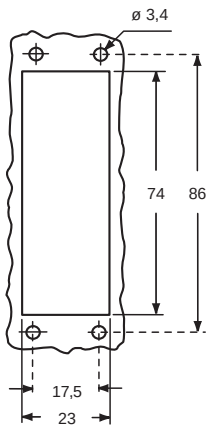

CZI L ▲

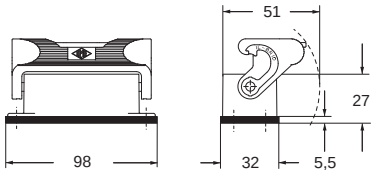

CZAP L and **MZAP L** ▲

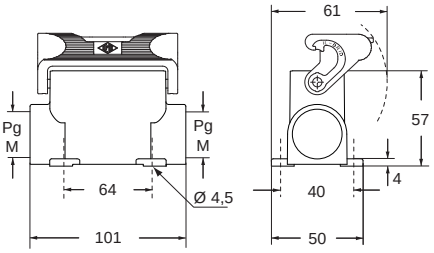

CZI LS ●

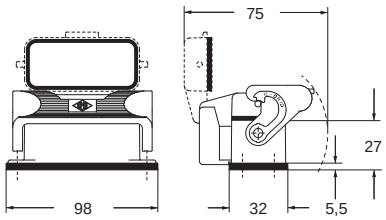

CZAP LS and **MZAP LS** ●

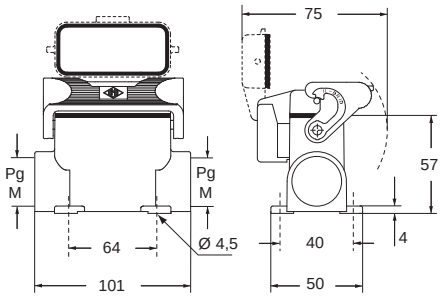

Type 4/4X/12

● insulating cable gland or fittings
▲ without gasket

▲ cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CZ - CZA and MZA IL-BRID lever standard version SIMPLEX self-closing covers

inserts		page:
CD	25 poles + ⏚	**69**
CDD	38 poles + ⏚	**77**
CDA	16 poles + ⏚	**100**
CSAH	16 poles + ⏚	**101**
CDC	16 poles + ⏚	**105**

bulkhead mounting housings with single lever

surface mounting housings with single lever

description	part No.	part No.	entry Pg	part No.	entry M
with single lever and cover	**CZI 25 LSP**				
with lever and cover, high construction		**CZAP 25LSP16**	16	**MZAP 25LSP20**	20
with lever and cover, high construction		**CZAP 25LSP21**	21	**MZAP 25LSP25**	25

The enclosures ensure IP65 degree of protection when mated and locked with the closing lever, or IP44 protection when not mated and locked with lever, thanks to the SIMPLEX self-closing cover.

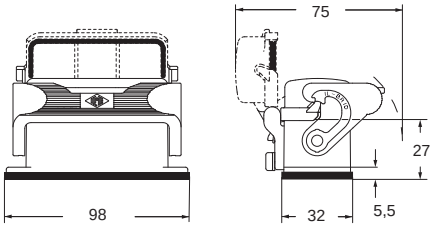

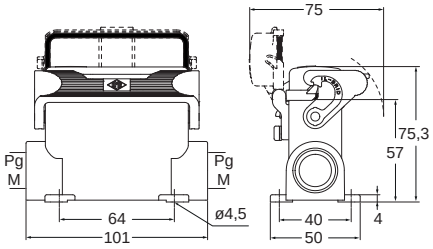

panel cut-out for bulkhead mounting housings

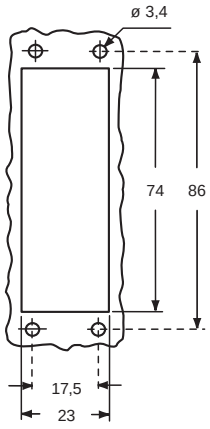

Type 4/4X/12

Type 4/4X/12 pending

CZ - CZA - CZF and MZ - MZA - MZF IL-BRID standard version

inserts		page:
CD	25 poles + ⏚	69
CDD	38 poles + ⏚	77
CDA	16 poles + ⏚	100
CSAH	16 poles + ⏚	101
CDC	16 poles + ⏚	105

hoods with 2 pegs

hoods with 2 pegs, double top entry

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
side entry	**CZO 25 L**	16	**MZO 25 L20**	20				
side entry			**MZO 25 L25**	25				
side entry, high construction	**CZAO 25 L16**	16	**MZAO 25 L20**	20				
side entry, high construction	**CZAO 25 L21**	21	**MZAO 25 L25**	25				
top entry	**CZV 25 L**	16						
top entry [2]			**MZV 25 L20**	20				
top entry, high construction	**CZAV 25 L16**	16	**MZAV 25 L20**	20				
top entry, high construction	**CZAV 25 L21**	21	**MZAV 25 L25**	25				
side entry, high construction, without adapter [1]	**CZFO 25 L16**	16	**MZFO 25 L20**	20				
side entry, high construction, without adapter [1]	**CZFO 25 L21**	21	**MZFO 25 L25**	25				
top entry, high construction, without adapter [1]	**CZFV 25 L16**	16	**MZFV 25 L20**	20				
top entry, high construction, without adapter [1]	**CZFV 25 L21**	21	**MZFV 25 L25**	25				
with pegs for 1 lever, high construction					**CZAV 25 L216**	16 x 2	**MZAV 25 L220**	20 x 2
with pegs for 1 lever, high construction, without adapter [1]					**CZFV 25 L216**	16 x 2	**MZFV 25 L220**	20 x 2

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

[2] can only be used with a complete cable gland (to be purchased separately).

CZO L and **MZO L** ▲



CZAO L - MZAO L and **CZAV L - MZAV L** ▲

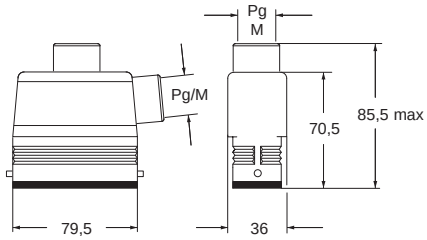

CZV L and **MZV L** ▲



CZFO L - MZFO L and **CZFV L - MZFV L** ●

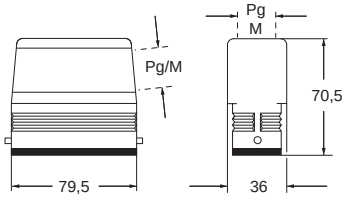

CZAV/CZFV L2 and **(MZAV)/MZFV L2** ●

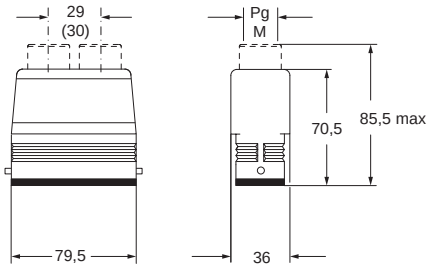

cULus Type 4/4X/12

IP65 ▲ ● insulating cable gland or fittings without gasket

IP66 IP69 ▲ cable gland with O-Ring gasket

IP66 IP67 IP69 ● cable gland with O-Ring gasket
IP67 if hoods with fused pegs and without adapters, coupled with IP67 housings

IL-BRID

dimensions shown in mm are not binding and may be changed without notice

CZ and MZ IL-BRID standard version

inserts		page:
CD	25 poles + ⏚	**69**
CDD	38 poles + ⏚	**77**
CDA	16 poles + ⏚	**100**
CSAH	16 poles + ⏚	**101**
CDC	16 poles + ⏚	**105**

hoods with single lever

covers

description	part No.	entry Pg	part No	entry M	part No. (with eyelet)	part No. (with loop)
with single lever, top entry	**CZV 25 LG**	16	**MZV 25 LG20**	20		
with pegs and gasket (for 1 lever enclosures)					**CZC 25 L**	**CZC 25 SL**
with lever (for enclosures with pegs)						**CZC 25 LG**

Cover versions L and LG cannot be used together with coding pins. If this application is required, please contact ILME SpA.

CZV LG and **MZV LG** ▲

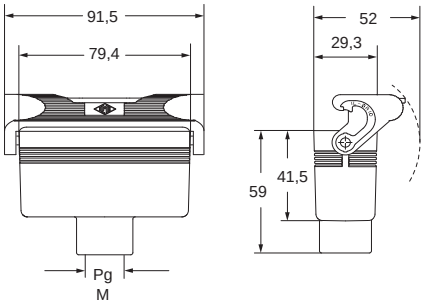

CZC L (SL) ●



CZC LG ▲



For fixing on housings

eyelet



For fixing on hoods

loop



Type 4/4X/12

▲ insulating cable gland or fittings without gasket

▲ cable gland with O-Ring gasket

● IP67 if coupled with CZ7 - MZ7 housings (see page 385)

CZAC IL-BRID standard version

inserts		page:
size “49.16“		
CD	15 poles + ⏚	**68**
CDA	10 poles + ⏚	**98**
CSAH	10 poles + ⏚	**99**
CDC	10 poles + ⏚	**104**
MIXO	1 module	**264 - 316**
size “66.16“		
CD	25 poles + ⏚	**69**
CDD	38 poles + ⏚	**77**
CDA	16 poles + ⏚	**100**
CSAH	16 poles + ⏚	**101**
CDC	16 poles + ⏚	**105**

hoods without entry, to be drilled

hoods without entry, to be drilled

description	part No. (with 2 pegs)	part No. (with 2 pegs)
with pegs, high construction used with enclosures size “49.16”	**CZAC 15 L**	
with pegs, high construction used with enclosures size “66.16”		**CZAC 25 L**





Type 4/4X/12

IP67 if coupled with CZ7 - MZ7 housings
(see page 384 or 385)

dimensions shown in mm are not binding and may be changed without notice

CZ7 - MZ7

Rigid coupling

Enclosures with rigid stainless steel lever to assure an IP66/IP67/IP69 dust and watertight seal.

SUM-UP

- **C7 series: V-TYPE stainless steel locking lever, vertical closing**
- **Sizes 44.27, 57.27, 77.27, 104.27**
- **With and without hinged cover (except size 57.27)**
- **Bulkhead or surface mounting**
- **Recommended in case of vibrations or heavy weight of cables**

- **CZ7 series: stainless steel locking lever, rigid**
- **Sizes 49.16, 66.16**
- **With and without hinged cover**
- **Bulkhead or surface mounting**
- **Recommended in case of vibrations or heavy weight of cables.**

IP66/IP69, IP66/IP67/IP69 degrees of protection according to model.

Characteristics of materials for CZ and MZ series

- Made of die cast aluminium alloy;
- with epoxy-polyester thermosetting powder coating;
- gaskets in anti-aging, oil-resistant, grease-resistant and fuel-resistant vinyl nitrile elastomer;
- locking device integrally in stainless steel;
- ambient temperature range: -40 °C / +125 °C.

CZ7 - MZ7 standard version RIGID LEVER

inserts		page:
CD	15 poles + ⏚	68
CDA	10 poles + ⏚	98
CSAH	10 poles + ⏚	99
CDC	10 poles + ⏚	104
MIXO	1 module	264 - 316

bulkhead mounting housings with single lever

STAINLESS STEEL LEVER

surface mounting housings with single lever

STAINLESS STEEL LEVER

description	part No.	part No.	entry M
with single lever	**CZ7I 15 L**		
with single lever and cover	**CZ7I 15 LS**		
with single lever		**MZ7P 15 L25**	25
with single lever		**MZ7P 15 L225**	25 x 2
with single lever and cover		**MZ7P 15 LS25**	25
with single lever and cover		**MZ7P 15LS225**	25 x 2

panel cut-out for bulkhead mounting housings

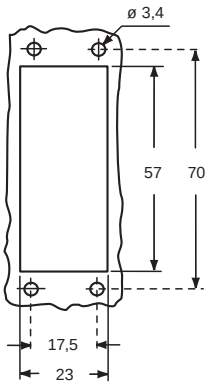

CZ7I L

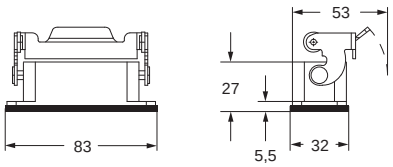

MZ7P L

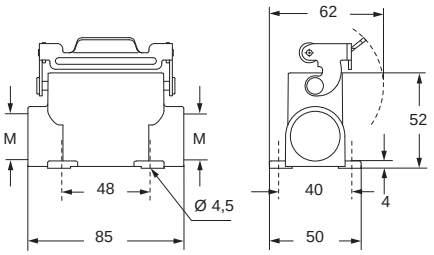

CZ7I LS

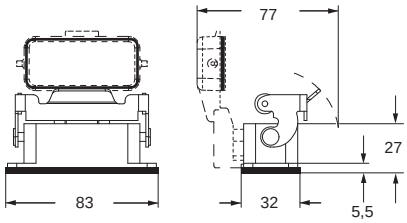

MZ7P LS

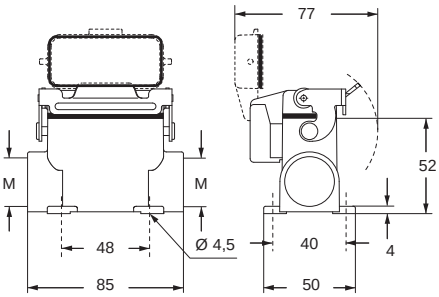

Hoods (page 376)



The rigid lever offers an IP66/IP67/IP69 degree of protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME standard hoods in die cast aluminum with pegs (without adapter).

Type 4/4X/12

IP65 insulating cable gland or fittings without gasket

IP66 IP67 IP69 cable gland with O-Ring gasket
IP67 if coupled with IP67 hood or cover

For bulkhead mounting housings, IP66/IP67/IP69 degree of protection is guaranteed for mounting on a sufficiently rigid panel; use M3 screws of suitable length (negligible surface buckling when subjected to tightening torque on the fixing screws of 0,9 - 1 Nm or to deformation caused by the weight of the complete connector).
In addition, the panel surface in contact with the flange gasket of the bulkhead mounting housings must be free from defects (deep scratches, grooves, burrs) that could negatively affect the performance of the gasket.

RIGID LEVER

dimensions shown in mm are not binding and may be changed without notice

CZ7 - MZ7 standard version RIGID LEVER

inserts		page:
CD	25 poles + ⏚	69
CDD	38 poles + ⏚	77
CDA	16 poles + ⏚	100
CSAH	16 poles + ⏚	101
CDC	16 poles + ⏚	105

bulkhead mounting housings with single lever

STAINLESS STEEL LEVER

surface mounting housings with single lever

STAINLESS STEEL LEVER

description	part No.	part No.	entry M
with single lever	**CZ7I 25 L**		
with single lever and cover	**CZ7I 25 LS**		
with single lever		**MZ7P 25 L25**	25
with single lever		**MZ7P 25 L225**	25 x 2
with single lever and cover		**MZ7P 25 LS25**	25
with single lever and cover		**MZ7P 25LS225**	25 x 2

panel cut-out for bulkhead mounting housings

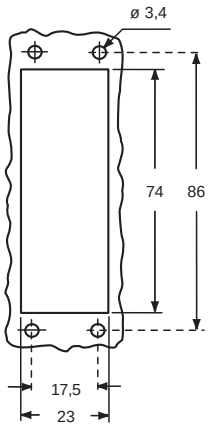

CZ7I L

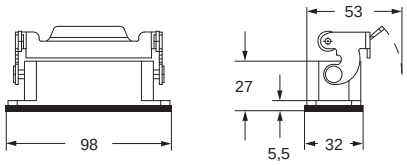

MZ7P L

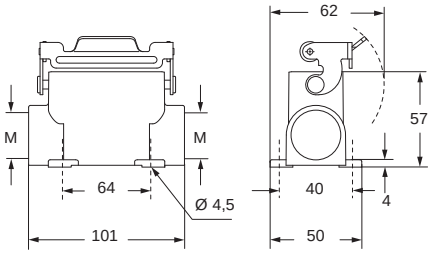

CZ7I LS

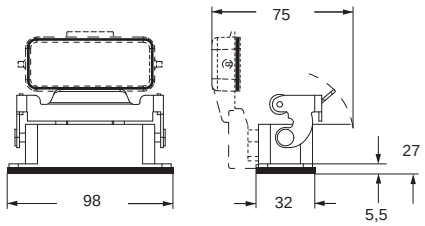

MZ7P LS

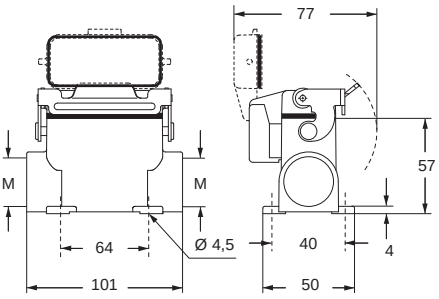

Hoods (page 380)



The rigid lever offers an IP66/IP67/IP69 degree of protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME standard hoods in die cast aluminum with pegs (without adapter).

Type 4/4X/12

IP65 — insulating cable gland or fittings without gasket

IP66 IP67 IP69 — cable gland with O-Ring gasket
IP67 if coupled with IP67 hood or cover

For bulkhead mounting housings, IP66/IP67/IP69 degree of protection is guaranteed for mounting on a sufficiently rigid panel; use M3 screws of suitable length (negligible surface buckling when subjected to tightening torque on the fixing screws of 0,9 - 1 Nm or to deformation caused by the weight of the complete connector).
In addition, the panel surface in contact with the flange gasket of the bulkhead mounting housings must be free from defects (deep scratches, grooves, burrs) that could negatively affect the performance of the gasket.

C-TYPE

The classic choice

This series has been developed for application in electrical and electronic machinery, control units, electrical panels, control equipment, in industrial environments and in general, wherever a reliable and easily disconnectable connection is required for power and signal circuits.

SUM-UP

The inserts of the CMCE series (except the 16+2 poles) and of the CMSH series may use standard enclosures also for uses of up to 830V

UL certified for USA and Canada for Type 4, 4X (outdoor use) and 12 (indoor use) degrees of protection (enclosure type rating), marked on the packaging.
IP65 or IP66/IP69 degrees of protection according to model.

Characteristics of materials for CH, CA and MH, MA, MF series

- Made of die cast aluminium alloy;
- with epoxy-polyester thermosetting powder coating;
- gaskets in anti-aging, oil-resistant, grease-resistant and fuel-resistant vinyl nitrile elastomer;
- locking device with levers, springs and pins in stainless steel;
- lever handles in self-extinguishing thermoplastic material reinforced with glass fibres, UL approved (for CH, CA and MH, MA enclosures);
- ambient temperature range: -40 °C / +125 °C.

CH C-TYPE standard version

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CT, CTSE (16A) ***)**	6 poles + ⏚	**160**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with single lever

bulkhead mounting housings with 2 pegs

description	part No.	part No.
with lever	**CHI 06 L**	
with lever and cover	**CHI 06 LS**	
with pegs [1)]		**CHI 06 LC**
with pegs and aluminum cover [1)]		**CHI 06 LCS**
with pegs and plastic cover [1)]		**CHI 06 LCP**

[1)] may be combined with enclosures:
- CHO/CHV 06 LX
- CHO/CHV 06 LX

panel cut-out for bulkhead mounting housings



IMPORTANT NOTE: The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers.
The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 degree of protection.

CHI L ▲

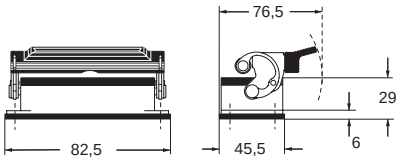

CHI LC ▲



CHI LS ●

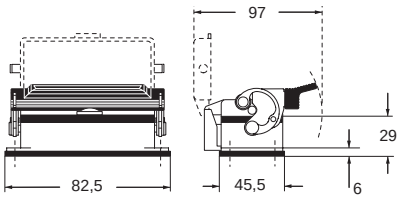

CHI LCS/LCP ●

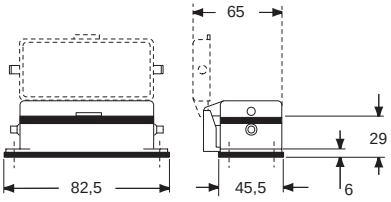

Type 4/4X/12
(except enclosures with plastic cover)

EN 60529 IP66 IP69 IEC 60529 ▲ EN 60529 IP65 IEC 60529 ●

CH - CA and MH - MA C-TYPE standard version

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

surface mounting housings with single lever

angled surface mounting housings with single lever

description	part No.	entry Pg	part No	entry M	part No.	entry M
with lever	**CHP 06 L**	16	**MHP 06 L20**	20		
with lever	**CHP 06 L2**	16 x 2	**MHP 06 L220**	20 x 2		
with lever, high construction [1]			**MAP 06 L25**	25		
with lever, high construction [1]			**MAP 06 L225**	25 x 2		
with lever, high construction	**CAP 06 L**	21	**MAP 06 L32**	32		
with lever, high construction	**CAP 06 L2**	21 x 2	**MAP 06 L232**	32 x 2		
with lever, high construction	**CAP 06 L29**	29	**MAP 06 L40**	40		
with lever, high construction	**CAP 06 L229**	29 x 2	**MAP 06 L240**	40 x 2		
with lever and cover	**CHP 06 LS**	16	**MHP 06 LS20**	20		
with lever and cover	**CHP 06 LS2**	16 x 2	**MHP 06 LS220**	20 x 2		
with lever and cover, high construction	**CAP 06 LS**	21	**MAP 06 LS32**	32		
with lever and cover, high construction	**CAP 06 LS2**	21 x 2	**MAP 06 LS232**	32 x 2		
with lever and cover, high construction	**CAP 06 LS29**	29	**MAP 06 LS40**	40		
with lever and cover, high construction	**CAP 06 LS229**	29 x 2	**MAP 06 LS240**	40 x 2		
with lever, cable gland entry, closed bulkhead [1] [2]					**MAV 06LG25-F**	25

[1] be used only with a complete cable gland (to be purchased separately).

[2] versions with M32, Pg 21 or Pg 29 entry on request.

IMPORTANT NOTE: The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers.
The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 degree of protection.

CHP L - CAP L and **MHP L - MAP L** ▲

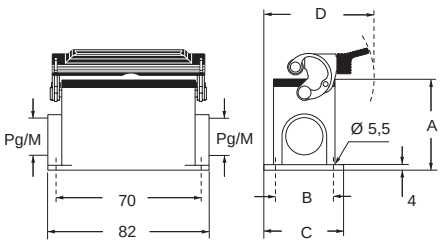

MAV 06LG25-F ▲

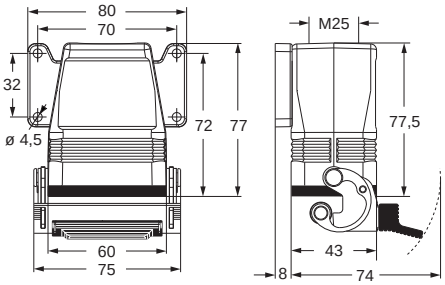

CHP LS - CAP LS and **MHP LS - MAP LS** ●

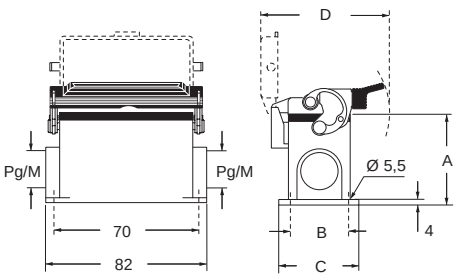

type	A	B	C	D
CHP L / MHP L	53	40	52	79,5
CAP L / MAP L	74	45	57	82
CHP LS / MHP LS	53	40	52	97
CAP LS / MAP LS	74	45	57	97

C US Type 4/4X/12

IP65 ● ▲ insulating cable gland or fittings without gasket

IP66 IP69 ▲ cable gland with O-Ring gasket

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

hoods with 2 pegs

hoods with 2 pegs
M40 cable entry with 20 mm thread length

description	part No.	entry Pg	part No	entry M	part No.	entry M
with pegs, side entry	**CHO 06 L13**	13,5	**MHO 06 L20**	20		
with pegs, side entry	**CHO 06 L16**	16	**MHO 06 L25**	25		
with pegs, side entry, high construction	**CAO 06 L21**	21	**MAO 06 L25**	25		
with pegs, side entry, high construction	**CAO 06 L29**	29	**MAO 06 L32**	32		
with pegs, side entry, high construction, without adapter [1]	**CFO 06 L21**	21	**MFO 06 L25**	25		
with pegs, side entry, high construction, without adapter [1]	**CFO 06 L29**	29	**MFO 06 L32**	32		
with pegs, side entry, high construction, without adapter [1]					**MFO 06 L40**	40
with pegs, top entry [2]	**CHV 06 L13**	13,5	**MHV 06 L20**	20		
with pegs, top entry [2]	**CHV 06 L16**	16	**MHV 06 L25**	25		
with pegs, top entry, high construction	**CAV 06 L21**	21	**MAV 06 L25**	25		
with pegs, top entry, high construction	**CAV 06 L29**	29	**MAV 06 L32**	32		
with pegs, top entry, high construction, without adapter [1]	**CFV 06 L21**	21	**MFV 06 L25**	25		
with pegs, top entry, high construction, without adapter [1]	**CFV 06 L29**	29	**MFV 06 L32**	32		
with pegs, top entry, high construction, without adapter [1]					**MFV 06 L40**	40

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

[2] cannot be used with MIXO series.

IP degrees are according to the type of lever of the counterpart enclosures.
Alternatively, hoods with pegs may be coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 387 to page 391
- C7, IP66/**IP67**/IP69 stainless steel lever, page 436
- CV, IP65 or IP66/IP69 stainless steel lever, page 444 and 445

CHO L (CAO L) and **(CFO L)**
MHO L (MAO L) and **(MFO L)**

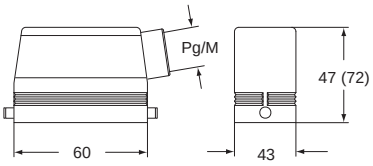

MFO 06 L40

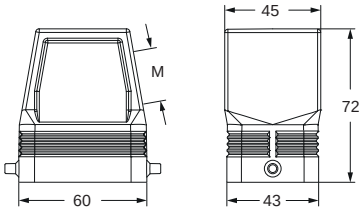

CHV L (CAV L) and **[CFV L]**
MHV L (MAV L) and **[MFV L]**

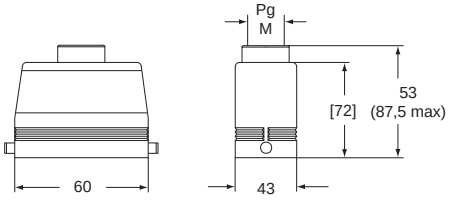

MFV 06 L40

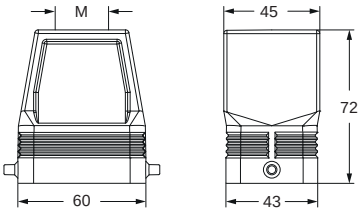

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

IP67 if hoods without adapters coupled with IP67 housings

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

hoods with 1 lever

hoods with 1 lever
M40 cable entry with 20 mm thread length

description	part No.	entry Pg	part No	entry M	part No.	entry M
with lever, top entry	**CHV 06 LG**	16	**MHV 06 LG25**	25		
with lever, top entry, high construction	**CAV 06 LG21**	21	**MAV 06 LG25**	25		
with lever, top entry, high construction	**CAV 06 LG29**	29	**MAV 06 LG32**	32		
with lever, side entry, high construction, without adapter [1]					**MFO 06 LG40**	40
with lever, top entry, high construction, without adapter [1]	**CFV 06 LG21**	21	**MFV 06 LG25**	25		
with lever, top entry, high construction, without adapter [1]	**CFV 06 LG29**	29	**MFV 06 LG32**	32		
with lever, top entry, high construction, without adapter [1]					**MFV 06 LG40**	40

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

CHV LG (CAV LG) and **[CFV LG]**
MHV LG (MAV LG) and **[MFV LG]**

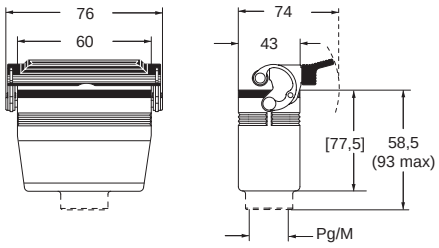

MFO 06 LG40

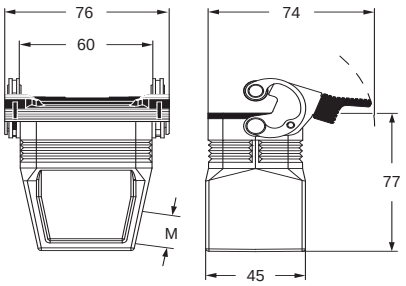

MFV 06 LG40

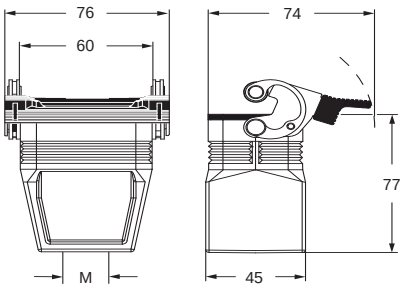

Type 4/4X/12

insulating cable gland or fittings
without gasket

cable gland
with O-Ring gasket

CH and MH C-TYPE standard version

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

hoods with 1 lever

covers

description	part No.	entry Pg	part No	entry M	part No. (with eyelet)	part No. (with loop)
with lever, without gasket, side entry [1) 3)]	**CHO 06 LX16**	16	**MHO 06 LX20**	20		
with lever, without gasket, side entry [1) 3)]			**MHO 06 LX25**	25		
with lever, without gasket, top entry [1) 3)]	**CHV 06 LX16**	16	**MHV 06 LX20**	20		
with lever, without gasket, top entry [1) 3)]			**MHV 06 LX25**	25		
with lever (for hoods with pegs)						**CHC 06 LG**
with pegs (for enclosures with lever)					**CHC 06 L**	**CHC 06 SL**
with pegs and gasket (for hoods with lever) [2)]						**CHC 06 LC**

[1)] may be combined with enclosures:
CHI 06 LCS/LCP/LC

[2)] may be combined with enclosures:
- CHO/CHV 06 LX
- CHO/CHV 06 LX

[3)] cannot be used with MIXO series

CHO LX and **MHO LX**

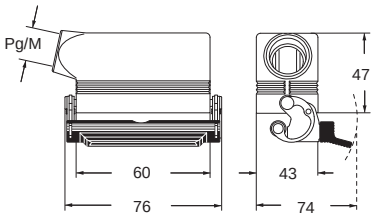

CHV LX and **MHV LX**

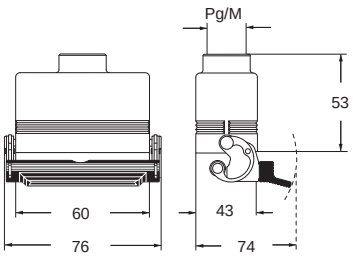

CHC LG

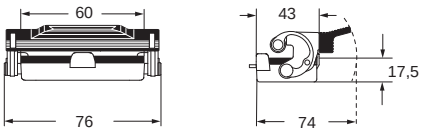

CHC L (SL)

CHC LC

CHCP 06
dust protection cover
(page 696)

Type
4/4X/12

IP66
IP69

For fixing on housings

eyelet



For fixing on hoods

loop



CAC C-TYPE standard version

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

hoods without entry, to be drilled

description	part No. (with 2 pegs)
with pegs, high construction	**CAC 06 L**

Alternatively, hoods with pegs are coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 387 to page 391
- C7, IP66/**IP67**/IP69 stainless steel lever, page 436
- CV, IP65 or IP66/IP69 stainless steel lever, page 444 and 445

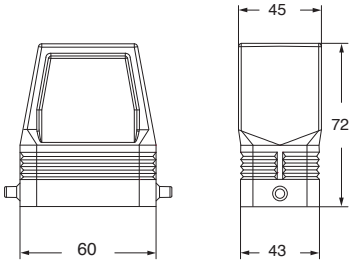

C US Type 4/4X/12

IP67 if coupled with IP67 hood or cover

dimensions shown in mm are not binding and may be changed without notice

CH C-TYPE standard version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with 2 levers or 4 pegs

bulkhead mounting housings with single lever

description	part No.	part No.
with one or two levers	**CHI 10**	**CHI 10 L**
with pegs [1)]	**CHI 10 C**	
with pegs and aluminum cover [1)]	**CHI 10 CS**	
with pegs and plastic cover [1)]	**CHI 10 CP**	
with lever and cover		**CHI 10 LS**

[1)] may be combined with enclosures:
- CHO/CAO 10 X and CHV/CAV 10 X
- MHO/MAO 10 X and MHV/MAV 10 X

panel cut-out for bulkhead mounting housings

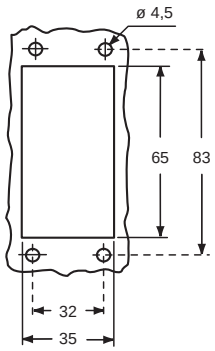

IMPORTANT NOTE: The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers.
The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 degree of protection.

CR CLK
locking device for CLASS locking levers
(page 666)

Type 4/4X/12
(except enclosures with plastic cover)

EN 60529 IP66 IP69 IEC 60529 ▲ EN 60529 IP65 IEC 60529 ●

CHI ▲

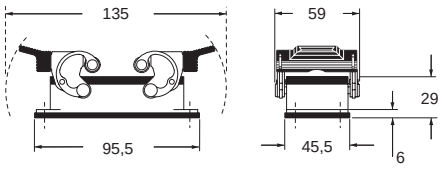

CHI C ▲



CHI CS/CP ●

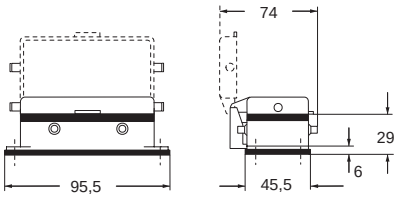

CHI L ▲

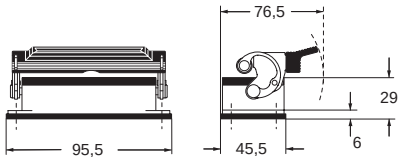

CHI LS ●

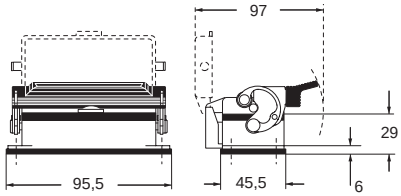

ANGLED VERSION
(page 450)

CH - CA and MH - MA C-TYPE standard version

inserts		page:
CDD	42 poles + ⏚	78
CDS	18 poles + ⏚	-
CDSH	18 poles + ⏚	87
CNE	10 poles + ⏚	111
CSE	10 poles + ⏚	-
CSH	10 poles + ⏚	111
CSH S	10 poles + ⏚	123
CCE	10 poles + ⏚	131
CMSH	3+2 (aux) poles + ⏚	136
CMCE	3+2 (aux) poles + ⏚	137
CSS	10 poles + ⏚	149
CQE	18 poles + ⏚	169
CX	8/24 poles + ⏚	194
MIXO	3 modules	262 - 317

surface mounting housings with 2 levers or 4 pegs

surface mounting housings with single lever

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with lever/s	**CHP 10**	16	**MHP 10.20**	20	**CHP 10 L**	16	**MHP 10 L20**	20
with lever/s	**CHP 10.2**	16 x 2	**MHP 10.220**	20 x 2	**CHP 10 L2**	16 x 2	**MHP 10 L220**	20 x 2
with levers, high construction [1]			**MAP 10.25**	25				
with levers, high construction [1]			**MAP 10.225**	25 x 2				
with lever/s, high construction	**CAP 10.21**	21	**MAP 10.32**	32	**CAP 10 L**	21	**MAP 10 L32**	32
with lever/s, high construction	**CAP 10.221**	21 x 2	**MAP 10.232**	32 x 2	**CAP 10 L2**	21 x 2	**MAP 10 L232**	32 x 2
with lever/s, high construction	**CAP 10.29**	29	**MAP 10.40**	40	**CAP 10 L29**	29	**MAP 10 L40**	40
with lever/s, high construction	**CAP 10.229**	29 x 2	**MAP 10.240**	40 x 2	**CAP 10 L229**	29 x 2	**MAP 10 L240**	40 x 2
with pegs and aluminum cover [2]	**CHP 10 CS**	16	**MHP 10 CS20**	20				
with pegs and aluminum cover [2]	**CHP 10 CS2**	16 x 2	**MHP 10 CS220**	20 x 2				
with pegs and aluminum cover, high construction [2]	**CAP 10 CS**	21	**MAP 10 CS32**	32				
with pegs and aluminum cover, high construction [2]	**CAP 10 CS2**	21 x 2	**MAP 10 CS232**	32 x 2				
with pegs and aluminum cover, high construction [2]	**CAP 10 CS29**	29	**MAP 10 CS40**	40				
with pegs and aluminum cover, high construction [2]	**CAP 10 CS229**	29 x 2	**MAP 10 CS240**	40 x 2				
with pegs and plastic cover [2]	**CHP 10 CP**	16	**MHP 10 CP20**	20				
with pegs and plastic cover [2]	**CHP 10 CP2**	16 x 2	**MHP 10 CP220**	20 x 2				
with pegs and plastic cover, high construction [2]	**CAP 10 CP**	21	**MAP 10 CP32**	32				
with pegs and plastic cover, high construction [2]	**CAP 10 CP2**	21 x 2	**MAP 10 CP232**	32 x 2				
with pegs and plastic cover, high construction [2]	**CAP 10 CP29**	29	**MAP 10 CP40**	40				
with pegs and plastic cover, high construction [2]	**CAP 10 CP229**	29 x 2	**MAP 10 CP240**	40 x 2				
with lever and aluminium cover					**CHP 10 LS**	16	**MHP 10 LS20**	20
with lever and aluminium cover					**CHP 10 LS2**	16 x 2	**MHP 10 LS220**	20 x 2
with lever and aluminium cover, high construction					**CAP 10 LS**	21	**MAP 10 LS32**	32
with lever and aluminium cover, high construction					**CAP 10 LS2**	21 x 2	**MAP 10 LS232**	32 x 2
with lever and aluminium cover, high construction					**CAP 10 LS29**	29	**MAP 10 LS40**	40
with lever and aluminium cover, high construction					**CAP 10 LS229**	29 x 2	**MAP 10 LS240**	40 x 2

[1] can only be used only with a complete cable gland (to be purchased separately)

[2] may be combined with enclosures:
- CHO/CAO 10 X and CHV/CAV 10 X
- MHO/MAO 10 X and MHV/MAV 10 X

IMPORTANT NOTE: The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers. The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 degree of protection.

CR CLK
locking device for
CLASS locking levers
(page 666)

Type 4/4X/12
(except enclosures with plastic cover)

● ▲ insulating cable gland or fittings without gasket

▲ cable gland with O-Ring gasket

CHP - CAP and MHP - MAP ▲

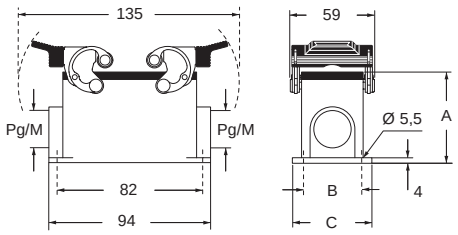

CHP CS/CP - CAP CS/CP and MHP CS/CP - MAP CS/CP ●

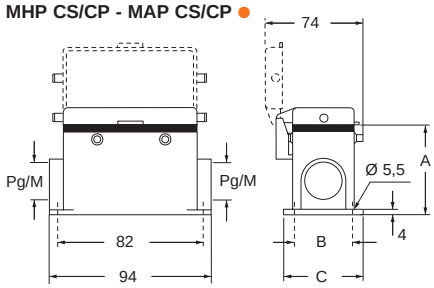

type	A	B	C
CHP / MHP	57	40	52
CAP / MAP	74	45	57
CHP CS / MHP CS	57	40	52
CAP CS / MAP CS	74	45	57
CHP CP / MHP CP	57	40	52
CAP CP / MAP CP	74	45	57

CHP L - CAP L and MHP L - MAP L ▲

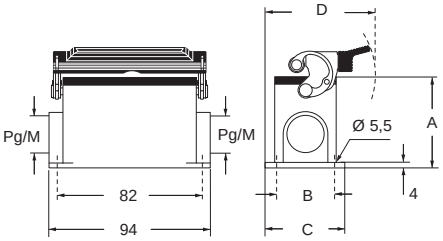

CHP LS - CAP LS and MHP LS - MAP LS ●

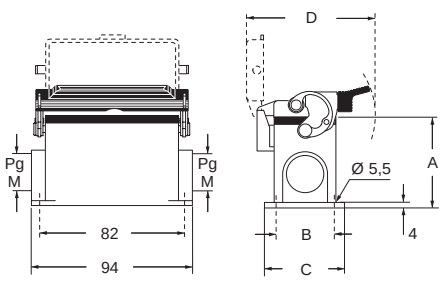

type	A	B	C	D
CHP L / MHP L	57	40	52	79,5
CAP L / MAP L	74	45	57	82
CHP LS / MHP LS	57	40	52	97
CAP LS / MAP LS	74	45	57	97

dimensions shown in mm are not binding and may be changed without notice

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

hoods with 4 pegs

hoods with 4 pegs
M40 cable entry with 20 mm thread length

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs, side entry	**CHO 10**	16	**MHO 10.20**	20				
with pegs, side entry			**MHO 10.25**	25				
with pegs, side entry, high construction	**CAO 10.21**	21	**MAO 10.32**	32				
with pegs, side entry, high construction	**CAO 10.29**	29	**MAO 10.40**	40				
with pegs, side entry, high construction, without adapter [1]					**CFO 10.21**	21	**MFO 10.32**	32
with pegs, side entry, high construction, without adapter [1]					**CFO 10.29**	29	**MFO 10.40**	40
with pegs, top entry [2]	**CHV 10**	16	**MHV 10.20**	20				
with pegs, top entry			**MHV 10.25**	25				
with pegs, top entry, high construction	**CAV 10.21**	21	**MAV 10.32**	32				
with pegs, top entry, high construction	**CAV 10.29**	29	**MAV 10.40**	40				
with pegs, top entry, high construction, without adapter [1]					**CFV 10.21**	21	**MFV 10.32**	32
with pegs, top entry, high construction, without adapter [1]					**CFV 10.29**	29	**MFV 10.40**	40
with pegs, frontal entry, high construction	**CAF 10**	16	**MAF 10.20**	20				
with pegs, frontal entry, high construction, without adapter [1]	**CFF 10**	16	**MFF 10.20**	20				

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

[2] can only be used with a complete cable gland (to be purchased separately).

IP degrees are according to the type of lever of the counterpart enclosures.
Alternatively, hoods with pegs may be coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 393 to page 400
- C7, IP66/**IP67**/IP69 stainless steel lever, page 438
- CV, IP65 or IP66/IP69 stainless steel lever, page 448 and 449

CHO (CAO) and **MHO (MAO)**

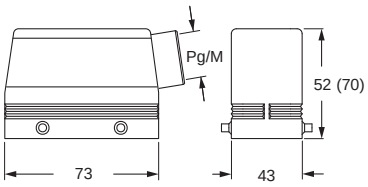

CFO and **MFO**

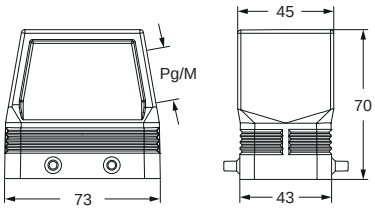

CHV (CAV) and **MHV (MAV)**

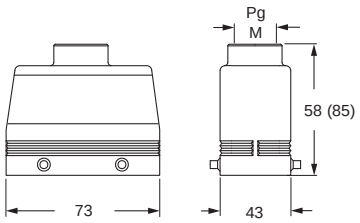

CFV and **MFV**

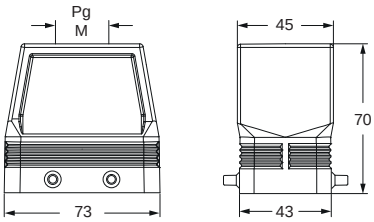

CAF/CFF and **MAF/MFF**

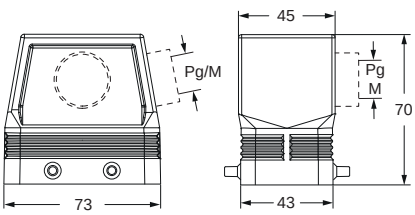

Type 4/4X/12

IP65 — insulating cable gland or fittings without gasket

IP66 IP67 IP69 — cable gland with O-Ring gasket
IP67 if hoods without adapters coupled with IP67 housings

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

hoods with 2 pegs

hoods with 2 pegs
M40 cable entry with 20 mm thread length

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs, side entry	**CHO 10 L**	16	**MHO 10 L20**	20				
with pegs, side entry			**MHO 10 L25**	25				
with pegs, side entry, high construction	**CAO 10 L21**	21	**MAO 10 L32**	32				
with pegs, side entry, high construction	**CAO 10 L29**	29	**MAO 10 L40**	40				
with pegs, side entry, high construction, without adapter [1]					**CFO 10 L21**	21	**MFO 10 L32**	32
with pegs, side entry, high construction, without adapter [1]					**CFO 10 L29**	29	**MFO 10 L40**	40
with pegs, top entry	**CHV 10 L**	16						
with pegs, top entry [2]			**MHV 10 L20**	20				
with pegs, top entry			**MHV 10 L25**	25				
with pegs, top entry, high construction	**CAV 10 L21**	21	**MAV 10 L32**	32				
with pegs, top entry, high construction	**CAV 10 L29**	29	**MAV 10 L40**	40				
with pegs, top entry, high construction, without adapter [1]					**CFV 10 L21**	21	**MFV 10 L32**	32
with pegs, top entry, high construction, without adapter [1]					**CFV 10 L29**	29	**MFV 10 L40**	40

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

[2] can only be used with a complete cable gland (to be purchased separately).

IP degrees are according to the type of lever of the counterpart enclosures.
Alternatively, hoods with pegs may be coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 393 to page 400
- C7, IP66/**IP67**/IP69 stainless steel lever, page 438
- CV, IP65 or IP66/IP69 stainless steel lever, page 448 and 449

CHO L (CAO L) and **MHO L (MAO L)**

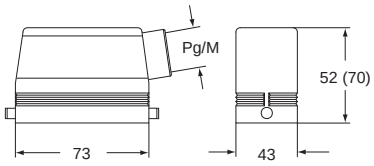

CFO L and **MFO L**

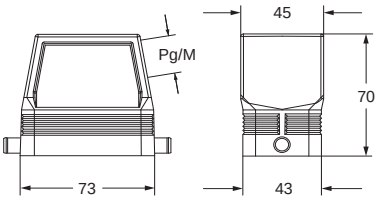

CHV L (CAV L) and **MHV L (MAV L)**

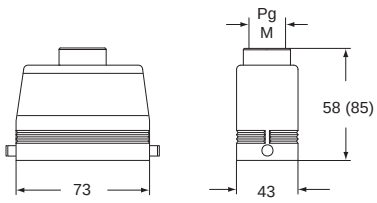

CFV L and **MFV L**

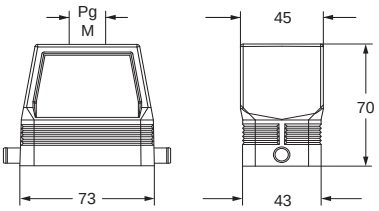

C US Type 4/4X/12

IP65 (EN 60529 / IEC 60529) insulating cable gland or fittings without gasket

IP66 IP69 (EN 60529 / IEC 60529) cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CH - CF and MA - MF C-TYPE standard version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

hoods with double top entry

description	part No.	entry Pg	part No	entry M
with pegs for two levers used with enclosures size “57.27”	**CAV 10.213**	13,5 x 2	**MAV 10.220**	20 x 2
with pegs for two levers, without adapter [1] used with enclosures size “57.27”	**CFV 10.213**	13,5 x 2	**MFV 10.220**	20 x 2

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

IP degrees are according to the type of lever of the counterpart enclosures.
Alternatively, hoods with pegs may be coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 393 to page 400
- C7, IP66/**IP67**/IP69 stainless steel lever, page 438
- CV, IP65 or IP66/IP69 stainless steel lever, page 448 and 449

CAV/CFV and **MAV/MFV**

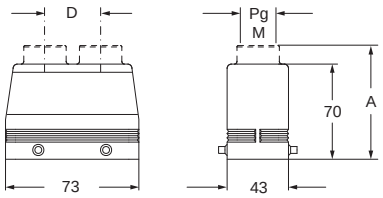

part No.	A	B
CAV 10.213 - MAV 10.220	82 (84,5)	26 (28,5)
CFV 10.213 - MFV 10.220	-	28,5 (26)

C-TYPE

Type 4/4X/12

IP65 — insulating cable gland or fittings without gasket

IP66 IP67 IP69 — cable gland with O-Ring gasket
IP67 if hoods without adapters coupled with IP67 housings

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

hoods with 2 levers

hoods with 2 levers
M40 cable entry with 20 mm thread length

description	part No.	entry Pg	part No	entry M	part No.	entry M
with levers and gasket, side entry, high construction, without adapter [1]					**MFO 10 G40**	40
with levers and gasket, top entry	**CHV 10 G**	16	**MHV 10 G25**	25		
with levers and gasket, top entry, high construction	**CAV 10 G**	21	**MAV 10 G25**	25		
with levers and gasket, top entry, high construction	**CAV 10 G29**	29	**MAV 10 G32**	32		
with levers and gasket, top entry, high construction, without adapter [1]	**CFV 10 G**	21	**MFV 10 G25**	25		
with levers and gasket, top entry, high construction, without adapter [1]	**CFV 10 G29**	29	**MFV 10 G32**	32		
with levers and gasket, top entry, high construction, without adapter [1]					**MFV 10 G40**	40

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

CHV G (CAV G) and **[CFV G]**,
MHV G (MAV G) and **[MFV G]**

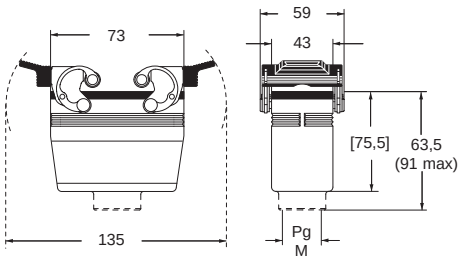

MFO 10 G40

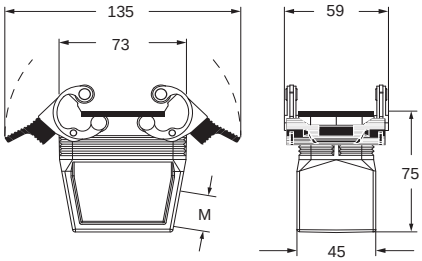

MFV 10 G40

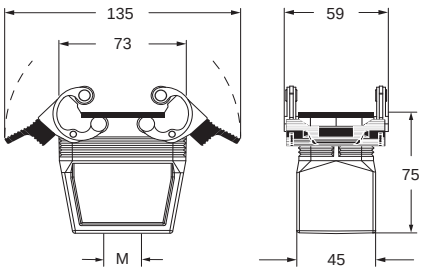

C US Type 4/4X/12

IP65 insulating cable gland or fittings without gasket

IP66 IP69 cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

hoods with 1 lever

hoods with 1 lever
M40 cable entry with 20 mm thread length

description	part No.	entry Pg	part No	entry M	part No.	entry M
with lever and gasket, side entry, high construction, without adapter [1]					**MFO 10 LG40**	40
with lever and gasket, top entry	**CHV 10 LG**	16	**MHV 10 LG25**	25		
with lever and gasket, top entry, high construction	**CAV 10 LG21**	21	**MAV 10 LG25**	25		
with lever and gasket, top entry, high construction	**CAV 10 LG29**	29	**MAV 10 LG32**	32		
with lever and gasket, top entry, high construction, without adapter [1]	**CFV 10 LG21**	21	**MFV 10 LG25**	25		
with lever and gasket, top entry, high construction, without adapter [1]	**CFV 10 LG29**	29	**MFV 10 LG32**	32		
with lever and gasket, top entry, high construction, without adapter [1]					**MFV 10 LG40**	40

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

CHV LG (CAV LG) and **[CFV LG],**
MHV LG (MAV LG) and **[MFV LG]**

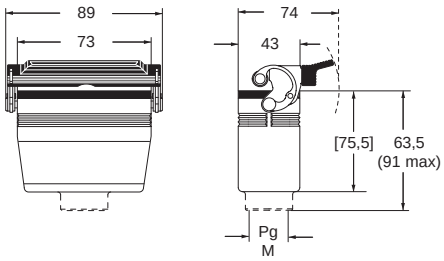

MFO 10 LG40

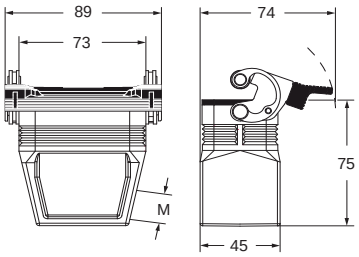

MFV 10 LG40

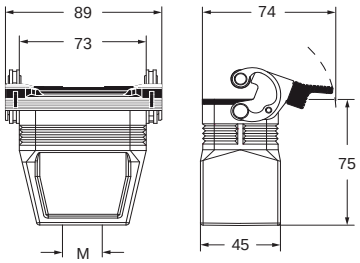

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

CH - CA and MH - MA C-TYPE standard version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

hoods with 2 levers

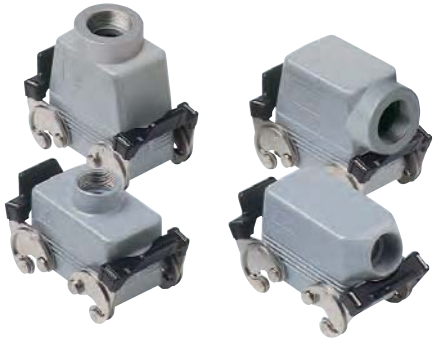

covers

description	part No.	entry Pg	part No	entry M	part No. (with eyelet)	part No. (with loop)
with levers, side entry [1]	**CHO 10 X**	16	**MHO 10 X20**	20		
with levers, side entry [1]			**MHO 10 X25**	25		
with levers, side entry, high construction [1]	**CAO 10 X**	21	**MAO 10 X32**	32		
with levers, side entry, high construction [1]	**CAO 10 X29**	29	**MAO 10 X40**	40		
with levers, top entry [1]	**CHV 10 X**	16				
with levers, top entry [3]			**MHV 10 X20**	20		
with levers, top entry [1]			**MHV 10 X25**	25		
with levers, top entry, high construction [1]	**CAV 10 X**	21	**MAV 10 X32**	32		
with levers, top entry, high construction [1]	**CAV 10 X29**	29	**MAV 10 X40**	40		
with 4 pegs (for enclosures with 2 levers with gasket)					**CHC 10**	**CHC 10 S**
with 4 pegs and gasket (for enclosures with 2 levers) [2]						**CHC 10 C**
with 2 pegs (for enclosures with 1 lever with gasket)					**CHC 10 L**	**CHC 10 SL**
with 2 levers (for hoods with 4 pegs)						**CHC 10 G**
with 1 lever (for hoods with 2 pegs)						**CHC 10 LG**

[1] may be combined with enclosures:
- CHI/CHP/CAP 10 CS/CP/C
- MHP/MAP 10 CS/CP

[2] may be combined with enclosures:
- CHO/CAO 10 X and CHV/CAV 10 X
- MHO/MAO 10 X and MHV/MAV 10 X

[3] can only be used with a complete cable gland (to be purchased separately).

CHO X (CAO X) and **MHO X (MAO X)**

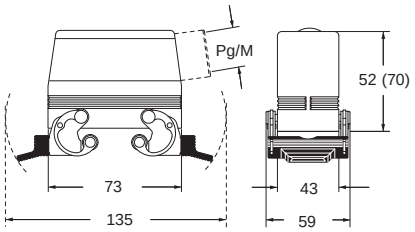

CHV X (CAV X) and **MHV X (MAV X)**

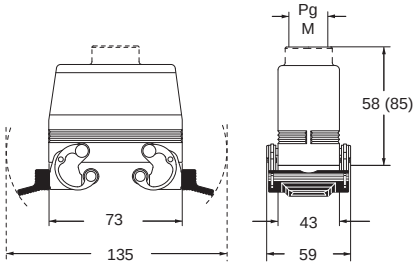

CHC (S)

CHC C

CHC L (SL)



CHC G



CHC LG

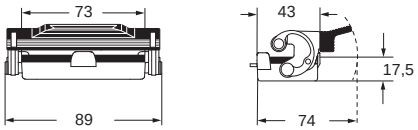

For fixing on housings

eyelet



For fixing on hoods

loop



Type 4/4X/12

IP65 — insulating cable gland or fittings without gasket

IP66 IP69 — cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CAC C-TYPE standard version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

hoods without entry, to be drilled

hoods without entry, to be drilled

description	part No. (with 4 pegs)	part No. (with 2 pegs)
with pegs, high construction	**CAC 10**	**CAC 10 L**

Alternatively, hoods with pegs are coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 393 to page 400
- C7, IP66/**IP67**/IP69 stainless steel lever, page 438
- CV, IP65 or IP66/IP69 stainless steel lever, page 448 and 449

CAC 10 ●

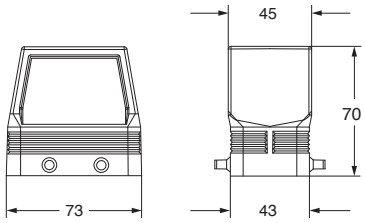

CAC 10 L ▲

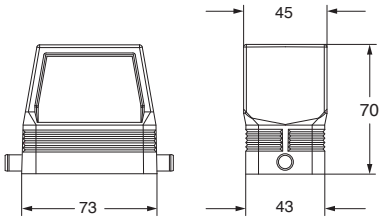

Type 4/4X/12

▲

● IP67 if coupled with IP67 housings

CH C-TYPE standard version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CT, CTS (10A) ***)**	40 poles + ⏚	**156**
CT, CTSE (16A) ***)**	16 poles + ⏚	**162**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with 2 levers or 4 pegs

bulkhead mounting housings with single lever

description	part No.	part No.
with one or two levers	**CHI 16**	**CHI 16 L**
with pegs [1)]	**CHI 16 C**	
with pegs and aluminum cover [1)]	**CHI 16 CS**	
with pegs and plastic cover [1)]	**CHI 16 CP**	
with lever and aluminum cover		**CHI 16 LS**

[1)] may be combined with enclosures:
- CHO/CAO 16 X and CHV/CAV 16 X
- MHO/MAO 16 X and MHV/MAV 16 X

panel cut-out for bulkhead mounting housings

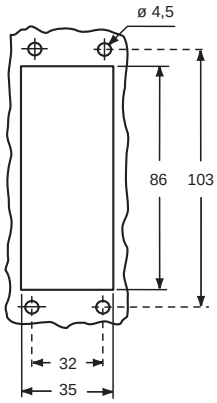

IMPORTANT NOTE: The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers. The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 degree of protection.

CR CLK
locking device for CLASS locking levers (page 666)

Type 4/4X/12
(except enclosures with plastic cover)

IP65 ●

IP66 IP69 ▲

CHI ▲

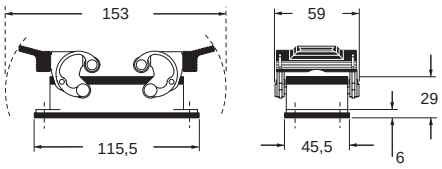

CHI C ▲



CHI CS/CP ●

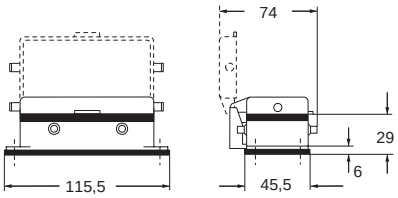

CHI L ▲

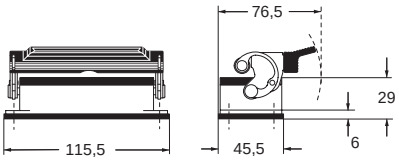

CHI LS ●

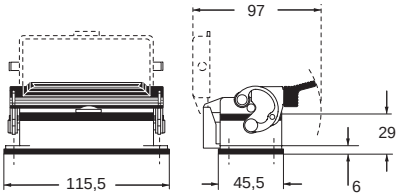

dimensions shown in mm are not binding and may be changed without notice

CH - CA and MH - MA C-TYPE standard version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

surface mounting housings with 2 levers or 4 pegs

surface mounting housings with single lever

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with lever/s	**CHP 16**	21	**MHP 16.25**	25	**CHP 16 L**	21	**MHP 16 L25**	25
with lever/s	**CHP 16.2**	21 x 2	**MHP 16.225**	25 x 2	**CHP 16 L2**	21 x 2	**MHP 16 L225**	25 x 2
with levers, high construction [1]			**MAP 16.25**	25				
with levers, high construction [1]			**MAP 16.225**	25 x 2				
with lever/s, high construction	**CAP 16.21**	21	**MAP 16.32**	32	**CAP 16 L**	21	**MAP 16 L32**	32
with lever/s, high construction	**CAP 16.221**	21 x 2	**MAP 16.232**	32 x 2	**CAP 16 L2**	21 x 2	**MAP 16 L232**	32 x 2
with lever/s, high construction	**CAP 16.29**	29	**MAP 16.40**	40	**CAP 16 L29**	29	**MAP 16 L40**	40
with lever/s, high construction	**CAP 16.229**	29 x 2	**MAP 16.240**	40 x 2	**CAP 16 L229**	29 x 2	**MAP 16 L240**	40 x 2
with pegs and aluminum cover [2]	**CHP 16 CS**	21	**MHP 16 CS25**	25				
with pegs and aluminum cover [2]	**CHP 16 CS2**	21 x 2	**MHP 16 CS225**	25 x 2				
with pegs and aluminum cover, high construction [2]	**CAP 16 CS**	21	**MAP 16 CS32**	32				
with pegs and aluminum cover, high construction [2]	**CAP 16 CS2**	21 x 2	**MAP 16 CS232**	32 x 2				
with pegs and aluminum cover, high construction [2]	**CAP 16 CS29**	29	**MAP 16 CS40**	40				
with pegs and aluminum cover, high construction [2]	**CAP 16 CS229**	29 x 2	**MAP 16 CS240**	40 x 2				
with pegs and plastic cover [2]	**CHP 16 CP**	21	**MHP 16 CP25**	25				
with pegs and plastic cover [2]	**CHP 16 CP2**	21 x 2	**MHP 16 CP225**	25 x 2				
with pegs and plastic cover, high construction [2]	**CAP 16 CP**	21	**MAP 16 CP32**	32				
with pegs and plastic cover, high construction [2]	**CAP 16 CP2**	21 x 2	**MAP 16 CP232**	32 x 2				
with pegs and plastic cover, high construction [2]	**CAP 16 CP29**	29	**MAP 16 CP40**	40				
with pegs and plastic cover, high construction [2]	**CAP 16 CP229**	29 x 2	**MAP 16 CP240**	40 x 2				
with lever and aluminium cover					**CHP 16 LS**	21	**MHP 16 LS25**	25
with lever and aluminium cover					**CHP 16 LS2**	21 x 2	**MHP 16 LS225**	25 x 2
with lever and aluminium cover, high construction					**CAP 16 LS**	21	**MAP 16 LS32**	32
with lever and aluminium cover, high construction					**CAP 16 LS2**	21 x 2	**MAP 16 LS232**	32 x 2
with lever and aluminium cover, high construction					**CAP 16 LS29**	29	**MAP 16 LS40**	40
with lever and aluminium cover, high construction					**CAP 16 LS229**	29 x 2	**MAP 16 LS240**	40 x 2

[1] can only be used with a complete cable gland (to be purchased separately)

[2] may be combined with enclosures:
- CHO/CAO 16 X and CHV/CAV 16 X
- MHO/MAO 16 X and MHV/MAV 16 X

IMPORTANT NOTE: The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers. The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 degree of protection.

CR CLK
locking device for CLASS locking levers
(page 666)

Type 4/4X/12
(except enclosures with plastic cover)

● ▲ insulating cable gland or fittings without gasket

▲ cable gland with O-Ring gasket

CHP - CAP and MHP - MAP ▲

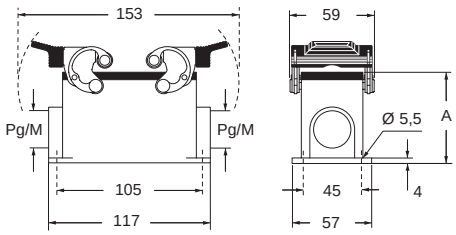

CHP L - CAP L and MHP L - MAP L ▲

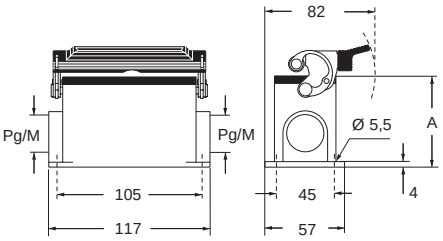

CHP CS/CP - CAP CS/CP and MHP CS/CP - MAP CS/CP ●

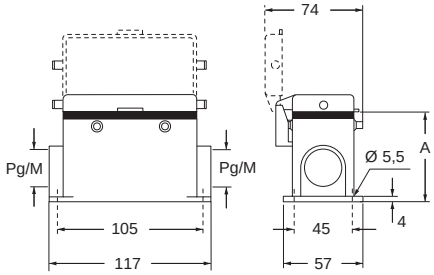

type	A
CHP / MHP	63
CAP / MAP	81
CHP CS / MHP CS	63
CAP CS / MAP CS	81
CHP CP / MHP CP	63
CAP CP / MAP CP	81

CHP LS - CAP LS and MHP LS - MAP LS ●

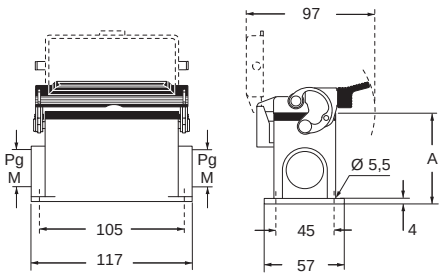

type	A
CHP L / MHP L	63
CAP L / MAP L	81
CHP LS / MHP LS	63
CAP LS / MAP LS	81

C-TYPE

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

hoods with 4 pegs

hoods with 4 pegs
M40 cable entry with 20 mm thread length

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs, side entry	**CHO 16**	21	**MHO 16.25**	25				
with pegs, side entry			**MHO 16.32**	32				
with pegs, side entry, high construction	**CAO 16.21**	21	**MAO 16.32**	32				
with pegs, side entry, high construction	**CAO 16.29**	29	**MAO 16.40**	40				
with pegs, side entry, high construction, without adapter [1]					**CFO 16.21**	21	**MFO 16.32**	32
with pegs, side entry, high construction, without adapter [1]					**CFO 16.29**	29	**MFO 16.40**	40
with pegs, top entry	**CHV 16**	21						
with pegs, top entry [2]			**MHV 16.25**	25				
with pegs, top entry			**MHV 16.32**	32				
with pegs, top entry, high construction	**CAV 16.21**	21	**MAV 16.32**	32				
with pegs, top entry, high construction	**CAV 16.29**	29	**MAV 16.40**	40				
with pegs, top entry, high construction, without adapter [1]					**CFV 16.21**	21	**MFV 16.32**	32
with pegs, top entry, high construction, without adapter [1]					**CFV 16.29**	29	**MFV 16.40**	40
with pegs, frontal entry, high construction	**CAF 16**	21	**MAF 16.25**	25				
with pegs, frontal entry, high construction, without adapter [1]	**CFF 16**	21	**MFF 16.25**	25				

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

[2] can only be used with a complete cable gland (to be purchased separately).

IP degrees are according to the type of lever of the counterpart enclosures.
Alternatively, hoods with pegs may be coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 402 to page 410
- C7, IP66/**IP67**/IP69 stainless steel lever, page 439
- CV, IP65 or IP66/IP69 stainless steel lever, page 454 and 455.

CHO (CAO) and **MHO (MAO)**

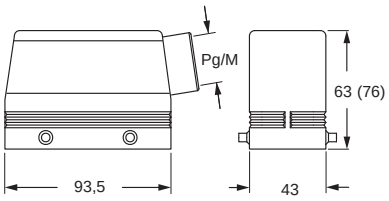

CFO and **MFO**



CHV (CAV) and **MHV (MAV)**

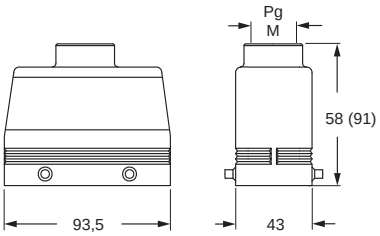

CFV and **MFV**



CAF/CFF and **MAF/MFF**

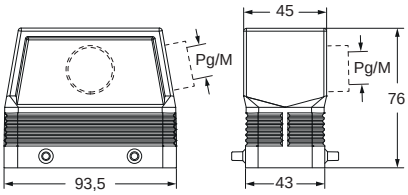

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

IP67 if hoods without adapters coupled with IP67 housings

dimensions shown in mm are not binding and may be changed without notice

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

hoods with 2 pegs

hoods with 2 pegs
M40 cable entry with 20 mm thread length

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs, side entry	**CHO 16 L**	21	**MHO 16 L25**	25				
with pegs, side entry			**MHO 16 L32**	32				
with pegs, side entry, high construction	**CAO 16 L21**	21	**MAO 16 L32**	32				
with pegs, side entry, high construction	**CAO 16 L29**	29	**MAO 16 L40**	40				
with pegs, side entry, high construction, without adapter [1]					**CFO 16 L21**	21	**MFO 16 L32**	32
with pegs, side entry, high construction, without adapter [1]					**CFO 16 L29**	29	**MFO 16 L40**	40
with pegs, top entry	**CHV 16 L**	21						
with pegs, top entry [2]			**MHV 16 L25**	25				
with pegs, top entry			**MHV 16 L32**	32				
with pegs, top entry, high construction	**CAV 16 L21**	21	**MAV 16 L32**	32				
with pegs, top entry, high construction	**CAV 16 L29**	29	**MAV 16 L40**	40				
with pegs, top entry, high construction, without adapter [1]					**CFV 16 L21**	21	**MFV 16 L32**	32
with pegs, top entry, high construction, without adapter [1]					**CFV 16 L29**	29	**MFV 16 L40**	40

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

[2] can only be used with a complete cable gland (to be purchased separately).

IP degrees are according to the type of lever of the counterpart enclosures.
Alternatively, hoods with pegs may be coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 402 to page 410
- CV, IP65 or IP66/IP69 stainless steel lever, page 454 and 455

CHO L (CAO L) and **MHO L (MAO L)**

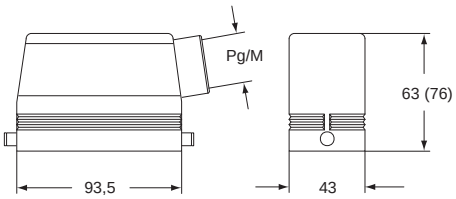

CFO L and **MFO L**

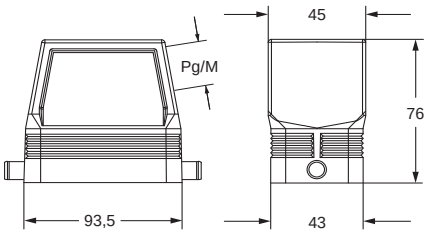

CHV L (CAV L) and **MHV L (MAV L)**

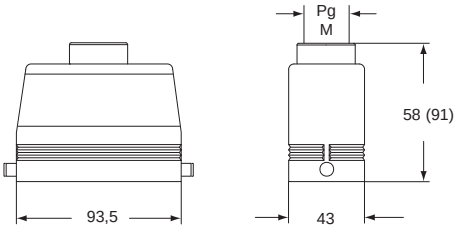

CFV L and **MFV L**

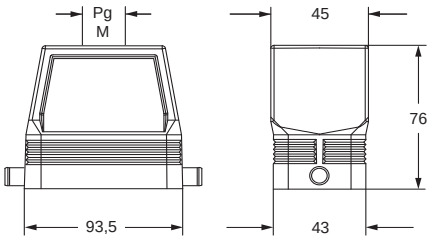

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

C-TYPE

CA - CF and MA - MF C-TYPE standard version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

hoods with double top entry

hoods with double front entry

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs for two levers								
used with enclosures size “77.27”	**CAV 16.216**	16 x 2	**MAV 16.220**	20 x 2				
used with enclosures size “77.27”	**CAV 16.221**	21 x 2	**MAV 16.225**	25 x 2				
with pegs for 2 levers, without adapter [1]								
used with enclosures size “77.27”	**CFV 16.216**	16 x 2	**MFV 16.220**	20 x 2				
used with enclosures size “77.27”	**CFV 16.221**	21 x 2	**MFV 16.225**	25 x 2				
with pegs for two levers								
used with enclosures size “77.27”					**CAF 16.221**	21 x 2	**MAF 16.225**	25 x 2
with pegs for 2 levers, without adapter [1]								
used with enclosures size “77.27”					**CFF 16.221**	21 x 2	**MFF 16.225**	25 x 2

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

IP degrees are according to the type of lever of the counterpart enclosures.
Alternatively, hoods with pegs may be coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 402 to page 410
- C7, IP66/**IP67**/IP69 stainless steel lever, page 439
- CV, IP65 or IP66/IP69 stainless steel lever, page 454 and 455

CAV/CFV and **MAV/MFV**

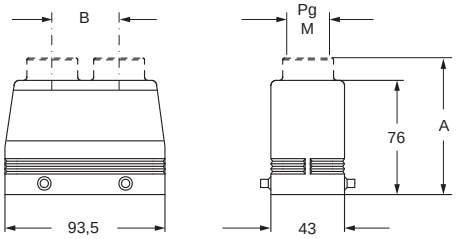

part No.	A	B
CAV 16.216 - MAV 16.220	89 (90,5)	35 (30)
CAV 16.221 - MAV 16.225	90,5 (91)	40
CFV 16.216 - MFV 16.220	-	35 (30)
CFV 16.221 - MFV 16.225	-	40

CAF/CFF and **MAF/MFF**

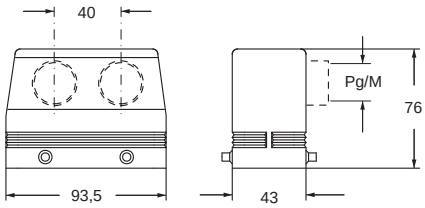

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

IP67 if hoods without adapters coupled with IP67 housings

dimensions shown in mm are not binding and may be changed without notice

CI and MI C-TYPE standard version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

inclined hoods for 2 levers with side entry

inclined hoods for 2 levers with top entry

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
used with enclosures size “77.27” with pegs for two levers, side entry			**MIO 16.40**	40				
with pegs for two levers, side entry	**CIO 16.36**	36	**MIO 16.50**	50				
used with enclosures size “77.27” with pegs for two levers, top entry					**CIV 16.29**	29	**MIV 16.40**	40

IP degrees are according to the type of lever of the counterpart enclosures.
Alternatively, hoods with pegs may be coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 402 to page 410
- C7, IP66/**IP67**/IP69 stainless steel lever, page 439
- CV, IP65 or IP66/IP69 stainless steel lever, page 454 and 455

CIO and **MIO**

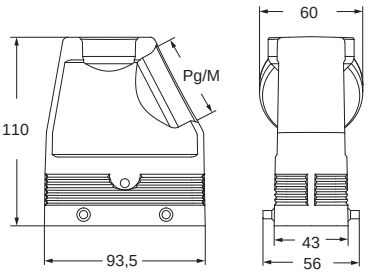

CIV and **MIV**

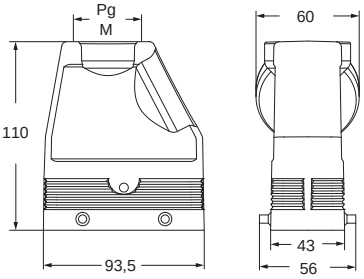

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket according to the type of lever

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

hoods with 2 levers

hoods with 2 levers
M40 cable entry with 20 mm thread length

description	part No.	entry Pg	part No	entry M	part No.	entry M
with levers and gasket, side entry, high construction, without adapter [1]					**MFO 16 G40**	40
with levers and gasket, top entry	**CHV 16 G**	21	**MHV 16 G32**	32		
with levers and gasket, top entry, high construction	**CAV 16 G**	21	**MAV 16 G25**	25		
with levers and gasket, top entry, high construction	**CAV 16 G29**	29	**MAV 16 G32**	32		
with levers and gasket, top entry, high construction			**MAV 16 G40**	40		
with levers and gasket, top entry, high construction, without adapter [1]	**CFV 16 G**	21	**MFV 16 G25**	25		
with levers and gasket, top entry, high construction, without adapter [1]	**CFV 16 G29**	29	**MFV 16 G32**	32		
with levers and gasket, top entry, high construction, without adapter [1]					**MFV 16 G40**	40

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

CHV G (CAV G) and **[CFV G]**,
MHV G (MAV G) and **[MFV G]**

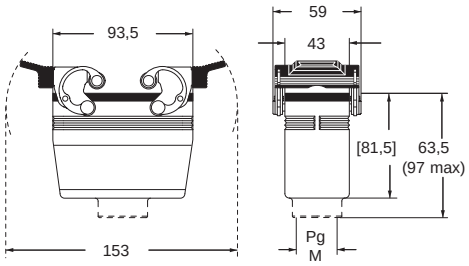

MFO 16 G40

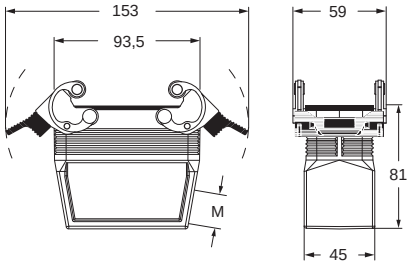

MFV 16 G40

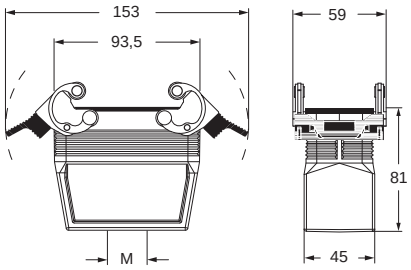

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

hoods with 1 lever

hoods with 1 lever
M40 cable entry with 20 mm thread length

description	part No.	entry Pg	part No	entry M	part No.	entry M
with lever and gasket, side entry, high construction, without adapter [1]					**MFO 16 LG40**	40
with lever and gasket, top entry	**CHV 16 LG**	21	**MHV 16 LG32**	32		
with lever and gasket, top entry, high construction	**CAV 16 LG21**	21	**MAV 16 LG25**	25		
with lever and gasket, top entry, high construction	**CAV 16 LG29**	29	**MAV 16 LG32**	32		
with lever and gasket, top entry, high construction			**MAV 16 LG40**	40		
with lever and gasket, top entry, high construction, without adapter [1]	**CFV 16 LG21**	21	**MFV 16 LG25**	25		
with lever and gasket, top entry, high construction, without adapter [1]	**CFV 16 LG29**	29	**MFV 16 LG32**	32		
with lever and gasket, top entry, high construction, without adapter [1]					**MFV 16 LG40**	40

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

CHV LG (CAV LG) and **[CFV LG],**
MHV LG (MAV LG) and **[MFV LG]**

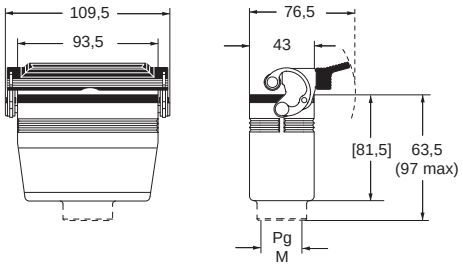

MFO 10 LG40

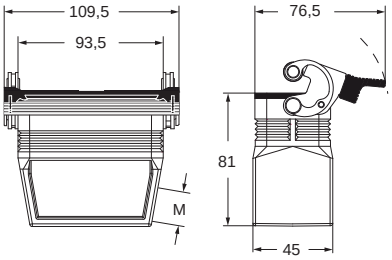

MFV 10 LG40

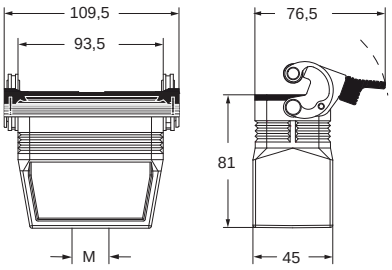

C US Type 4/4X/12

IP65 insulating cable gland or fittings without gasket

IP66 IP69 cable gland with O-Ring gasket

C-TYPE

CH - CA and MH - MA C-TYPE standard version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

hoods with 2 levers

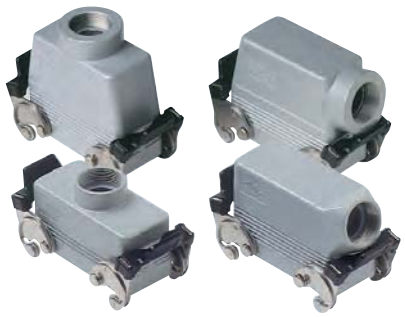

covers

description	part No.	entry Pg	part No	entry M	part No. (with eyelet)	part No. (with loop)
with levers, side entry [1]	**CHO 16 X**	21	**MHO 16 X25**	25		
with levers, side entry [1]			**MHO 16 X32**	32		
with levers, side entry, high construction [1]	**CAO 16 X**	21	**MAO 16 X32**	32		
with levers, side entry, high construction [1]	**CAO 16 X29**	29	**MAO 16 X40**	40		
with levers, top entry [1]	**CHV 16 X**	21				
with levers, top entry [1] [3]			**MHV 16 X25**	25		
with levers, top entry [1]			**MHV 16 X32**	32		
with levers, top entry, high construction [1]	**CAV 16 X**	21	**MAV 16 X32**	32		
with levers, top entry, high construction [1]	**CAV 16 X29**	29	**MAV 16 X40**	40		
with 4 pegs (for enclosures with 2 levers with gasket)					**CHC 16**	**CHC 16 S**
with 4 pegs and gasket (for enclosures with 2 levers) [2]						**CHC 16 C**
with 2 pegs (for enclosures with 1 lever with gasket)					**CHC 16 L**	**CHC 16 SL**
with 2 levers (for hoods with 4 pegs)						**CHC 16 G**
with 1 lever (for hoods with 2 pegs)						**CHC 16 LG**

[1] may be combined with enclosures:
- CHI/CHP/CAP 16 CS/CP/C
- MHP/MAP 16 CS/CP

[2] may be combined with enclosures:
- CHO/CAO 16 X and CHV/CAV 16 X
- MHO/MAO 16 X and MHV/MAV 16 X

[3] can only be used with a complete cable gland (to be purchased separately).

CHO X (CAO X) and **MHO X (MAO X)**

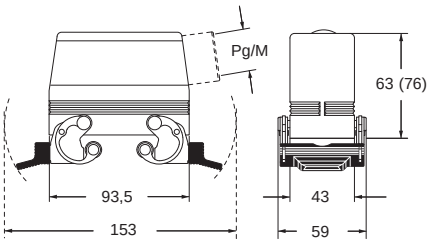

CHV X (CAV X) and **MHV X (MAV X)**

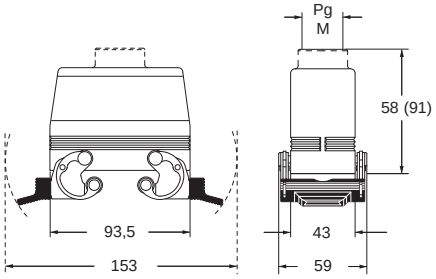

CHC (S)



CHC C



CHC L (SL)



CHC G

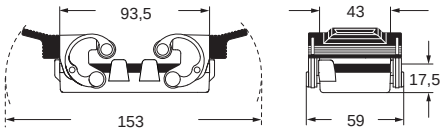

CHC LG

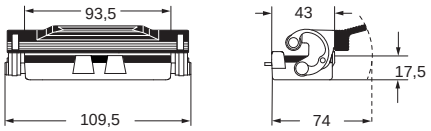

For fixing on housings

eyelet



For fixing on hoods

loop



Type 4/4X/12

IP65 — insulating cable gland or fittings without gasket

IP66 IP69 — cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CAC C-TYPE standard version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

hoods without entry, to be drilled

hoods without entry, to be drilled

description	part No. (with 4 pegs)	part No. (with 2 pegs)
with pegs, high construction	**CAC 16**	**CAC 16 L**

Alternatively, hoods with pegs may be coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 402 to page 410
- C7, IP66/**IP67**/IP69 stainless steel lever, page 439
- CV, IP65 or IP66/IP69 stainless steel lever, page 454 and 455

CAC 16 ●

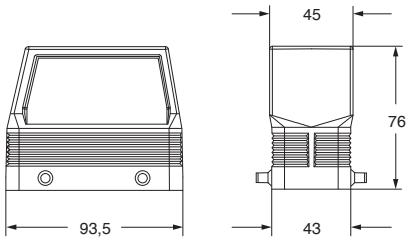

CAC 16 L ▲

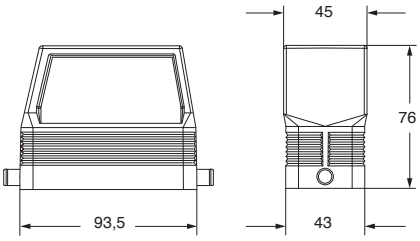

Type 4/4X/12

▲

● IP67 if coupled with IP67 housings

CH C-TYPE standard version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTS (10A) ***)**	64 poles + ⏚	**157**
CT, CTSE (16A) ***)**	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204 and 206**
MIXO	6 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with 2 levers or 4 pegs

bulkhead mounting housings with single lever

description	part No.	part No.
with one or two levers	**CHI 24**	**CHI 24 L**
with pegs [1)]	**CHI 24 C**	
with pegs and aluminum cover [1)]	**CHI 24 CS**	
with pegs and plastic cover [1)]	**CHI 24 CP**	
with lever and aluminum cover		**CHI 24 LS**

[1)] may be combined with enclosures:
- CHO/CAO 24 X and CHV/CAV 24 X
- MHO/MAO 24 X and MHV/MAV 24 X

panel cut-out for bulkhead mounting housings

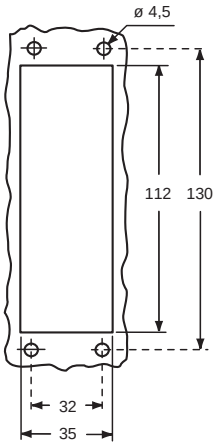

IMPORTANT NOTE: The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers. The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 degree of protection.

CR CLK locking device for CLASS locking levers (page 666)

Type 4/4X/12
(except enclosures with plastic cover)

IP65 ●

IP66 IP69 ▲

CHI ▲

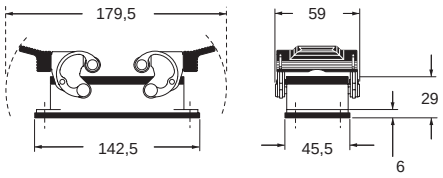

CHI C ▲



CHI CS/CP ●

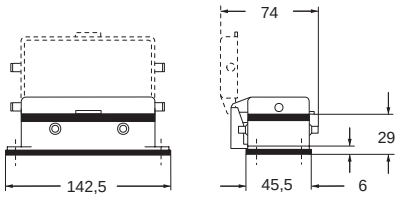

CHI L ▲

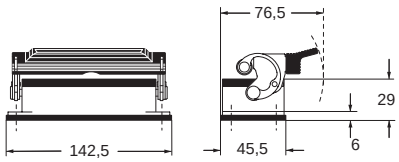

CHI LS ●

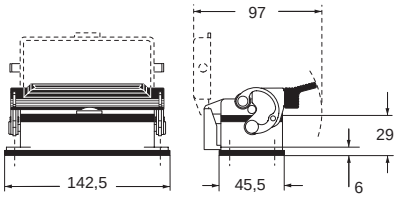

dimensions shown in mm are not binding and may be changed without notice

CH - CA and MH - MA C-TYPE standard version

inserts		page:
CD	64 poles + ⏚	72
CDD	108 poles + ⏚	81
CDS	42 poles + ⏚	-
CDSH	42 poles + ⏚	89
CNE	24 poles + ⏚	113
CSE	24 poles + ⏚	-
CSH	24 poles + ⏚	113
CSH S	24 poles + ⏚	125
CCE	24 poles + ⏚	133
CMSH	10+2 (aux) poles + ⏚	140
CMCE	10+2 (aux) poles + ⏚	141
CSS	24 poles + ⏚	151
CQE	46 poles + ⏚	171
CQEE	64 poles + ⏚	177
CX	4/8 and 6/6 poles + ⏚	204 and 206
MIXO	6 modules	262 - 317

surface mounting housings with 2 levers or 4 pegs

surface mounting housings with single lever

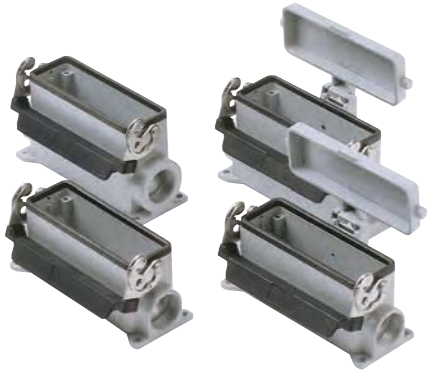

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with lever/s	**CHP 24**	21	**MHP 24.25**	25	**CHP 24 L**	21	**MHP 24 L25**	25
with lever/s	**CHP 24.2**	21 x 2	**MHP 24.225**	25 x 2	**CHP 24 L2**	21 x 2	**MHP 24 L225**	25 x 2
with levers, high construction [1]			**MAP 24.25**	25				
with levers, high construction [1]			**MAP 24.225**	25 x 2				
with lever/s, high construction	**CAP 24.21**	21	**MAP 24.32**	32	**CAP 24 L**	21	**MAP 24 L32**	32
with lever/s, high construction	**CAP 24.221**	21 x 2	**MAP 24.232**	32 x 2	**CAP 24 L2**	21 x 2	**MAP 24 L232**	32 x 2
with lever/s, high construction	**CAP 24.29**	29	**MAP 24.40**	40	**CAP 24 L29**	29	**MAP 24 L40**	40
with lever/s, high construction	**CAP 24.229**	29 x 2	**MAP 24.240**	40 x 2	**CAP 24 L229**	29 x 2	**MAP 24 L240**	40 x 2
with pegs and aluminum cover [2]	**CHP 24 CS**	21	**MHP 24 CS25**	25				
with pegs and aluminum cover [2]	**CHP 24 CS2**	21 x 2	**MHP 24 CS225**	25 x 2				
with pegs and aluminum cover, high construction [2]	**CAP 24 CS**	21	**MAP 24 CS32**	32				
with pegs and aluminum cover, high construction [2]	**CAP 24 CS2**	21 x 2	**MAP 24 CS232**	32 x 2				
with pegs and aluminum cover, high construction [2]	**CAP 24 CS29**	29	**MAP 24 CS40**	40				
with pegs and aluminum cover, high construction [2]	**CAP 24 CS229**	29 x 2	**MAP 24 CS240**	40 x 2				
with pegs and plastic cover [2]	**CHP 24 CP**	21	**MHP 24 CP25**	25				
with pegs and plastic cover [2]	**CHP 24 CP2**	21 x 2	**MHP 24 CP225**	25 x 2				
with pegs and plastic cover, high construction [2]	**CAP 24 CP**	21	**MAP 24 CP32**	32				
with pegs and plastic cover, high construction [2]	**CAP 24 CP2**	21 x 2	**MAP 24 CP232**	32 x 2				
with pegs and plastic cover, high construction [2]	**CAP 24 CP29**	29	**MAP 24 CP40**	40				
with pegs and plastic cover, high construction [2]	**CAP 24 CP229**	29 x 2	**MAP 24 CP240**	40 x 2				
with lever and aluminium cover					**CHP 24 LS**	21	**MHP 24 LS25**	25
with lever and aluminium cover					**CHP 24 LS2**	21 x 2	**MHP 24 LS225**	25 x 2
with lever and aluminium cover, high construction					**CAP 24 LS**	21	**MAP 24 LS32**	32
with lever and aluminium cover, high construction					**CAP 24 LS2**	21 x 2	**MAP 24 LS232**	32 x 2
with lever and aluminium cover, high construction					**CAP 24 LS29**	29	**MAP 24 LS40**	40
with lever and aluminium cover, high construction					**CAP 24 LS229**	29 x 2	**MAP 24 LS240**	40 x 2

[1] can only be used with a complete cable gland (to be purchased separately)

[2] may be combined with enclosures:
- CHO/CAO 24 X and CHV/CAV 24 X
- MHO/MAO 24 X and MHV/MAV 24 X

IMPORTANT NOTE: The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers. The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 degree of protection.

CR CLK
locking device for CLASS locking levers
(page 666)

Type 4/4X/12
(except enclosures with plastic cover)

IP65 (EN 60529 / IEC 60529)
● ▲ insulating cable gland or fittings without gasket

IP66 IP69 (EN 60529 / IEC 60529)
▲ cable gland with O-Ring gasket

CHP - CAP and MHP - MAP ▲

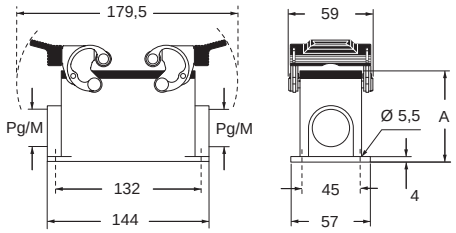

CHP CS/CP - CAP CS/CP and MHP CS/CP - MAP CS/CP ●

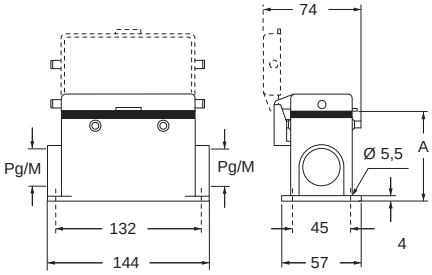

type	A
CHP / MHP	63
CAP / MAP	81
CHP CS / MHP CS	63
CAP CS / MAP CS	81
CHP CP / MHP CP	63
CAP CP / MAP CP	81

CHP L - CAP L and MHP L - MAP L ▲

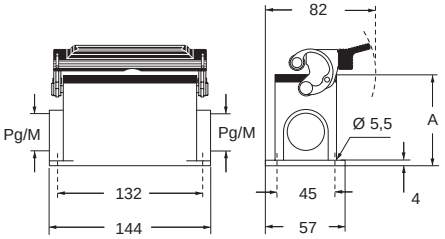

CHP LS - CAP LS and MHP LS - MAP LS ●

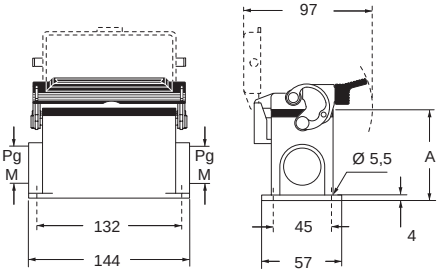

type	A
CHP L / MHP L	63
CAP L / MAP L	81
CHP LS / MHP LS	63
CAP LS / MAP LS	81

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204 and 206**
MIXO	6 modules	**262 - 317**

hoods with 4 pegs

hoods with 4 pegs
M40 cable entry with 20 mm thread length

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs, side entry	**CHO 24**	21	**MHO 24.25**	25				
with pegs, side entry			**MHO 24.32**	32				
with pegs, side entry, high construction	**CAO 24.21**	21	**MAO 24.32**	32				
with pegs, side entry, high construction	**CAO 24.29**	29	**MAO 24.40**	40				
with pegs, side entry, high construction, without adapter [1]					**CFO 24.21**	21	**MFO 24.32**	32
with pegs, side entry, high construction, without adapter [1]					**CFO 24.29**	29	**MFO 24.40**	40
with pegs, top entry	**CHV 24**	21						
with pegs, top entry [2]			**MHV 24.25**	25				
with pegs, top entry			**MHV 24.32**	32				
with pegs, top entry	**CHV 24.29**	29	**MHV 24.40**	40				
with pegs, top entry, high construction	**CAV 24.21**	21	**MAV 24.32**	32				
with pegs, top entry, high construction	**CAV 24.29**	29	**MAV 24.40**	40				
with pegs, top entry, high construction, without adapter [1]					**CFV 24.21**	21	**MFV 24.32**	32
with pegs, top entry, high construction, without adapter [1]					**CFV 24.29**	29	**MFV 24.40**	40
with pegs, frontal entry, high construction	**CAF 24.21**	21	**MAF 24.25**	25				
with pegs, frontal entry, high construction	**CAF 24.29**	29	**MAF 24.32**	32				
with pegs, frontal entry, high construction, without adapter [1]	**CFF 24.21**	21	**MFF 24.25**	25				
with pegs, frontal entry, high construction, without adapter [1]	**CFF 24.29**	29	**MFF 24.32**	32				

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

[2] can only be used with a complete cable gland (to be purchased separately).

IP degrees are according to the type of lever of the counterpart enclosures.
Alternatively, hoods with pegs may be coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 412 to page 422
- C7, IP66/**IP67**/IP69 stainless steel lever, page 441
- CV, IP65 or IP66/IP69 stainless steel lever, page 460 and 461

CHO (CAO) and **MHO (MAO)**

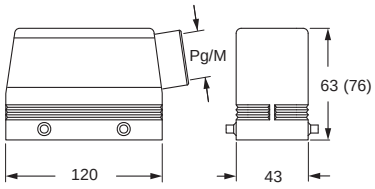

CFO and **MFO**

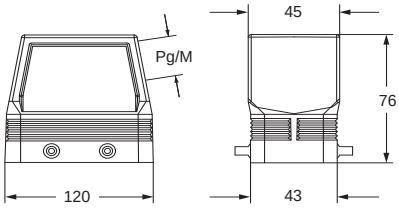

CHV (CAV) and **MHV (MAV)**

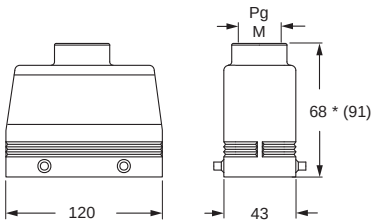

* 69,5 for Pg 29 - M40 versions

CFV and **MFV**

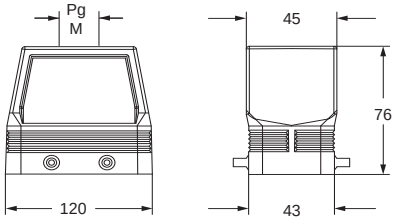

CAF/CFF and **MAF/MFF**

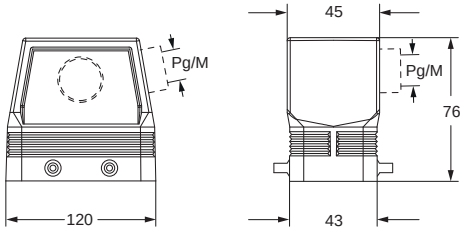

Type 4/4X/12

IP65 — insulating cable gland or fittings without gasket

IP66 IP67 IP69 — cable gland with O-Ring gasket
IP67 if hoods without adapters coupled with IP67 housings

dimensions shown in mm are not binding and may be changed without notice

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204 and 206**
MIXO	6 modules	**262 - 317**

hoods with 2 pegs

hoods with 2 pegs
M40 cable entry with 20 mm thread length

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs, side entry	**CHO 24 L**	21	**MHO 24 L25**	25				
with pegs, side entry			**MHO 24 L32**	32				
with pegs, side entry, high construction	**CAO 24 L21**	21	**MAO 24 L32**	32				
with pegs, side entry, high construction	**CAO 24 L29**	29	**MAO 24 L40**	40				
with pegs, side entry, high construction, without adapter [1]					**CFO 24 L21**	21	**MFO 24 L32**	32
with pegs, side entry, high construction, without adapter [1]					**CFO 24 L29**	29	**MFO 24 L40**	40
with pegs, top entry	**CHV 24 L**	21						
with pegs, top entry [2]			**MHV 24 L25**	25				
with pegs, top entry			**MHV 24 L32**	32				
with pegs, top entry	**CHV 24 L29**	29	**MHV 24 L40**	40				
with pegs, top entry, high construction	**CAV 24 L21**	21	**MAV 24 L32**	32				
with pegs, top entry, high construction	**CAV 24 L29**	29	**MAV 24 L40**	40				
with pegs, top entry, high construction, without adapter [1]					**CFV 24 L21**	21	**MFV 24 L32**	32
with pegs, top entry, high construction, without adapter [1]					**CFV 24 L29**	29	**MFV 24 L40**	40

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

[2] can only be used with a complete cable gland (to be purchased separately).

IP degrees are according to the type of lever of the counterpart enclosures.
Alternatively, hoods with pegs may be coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 412 to page 422
- CV, IP65 or IP66/IP69 stainless steel lever, page 460 and 461

CHO L (CAO L) and **MHO L (MAO L)**

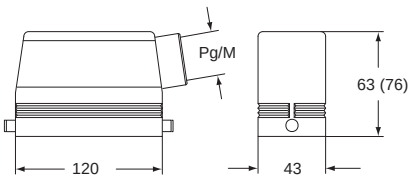

CHV L (CAV L) and **MHV L (MAV L)**

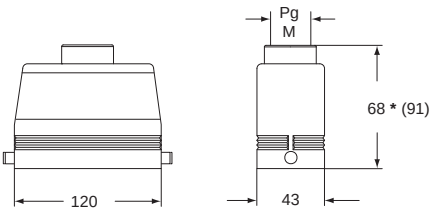

* 69,5 for Pg 29 - M 40 versions

CFO L and **MFO L**

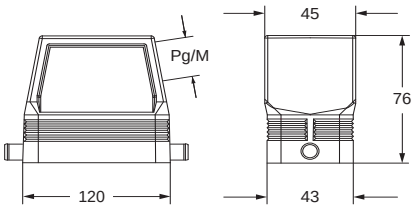

CFV L and **MFV L**

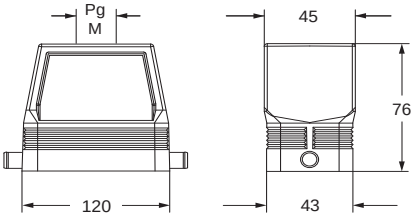

c UL us Type 4/4X/12

IP65 insulating cable gland or fittings without gasket

IP66 IP69 cable gland with O-Ring gasket

CA - CF and MA - MF C-TYPE standard version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204 and 206**
MIXO	6 modules	**262 - 317**

hoods with double top entry and 4 pegs

hoods with double front entry and 4 pegs

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs for two levers used with enclosures size “104.27” used with enclosures size “104.27”	**CAV 24.221** **CAV 24.229**	21 x 2 29 x 2	**MAV 24.232**	32 x 2				
with pegs for 2 levers, without adapter [1] used with enclosures size “104.27”	**CFV 24.221**	21 x 2	**MFV 24.232**	32 x 2				
with pegs for two levers used with enclosures size “104.27”					**CAF 24.221**	21 x 2	**MAF 24.225**	25 x 2
with pegs for 2 lever, without adapter [1] used with enclosures size “104.27”					**CFF 24.221**	21 x 2	**MFF 24.225**	25 x 2

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

IP degrees are according to the type of lever of the counterpart enclosures.
Alternatively, hoods with pegs may be coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 412 to page 422
- C7, IP66/**IP67**/IP69 stainless steel lever, page 441
- CV, IP65 or IP66/IP69 stainless steel lever, page 460 and 461

CAV/CFV and **MAV/MFV**

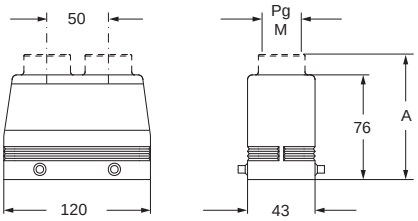

part No.	**A**
CAV 24.221 - MAV 24.232	90,5 (91)
CAV 24.229	90,5
CFV 24.221 - MFV 24.232	-

CAF/CFF and **MAF/MFF**

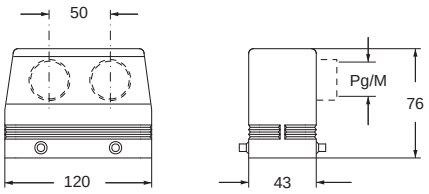

c UL us Type 4/4X/12

EN 60529 IP65 IEC 60529 insulating cable gland or fittings without gasket

EN 60529 IP66 IP67 IP69 IEC 60529 cable gland with O-Ring gasket
IP67 if hoods without adapters coupled with IP67 housings

dimensions shown in mm are not binding and may be changed without notice

CI and MI C-TYPE standard version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204 and 206**
MIXO	6 modules	**262 - 317**

inclined hoods for 2 levers with side entry

inclined hoods for 2 levers with top entry

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
used with enclosures size “104.27” with pegs for two levers, side entry			**MIO 24.40**	40				
with pegs for two levers, side entry	**CIO 24.36**	36	**MIO 24.50**	50				
used with enclosures size “104.27” with pegs for two levers, top entry							**MIV 24.40**	40
with pegs for two levers, top entry					**CIV 24.36**	36	**MIV 24.50**	50

IP degrees are according to the type of lever of the counterpart enclosures.
Alternatively, hoods with pegs may be coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 412 to page 422
- C7, IP66/**IP67**/IP69 stainless steel lever, page 441
- CV, IP65 or IP66/IP69 stainless steel lever, page 460 and 461

CIO and **MIO**

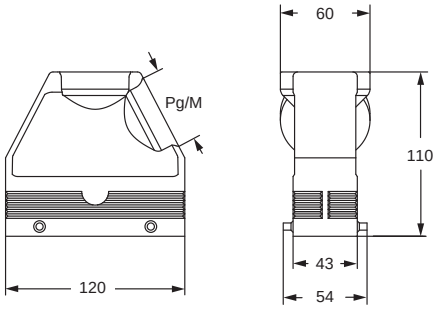

CIV and **MIV**

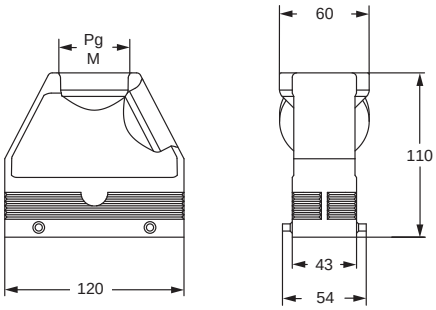

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket according to the type of lever

CQ and MQ C-TYPE standard version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204 and 206**
MIXO	6 modules	**262 - 317**

enlarged hoods,
side or top entry with 4 pegs

description	part No.	entry Pg	part No	entry M
used with enclosures size “104.27”				
with pegs for two levers, side entry, without adapter [1]	**CQO 24**	36	**MQO 24.40**	40
with pegs for two levers, top entry, without adapter [1]	**CQV 24**	36	**MQV 24.40**	40

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

IP degrees are according to the type of lever of the counterpart enclosures.
Alternatively, hoods with pegs may be coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 412 to page 422
- C7, IP66/**IP67**/IP69 stainless steel lever, page 441
- CV, IP65 or IP66/IP69 stainless steel lever, page 460 and 461

CQO and **MQO**

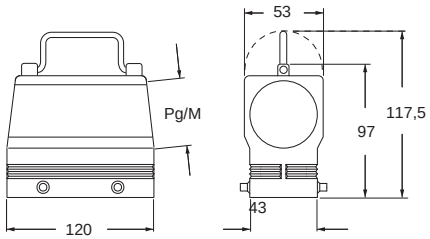

CQV and **MQV**

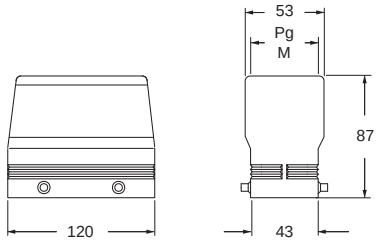

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket according to the type of lever

dimensions shown in mm are not binding and may be changed without notice

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204 and 206**
MIXO	6 modules	**262 - 317**

hoods with 2 levers

hoods with 2 levers
M40 cable entry with 20 mm thread length

description	part No.	entry Pg	part No	entry M	part No.	entry M
with levers and gasket, side entry, high construction, without adapter [1]					**MFO 24 G40**	40
with levers and gasket, top entry	**CHV 24 G**	21	**MHV 24 G32**	32		
with levers and gasket, top entry, high construction	**CAV 24 G**	21	**MAV 24 G25**	25		
with levers and gasket, top entry, high construction	**CAV 24 G29**	29	**MAV 24 G32**	32		
with levers and gasket, top entry, high construction			**MAV 24 G40**	40		
with levers and gasket, top entry, high construction, without adapter [1]	**CFV 24 G**	21	**MFV 24 G25**	25		
with levers and gasket, top entry, high construction, without adapter [1]	**CFV 24 G29**	29	**MFV 24 G32**	32		
with levers and gasket, top entry, high construction, without adapter [1]					**MFV 24 G40**	40

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

CHV G (CAV G) and **[CFV G]**,
MHV G (MAV G) and **[MFV G]**

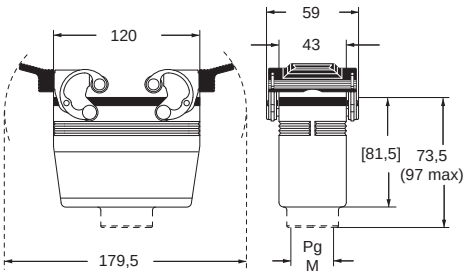

MFO 16 G40

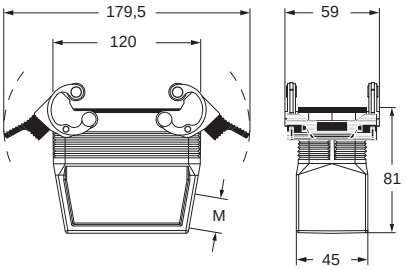

MFV 16 G40

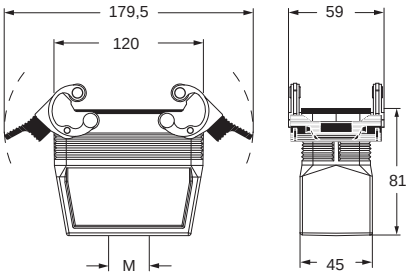

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

C-TYPE

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204 and 206**
MIXO	6 modules	**262 - 317**

hoods with 1 lever

hoods with 1 lever
M40 cable entry with 20 mm thread length

description	part No.	entry Pg	part No	entry M	part No.	entry M
with lever and gasket, side entry, high construction, without adapter [1]					**MFO 24 LG40**	40
with lever and gasket, top entry	**CHV 24 LG**	21	**MHV 24 LG32**	32		
with lever and gasket, top entry, high construction	**CAV 24 LG21**	21	**MAV 24 LG25**	25		
with lever and gasket, top entry, high construction	**CAV 24 LG29**	29	**MAV 24 LG32**	32		
with lever and gasket, top entry, high construction			**MAV 24 LG40**	40		
with lever and gasket, top entry, high construction, without adapter [1]	**CFV 24 LG21**	21	**MFV 24 LG25**	25		
with lever and gasket, top entry, high construction, without adapter [1]	**CFV 24 LG29**	29	**MFV 24 LG32**	32		
with lever and gasket, top entry, high construction, without adapter [1]					**MFV 24 LG40**	40

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

CHV LG (CAV LG) and **[CFV LG],**
MHV LG (MAV LG) and **[MFV LG]**

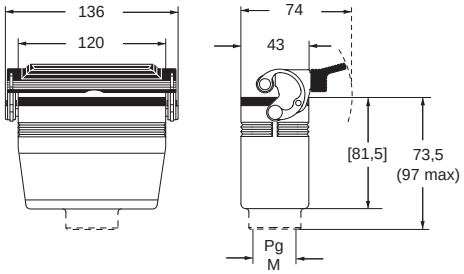

MFO 24 LG40

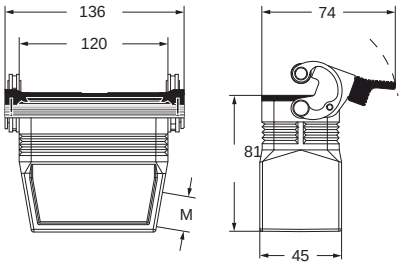

MFV 24 LG40

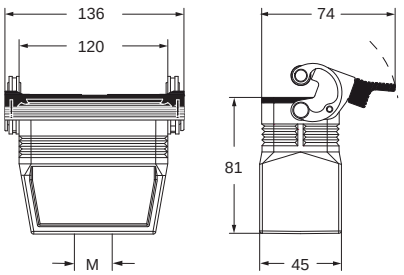

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

CAN C-TYPE standard version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204 and 206**
MIXO	6 modules	**262 - 317**

hoods for ribbon cable with 4 pegs

gaskets for ribbon cable hood

description	part No.	part No.
with pegs, top entry	**CAN 24**	
ribbon cable seals (supplied separately)		
one slot for cable sizes 18,8 x 5,8 mm		**CRN 1**
one slot for cable sizes 63,8 x 5,1 mm		**CRN 2**
slot for cable sizes 36 x 9 mm		**CRN 3**
not pre-drilled		**CRN P**



Type 4/4X/12

IP66 EN 60529 IEC 60529

C-TYPE

CH - CA and MH - MA C-TYPE standard version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204 and 206**
MIXO	6 modules	**262 - 317**

hoods with 2 levers

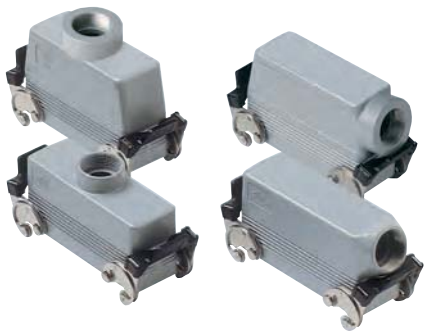

covers

description	part No.	entry Pg	part No	entry M	part No. (with eyelet)	part No. (with loop)
with levers, side entry [1]	**CHO 24 X**	21	**MHO 24 X25**	25		
with levers, side entry [1]			**MHO 24 X32**	32		
with levers, side entry, high construction [1]	**CAO 24 X**	21	**MAO 24 X32**	32		
with levers, side entry, high construction [1]	**CAO 24 X29**	29	**MAO 24 X40**	40		
with levers, top entry [1]	**CHV 24 X**	21				
with levers, top entry [1] [3]			**MHV 24 X25**	25		
with levers, top entry [1]			**MHV 24 X32**	32		
with levers, top entry, high construction [1]	**CAV 24 X**	21	**MAV 24 X32**	32		
with levers, top entry, high construction [1]	**CAV 24 X29**	29	**MAV 24 X40**	40		
with 4 pegs (for enclosures with 2 levers with gasket)					**CHC 24**	**CHC 24 S**
with 4 pegs and gasket (for enclosures with 2 levers) [2]						**CHC 24 C**
with 2 pegs (for enclosures with 1 lever with gasket)					**CHC 24 L**	**CHC 24 SL**
with 2 levers (for hoods with 4 pegs)						**CHC 24 G**
with 1 lever (for hoods with 2 pegs)						**CHC 24 LG**

[1] may be combined with enclosures:
- CHI/CHP/CAP 16 CS/CP/C
- MHP/MAP 24 CS/CP

[2] may be combined with enclosures:
- CHO/CAO 24 X and CHV/CAV 24 X
- MHO/MAO 24 X and MHV/MAV 24 X

[3] can only be used with a complete cable gland (to be purchased separately).

CHO X (CAO X) and **MHO X (MAO X)**

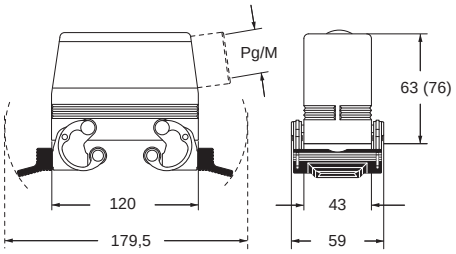

CHV X (CAV X) and **MHV X (MAV X)**

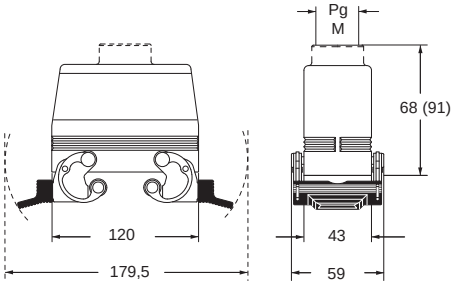

CHC (S)



CHC C



CHC L (SL)



CHC G

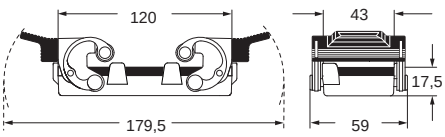

CHC LG



For fixing on housings

eyelet



For fixing on hoods

loop



Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CAC C-TYPE standard version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204 and 206**
MIXO	6 modules	**262 - 317**

hoods without entry, to be drilled

hoods without entry, to be drilled

description	part No. with 4 pegs	part No. with 2 pegs
with pegs, high construction	**CAC 24**	**CAC 24 L**

Alternatively, hoods with pegs may be coupled with fixed enclosures:
- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 412 to page 422
- C7, IP66/**IP67**/IP69 stainless steel lever, page 441
- CV, IP65 or IP66/IP69 stainless steel lever, page 460 and 461

CAC 24 ●

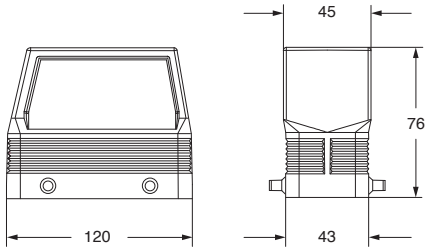

CAC 24 L ▲

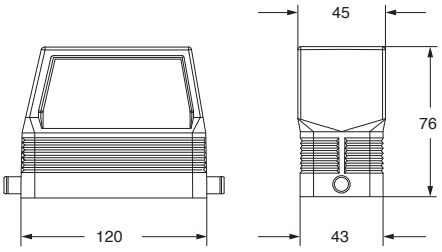

Type 4/4X/12

▲

● IP67 if coupled with IP67 housings

CH C-TYPE standard version

inserts		page:
CD	80 poles + ⏚	**73**
CDD	144 poles + ⏚	**82**
CDS	54 poles + ⏚	**-**
CDSH	54 poles + ⏚	**90**
CNE	32 poles + ⏚	**114**
CSE	32 poles + ⏚	**-**
CSH	32 poles + ⏚	**114**
CSH S	32 poles + ⏚	**126**
CCE	32 poles + ⏚	**134**
CSS	32 poles + ⏚	**152**
CTSE (16A) ***)**	32 poles + ⏚	**164**
CQE	64 poles + ⏚	**172**
CME	12+4 (aux) poles + ⏚	**142**
CMSH	12+4 (aux) poles + ⏚	**142**
CMCE	12+4 (aux) poles + ⏚	**143**
CP	12 poles + ⏚	**179**
MIXO	4 + 4 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

insert dimensions:
2 x (77,5 x 27) mm

bulkhead mounting housings with 2 levers or 4 pegs

bulkhead mounting housings with single lever

description	part No.	part No.
with one or two levers	**CHI 32**	**CHI 32 L**
with pegs and aluminium cover [1)]	**CHI 32 CS**	
with lever and aluminium cover		**CHI 32 LS**

[1)] may be combined with enclosures:
- CHO/CHV/CFO/CFV 32 X
- MHO/MHV/MFO/MFV 32 X

panel cut-out for bulkhead mounting housings

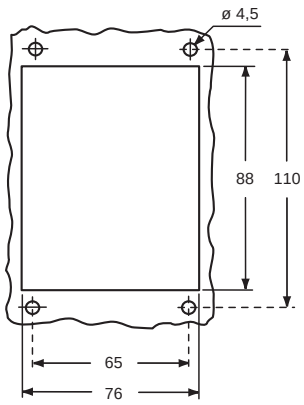

CHI ▲

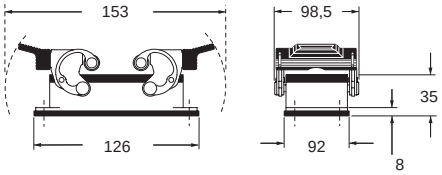

CHI L ▲

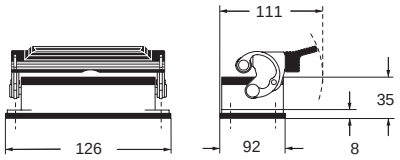

CHI CS ●

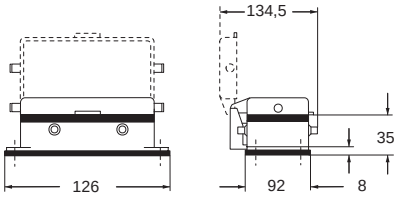

CHI LS ●

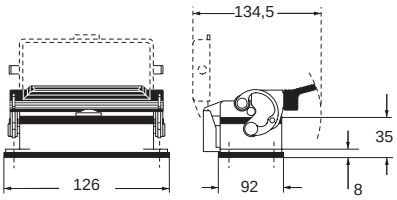

IMPORTANT NOTE: The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers.
The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 degree of protection.

C US Type 4/4X/12

EN 60529 IP65 IEC 60529 ●

EN 60529 IP66 IP69 IEC 60529 ▲

dimensions shown in mm are not binding and may be changed without notice

CH and MH C-TYPE standard version

inserts		page:
CD	80 poles + ⏚	**73**
CDD	144 poles + ⏚	**82**
CDS	54 poles + ⏚	**-**
CDSH	54 poles + ⏚	**90**
CNE	32 poles + ⏚	**114**
CSE	32 poles + ⏚	**-**
CSH	32 poles + ⏚	**114**
CSH S	32 poles + ⏚	**126**
CCE	32 poles + ⏚	**134**
CSS	32 poles + ⏚	**152**
CQE	64 poles + ⏚	**172**
CME	12+4 (aux) poles + ⏚	**142**
CMSH	12+4 (aux) poles + ⏚	**142**
CMCE	12+4 (aux) poles + ⏚	**143**
CP	12 poles + ⏚	**179**
MIXO	4 + 4 modules	**262 - 317**

insert dimensions:
2 x (77,5 x 27) mm

surface mounting housings with 2 levers

surface mounting housings with single lever

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with one or two levers	**CHP 32.29**	29	**MHP 32.40**	40	**CHP 32 L29**	29	**MHP 32 L40**	40
with one or two levers	**CHP 32.229**	29 x 2	**MHP 32.240**	40 x 2	**CHP 32 L229**	29 x 2	**MHP 32 L240**	40 x 2
with one or two levers	**CHP 32**	36	**MHP 32.50**	50	**CHP 32 L**	36	**MHP 32 L50**	50
with one or two levers	**CHP 32.2**	36 x 2	**MHP 32.250**	50 x 2	**CHP 32 L2**	36 x 2	**MHP 32 L250**	50 x 2
with one or two levers	**CHP 32.42**	42			**CHP 32 L42**	42		
with one or two levers	**CHP 32.242**	42 x 2			**CHP 32 L242**	42 x 2		
with lever and aluminium cover					**CHP 32 LS29**	29	**MHP 32 LS40**	40
with lever and aluminium cover					**CHP 32 LS229**	29 x 2	**MHP 32 LS240**	40 x 2
with lever and aluminium cover					**CHP 32 LS**	36	**MHP 32 LS50**	50
with lever and aluminium cover					**CHP 32 LS2**	36 x 2	**MHP 32 LS250**	50 x 2
with lever and aluminium cover					**CHP 32 LS42**	42		
with lever and aluminium cover					**CHP 32 LS242**	42 x 2		

IMPORTANT NOTE: The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers.
The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 degree of protection.

CHP and **MHP** ▲

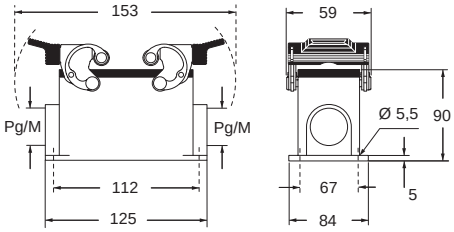

CHP L and **MHP L** ▲

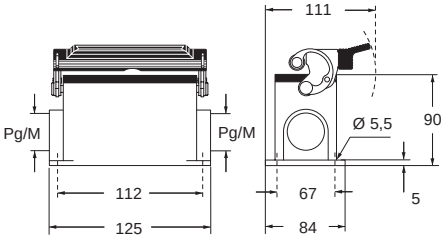

CHP LS and **MHP LS** ●

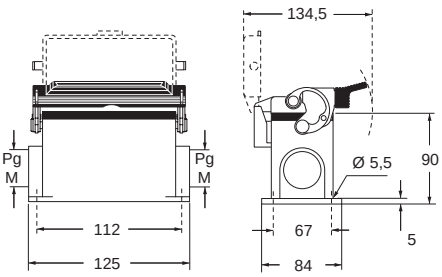

Type 4/4X/12

● ▲ insulating cable gland or fittings without gasket

▲ cable gland with O-Ring gasket

C-TYPE

CH - CF and MH - MF C-TYPE standard version

inserts		page:
CD	80 poles + ⏚	73
CDD	144 poles + ⏚	82
CDS	54 poles + ⏚	-
CDSH	54 poles + ⏚	90
CNE	32 poles + ⏚	114
CSE	32 poles + ⏚	-
CSH	32 poles + ⏚	114
CSH S	32 poles + ⏚	126
CCE	32 poles + ⏚	134
CSS	32 poles + ⏚	152
CQE	64 poles + ⏚	172
CME	12+4 (aux) poles + ⏚	142
CMSH	12+4 (aux) poles + ⏚	142
CMCE	12+4 (aux) poles + ⏚	143
CP	12 poles + ⏚	179
MIXO	4 + 4 modules	262 - 317

insert dimensions:
2 x (77,5 x 27) mm

hoods with 4 pegs and 2 levers

hoods with 2 pegs and 1 lever

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs, side entry	**CHO 32.29**	29	**MHO 32.32**	32				
with pegs, side entry	**CHO 32**	36	**MHO 32.40**	40	**CHO 32 L**	36	**MHO 32 L40**	40
with pegs, side entry	**CHO 32.42**	42	**MHO 32.50**	50				
with pegs, side entry, without adapter 1)	**CFO 32.29**	29	**MFO 32.32**	32				
with pegs, side entry, without adapter 1)	**CFO 32**	36	**MFO 32.40**	40	**CFO 32 L**	36	**MFO 32 L40**	40
with pegs, side entry, without adapter 1)	**CFO 32.42**	42	**MFO 32.50**	50				
with pegs, top entry	**CHV 32.29**	29	**MHV 32.32**	32				
with pegs, top entry	**CHV 32**	36	**MHV 32.40**	40	**CHV 32 L**	36	**MHV 32 L40**	40
with pegs, top entry	**CHV 32.42**	42	**MHV 32.50**	50				
with pegs, top entry, without adapter 1)	**CFV 32.29**	29	**MFV 32.32**	32				
with pegs, top entry, without adapter 1)	**CFV 32**	36	**MFV 32.40**	40	**CFV 32 L**	36	**MFV 32 L40**	40
with pegs, top entry, without adapter 1)	**CFV 32.42**	42	**MFV 32.50**	50				
with levers and gasket, top entry	**CHV 32 G29**	29	**MHV 32 G32**	32				
with one or two levers and gasket, top entry	**CHV 32 G**	36	**MHV 32 G40**	40	**CHV 32 LG**	36	**MHV 32 LG40**	40
with levers and gasket, top entry	**CHV 32 G42**	42	**MHV 32 G50**	50				
with levers and gasket, top entry, without adapter 1)	**CFV 32 G29**	29	**MFV 32 G32**	32				
with lever/s and gasket, top entry, without adapter 1)	**CFV 32 G**	36	**MFV 32 G40**	40	**CFV 32 LG**	36	**MFV 32 LG40**	40
with levers and gasket, top entry, without adapter 1)	**CFV 32 G42**	42	**MFV 32 G50**	50				

1) enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

CHO/CFO and **MHO/MFO**



CHO/CFO L and **MHO/MFO L**

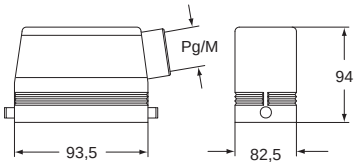

CHV/CFV and **MHV/MFV**

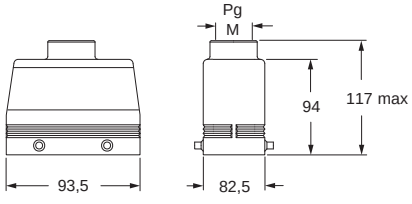

CHV/CFV L and **MHV/MFV L**

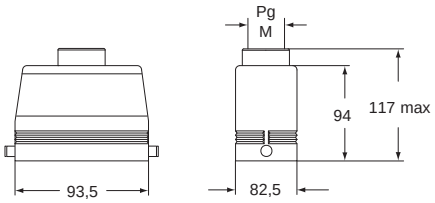

CHV/CFV G and **MHV/MFV G**

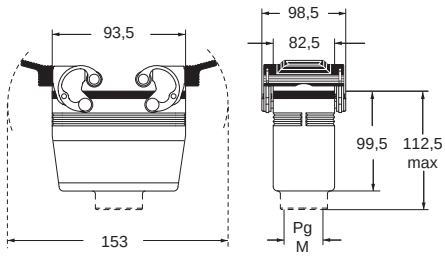

CHV/CFV LG and **MHV/MFV LG**

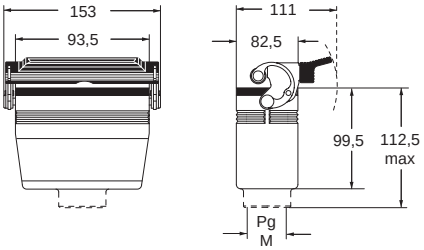

Type 4/4X/12

IP65 insulating cable gland or fittings without gasket

IP66 IP69 cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CH - CF and MH - MF C-TYPE standard version

inserts		page:
CD	80 poles + ⏚	**73**
CDD	144 poles + ⏚	**82**
CDS	54 poles + ⏚	**-**
CDSH	54 poles + ⏚	**90**
CNE	32 poles + ⏚	**114**
CSE	32 poles + ⏚	**-**
CSH	32 poles + ⏚	**114**
CSH S	32 poles + ⏚	**126**
CCE	32 poles + ⏚	**134**
CSS	32 poles + ⏚	**152**
CQE	64 poles + ⏚	**172**
CME	12+4 (aux) poles + ⏚	**142**
CMSH	12+4 (aux) poles + ⏚	**142**
CMCE	12+4 (aux) poles + ⏚	**143**
CP	12 poles + ⏚	**179**
MIXO	4 + 4 modules	**262 - 317**

insert dimensions:
2 x (77,5 x 27) mm

hoods with 2 levers

covers

description	part No.	entry Pg	part No	entry M	part No. (with eyelet)	part No. (with loop)
with levers, side entry [2]	**CHO 32 X**	36	**MHO 32 X40**	40		
with levers, side entry, without adaptor [1] [2]	**CFO 32 X**	36	**MFO 32 X40**	40		
with levers, top entry [2]	**CHV 32 X**	36	**MHV 32 X40**	40		
with levers, top entry, without adaptor [1] [2]	**CFV 32 X**	36	**MFV 32 X40**	40		
with 4 pegs (for enclosures with 2 levers with gasket) with 4 pegs and gasket (for enclosures with 2 levers) [3] with 2 pegs (for enclosures with 1 lever with gasket)					**CHC 32** **CHC 32 L**	**CHC 32 S** **CHC 32 C** **CHC 32 SL**
with 2 levers (for hoods with 4 pegs) with 1 lever (for hoods with 2 pegs)						**CHC 32 G** **CHC 32 LG**

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

[2] may be combined with CHI 32 CS enclosures

[3] may be combined with enclosures:
- CHO/CFO 32 X and CHV/CFV 32 X
- MHO/MFO 32 X and MHV/MFV 32 X

CHO/CFO X and **MHO/MFO X**

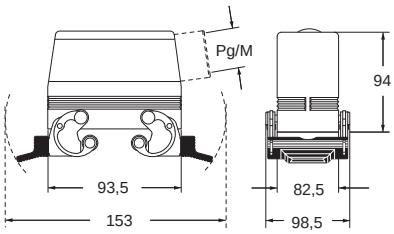

CHV/CFV X and **MHV/MFV X**

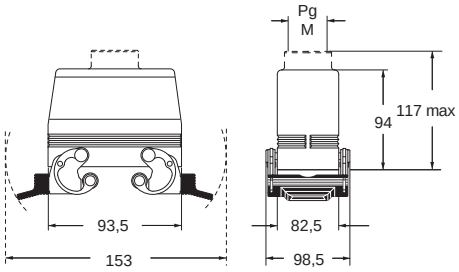

CHC (S)



CHC C



CHC L (SL)



CHC G

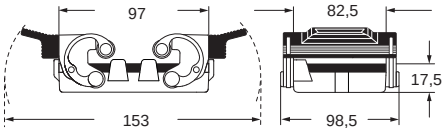

CHC LG

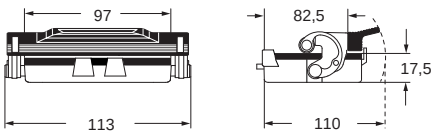

For fixing on housings

eyelet



For fixing on hoods

loop



Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

CHIX C-TYPE standard version RIGID LEVER

inserts		page:
CD	80 poles + ⏚	**73**
CDD	144 poles + ⏚	**82**
CDS	54 poles + ⏚	**-**
CDSH	54 poles + ⏚	**90**
CNE	32 poles + ⏚	**114**
CSE	32 poles + ⏚	**-**
CSH	32 poles + ⏚	**114**
CSH S	32 poles + ⏚	**126**
CCE	32 poles + ⏚	**134**
CSS	32 poles + ⏚	**152**
CTSE (16A) ***)**	32 poles + ⏚	**164**
CQE	64 poles + ⏚	**172**
CME	12+4 (aux) poles + ⏚	**142**
CMSH	12+4 (aux) poles + ⏚	**142**
CMCE	12+4 (aux) poles + ⏚	**143**
CP	12 poles + ⏚	**179**
MIXO	4 + 4 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

insert dimensions:
2 x (77,5 x 27) mm

bulkhead mounting housings with single lever

STAINLESS STEEL RIGID LEVER

bulkhead mounting housings with single lever, with cover

STAINLESS STEEL RIGID LEVER

description	part No.	part No.
with lever	**CHIX 32 L**	
with lever and aluminum cover		**CHIX 32 LS**
with lever and plastic cover		**CHIX 32 LP**

The enclosures ensure IP66/IP69 degree of protection (or IP65 for cover versions) when mated and locked with the closing levers.

Available upon request in “**W-TYPE**” version for aggressive environment and in **180 °C** version for high temperatures.

panel cut-out for bulkhead mounting housings



CHIX L



CHIX LS and **CHIX LP**

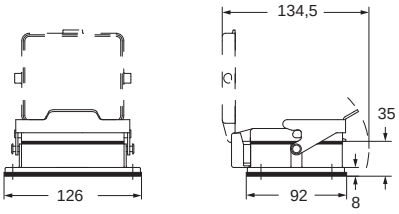

EN 60529 IP66 IP69 IEC 60529

EN 60529 IP65 IEC 60529

cURus
Type 12 / Type 4/4X
(except enclosures with plastic cover)
pending

C-TYPE

dimensions shown in mm are not binding and may be changed without notice

CHPX C-TYPE standard version RIGID LEVER

inserts		page:
CD	80 poles + ⏚	**73**
CDD	144 poles + ⏚	**82**
CDS	54 poles + ⏚	**-**
CDSH	54 poles + ⏚	**90**
CNE	32 poles + ⏚	**114**
CSE	32 poles + ⏚	**-**
CSH	32 poles + ⏚	**114**
CSH S	32 poles + ⏚	**126**
CCE	32 poles + ⏚	**134**
CSS	32 poles + ⏚	**152**
CTSE (16A) ***)**	32 poles + ⏚	**164**
CQE	64 poles + ⏚	**172**
CME	12+4 (aux) poles + ⏚	**142**
CMSH	12+4 (aux) poles + ⏚	**142**
CMCE	12+4 (aux) poles + ⏚	**143**
CP	12 poles + ⏚	**179**
MIXO	4 + 4 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

insert dimensions:
2 x (77,5 x 27) mm

surface mounting housings with single lever

STAINLESS STEEL RIGID LEVER

surface mounting housings with single lever, with cover

STAINLESS STEEL RIGID LEVER

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with lever	**CHPX 32 L29**	29						
with lever	**CHPX 32 L**	36	**MHPX 32 L40**	40				
with lever and aluminum cover					**CHPX 32 LS29**	29		
with lever and aluminum cover					**CHPX 32 LS**	36	**MHPX 32 LS40**	40
with lever and plastic cover					**CHPX 32 LP29**	29		
with lever and plastic cover					**CHPX 32 LP**	36	**MHPX 32 LP40**	40
with lever and plastic cover							**MHPX 32 LP50**	50

The enclosures ensure IP66/IP69 degree of protection (or IP65 for cover versions) when mated and locked with the closing levers.

Available upon request in “**W-TYPE**” version for aggressive environment and in **180 °C** version for high temperatures.

CHPX L and **MHPX L**

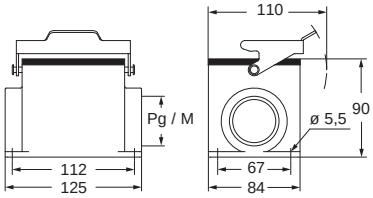

CHPX LS - MHPX LS and **CHPX LP - MHPX LP**

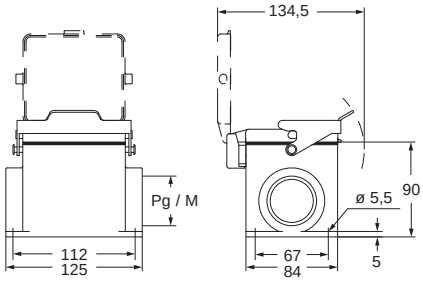

EN 60529 IP65 IEC 60529 insulating cable gland or fittings without gasket

EN 60529 IP66 IP69 IEC 60529 cable gland with O-Ring gasket

EN 60529 IP65 IEC 60529

cURus
Type 12 / Type 4/4X
(except enclosures with plastic cover)
pending

C-TYPE

CH - CF and MH - MF C-TYPE standard version

inserts		page:
CD	128 poles + ⏚	**74**
CDD	216 poles + ⏚	**83**
CDS	84 poles + ⏚	**-**
CDSH	84 poles + ⏚	**91**
CNE	48 poles + ⏚	**115**
CSE	48 poles + ⏚	**-**
CSH	48 poles + ⏚	**115**
CSH S	48 poles + ⏚	**127**
CCE	48 poles + ⏚	**135**
CME	20+4 (aux) poles + ⏚	**144**
CMSH	20+4 (aux) poles + ⏚	**144**
CSS	48 poles + ⏚	**153**
CTSE (16A) ***)**	48 poles + ⏚	**165**
CQE	92 poles + ⏚	**173**
MIXO	6 + 6 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

insert dimensions:
2 x (104 x 27) mm

bulkhead and surface mounting enclosures with single lever

hoods with 2 pegs

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting enclosures with lever	**CHI 48 L**	—						
bulkhead mounting enclosures with lever and cover	**CHI 48 LS**	—						
surface mounting enclosures with lever and cover	**CHP 48 LS29**	29 x 2	**MHP 48 LS40**	40 x 2				
surface mounting enclosures with lever and cover	**CHP 48 LS**	36 x 2	**MHP 48 LS50**	50 x 2				
with pegs, side entry					**CHO 48 L29**	29	**MHO 48 L32**	32
with pegs, side entry					**CHO 48 L**	36	**MHO 48 L40**	40
with pegs, side entry					**CHO 48 L42**	42	**MHO 48 L50**	50
with pegs, side entry, without adapter 1)					**CFO 48 L29**	29	**MFO 48 L32**	32
with pegs, side entry, without adapter 1)					**CFO 48 L**	36	**MFO 48 L40**	40
with pegs, side entry, without adapter 1)					**CFO 48 L42**	42	**MFO 48 L50**	50
with pegs, top entry					**CHV 48 L29**	29	**MHV 48 L32**	32
with pegs, top entry					**CHV 48 L**	36	**MHV 48 L40**	40
with pegs, top entry					**CHV 48 L42**	42	**MHV 48 L50**	50
with pegs, top entry, without adaptor 1)					**CFV 48 L29**	29	**MFV 48 L32**	32
with pegs, top entry, without adaptor 1)					**CFV 48 L**	36	**MFV 48 L40**	40
with pegs, top entry, without adaptor 1)					**CFV 48 L42**	42	**MFV 48 L50**	50

1) enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

panel cut-out for bulkhead mounting housings

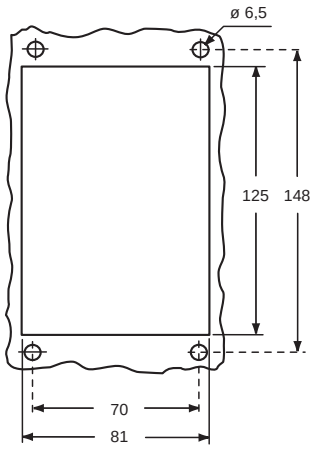

IMPORTANT NOTE: The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers. The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 degree of protection.

c UL us Type 4/4X/12

IP65 insulating cable gland or fittings without gasket

IP66 IP69 cable gland with O-Ring gasket

CHI L - LS

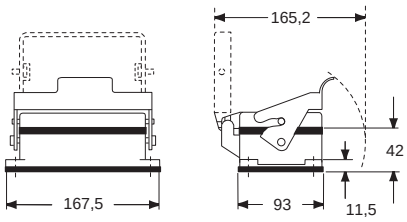

CHO/CFO L and **MHO/MFO L**

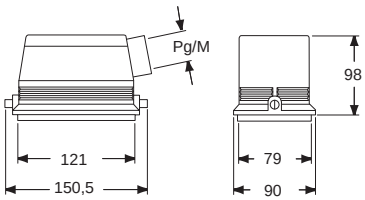

CHP LS and **MHP LS**

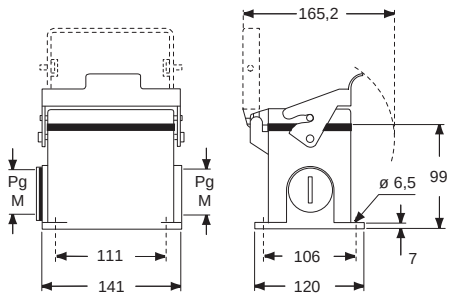

CHV/CFV L and **MHV/MFV L**

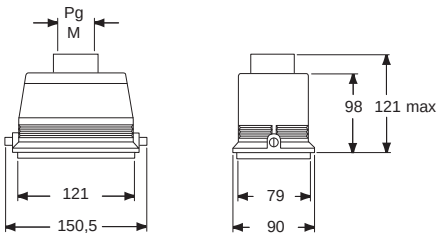

dimensions shown in mm are not binding and may be changed without notice

CH and MH C-TYPE standard version

inserts		page:
CD	50 poles + ⏚	71
CDD	76 poles + ⏚	80
CDA	32 poles + ⏚	102
CSAH	32 poles + ⏚	103
CDC	32 poles + ⏚	106

insert dimensions:
2 x (66 x 16) mm

bulkhead mounting housings with 2 levers or 4 pegs

surface mounting housings with 2 levers or 4 pegs

description	part No.	part No.	entry Pg	part No.	entry M
with levers	**CHI 50**				
with pegs and cover [1]	**CHI 50 CS**				
with levers		**CHP 50.21**	21	**MHP 50.32**	32
with levers		**CHP 50.221**	21 x 2	**MHP 50.232**	32 x 2
with levers		**CHP 50.29**	29	**MHP 50.40**	40
with levers		**CHP 50.229**	29 x 2	**MHP 50.240**	40 x 2
with pegs and cover [1]		**CHP 50 CS**	21	**MHP 50 CS32**	32
with pegs and cover [1]		**CHP 50 CS2**	21 x 2	**MHP 50 CS232**	32 x 2
with pegs and cover [1]		**CHP 50 CS29**	29	**MHP 50 CS40**	40
with pegs and cover [1]		**CHP 50 CS229**	29 x 2	**MHP 50 CS240**	40 x 2

[1] may be combined with enclosures:
- CHO/CAO 50 X and CAV 50 X
- MHO/MAO/MFO 50 X and MAV/MFV 50 X

panel cut-out for bulkhead mounting housings

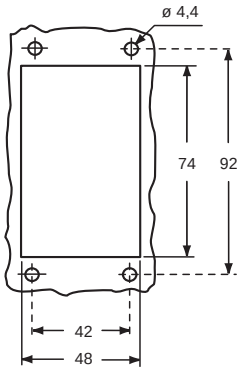

IMPORTANT NOTE: The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers.
The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 degree of protection.

CHI

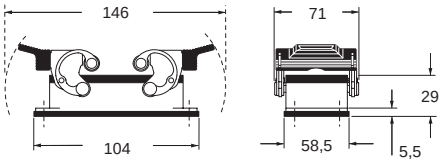

CHP and **MHP**

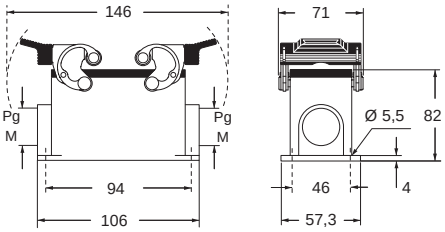

CHI CS

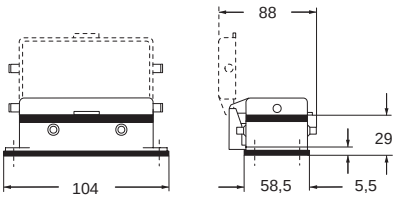

CHP CS and **MHP CS**

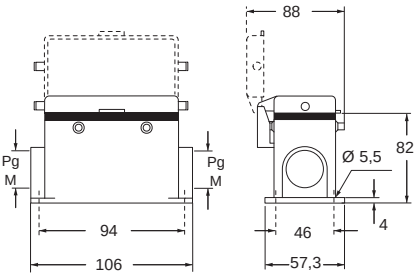

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CD	50 poles + ⏚	**71**
CDD	76 poles + ⏚	**80**
CDA	32 poles + ⏚	**102**
CSAH	32 poles + ⏚	**103**
CDC	32 poles + ⏚	**106**

insert dimensions:
2 x (66 x 16) mm

hoods with 4 pegs

hoods with 2 levers or 4 pegs

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs, side entry	**CHO 50**	21	**MHO 50.25**	25				
with pegs, side entry			**MHO 50.32**	32				
with pegs, side entry, high construction	**CAO 50.21**	21	**MAO 50.25**	25				
with pegs, side entry, high construction	**CAO 50.29**	29	**MAO 50.32**	32				
with pegs, top entry, high construction					**CAV 50.21**	21	**MAV 50.25**	25
with pegs, top entry, high construction					**CAV 50.29**	29	**MAV 50.32**	32
with levers and gasket, top entry, high construction					**CAV 50 G29**	29	**MAV 50 G32**	32
with pegs, side entry, high construction, without adapter [1]	**CFO 50.21**	21	**MFO 50.25**	25				
with pegs, side entry, high construction, without adapter [1]	**CFO 50.29**	29	**MFO 50.32**	32				
with pegs, top entry, high construction, without adapter [1]					**CFV 50.21**	21	**MFV 50.25**	25
with pegs, top entry, high construction, without adapter [1]					**CFV 50.29**	29	**MFV 50.32**	32
with levers and gasket, top entry, high, without adapter [1]					**CFV 50 G29**	29	**MFV 50 G32**	32

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

CHO (CAO/CFO) and **MHO (MAO/MFO)**



CAV (CFV) and **MAV (MFV)**

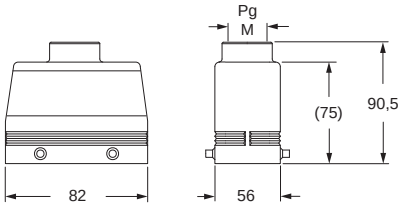

CAV G (CFV G) and **MAV G (MFV G)**

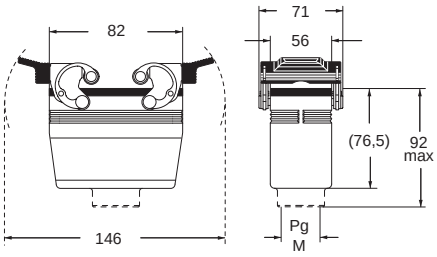

C US Type 4/4X/12

IP65 insulating cable gland or fittings without gasket

IP66 IP69 cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CD	50 poles + ⏚	**71**
CDD	76 poles + ⏚	**80**
CDA	32 poles + ⏚	**102**
CSAH	32 poles + ⏚	**103**
CDC	32 poles + ⏚	**106**

insert dimensions:
2 x (66 x 16) mm

hoods with 2 levers

covers

description	part No.	entry Pg	part No	entry M	part No. (with eyelet)	part No. (with loop)
with levers, side entry [1]	**CHO 50 X**	21	**MHO 50 X25**	25		
with levers, side entry [1]			**MHO 50 X32**	32		
with levers, side entry, high construction [1]	**CAO 50 X**	21	**MAO 50 X25**	25		
with levers, side entry, high construction [1]	**CAO 50 X29**	29	**MAO 50 X32**	32		
with levers, top entry, high construction [1]	**CAV 50 X**	21	**MAV 50 X25**	25		
with levers, top entry, high construction [1]	**CAV 50 X29**	29	**MAV 50 X32**	32		
with levers, side entry, high construction, without adapter [1] [2]	**CFO 50 X**	21	**MFO 50 X25**	25		
with levers, side entry, high construction, without adapter [1] [2]	**CFO 50 X29**	29	**MFO 50 X32**	32		
with levers, top entry, high construction, without adapter [1] [2]	**CFV 50 X**	21	**MFV 50 X25**	25		
with levers, top entry, high construction, without adapter [1] [2]	**CFV 50 X29**	29	**MFV 50 X32**	32		
with 4 pegs (for enclosures with 2 levers)					**CHC 50**	**CHC 50 S**
with 2 levers and gasket (for hoods with 4 pegs)						**CHC 50 G**

[1] may be combined with enclosures:
- CHI 50 CS, CHP 50 CS and MHP 50 CS

[2] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

CHO X (CAO X/CFO X) and **MHO X (MAO X/MFO X)**

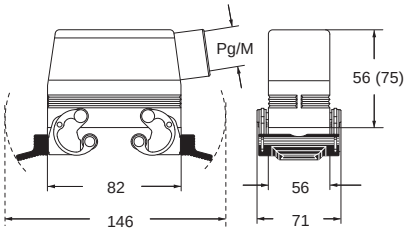

CHC(S)

CAV X (CFV X) and **MAV X (MFV X)**

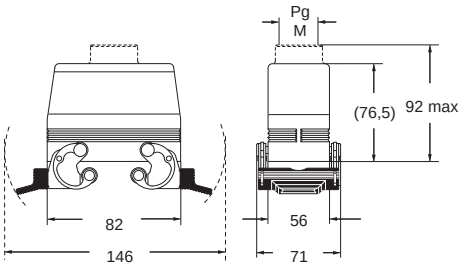

CHC G

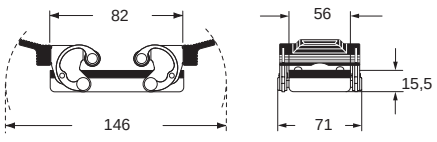

Type 4/4X/12

IP65 (EN 60529 / IEC 60529) insulating cable gland or fittings without gasket

IP66 IP69 (EN 60529 / IEC 60529) cable gland with O-Ring gasket

For fixing on housings

eyelet



For fixing on hoods

loop



C-TYPE

CAC C-TYPE standard version

inserts		page:
CD	50 poles + ⏚	**71**
CDD	76 poles + ⏚	**80**
CDA	32 poles + ⏚	**102**
CSAH	32 poles + ⏚	**103**
CDC	32 poles + ⏚	**106**

insert dimensions:
2 x (66 x 16) mm

hoods without entry, to be drilled

description	part No. with 4 pegs
with pegs, high construction	**CAC 50**

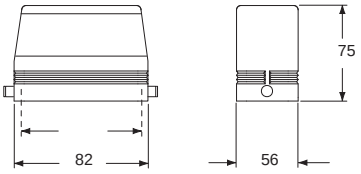

C-TYPE

Type
4/4X/12

IP66
IP69

dimensions shown in mm are not binding and may be changed without notice

V-TYPE

Extra tough

The performance requirements in **connection protection** are increasingly varied and specialized.

To respond to this wide range of needs, **ILME has developed several original solutions, including the innovative V-TYPE lever**.

This proprietary lever, due to the **vertical closing movement, offers an IP66/IP67/IP69 degree of protection** (according to EN 60529) when fitted with a complete and coupled connector **and used with ILME standard hoods in die cast aluminium moulded (without adaptor)**.

The high degree of protection is therefore not dependant on the use of special gaskets or locking devices.

The fixing flanges are the same as those fitted on traditional models.

This means it is possible to use the new housings **as alternatives to the traditional version without affecting the interchangeability,** or changing dimensions, spaces, flanges or fixing positions.

This lever differs from other commercial ones because of its closing movement principle, consisting of 2 hinged elements that are then pivoted on the housing.

This composite movement enables to move the lever above the pin of the housing that has to be fixed in place with an initial rotatory movement and then press it downwards to engage the locking mechanism.

The tight seal after closure and the simplicity of the movement are key characteristics that **only ILME has managed to combine into a single lever.**





SUM-UP

- **The friction on the pin is almost zero because the lever exerts its pressure vertically, thus significantly reducing wear in case of frequent use**
- **The complete lever is manufactured in stainless steel and is fitted with a catch that prevents it from being accidentally detached**
- **The absence of parts in plastic offers a higher resistance to impacts and in case of contact with oils and aggressive chemical substances or high ambient temperatures**
- **The lever can be used for applications with vibrations because it has no springs and is therefore more rigid**
- **The lever occupies a very small space during the closing phase**
- **It is recommended in cases when the cable weight forces the levers to open, such as vertically installed connectors and the cable is mounted in the bottom**

The interchangeability with equivalent traditional levers with springs and rollers **simplifies the management of stocks, reduces costs and increases flexibility of use.**

Available in bulkhead or surface-mounted versions for sizes 44.27 with a single lever, 57.27, 77.27 and 104.27 with 2 levers. High construction models are available on request.

The item code identifies the series with the **suffix C7 or M7**:

- **C7I** bulkhead mounting housing
- **C7P** surface mounting housing, Pg thread, standard height
- **M7P** surface mounting housing, metric thread, standard height
- **C7AP** surface mounting housing, Pg thread, high
- **M7AP** surface mounting housing, metric thread, high.

C7 - C7A and M7 - M7A IP67 enclosures V-TYPE lever version

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CT, CTSE (16A) ***)**	6 poles + ⏚	**160**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with stainless steel single lever

surface mounting housings with stainless steel single lever

description	part No.	part No.	entry Pg	part No.	entry M
with lever and gasket, size “44.27”	**C7I 06 L**				
with lever, size “44.27”		**C7P 06 L**	16	**M7P 06 L20**	20
with lever, size “44.27”		**C7P 06 L2**	16 x 2	**M7P 06 L220**	20 x 2
with lever, high construction, size “44.27”		**C7AP 06 L**	21	**M7AP 06 L32**	32
with lever, high construction, size “44.27”		**C7AP 06 L2**	21 x 2	**M7AP 06 L232**	32 x 2
with lever, high construction, size “44.27”		**C7AP 06 L29**	29	**M7AP 06 L40**	40
with lever, high construction, size “44.27”		**C7AP 06 L229**	29 x 2	**M7AP 06 L240**	40 x 2

panel cut-out for bulkhead mounting housings



C7I L

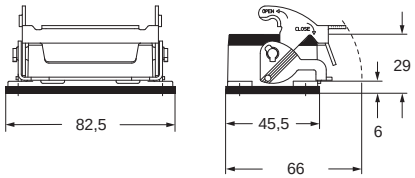

C7P L - C7AP L and **M7P L - M7AP L**

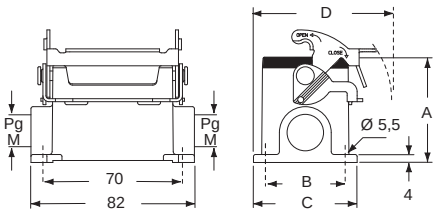

The lever, due to the vertical closing movement, offers an IP66/IP67/IP69 degree of protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME standard hoods in die cast aluminum with pegs (without adapter).

For bulkhead mounting housings, IP66/IP67/IP69 degree of protection is guaranteed for mounting on a sufficiently rigid panel; use suitable length M4 screws (negligible surface buckling when subjected to tightening couple on the fixing screws of 0,8 - 1,2 Nm or deformation caused by the weight of the complete connector). In case of insufficient rigidity use of C7.. FL counterflanges (page 443) is recommended, in which case use suitable length M4 screws and M4 (on the enclosure) and M4 (on the counterflange) flat/ spring washers with M4 locknut.
In addition, the panel surface in contact with the counterflange gasket of the bulkhead mounting housings must be free from defects (deep scratches, grooves, burrs) that could negatively affect the performance of the gasket.

type	A	B	C	D
C7P/M7P 06 L	53	40	52	70
C7AP/M7AP 06 L	74	45	57	72,5

Hoods (page 389)

Hoods (pages 466-467)

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

V-TYPE IP67

dimensions shown in mm are not binding and may be changed without notice

C7 and M7 - M7A IP67 enclosures V-TYPE lever version

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CT, CTSE (16A) ***)**	6 poles + ⏚	**160**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with stainless steel single lever and metal cover

surface mounting housings with stainless steel single lever and metal cover

description	part No.	part No.	entry M
with lever, cover and gasket, size “44.27”	**C7I 06 LS**		
with lever and cover, size “44.27”		**M7P 06 LS20**	20
with lever and cover, size “44.27”		**M7P 06 LS220**	20 x 2
with lever and cover, high construction, size “44.27”		**M7AP 06 LS32**	32
with lever and cover, high construction, size “44.27”		**M7AP 06LS232**	32 x 2
with lever and cover, high construction, size “44.27”		**M7AP 06 LS40**	40
with lever and cover, high construction, size “44.27”		**M7AP 06LS240**	40 x 2

panel cut-out for bulkhead mounting housings



The lever, due to the vertical closing movement, offers an IP66/IP67/IP69 degree of protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME standard hoods in die cast aluminum with pegs (without adapter).

C7I LS

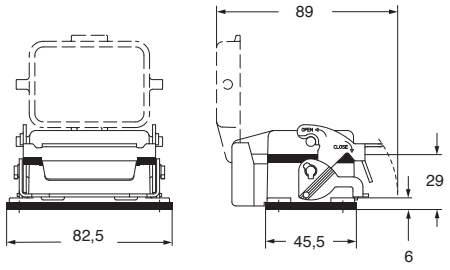

For bulkhead mounting housings, IP66/IP67/IP69 degree of protection is guaranteed for mounting on a sufficiently rigid panel; use suitable length M4 screws (negligible surface buckling when subjected to tightening couple on the fixing screws of 0,8 - 1,2 Nm or deformation caused by the weight of the complete connector). In case of insufficient rigidity use of C7.. FL counterflanges (page 443) is recommended, in which case use suitable length M4 screws and M4 (on the enclosure) and M4 (on the counterflange) flat/ spring washers with M4 locknut.
In addition, the panel surface in contact with the counterflange gasket of the bulkhead mounting housings must be free from defects (deep scratches, grooves, burrs) that could negatively affect the performance of the gasket.

M7P LS - M7AP LS

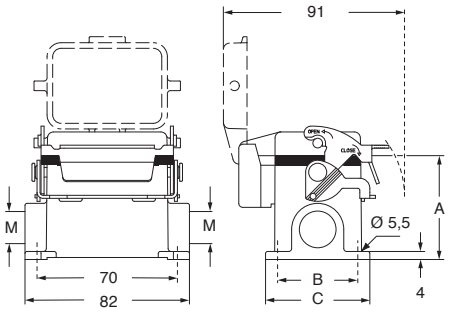

type	A	B	C
M7P 06 LS	53	40	52
M7AP 06 LS	74	45	57

Hoods (page 389)

Hoods (pages 466-467)

Type 4/4X/12

IP65 insulating cable gland or fittings without gasket

IP66 IP67 IP69 cable gland with O-Ring gasket

V-TYPE IP67

C7 - C7A and M7 - M7A IP67 enclosures V-TYPE lever version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with 2 levers in stainless steel

surface mounting housings with 2 levers in stainless steel

description	part No.	part No.	entry Pg	part No.	entry M
with levers and gasket, size “57.27”	**C7I 10**				
with levers, size “57.27”		**C7P 10**	16	**M7P 10.20**	20
with levers, size “57.27”		**C7P 10.2**	16 x 2	**M7P 10.220**	20 x 2
with levers, high construction, size “57.27”		**C7AP 10.21**	21	**M7AP 10.32**	32
with levers, high construction, size “57.27”		**C7AP 10.221**	21 x 2	**M7AP 10.232**	32 x 2
with levers, high construction, size “57.27”		**C7AP 10.29**	29	**M7AP 10.40**	40
with levers, high construction, size “57.27”		**C7AP 10.229**	29 x 2	**M7AP 10.240**	40 x 2

panel cut-out for bulkhead mounting housings

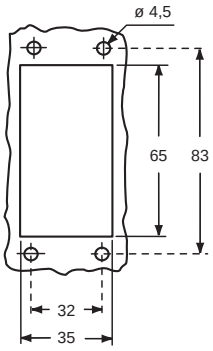

C7I

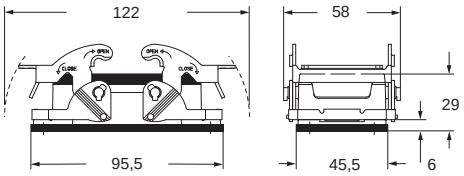

C7P - C7AP and **M7P - M7AP**

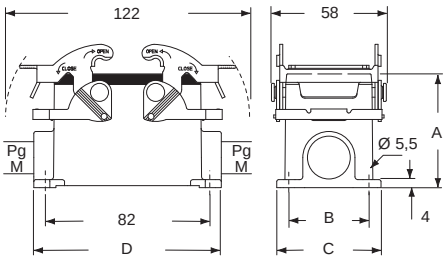

The lever, due to the vertical closing movement, offers an IP66/IP67/IP69 degree of protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME standard hoods in die cast aluminum with pegs (without adapter).

For bulkhead mounting housings, IP66/IP67/IP69 degree of protection is guaranteed for mounting on a sufficiently rigid panel; use suitable length M4 screws (negligible surface buckling when subjected to tightening couple on the fixing screws of 0,8 - 1,2 Nm or deformation caused by the weight of the complete connector). In case of insufficient rigidity use of C7.. FL counterflanges (page 443) is recommended, in which case use suitable length M4 screws and M4 (on the enclosure) and M4 (on the counterflange) flat/ spring washers with M4 locknut.
In addition, the panel surface in contact with the counterflange gasket of the bulkhead mounting housings must be free from defects (deep scratches, grooves, burrs) that could negatively affect the performance of the gasket.

type	A	B	C	D
C7P/M7P 10	57	40	52	93,5
C7AP/M7AP 10	74	45	57	94

Hoods (page 395)

Hoods (pages 468-469)

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

V-TYPE IP67

dimensions shown in mm are not binding and may be changed without notice

C7 - C7A and M7 - M7A IP67 enclosures V-TYPE lever version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CT, CTS (10A) ***)**	40 poles + ⏚	**156**
CT, CTSE (16A) ***)**	16 poles + ⏚	**162**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with 2 levers in stainless steel

surface mounting housings with 2 levers in stainless steel

description	part No.	part No.	entry Pg	part No.	entry M
with levers and gasket, size “77.27”	**C7I 16**				
with levers, size ”77.27“		**C7P 16**	21	**M7P 16.25**	25
with levers, size ”77.27“		**C7P 16.2**	21 x 2	**M7P 16.225**	25 x 2
with levers, high construction, size ”77.27“		**C7AP 16.21**	21	**M7AP 16.32**	32
with levers, high construction, size ”77.27“		**C7AP 16.221**	21 x 2	**M7AP 16.232**	32 x 2
with levers, high construction, size ”77.27“		**C7AP 16.29**	29	**M7AP 16.40**	40
with levers, high construction, size ”77.27“		**C7AP 16.229**	29 x 2	**M7AP 16.240**	40 x 2

panel cut-out for bulkhead mounting housings

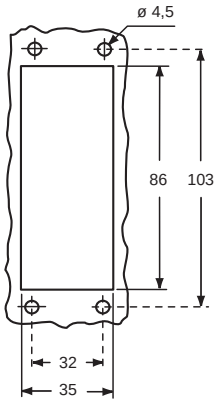

The lever, due to the vertical closing movement, offers an IP66/IP67/IP69 degree of protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME standard hoods in die cast aluminum with pegs (without adapter).

C7I

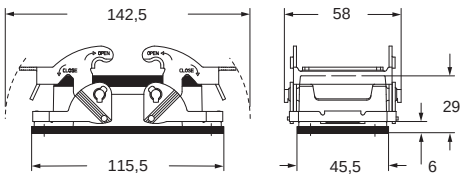

For bulkhead mounting housings, IP66/IP67/IP69 degree of protection is guaranteed for mounting on a sufficiently rigid panel; use suitable length M4 screws (negligible surface buckling when subjected to tightening couple on the fixing screws of 0,8 - 1,2 Nm or deformation caused by the weight of the complete connector). In case of insufficient rigidity use of C7.. FL counterflanges (page 443) is recommended, in which case use suitable length M4 screws and M4 (on the enclosure) and M4 (on the counterflange) flat/spring washers with M4 locknut.
In addition, the panel surface in contact with the counterflange gasket of the bulkhead mounting housings must be free from defects (deep scratches, grooves, burrs) that could negatively affect the performance of the gasket.

C7P - C7AP and **M7P - M7AP**

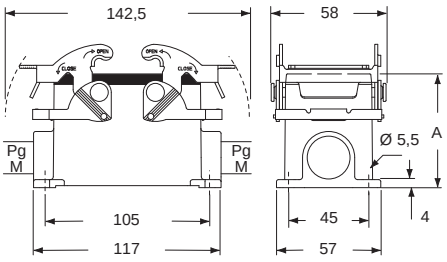

type	A
C7P/M7P 16	63
C7AP/M7AP 16	81

Hoods (page 404)

Hoods (pages 470-471)

Type 4/4X/12

IP65 — insulating cable gland or fittings without gasket

IP66 IP67 IP69 — cable gland with O-Ring gasket

C7 and M7A IP67 enclosures V-TYPE lever version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CT, CTS (10A) ***)**	40 poles + ⏚	**156**
CT, CTSE (16A) ***)**	16 poles + ⏚	**162**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with 2 levers in stainless steel and metal cover

surface mounting housings with 2 levers in stainless steel and metal cover

description	part No.	part No.	entry M
with levers, cover and gasket, size “77.27”	**C7I 16 S**		
with levers and cover, high construction, size “77.27”		**M7AP 16 S32**	32
with levers and cover, high construction, size “77.27”		**M7AP 16 S232**	32 x 2

panel cut-out for bulkhead mounting housings

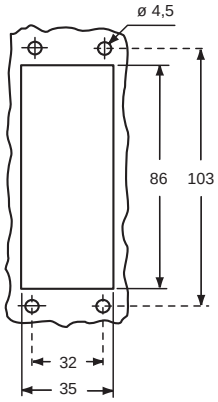

C7I S

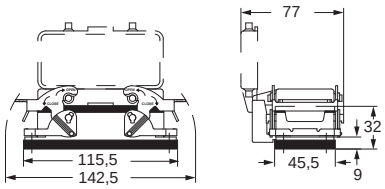

M7AP S

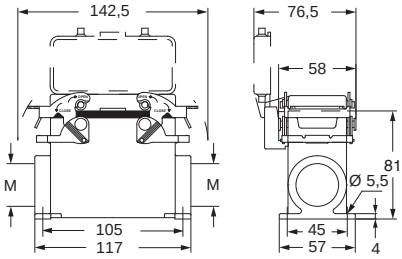

The lever, due to the vertical closing movement, offers an IP66/IP67/IP69 degree of protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME standard hoods in die cast aluminum with pegs (without adapter).

For bulkhead mounting housings, IP66/IP67/IP69 degree of protection is guaranteed for mounting on a sufficiently rigid panel; use suitable length M4 screws (negligible surface buckling when subjected to tightening couple on the fixing screws of 0,8 - 1,2 Nm or deformation caused by the weight of the complete connector). In case of insufficient rigidity use of C7.. FL counterflanges (page 443) is recommended, in which case use suitable length M4 screws and M4 (on the enclosure) and M4 (on the counterflange) flat/spring washers with M4 locknut.
In addition, the panel surface in contact with the counterflange gasket of the bulkhead mounting housings must be free from defects (deep scratches, grooves, burrs) that could negatively affect the performance of the gasket.

Hoods (page 404)

Hoods (pages 470-471)

cULus Type 4/4X/12

IP65 insulating cable gland or fittings without gasket

IP66 IP67 IP69 cable gland with O-Ring gasket

V-TYPE IP67

dimensions shown in mm are not binding and may be changed without notice

C7 - C7A and M7 - M7A IP67 enclosures V-TYPE lever version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTS (10A) ***)**	64 poles + ⏚	**157**
CT, CTSE (16A) ***)**	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with 2 levers in stainless steel

surface mounting housings with 2 levers in stainless steel

description	part No.	part No.	entry Pg	part No.	entry M
with levers and gasket, size ”104.27”	**C7I 24**				
with levers, size ”104.27”		**C7P 24**	21	**M7P 24.25**	25
with levers, size ”104.27”		**C7P 24.2**	21 x 2	**M7P 24.225**	25 x 2
with levers, high construction, size ”104.27”		**C7AP 24.21**	21	**M7AP 24.32**	32
with levers, high construction, size ”104.27”		**C7AP 24.221**	21 x 2	**M7AP 24.232**	32 x 2
with levers, high construction, size ”104.27”		**C7AP 24.29**	29	**M7AP 24.40**	40
with levers, high construction, size ”104.27”		**C7AP 24.229**	29 x 2	**M7AP 24.240**	40 x 2

panel cut-out for bulkhead mounting housings

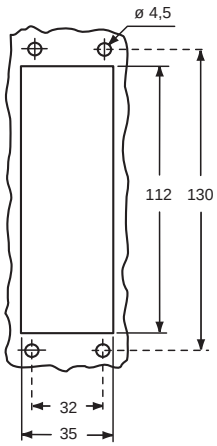

C7I

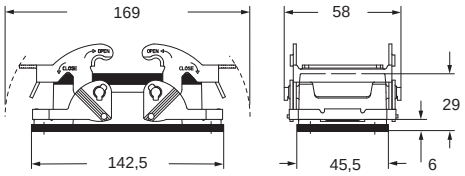

C7P - C7AP and **M7P - M7AP**

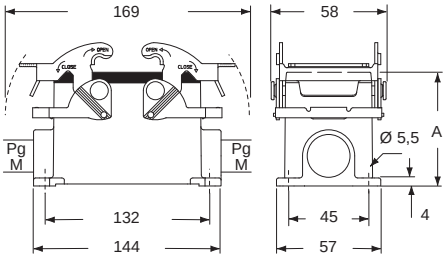

The lever, due to the vertical closing movement, offers an IP66/IP67/IP69 degree of protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME standard hoods in die cast aluminum with pegs (without adapter).

For bulkhead mounting housings, IP66/IP67/IP69 degree of protection is guaranteed for mounting on a sufficiently rigid panel; use suitable length M4 screws (negligible surface buckling when subjected to tightening couple on the fixing screws of 0,8 - 1,2 Nm or deformation caused by the weight of the complete connector). In case of insufficient rigidity use of C7.. FL counterflanges (page 443) is recommended, in which case use suitable length M4 screws and M4 (on the enclosure) and M4 (on the counterflange) flat/ spring washers with M4 locknut.
In addition, the panel surface in contact with the counterflange gasket of the bulkhead mounting housings must be free from defects (deep scratches, grooves, burrs) that could negatively affect the performance of the gasket.

type	**A**
C7P/M7P 24	63
C7AP/M7AP 24	81

Hoods (page 414)

Hoods (pages 472-473)

Type 4/4X/12

IP65 (EN 60529 / IEC 60529) insulating cable gland or fittings without gasket

IP66 IP67 IP69 (EN 60529 / IEC 60529) cable gland with O-Ring gasket

C7 and M7A IP67 enclosures V-TYPE lever version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTS (10A) ***)**	64 poles + ⏚	**157**
CT, CTSE (16A) ***)**	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with 2 levers in stainless steel and metal cover

surface mounting housings with 2 levers in stainless steel and metal cover

description	part No.	part No.	entry M
with levers, cover and gasket, size ”104.27”	**C7I 24 S**		
with levers and cover, high construction, size ”104.27”		**M7AP 24 S32**	32
with levers and cover, high construction, size ”104.27”		**M7AP 24 S232**	32 x 2

panel cut-out for bulkhead mounting housings

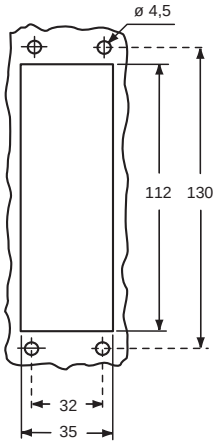

C7I S

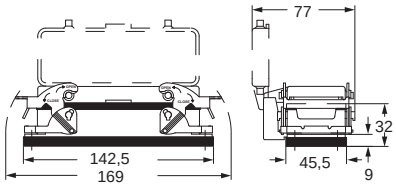

M7AP S

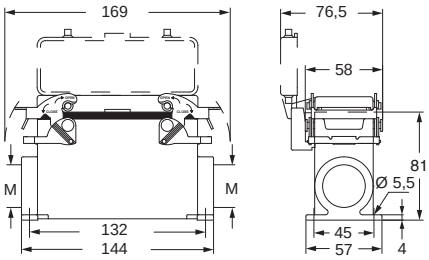

The lever, due to the vertical closing movement, offers an IP66/IP67/IP69 degree of protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME standard hoods in die cast aluminum with pegs (without adapter).

For bulkhead mounting housings, IP66/IP67/IP69 degree of protection is guaranteed for mounting on a sufficiently rigid panel; use suitable length M4 screws (negligible surface buckling when subjected to tightening couple on the fixing screws of 0,8 - 1,2 Nm or deformation caused by the weight of the complete connector). In case of insufficient rigidity use of C7.. FL counterflanges (page 443) is recommended, in which case use suitable length M4 screws and M4 (on the enclosure) and M4 (on the counterflange) flat/ spring washers with M4 locknut.
In addition, the panel surface in contact with the counterflange gasket of the bulkhead mounting housings must be free from defects (deep scratches, grooves, burrs) that could negatively affect the performance of the gasket.

Hoods (page 414)

Hoods (page 472 - 473)

cULus Type 4/4X/12

IP65 (EN 60529 / IEC 60529) insulating cable gland or fittings without gasket

IP66 IP67 IP69 (EN 60529 / IEC 60529) cable gland with O-Ring gasket

V-TYPE IP67

dimensions shown in mm are not binding and may be changed without notice

counterflanges
for bulkhead mounting housings

description	part No.
size ”44.27”	**C7 06 FL**
size ”57.27”	**C7 10 FL**
size ”77.27”	**C7 16 FL**
size ”104.27”	**C7 24 FL**

C7..FL

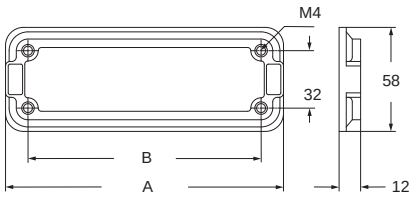

type	A	B
C7 06 FL	95	70
C7 10 FL	108	83
C7 16 FL	128	103
C7 24 FL	155	130

CV V-TYPE lever version

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CT, CTSE (16A) ***)**	6 poles + ⏚	**160**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with stainless steel single lever

description	part No.
with lever, gasket and cover in aluminium, size “44.27”	**CVI 06 LS**
with lever, gasket and cover in plastic, size “44.27”	**CVI 06 LP**

The enclosures ensure IP66 (or IP65 cover versions) degree of protection when mated and locked with the closing levers.

CVI LS/LP

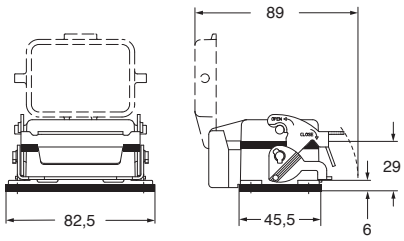

panel cut-out for bulkhead mounting housings



Hoods (from page 389)

Type 4/4X/12

(except enclosures with plastic cover)

EN 60529 IP65 IEC 60529

dimensions shown in mm are not binding and may be changed without notice

CV - CVA and MV - MVA V-TYPE lever SIMPLEX self-closing covers

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CT, CTSE (16A) ***)**	6 poles + ⏚	**160**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with stainless steel single lever

surface mounting housings with stainless steel single lever

description	part No.	part No.	entry Pg	part No.	entry M
with lever, gasket and cover in plastic	**CVI 06 LSP**				
with lever and cover		**CVP 06 LSP16**	16	**MVP 06 LSP20**	20
with lever and cover, high construction		**CVAP 06LSP21**	21	**MVAP 06LSP25**	25
with lever and cover, high construction		**CVAP 06LSP29**	29	**MVAP 06LSP32**	32
with lever and cover, high construction				**MVAP 06LSP40**	40

The enclosures ensure IP65 degree of protection when mated and locked with the closing lever, or IP44 degree of protection when not mated and locked with lever.

panel cut-out for bulkhead mounting housings



CVI LSP

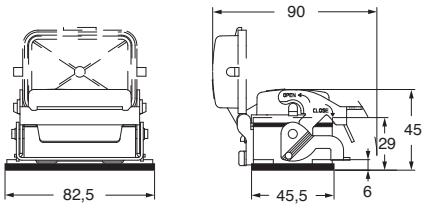

CVP - CVAP LSP and **MVP - MVAP LSP**

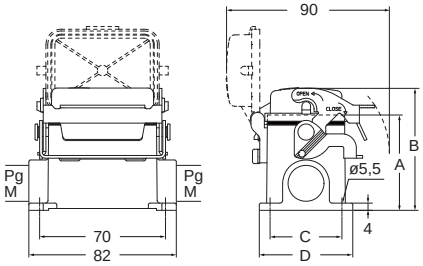

type	A	B	C	D
CVP / MVP 6 LSP	53	68	40	52
CVAP / MVAP 6 LSP	74	89	45	57

Hoods (from page 389)

cULus Type 4/4X/12

EN 60529 IP65 IEC 60529

cULus Type 4/4X/12 pending

EN 60529 IP65 IEC 60529

CV - CVA and MV - MVA V-TYPE lever version

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

surface mounting housings with stainless steel single lever and plastic cover

surface mounting housings with stainless steel single lever and aluminium cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with lever and cover, size “44.27”	**CVP 06 LP**	16	**MVP 06 LP20**	20	**CVP 06 LS**	16	**MVP 06 LS20**	20
with lever and cover, size “44.27”	**CVP 06 LP2**	16 x 2	**MVP 06 LP220**	20 x 2	**CVP 06 LS2**	16 x 2	**MVP 06 LS220**	20 x 2
with lever and cover, high construction, size “44.27”	**CVAP 06 LP**	21	**MVAP 06 LP32**	32	**CVAP 06 LS**	21	**MVAP 06 LS32**	32
with lever and cover, high construction, size “44.27”	**CVAP 06 LP2**	21 x 2	**MVAP 06LP232**	32 x 2	**CVAP 06 LS2**	21 x 2	**MVAP 06LS232**	32 x 2
with lever and cover, high construction, size “44.27”	**CVAP 06 LP29**	29	**MVAP 06 LP40**	40	**CVAP 06 LS29**	29	**MVAP 06 LS40**	40
with lever and cover, high construction, size “44.27”	**CVAP 06LP229**	29 x 2	**MVAP 06LP240**	40 x 2	**CVAP 06LS229**	29 x 2	**MVAP 06LS240**	40 x 2

The enclosures ensure IP66 (or IP65 cover versions) degree of protection when mated and locked with the closing levers.

CVP LP - CVAP LP and **MVP LP - MVAP LP**

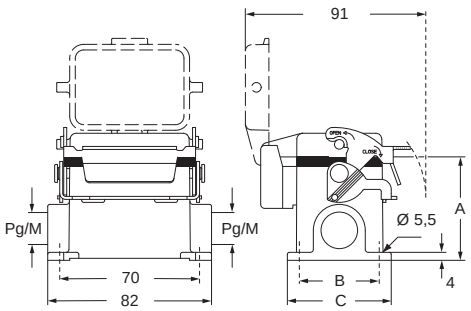

type	A	B	C
CVP/MVP 06 LP	53	40	52
CVAP/MVAP 06 LP	74	45	57

CVP LS - CVAP LS and **MVP LS - MVAP LS**

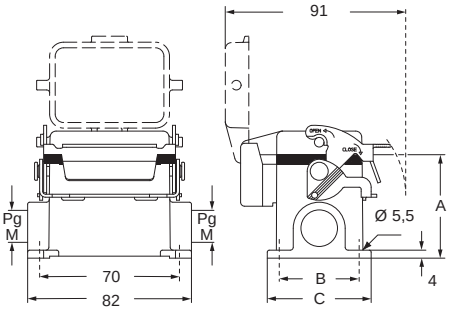

type	A	B	C
CVP/MVP 06 LS	53	40	52
CVAP/MVAP 06 LS	74	45	57

Hoods (from page 389)

c UL us Type 4/4X/12

(except enclosures with plastic cover)

EN 60529 IP65 IEC 60529

V-TYPE IP65/IP66

dimensions shown in mm are not binding and may be changed without notice

CV - CVA - CVF MV - MVA - MVF V-TYPE lever version

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

hoods, top entry
with gasket and stainless steel single lever

description	part No.	entry Pg	part No	entry M
with lever, size “44.27”	**CVV 06 LG**	16	**MVV 06 LG25**	25
with lever, high construction, size “44.27”	**CVAV 06 LG21**	21	**MVAV 06 LG25**	25
with lever, high construction, size “44.27”	**CVAV 06 LG29**	29	**MVAV 06 LG32**	32
with lever, high construction, without adapter, size “44.27”	**CVFV 06 LG21**	21	**MVFV 06 LG25**	25
with lever, high construction, without adapter, size “44.27”	**CVFV 06 LG29**	29	**MVFV 06 LG32**	32

CVV LG - CVAV LG - CVFV LG and
MVV LG - MVAV LG - MVFV LG

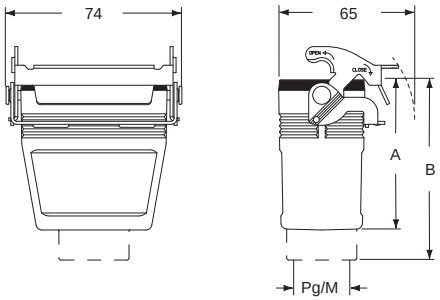

type	A	B
CVV/MVV 06 LG	45,5	58,5
CVAV/MVAV 06 LG	77	93
CVFV/MVFV 06 LG	77	-

Hoods
(from page 389)

Type 4/4X/12

insulating cable gland or fittings
without gasket

cable gland
with O-Ring gasket

CV V-TYPE lever version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with single lever in stainless steel

bulkhead mounting housings with single lever in stainless steel

description	part No.	part No.
with lever and gasket, size “57.27”	**CVI 10 L**	
with lever, gasket and cover in aluminium, size “57.27”		**CVI 10 LS**
with lever, gasket and cover in plastic, size “57.27”		**CVI 10 LP**

The enclosures ensure IP66/IP69 (or IP65 cover versions) degree of protection when mated and locked with the closing levers.

panel cut-out for bulkhead mounting housings

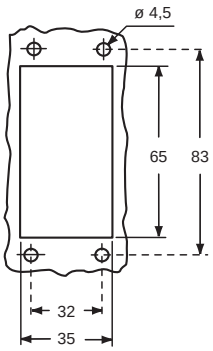

CVI L

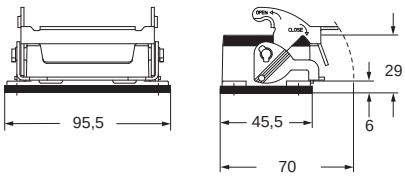

CVI LS/LP

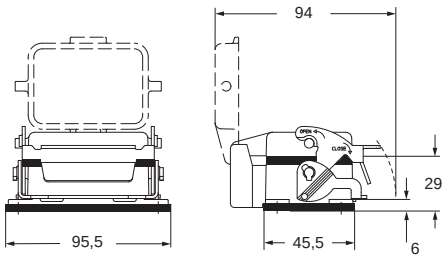

Hoods (from page 395)

c UL us Type 4/4X/12

EN 60529 IP66 IP69 IEC 60529

c UL us Type 4/4X/12 (except enclosures with plastic cover)

EN 60529 IP65 IEC 60529

dimensions shown in mm are not binding and may be changed without notice

CV - CVA and MV - MVA V-TYPE lever SIMPLEX self-closing covers

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with stainless steel single lever

surface mounting housings with stainless steel single lever

description	part No.	part No.	entry Pg	part No.	entry M
with lever, gasket and cover in plastic	**CVI 10 LSP**				
with lever and cover		**CVP 10 LSP16**	16	**MVP 10 LSP20**	20
with lever and cover				**MVP 10 LSP25**	25
with lever and cover, high construction		**CVAP 10LSP21**	21	**MVAP 10LSP25**	25
with lever and cover, high construction		**CVAP 10LSP29**	29	**MVAP 10LSP32**	32
with lever and cover, high construction				**MVAP 10LSP40**	40

The enclosures ensure IP65 degree of protection when mated and locked with the closing lever, or IP44 protection when not mated and locked with lever, thanks to the SIMPLEX self-closing cover.

panel cut-out for bulkhead mounting housings



CVI LSP

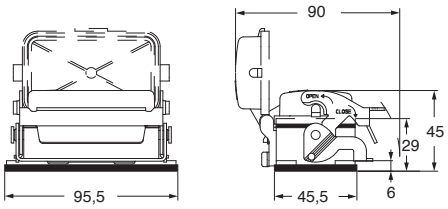

CVP - CVAP LSP and **MVP - MVAP LSP**

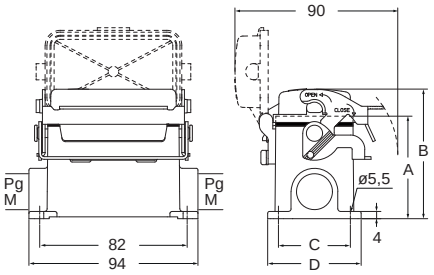

type	A	B	C	D
CVP / MVP 10 LSP	57	72	40	52
CVAP / MVAP 10 LSP	74	89	45	57

Hoods (from page 395)

c UL us Type 4/4X/12

EN 60529 IP65 IEC 60529

c UL us Type 4/4X/12 pending

EN 60529 IP65 IEC 60529

V-TYPE IP65/IP66

CV and MV V-TYPE lever version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

angled bulkhead mounting housings with stainless steel single lever

angled bulkhead mounting housings with stainless steel single lever

description	part No.	part No.	entry M
with lever, without cable gland entry [1) 3)]	**CVI 10 LA**		
with lever, with cable gland entry, closed bulkhead [2)]		**MVI 10 LAP32**	32

[1)] Flange gasket to be purchased separately. part No.: **CR 10 MO.**

CR 10 MO gasket



Following flange versions available on request: 73 x 73, 78 x 78, 80 x 80, 98 x 98 mm

[2)] Be used only with a complete cable gland (to be purchased separately). Versions with M 25 or Pg 21 entry on request.

[3)] Kit with earthing contact, comprising a special screw and wire-terminals for 6 mm² earthing conductors (for the additional connection of the upper enclosure half) part No.: **CR MOT**.

CR MOT kit

The enclosures ensure IP65 degree of protection when mated and locked with the closing lever.

Hoods (from page 395)

Type 4/4X/12

EN 60529 IP66 IP69 IEC 60529

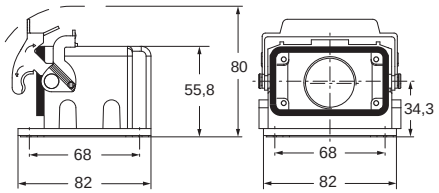

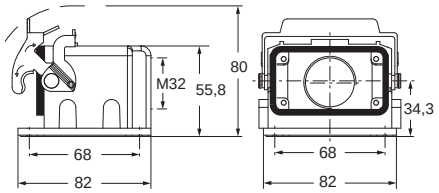

V-TYPE IP65/IP66

dimensions shown in mm are not binding and may be changed without notice

CV - CVA and MV - MVA V-TYPE lever version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

surface mounting housings with single lever in stainless steel

description	part No.	entry Pg	part No	entry M
with lever, size “57.27”	**CVP 10 L**	16	**MVP 10 L20**	20
with lever, size “57.27”	**CVP 10 L2**	16 x 2	**MVP 10 L220**	20 x 2
with lever, high construction, size “57.27”	**CVAP 10 L21**	21	**MVAP 10 L32**	32
with lever, high construction, size “57.27”	**CVAP 10 L221**	21 x 2	**MVAP 10 L232**	32 x 2
with lever, high construction, size “57.27”	**CVAP 10 L29**	29	**MVAP 10 L40**	40
with lever, high construction, size “57.27”	**CVAP 10 L229**	29 x 2	**MVAP 10 L240**	40 x 2

CVP L - CVAP L and **MVP L - MVAP L**

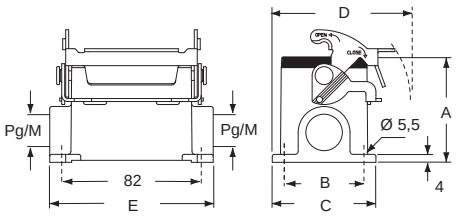

type	A	B	C	D	E
CVP/MVP 10 L	57	40	52	73	93,5
CVAP/MVAP 10 L	74	45	57	75,5	94

Hoods (from page 395)

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

CV - CVA and MV - MVA V-TYPE lever version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

surface mounting housings with stainless steel single lever and plastic cover

surface mounting housings with stainless steel single lever and aluminium cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with lever and cover, size “57.27”	**CVP 10 LP**	16	**MVP 10 LP20**	20	**CVP 10 LS**	16	**MVP 10 LS20**	20
with lever and cover, size “57.27”	**CVP 10 LP2**	16 x 2	**MVP 10 LP220**	20 x 2	**CVP 10 LS2**	16 x 2	**MVP 10 LS220**	20 x 2
with lever and cover, high construction, size “57.27”	**CVAP 10 LP21**	21	**MVAP 10 LP32**	32	**CVAP 10 LS**	21	**MVAP 10 LS32**	32
with lever and cover, high construction, size “57.27”	**CVAP 10LP221**	21 x 2	**MVAP 10LP232**	32 x 2	**CVAP 10 LS2**	21 x 2	**MVAP 10LS232**	32 x 2
with lever and cover, high construction, size “57.27”	**CVAP 10 LP29**	29	**MVAP 10 LP40**	40	**CVAP 10 LS29**	29	**MVAP 10 LS40**	40
with lever and cover, high construction, size “57.27”	**CVAP 10LP229**	29 x 2	**MVAP 10LP240**	40 x 2	**CVAP 10LS229**	29 x 2	**MVAP 10LS240**	40 x 2

The enclosures ensure IP66 (or IP65 cover versions) degree of protection when mated and locked with the closing levers.

CVP LP - CVAP LP and **MVP LP - MVAP LP**

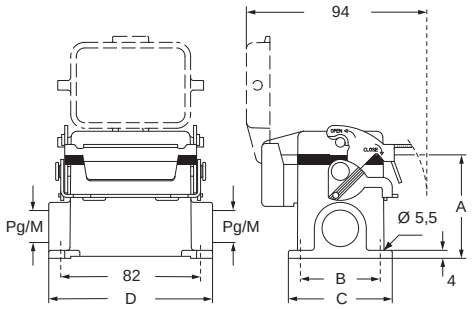

type	A	B	C	D
CVP/MVP 10 LP	57	40	52	93,5
CVAP/MVAP 10 LP	74	45	57	94

CVP LS - CVAP LS and **MVP LS - MVAP LS**

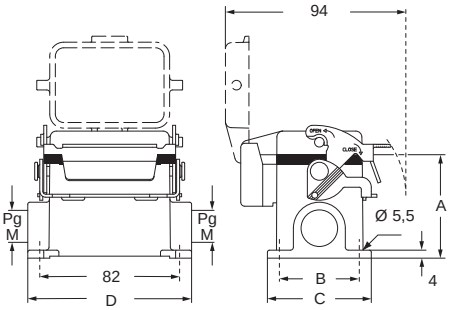

type	A	B	C	D
CVP/MVP 10 LS	57	40	52	93,5
CVAP/MVAP 10 LS	74	45	57	94

Hoods
(from page 395)

Type 4/4X/12
(except enclosures with plastic cover)

EN 60529 IP65 IEC 60529

V-TYPE IP65/IP66

dimensions shown in mm are not binding and may be changed without notice

CV - CVA - CVF MV - MVA - MVF V-TYPE lever version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

hoods, top entry,
with gasket and stainless steel single lever

hoods, top entry,
with gasket and 2 levers in stainless steel

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with lever/s, size “57.27”	**CVV 10 LG**	16	**MVV 10 LG25**	25	**CVV 10 G**	16	**MVV 10 G25**	25
with lever/s, high construction, size “57.27”	**CVAV 10 LG21**	21	**MVAV 10 LG25**	25	**CVAV 10 G21**	21	**MVAV 10 G25**	25
with lever/s, high construction, size “57.27”	**CVAV 10 LG29**	29	**MVAV 10 LG32**	32	**CVAV 10 G29**	29	**MVAV 10 G32**	32
with lever/s, high construction, without adapter, size “57.27”	**CVFV 10 LG21**	21	**MVFV 10 LG25**	25	**CVFV 10 G21**	21	**MVFV 10 G25**	25
with lever/s, high construction, without adapter, size “57.27”	**CVFV 10 LG29**	29	**MVFV 10 LG32**	32	**CVFV 10 G29**	29	**MVFV 10 G32**	32

CVV LG - CVAV LG - CVFV LG and
MVV LG - MVAV LG - MVFV LG

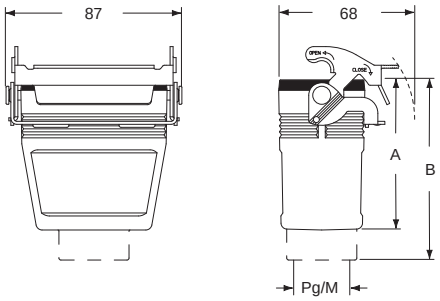

type	A	B
CVV/MVV 10 LG	50,5	63,5
CVAV/MVAV 10 LG	75	91
CVFV/MVFV 10 LG	75	-

CVV G - CVAV G - CVFV G and
MVV G - MVAV G - MVFV G

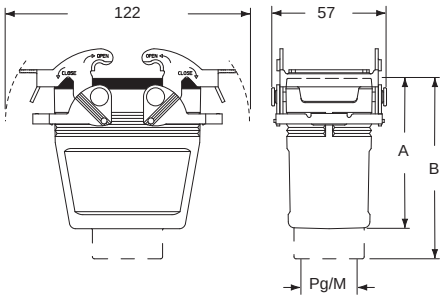

type	A	B
CVV/MVV 10 G	50,5	63,5
CVAV/MVAV 10 G	75	91
CVFV/MVFV 10 G	75	-

Hoods
(from page 395)

Type 4/4X/12

insulating cable gland or fittings
without gasket

cable gland
with O-Ring gasket

CV V-TYPE lever version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CT, CTS (10A) ***)**	40 poles + ⏚	**156**
CT, CTSE (16A) ***)**	16 poles + ⏚	**162**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with single lever in stainless steel

bulkhead mounting housings with single lever in stainless steel

description	part No.	part No.
with lever and gasket, size “77.27”	**CVI 16 L**	
with lever, gasket and cover in aluminium, size “77.27”		**CVI 16 LS**
with lever, gasket and cover in plastic, size “77.27”		**CVI 16 LP**

The enclosures ensure IP66/IP69 (or IP65 cover versions) degree of protection when mated and locked with the closing levers.

panel cut-out for bulkhead mounting housings

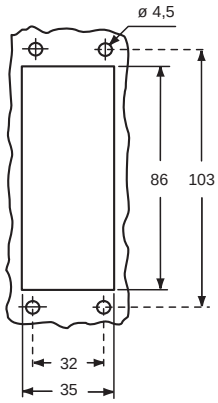

CVI L

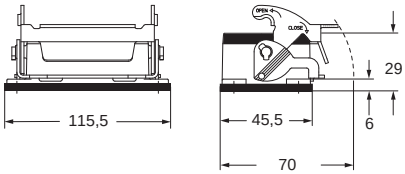

CVI LS/LP

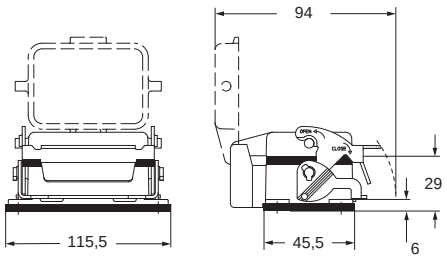

Hoods (from page 404)

Type 4/4X/12

EN 60529 IP66 IP69 IEC 60529

Type 4/4X/12

(except enclosures with plastic cover)

EN 60529 IP65 IEC 60529

dimensions shown in mm are not binding and may be changed without notice

CV - CVA and MV - MVA V-TYPE lever SIMPLEX self-closing covers

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CT, CTS (10A) ***)**	40 poles + ⏚	**156**
CT, CTSE (16A) ***)**	16 poles + ⏚	**162**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with stainless steel single lever

surface mounting housings with stainless steel single lever

description	part No.	part No.	entry Pg	part No.	entry M
with lever, gasket and cover in plastic	**CVI 16 LSP**				
with lever and cover		**CVP 16 LSP21**	21	**MVP 16 LSP25**	25
with lever and cover, high construction		**CVAP 16LSP21**	21	**MVAP 16LSP25**	25
with lever and cover, high construction		**CVAP 16LSP29**	29	**MVAP 16LSP32**	32
with lever and cover, high construction				**MVAP 16LSP40**	40

The enclosures ensure IP65 degree of protection when mated and locked with the closing lever, or IP44 protection when not mated and locked with lever, thanks to the SIMPLEX self-closing cover.

panel cut-out for bulkhead mounting housings

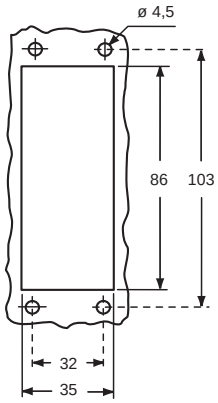

CVI LSP

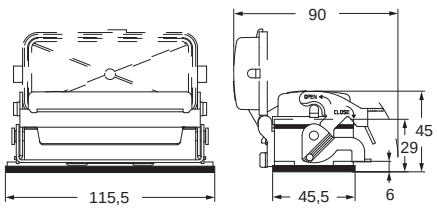

CVP - CVAP LSP and **MVP - MVAP LSP**

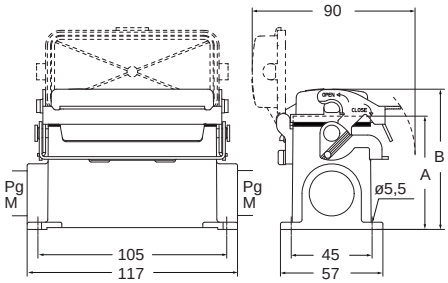

part No.	A	B
CVP / MVP 16 LSP	63	78
CVAP / MVAP 16 LSP	81	96

Hoods (from page 404)

cULus Type 4/4X/12

EN 60529 IP65 IEC 60529

cULus Type 4/4X/12 pending

EN 60529 IP65 IEC 60529

V-TYPE IP65/IP66

CV - CVA and MV - MVA V-TYPE lever version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

surface mounting housings with single lever in stainless steel

description	part No.	entry Pg	part No	entry M
with lever, size “77.27”	**CVP 16 L**	21	**MVP 16 L25**	25
with lever, size “77.27”	**CVP 16 L2**	21 x 2	**MVP 16 L225**	25 x 2
with lever, high construction, size “77.27”	**CVAP 16 L21**	21	**MVAP 16 L32**	32
with lever, high construction, size “77.27”	**CVAP 16 L221**	21 x 2	**MVAP 16 L232**	32 x 2
with lever, high construction, size “77.27”	**CVAP 16 L29**	29	**MVAP 16 L40**	40
with lever, high construction, size “77.27”	**CVAP 16 L229**	29 x 2	**MVAP 16 L240**	40 x 2

CVP L - CVAP L and **MVP L - MVAP L**

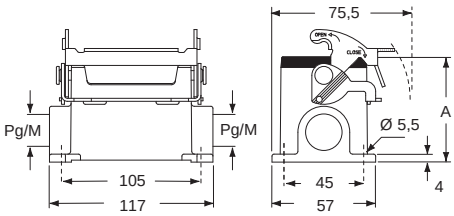

type	A
CVP/MVP 16 L	63
CVAP/MVAP 16 L	81

V-TYPE IP65/IP66

Hoods
(from page 404)

Type 4/4X/12

insulating cable gland or fittings
without gasket

cable gland
with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CV - CVA and MV - MVA V-TYPE lever version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

surface mounting housings with single lever in stainless steel and plastic cover

surface mounting housings with single lever in stainless steel and aluminium cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with lever and cover, size “77.27”	**CVP 16 LP**	21	**MVP 16 LP25**	25	**CVP 16 LS**	21	**MVP 16 LS25**	25
with lever and cover, size “77.27”	**CVP 16 LP2**	21 x 2	**MVP 16 LP225**	25 x 2	**CVP 16 LS2**	21 x 2	**MVP 16 LS225**	25 x 2
with lever and cover, high construction, size “77.27”	**CVAP 16 LP21**	21	**MVAP 16 LP32**	32	**CVAP 16 LS**	21	**MVAP 16 LS32**	32
with lever and cover, high construction, size “77.27”	**CVAP 16LP221**	21 x 2	**MVAP 16LP232**	32 x 2	**CVAP 16 LS2**	21 x 2	**MVAP 16LS232**	32 x 2
with lever and cover, high construction, size “77.27”	**CVAP 16 LP29**	29	**MVAP 16 LP40**	40	**CVAP 16 LS29**	29	**MVAP 16 LS40**	40
with lever and cover, high construction, size “77.27”	**CVAP 16LP229**	29 x 2	**MVAP 16LP240**	40 x 2	**CVAP 16LS229**	29 x 2	**MVAP 16LS240**	40 x 2

The enclosures ensure IP66 (or IP65 cover versions) degree of protection when mated and locked with the closing levers.

CVP LP - CVAP LP and **MVP LP - MVAP LP**

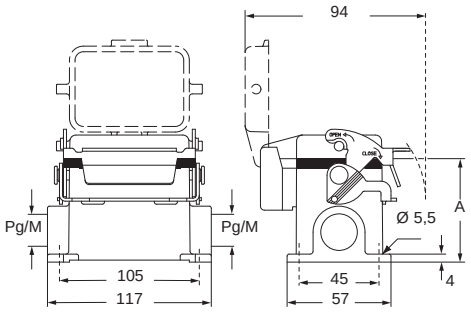

type	A
CVP/MVP 16 LP	63
CVAP/MVAP 16 LP	81

CVP LS - CVAP LS and **MVP LS - MVAP LS**

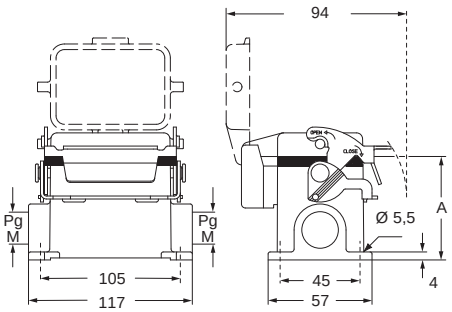

type	A
CVP/MVP 16 LS	63
CVAP/MVAP 16 LS	81

Hoods (from page 404)

c UL us Type 4/4X/12

(except enclosures with plastic cover)

EN 60529 IP65 IEC 60529

V-TYPE IP65/IP66

CV - CVA - CVF MV - MVA - MVF V-TYPE lever version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

hoods, top entry,
with gasket and single lever in stainless steel

hoods, top entry,
with gasket and 2 levers in stainless steel

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with lever/s, size “77.27”	**CVV 16 LG**	21	**MVV 16 LG32**	32	**CVV 16 G**	21	**MVV 16 G32**	32
with lever/s, high construction, size “77.27”	**CVAV 16 LG21**	21	**MVAV 16 LG25**	25	**CVAV 16 G21**	21	**MVAV 16 G25**	25
with lever/s, high construction, size “77.27”	**CVAV 16 LG29**	29	**MVAV 16 LG32**	32	**CVAV 16 G29**	29	**MVAV 16 G32**	32
with lever/s, high construction, without adapter, size “77.27”	**CVFV 16 LG21**	21	**MVFV 16 LG25**	25	**CVFV 16 G21**	21	**MVFV 16 G25**	25
with lever/s, high construction, without adapter, size “77.27”	**CVFV 16 LG29**	29	**MVFV 16 LG32**	32	**CVFV 16 G29**	29	**MVFV 16 G32**	32

CVV LG - CVAV LG - CVFV LG and
MVV LG - MVAV LG - MVFV LG

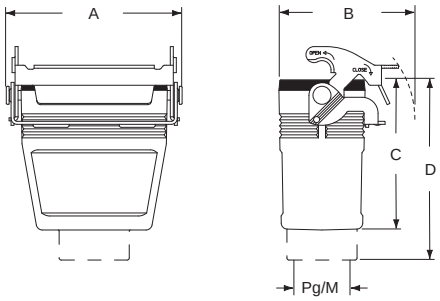

type	A	B	C	D
CVV/MVV 16 LG	107,5	68	50,5	63,5
CVAV/MVAV 16 LG	107,5	68	81	97
CVFV/MVFV 16 LG	107,5	68	81	-

CVV G - CVAV G - CVFV G and
MVV G - MVAV G - MVFV G

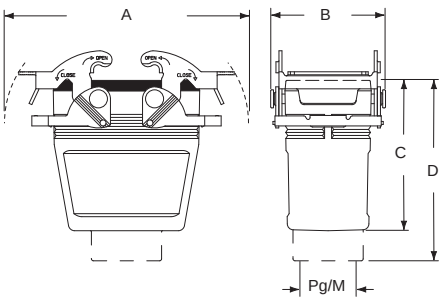

type	A	B	C	D
CVV/MVV 16 G	142,5	57	50,5	63,5
CVAV/MVAV 16 G	142,5	57	81	97
CVFV/MVFV 16 G	142,5	57	81	-

Hoods
(from page 404)

c UL us Type 4/4X/12

EN 60529 IP65 IEC 60529 insulating cable gland or fittings without gasket

EN 60529 IP66 IP69 IEC 60529 cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CV V-TYPE lever version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTS (10A) ***)**	64 poles + ⏚	**157**
CT, CTSE (16A) ***)**	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with single lever in stainless steel

bulkhead mounting housings with single lever in stainless steel

description	part No.	part No.
with lever and gasket, size “104.27”	**CVI 24 L**	
with lever, gasket and cover in aluminium, size “104.27”		**CVI 24 LS**
with lever, gasket and cover in plastic, size “104.27”		**CVI 24 LP**

The enclosures ensure IP66/IP69 (or IP65 cover versions) degree of protection when mated and locked with the closing levers.

panel cut-out for bulkhead mounting housings

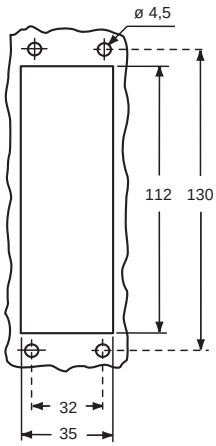

CVI L

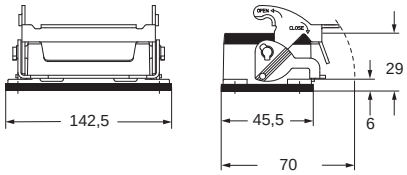

CVI LS/LP

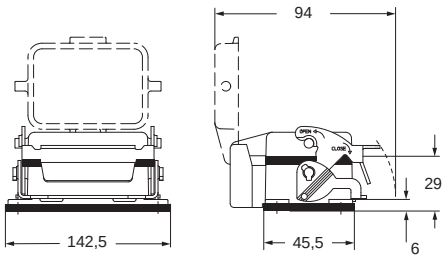

Hoods (from page 414)

Type 4/4X/12

Type 4/4X/12 (except enclosures with plastic cover)

CV - CVA and MV - MVA V-TYPE lever SIMPLEX self-closing covers

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTS (10A) ***)**	64 poles + ⏚	**157**
CT, CTSE (16A) ***)**	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with stainless steel single lever

surface mounting housings with stainless steel single lever

description	part No.	part No.	entry Pg	part No.	entry M
with lever, gasket and cover in plastic	**CVI 24 LSP**				
with lever and cover		**CVP 24 LSP21**	21	**MVP 24 LSP25**	25
with lever and cover, high construction		**CVAP 24LSP21**	21	**MVAP 24LSP25**	25
with lever and cover, high construction		**CVAP 24LSP29**	29	**MVAP 24LSP32**	32
with lever and cover, high construction				**MVAP 24LSP40**	40

The enclosures ensure IP65 degree of protection when mated and locked with the closing lever, or IP44 protection when not mated and locked with lever, thanks to the SIMPLEX self-closing cover.

panel cut-out for bulkhead mounting housings

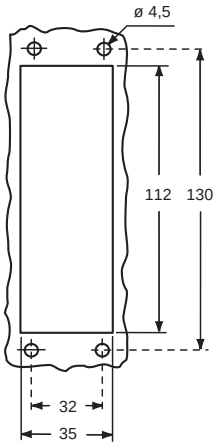

CVI LSP

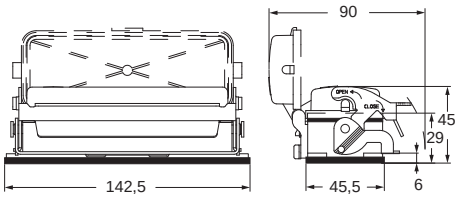

CVP - CVAP LSP and **MVP - MVAP LSP**

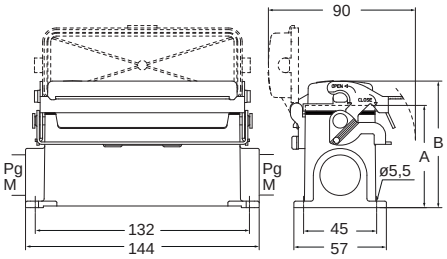

type	A	B
CVP / MVP 24 LSP	63	78
CVAP / MVAP 24 LSP	81	96

Hoods (from page 414)

c UL us Type 4/4X/12

EN 60529 IP65 IEC 60529

c UL us Type 4/4X/12 pending

EN 60529 IP65 IEC 60529

V-TYPE IP65/IP66

dimensions shown in mm are not binding and may be changed without notice

CV - CVA and MV - MVA V-TYPE lever version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

surface mounting housings with single lever in stainless steel

description	part No.	entry Pg	part No	entry M
with lever, size “104.27”	**CVP 24 L**	21	**MVP 24 L25**	25
with lever, size “104.27”	**CVP 24 L2**	21 x 2	**MVP 24 L225**	25 x 2
with lever, high construction, size “104.27”	**CVAP 24 L21**	21	**MVAP 24 L32**	32
with lever, high construction, size “104.27”	**CVAP 24 L221**	21 x 2	**MVAP 24 L232**	32 x 2
with lever, high construction, size “104.27”	**CVAP 24 L29**	29	**MVAP 24 L40**	40
with lever, high construction, size “104.27”	**CVAP 24 L229**	29 x 2	**MVAP 24 L240**	40 x 2

CVP L - CVAP L and **MVP L - MVAP L**

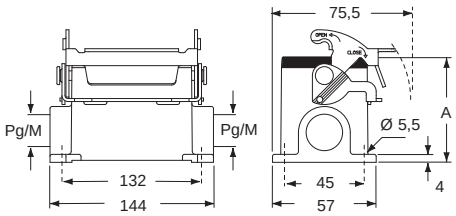

type	A
CVP / MVP 24 L	63
CVAP / MVAP 24 L	81

Hoods
(from page 414)

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

CV - CVA and MV - MVA V-TYPE lever version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

surface mounting housings with single lever in stainless steel and plastic cover

surface mounting housings with single lever in stainless steel and aluminium cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with lever and cover, size “104.27”	**CVP 24 LP**	21	**MVP 24 LP25**	25	**CVP 24 LS**	21	**MVP 24 LS25**	25
with lever and cover, size “104.27”	**CVP 24 LP2**	21 x 2	**MVP 24 LP225**	25 x 2	**CVP 24 LS2**	21 x 2	**MVP 24 LS225**	25 x 2
with lever and cover, high construction, size “104.27”	**CVAP 24 LP21**	21	**MVAP 24 LP32**	32	**CVAP 24 LS**	21	**MVAP 24 LS32**	32
with lever and cover, high construction, size “104.27”	**CVAP 24LP221**	21 x 2	**MVAP 24LP232**	32 x 2	**CVAP 24 LS2**	21 x 2	**MVAP 24LS232**	32 x 2
with lever and cover, high construction, size “104.27”	**CVAP 24 LP29**	29	**MVAP 24 LP40**	40	**CVAP 24 LS29**	29	**MVAP 24 LS40**	40
with lever and cover, high construction, size “104.27”	**CVAP 24LP229**	29 x 2	**MVAP 24LP240**	40 x 2	**CVAP 24LS229**	29 x 2	**MVAP 24LS240**	40 x 2

The enclosures ensure IP66 (or IP65 cover versions) degree of protection when mated and locked with the closing levers.

CVP LP - CVAP LP and **MVP LP - MVAP LP**

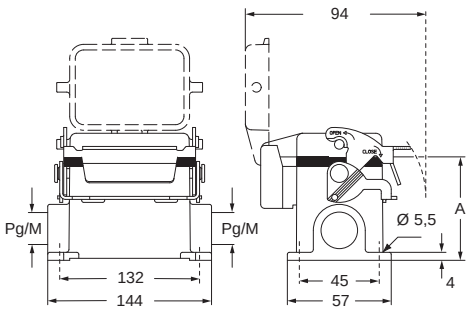

type	A
CVP/MVP 24 LP	63
CVAP/MVAP 24 LP	81

CVP LS - CVAP LS and **MVP LS - MVAP LS**

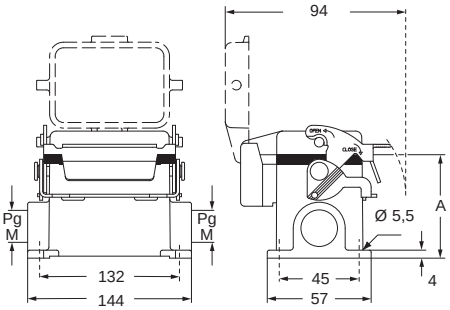

type	A
CVP/MVP 24 LS	63
CVAP/MVAP 24 LS	81

Hoods
(from page 414)

Type 4/4X/12
(except enclosures with plastic cover)

IP65 EN 60529 IEC 60529

dimensions shown in mm are not binding and may be changed without notice

CV - CVA - CVF MV - MVA - MVF V-TYPE lever version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

hoods, top entry,
with gasket and single lever in stainless steel

hoods, top entry,
with gasket and 2 levers in stainless steel

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with lever/s, size “104.27”	**CVV 24 LG**	21	**MVV 24 LG32**	32	**CVV 24 G**	21	**MVV 24 G32**	32
with lever/s, high construction, size “104.27”	**CVAV 24 LG21**	21	**MVAV 24 LG25**	25	**CVAV 24 G21**	21	**MVAV 24 G25**	25
with lever/s, high construction, size “104.27”	**CVAV 24 LG29**	29	**MVAV 24 LG32**	32	**CVAV 24 G29**	29	**MVAV 24 G32**	32
with lever/s, high construction, without adapter, size “104.27”	**CVFV 24 LG21**	21	**MVFV 24 LG25**	25	**CVFV 24 G21**	21	**MVFV 24 G25**	25
with lever/s, high construction, without adapter, size “104.27”	**CVFV 24 LG29**	29	**MVFV 24 LG32**	32	**CVFV 24 G29**	29	**MVFV 24 G32**	32

CVV LG - CVAV LG - CVFV LG and
MVV LG - MVAV LG - MVFV LG

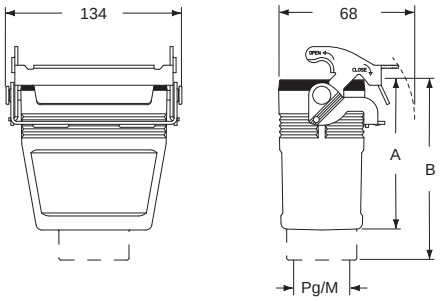

type	A	B
CVV/MVV 24 LG	60,5	73,5
CVAV/MVAV 24 LG	81	97
CVFV/MVFV 24 LG	81	-

CVV G - CVAV G - CVFV G and
MVV G - MVAV G - MVFV G

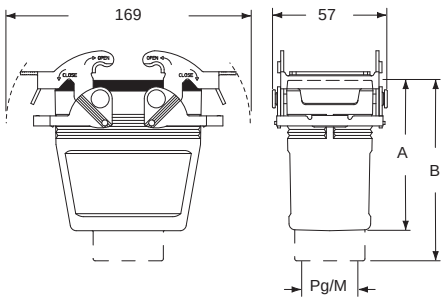

type	A	B
CVV/MVV 24 G	60,5	73,5
CVAV/MVAV 24 G	81	97
CVFV/MVFV 24 G	81	-

Hoods
(from page 414)

Type 4/4X/12

insulating cable gland or fittings
without gasket

cable gland
with O-Ring gasket

The space
you have always needed

BIG Series, based on the wide-ranging experience achieved by ILME, introduces a significant **change in the design of hoods and has been specifically designed to meet the new requirements of the wiring market**. The enclosures **integrate the existing range** and **are ideal for installations with structured and complex wiring**.

Accurate design

The **large dimensions** of these innovative enclosures have been chosen to offer customers an **adequate space to store conductors**.

The **width** of the new enclosures is **greater than that of previous versions**: 66 mm compared to the 43 mm for standard enclosures. The **height** of BIG enclosures has also been **increased to 100 mm** for sizes “44.27” and “57.27” (standard versions for high models: 70 and 72mm), **and to 110 mm** for sizes “77.27” and “104.27” (standard versions for high models: 76 mm).

The cable compartment is now fully accessible during assembly (the connector insert is fully inserted in the lower half of the enclosure), **offering three times the space compared to standard enclosures**. This means it is possible to bend cables and pipes with greater bending radii.

Due to this important feature, the new BIG enclosures are **particularly suitable for MIXO modular inserts**, being versatile and customizable, for multiple cable entries.

Each insert, differentiated according to electric power or signal, pneumatic, optical fibre or Ethernet network current, **may thus have the specific branching. One single large connector can replace what previously required two connectors**.

Ease of use

The possibility of **splitting the enclosure in two halves simplifies the installation of the insert**. It is also possible to **connect the insert with a cable and later insert it in the lower half of the enclosure** (except for the 6 pole version).

Options for the connection of control and signalling devices

All the five walls of the upper half of the enclosure have a high thickness to allow them to be drilled and threaded, even with multiple threads.

BIG enclosures enable the connection – of push – buttons, selectors, switches and signalling lamps after the necessary holes have been drilled. It is possible, for example, to enable power supplies or signalling circuits, even after the connector has been coupled.

Simplified installation

Installation operations for the new hoods are simple and fast.
No special accessories, tools or expensive additional operations are required.

The lower half of the enclosure must be fixed to the upper half by means of the 4 screws supplied.

It is possible to prevent the fixing screws from coming loose by fitting on each screw the O-ring seal supplied with the enclosures.

Compartment for electronic boards

It is possible to install electronic boards in the lower section of enclosures with side entry. In this case, it is however necessary to order CR MBS screws separately to fix the board in place.

Greater protection

It is also possible to fix one earthing terminal in the upper half of the enclosure to provide protection against indirect contacts.

In this case, it is however necessary to order separately earthing terminal CR MBT, consisting of a fixing screws and a wire-terminal for 6 mm^2 conductors.

Range

The items are classified with the following pre-code:

- MBO for enclosures with side entry
- MBV for enclosures with one or more top entries
- MBVO for enclosures with top and side entries
- CBC for closed enclosures that can be drilled

The available versions are:

- for enclosures with size “44.27”: **single lever**
- for enclosures with sizes “57.27”, “72.27” and “104.27”: **two levers**

SUM-UP

- **The BIG enclosures are made in die-cast aluminum alloy and are fitted with cast pegs with a reinforced design, painted with epoxy-polyester powder paint. The sealing gasket in anti-aging NBR elastomer, resistant to oils and fuels, is positioned internally to guarantee a greater protection from light and atmospheric agents**
- **BIG enclosures guarantee an IP66 protection rating (EN 60529) after the connector has been coupled, and completed with appropriate cable glands; they are manufactured in compliance with standard IEC/EN 61984**
- **Ambient temperature range -40°C / +125°C**
- **Versions for class W aggressive environments are also available on request**

WARNING:

Due to the considerable weight of BIG hoods, when fitted with inserts, conductors and cable glands, we recommend to use them in combination with housings fitted with V-TYPE closing levers (C7/M7/CV/MV).

If used in combination with enclosures series CLASS, it is advisable to appropriately anchor the cables in order to prevent their weight from being applied to the closing levers.

MB wider version BIG

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CT, CTSE (16A)	6 poles + ⏚	**160**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

hoods with 2 pegs

hoods with 2 pegs

description	part No.	entry M	part No.	entry M
with pegs, side entry	**MBO 06 L40**	40		
with pegs, side entry	**MBO 06 L50**	50		
with pegs, top entry	**MBV 06 L40**	40	**MBV 06 L225**	25 x 2
with pegs, top entry	**MBV 06 L50**	50	**MBV 06 L320**	20 x 3

MBO 06 L

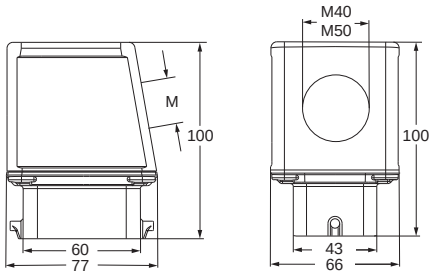

MBV 06 L225

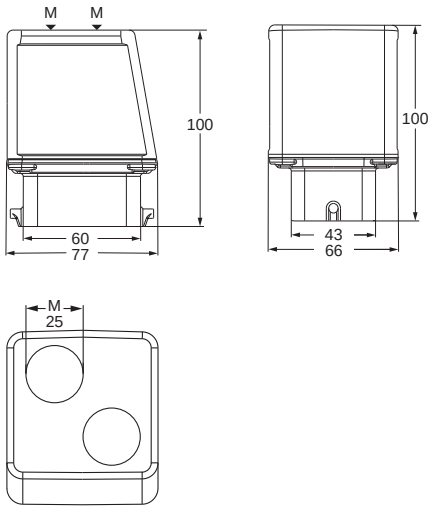

MBV 06 L

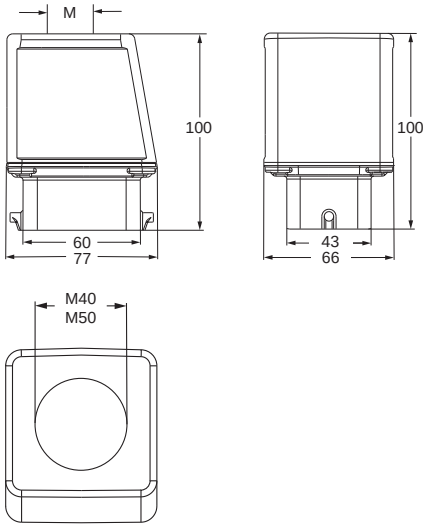

MBV 06 L320

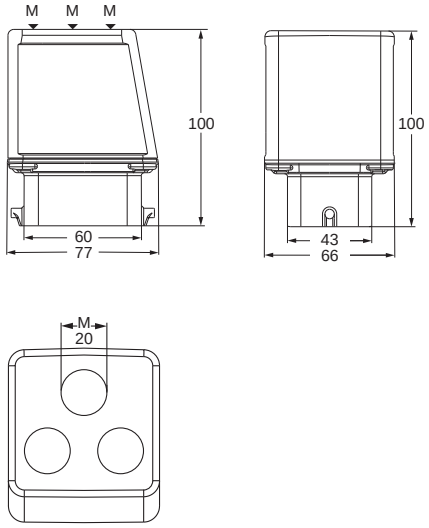

Housings (page 436)

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CB and MB wider version BIG

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CT, CTSE (16A)	6 poles + ⏚	**160**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

hoods with 2 pegs

hoods with 2 pegs

description	part No.	entry M	part No.
with pegs, side and top entries	**MBVO 06 L240**	2 x 40	
with pegs, without entries, designed to be drilled			**CBC 06 L**











Housings (page 436)

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

MB wider version BIG

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A)	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

hoods with 4 pegs

hoods with 4 pegs

description	part No.	entry M	part No.	entry M
with pegs, side entry	**MBO 10.40**	40		
with pegs, side entry	**MBO 10.50**	50		
with pegs, top entry	**MBV 10.40**	40	**MBV 10.225**	25 x 2
with pegs, top entry	**MBV 10.50**	50	**MBV 10.420**	20 x 4

dimensions of electronic boards for MBO enclosures side entry

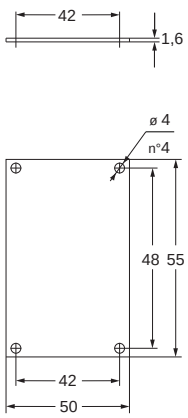

MBO 10

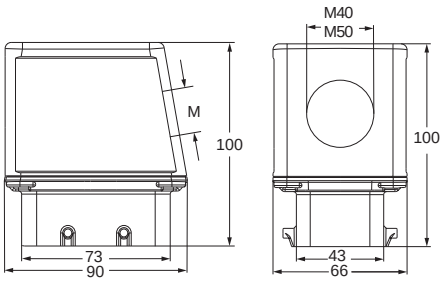

MBV 10.225

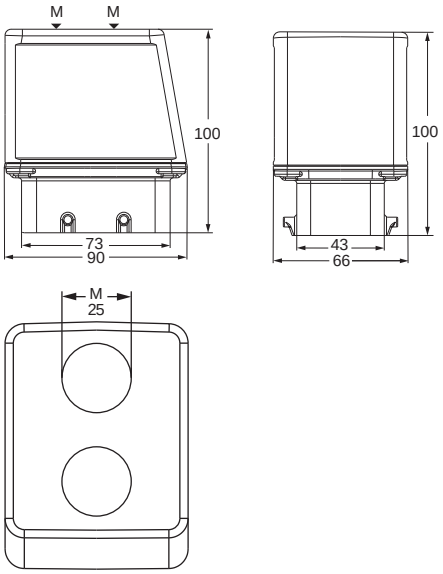

MBV 10

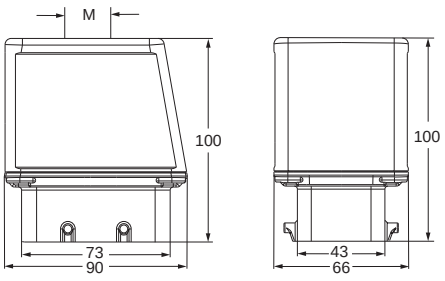

MBV 10.240

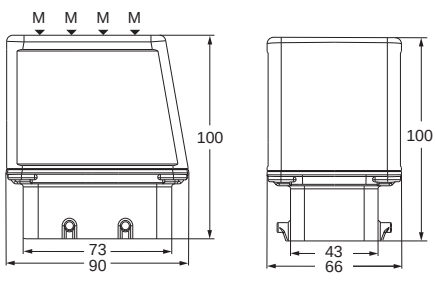

Housings (page 438)

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CB and MB wider version BIG

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A)	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

hoods with 4 pegs

hoods with 4 pegs

description	part No.	entry M	part No.
with pegs, side and top entries	**MBVO 10.240**	40 x 2	
with pegs, without entries, designed to be drilled			**CBC 10**

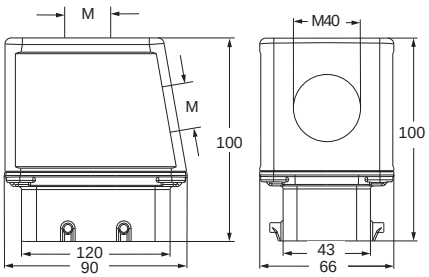



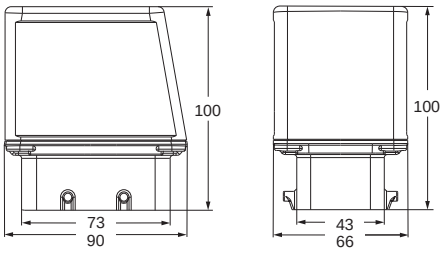

Housings (page 438)

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

MB wider version BIG

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CT, CTSE (16A)	16 poles + ⏚	**162**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

hoods with 4 pegs

hoods with 4 pegs

description	part No.	entry M	part No.	entry M
with pegs, side entry	**MBO 16.40**	40		
with pegs, side entry	**MBO 16.50**	50		
with pegs, top entry	**MBV 16.40**	40	**MBV 16.232**	32 x 2
with pegs, top entry	**MBV 16.50**	50	**MBV 16.325**	25 x 3

dimensions of electronic boards for MBO enclosures side entry

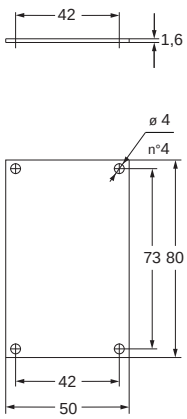

MBO 16

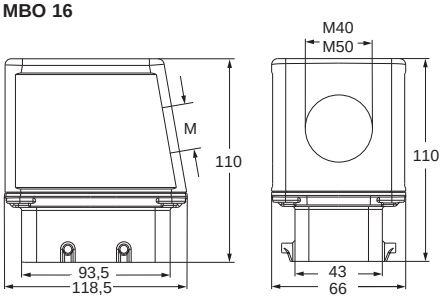

MBV 16.232

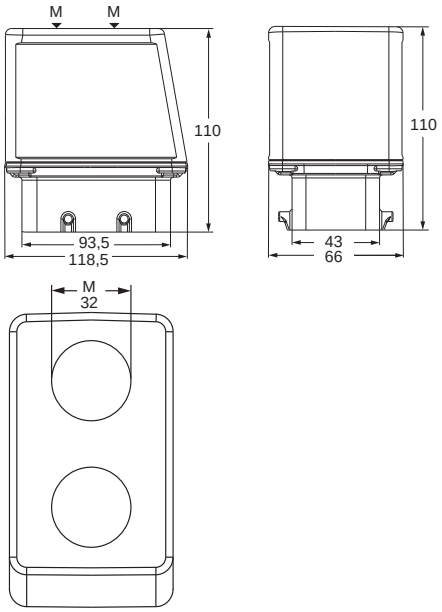

MBV 16

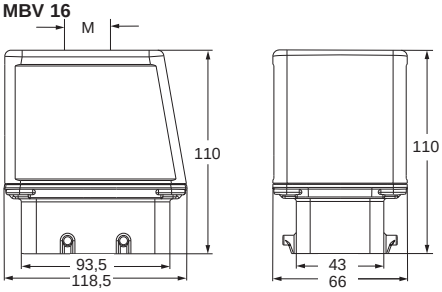

MBV 16.325

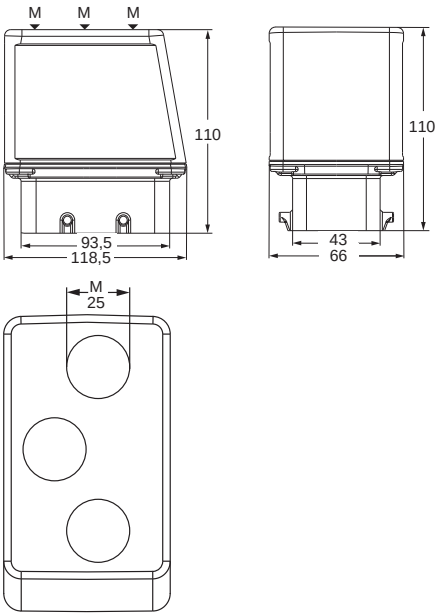

Housings (page 439)

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CB and MB wider version BIG

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CT, CTSE (16A)	16 poles + ⏚	**162**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

hoods with 4 pegs

hoods with 4 pegs

description	part No.	entry M	part No.	entry M
with pegs, side entry	**MBO 16.225**	25 x 2		
with pegs, top entry	**MBV 16.620**	20 x 6		
with pegs, side and top entries			**MBVO 16.240**	40 x 2
with pegs, without entries, designed to be drilled			**CBC 16**	--

MBO 16.225

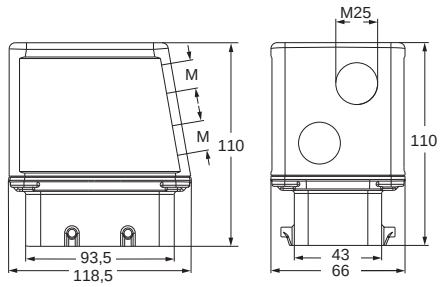

MBVO 16.240

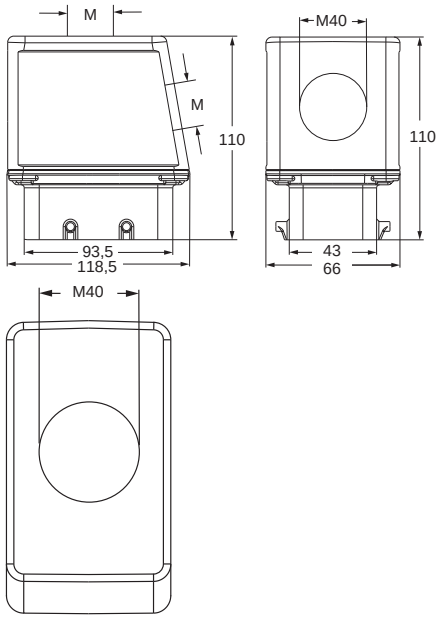

MBV 16.220

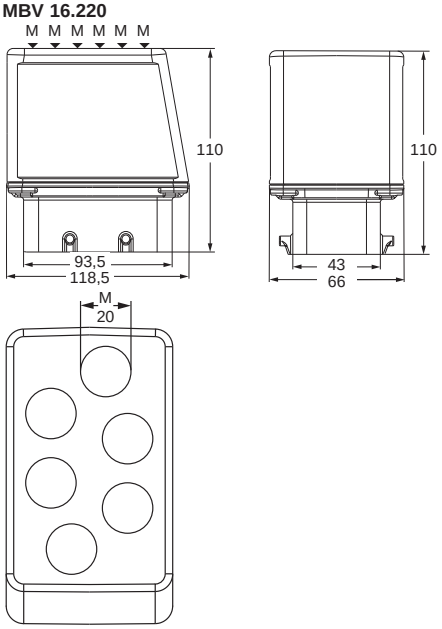

CBC 16

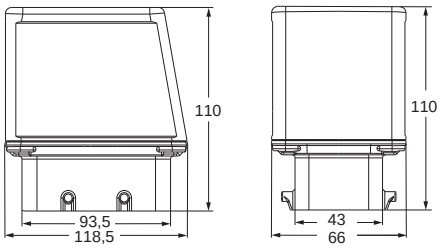

Housings (page 439)

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

BIG

MB wider version BIG

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTSE (16A)	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

hoods with 4 pegs

hoods with 4 pegs

description	part No.	entry M	part No.	entry M
with pegs, side entry	**MBO 24.40**	40		
with pegs, side entry	**MBO 24.50**	50		
with pegs, top entry	**MBV 24.40**	40	**MBV 24.240**	40 x 2
with pegs, top entry	**MBV 24.50**	50	**MBV 24.332**	32 x 3

dimensions of electronic boards for MBO enclosures side entry

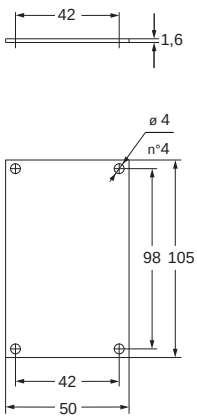

MBO 24

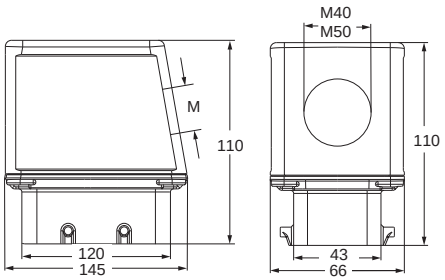

MBV 24

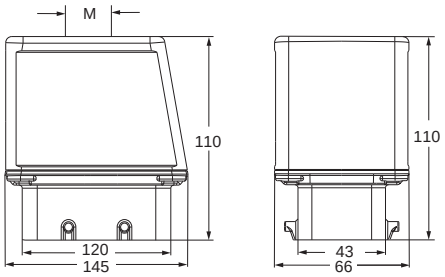

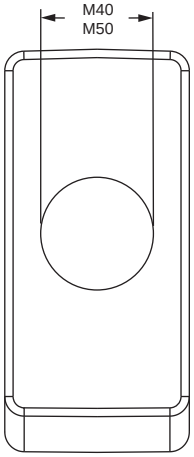

MBV 24.240 - MBV 24.332

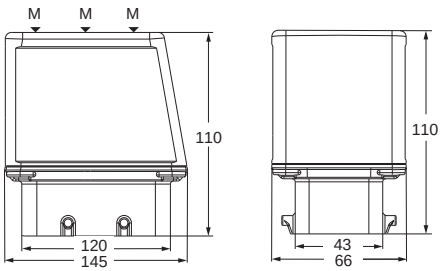

MBV 24.240

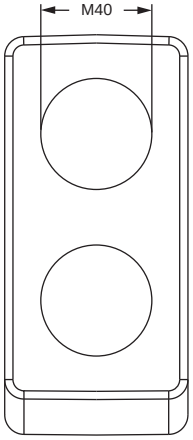

MBV 24.332

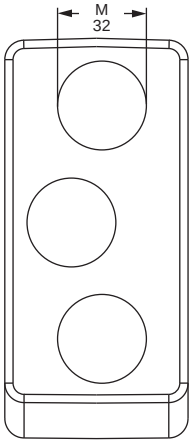

Housings (page 441)

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CB and MB wider version BIG

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTSE (16A)	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

hoods with 4 pegs

hoods with 4 pegs

description	part No.	entry M	part No.	entry M
with pegs, side entry	**MBO 24.225**	25 x 2		
with pegs, top entry	**MBV 24.425**	25 x 4		
with pegs, top entry	**MBV 24.720**	20 x 7		
with pegs, side and top entries			**MBVO 24.250**	50 x 2
with pegs, without entries, designed to be drilled			**CBC 24**	--

MBO 24



MBVO 24.250

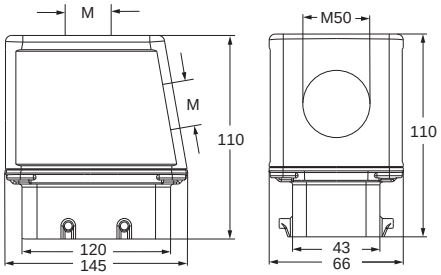

MBV 24.425 - MBV 24.270

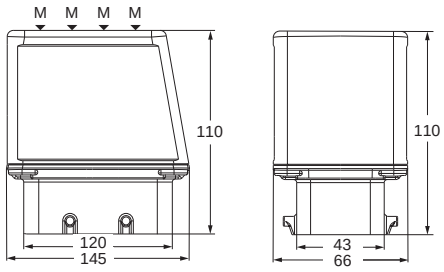

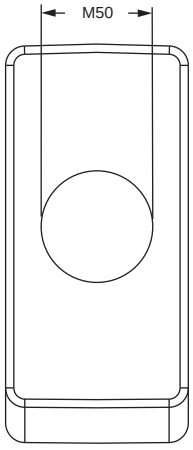

MBV 24.425

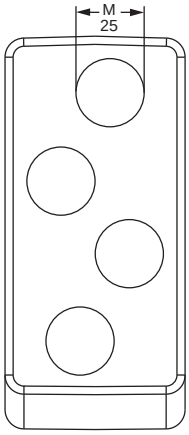

MBV 24.720

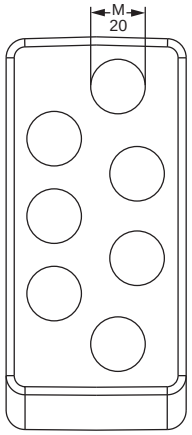

CBC 24

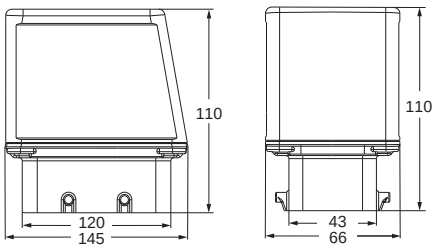

Housings (page 441)

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

BIG

T-TYPE enclosures
Standard & Aggressive environments,
Hygienic applications

T-TYPE
STANDARD
for standard applications

Pages 478 - 487

T-TYPE/W
for aggressive environments

Pages 488 - 492

HYGIENIC T-TYPE/H
for food & beverage

HYGIENIC T-TYPE/C
for low temperatures

Pages 493 - 509

ECOLAB

T-TYPE general information

International standards

T-TYPE enclosures have been **successfully** tested in accordance with the following international standards, guaranteeing their usage for numerous applications:

- **EN 61984: Connectors - Safety requirements and tests.**
- **ANSI/UL 50 (Enclosures for Electrical Equipment)** equivalent to voluntary North American standard NEMA 250 (NEMA = National Electrical Manufactures Association) and the corresponding Canadian standard CSA C22.2 No. 94 (Special Purpose Enclosures) for degrees of protection used in North America and required by local installation codes (e.g. NFPA 70 National Electrical Code in the USA, CSA plant standards for Canada). The current type approval was obtained after passing a series of tests carried out in accordance with the standard, in particular: **Type 12 (= NEMA 12)** for internal use, similar to degree of protection IP54 according to IEC/EN 60529. (Only standard T-TYPE enclosures).
- **EN 60529: Degrees of protection provided by enclosures (IP Code)** for ratings IP65, IP66 and IP69 (according to type).
- **EN 62262: Degrees of protection provided by enclosures for electrical equipment against external mechanical impacts (IK Code)** for ratings IK09 (enclosures with levers), IK10 (enclosures without levers).
- **IEC 60068-2-52: Environmental testing - Part 2-52:**
  Salt mist, cyclic: with 5% solution of sodium chloride (NaCl), solution Ph from 6,5 to 7,2;
  ENVIRONMENTAL CONDITIONS: salt mist 35 °C for 2 hours; 40 °C for 168 hours with 93% relative humidity;
  NO. OF CYCLES: 4;
  TEST PASSED: maintaining the IP degree of protection and with a change of contact resistance ≤ 50% of the initial value or ≤ 5 mΩ.
- **IEC 60068-2-6: Environmental testing - Part 2-6:**
  Vibration (sinusoidal): with values 10Hz÷500Hz, 0,35 mm amplitude of displacement, 50m/s^2 (5g$_n$), crossover point 60,1 Hz;
  NO. OF CYCLES: 10;
  TEST PASSED: scanning 3 axes for 2 hours, with a change of contact resistance value ≤ 50% of the initial value or ≤ 5 mΩ and no micro-interruption (≥ 1 μs).
- **IEC 60068-2-3: Environmental testing - Part 2-3:**
  Damp heat, steady state: at 40 °C, 93% relative humidity, 504 hours;
  TEST PASSED: with a change of contact resistance value ≤ 50% of the initial value or ≤ 5 mΩ and no disruptive discharge (insulation resistance > 100 GΩ).
- **IEC 60068-2-30: Environmental testing - Part 2-30:**
  Damp heat, cyclic: 40 °C, 95% relative humidity, 12 hours at ambient temperature;
  NO. OF CYCLES: 21;
  TEST PASSED: with a change of contact resistance value ≤ 50% of the initial value or ≤ 5 mΩ and no disruptive discharge (insulation resistance > 100 GΩ).

T-TYPE general information

Resistance to chemicals comparison table

A	T-TYPE	T-TYPE / W	T-TYPE / H	T-TYPE / C
Acetone (propanone)	x	x	x	x
Active chlorine	x	x	x	x
Alum	●	●	●	●
Ammonia, 10% aqueous solution	●	x	●	●
Ammonia, liquid	x	x	●	●
Ammonium acetate	●	x	●	●
Ammonium carbonate	●	●	●	x
Ammonium chloride	●	●	●	x
Ammonium nitrate	●	●	●	●
Ammonium phosphate	●	●	●	●
Ammonium sulphate	●	●	●	●
Amyl alcohol	□	□	□	x
Aniline	□	□	x	x
Aqua regia (1:3 nitric acid : hydrochloric acid)	x	x	x	x
Asphalt	□	□	□	x
B				
Beer	●	●	●	●
Benzene	x	□	x	x
Borax	□	□	□	□
Boric acid	●	●	●	●
Boric acid, 10% aqueous solution	●	●	●	●
Boric water (boric acid 3%)	●	●	●	●
Butane, gas	□	□	□	x
Butane, liquid	□	□	□	x
C				
Calcium chloride	●	●	●	●
Calcium chloride, 10% aqueous solution	●	●	●	●
Calcium chloride, diluted suspension	●	●	●	●
Calcium nitrate	●	●	●	●
Calcium sulphate	●	●	x	●
Caustic potash (potassium hydroxide) 10%	x	●	●	x
Citric acid 50% aqueous solution	x	x	●	●
Copper sulphate 10% aqueous solution	●	●	●	●
Cresol	□	□	x	x
Cresolic solution	□	□	x	x
Cutting oil	□	□	□	x
Cyclo-hexane	□	□	□	x
D				
Deca-hydro-naphtalene	x	x	x	x
Di-exyl Phtalate	●	x	x	x
Di-isononyl Phtalate	●	x	x	x
Di-optyl Phtalate	●	●	x	x
Diesel Oil	□	□	□	□
Diluted Glucose	●	●	●	●

D	T-TYPE	T-TYPE / W	T-TYPE / H	T-TYPE / C
Diluted Glycerine	●	●	●	●
Diluted Glycol	●	●	●	●
Diluted Phenol	□	□	x	x
Diluted urea	●	●	●	●
E				
Ethanol (ethyl alcohol)	x	x	●	●
Ethyl alcohol, 10% aqueous solution	●	●	●	●
Ethylene-glycol or propylene-glycol	●	●	●	●
F				
Fatty acids	●	●	●	□
Ferric chloride, 10% aqueous solution	x	x	x	x
Formalin (formaldehyde 40% aqueous solution)	x	x	●	●
Fruit juices	●	●	●	●
Fuel oils	□	□	□	x
G				
Gaseous ammonia	□	x	●	●
Gaseous propane	x	●	●	x
Glycerine	●	●	●	●
Grinding oil	□	□	□	x
Gypsum (see calcium sulphate)	●	●	x	●
H				
Heptane	□	□	□	x
Hexane	□	□	□	x
Hydrochloric acid, <2% aqueous solution	x	x	●	□
Hydrogen sulphide	□	x	●	x
I				
Ink	●	●	●	●
IRM oil 901	●	●	●	●
IRM oil 902	□	●	●	x
IRM oil 903	x	□	□	□
Isopropyl alcohol	□	●	●	●
K				
Kitchen salt, aqueous solution	●	●	●	●
L				
Lactic acid	●	●	●	●
Linseed oil	●	●	●	●
Liquid soap	x	●	●	●
Lubricating engine oil	□	□	□	x
Lubricating oil	●	●	●	x

The classification herewith provided is only a generic reference guide in order to enable a first selection. It is based on literature data provided by the suppliers of the raw materials used, which are related to tests carried out on specimens under test conditions which are not always homogeneous and involving accelerating techniques, therefore not necessarily describing real operational conditions. The actual behaviour of products in the field may therefore be positively or negatively influenced by several variable environmental parameters such as temperature, relative humidity, simultaneous presence of a plurality of substances and their concentration, exposure time, dynamic or static application condition, and so on. The accuracy of transferring the indications given herein to the actual conditions of use is therefore merely indicative and does not imply any guarantee or responsibility by ILME.

	T-TYPE	T-TYPE / W	T-TYPE / H	T-TYPE / C
M				
Mercury	●	●	●	●
Methanol (methyl alcohol)	x	x	●	●
Methyl alcohol, diluted 50%	□	□	●	●
Mineral based oil	●	●	●	●
Mineral oils (un-tasteful)	●	●	●	●
Mothballs (naphthalene, paradichlorobenzene)	□	□	x	x
Muriatic acid, concentrated	x	x	x	x
N				
n-Butanol (butyl alcohol)	●	●	●	●
Naphthalene	□	●	x	x
Normal (low octane) gasoline (petrol)	□	□	□	x
O				
Octane	□	□	□	x
Oleic acid	●	●	●	x
Oxalic acid	●	●	●	●
Ozone	x	x	x	□
P				
Paraffin oil	●	●	●	●
Petrol ether	□	□	□	□
Petroleum	●	●	●	●
Petroleum spirit (dry cleaning)	□	□	x	x
Potassium carbonate	●	●	●	●
Potassium chlorate	●	●	x	●
Potassium chloride	●	●	●	●
Potassium cyanide, aqueous solution	●	●	●	●
Potassium di-chromate	□	□	●	●
Potassium iodide	□	□	●	●
Potassium nitrate	□	x	x	●
Potassium persulphate	□	□	x	●
Potassium sulphate	□	□	●	●
S				
Sea water	●	●	●	●
Silicon oil	●	●	●	x
Soap solution	□	●	●	●
Sodium bicarbonate (oxide)	●	●	●	●
Sodium carbonate (washing soda)	●	●	●	●
Sodium chlorate	●	●	x	●
Sodium chloride (kitchen salt)	●	●	●	●
Sodium disulphate, aqueous solution	●	●	●	●
Sodium hydroxide (caustic soda)	x	x	●	●
Sodium hydroxide 12,5% (liscivia)	□	x	●	●
Sodium Hypochlorite	x	x	●	●

	T-TYPE	T-TYPE / W	T-TYPE / H	T-TYPE / C
S				
Sodium nitrate	●	●	●	x
Sodium nitrite	□	□	●	x
Sodium perborate	●	●	●	●
Sodium phosphate	●	●	●	x
Sodium silicate	●	x	x	●
Sodium sulphate	●	●	●	●
Sodium sulphide	●	●	●	●
Sodium Thiosulphate (photographic fixer)	●	●	●	●
Solution for photographic processing	●	●	●	●
Starch, aqueous (amylum)	●	●	●	●
Stearic acid	●	●	●	●
Succinic acid (butanedioic acid)	●	●	●	●
Sulphur	●	●	x	x
Sulphur dioxide (sulphurous anhydride)	□	x	x	□
Sulphuric acid, 2% aqueous solution	x	x	□	□
T				
Tallow	●	●	●	●
Tar	□	□	x	□
Tartaric acid	●	●	●	●
Toluene	x	x	x	x
Transformer oil (dielectric)	●	●	●	●
Trichloroethylene	x	x	x	x
Trichresyl phosphate	●	●	x	x
Turpentine essence	x	□	□	x
U				
Urine	●	●	●	●
V				
Vegetable oil	●	●	●	●
Vinegar	x	□	●	□
W				
Water	●	●	●	●
White alcohol (isopropanol + ethanol)	□	●	●	●
X				
Xylene	x	x	x	x

Legend

● : Resistant □ : Limited resistance x : Not resistant

T-TYPE standard

For modular and standard inserts

Alongside the wide range of traditional metallic enclosures for multipole connectors, ILME first "pioneered" a **series of enclosures in self-extinguishing thermoplastic material** in the most common sizes "44.27", "57.27", "77.27" and "104.27".

Quality and money saving are the main features of these enclosures, as an outcome of careful product studies.

Valuable characteristics of these new versions of enclosures:

- **significant structural solidity** and mechanical robustness by virtue of **substantial thickness;**
- **external dimensions** of the bulkhead mounting housings are **similar to those of the corresponding metallic enclosures; hole fixing centres are unchanged;**
- **pre-fastened gaskets** for easier installation;
- **wide space inside the enclosures** for cables, with mounted connector inserts, similar to the corresponding "high construction" versions;
- possibility of making **total insulation** constructions (equivalent to Class II) ⧈ ;
- **absence of powder paint** for environments in which these are not recommended (e.g. to avoid food contamination).

STANDARD APPLICATIONS

SUM-UP

- **Enclosures in thermoplastic material, dark grey RAL 7012 colour, with high thicknesses providing structural solidity and durability**
- **Built-in polyurethane gaskets**
- **Locking levers in thermoplastic material colour grey RAL 7001**
- **M25, M32 and M40 threaded cable entries**
- **IP65 degree of protection according to EN 60529**
- **UL TYPE 12 degree of protection according to ANSI/UL50**
- **Each enclosure carries its own part number, thread/size, conformity markings and UL type rating**
- **Ambient temperature range: -40 °C / +90 °C**

T-TYPE STANDARD

Interchangeability with other ILME series

T-TYPE series housings can be coupled with metal hoods.
Insulating hoods can be coupled with "V-TYPE" metal housings.

Hoods "57.27", "77.27" and "104.07" can be mounted on COB TCQ and COB BC frames simply by replacing the supplied levers with COB L levers (to be purchased separately).

Insulating enclosures are ideal for mounting of all ILME inserts with the exception of series models CT 40/ 64 and CTS 40/ 64 connector.

Inserts with 45° terminals of the CT series (screw-type terminals) and CTSE (spring terminals) are only insertable from the front (therefore not from the back) of the bulkhead mounting housings.

Being made by insulating material, they do not require a special reinforced insulation as metal ones do, for use with series CME higher voltage connector inserts (screw-type terminals).

With the exception of the limitations described below, it is generally possible to mount the MIXO series modular connectors and frames with the ground and screen anchors dedicated to this series.

Limitations

With respect to enclosures in metal alloy, ILME insulating enclosures have some limitations of use in combination with particular accessories:

- CRZ 06/ 10/ 16/ 24 reduction plates cannot be mounted with bulkhead mounting housings due to increased dimensions of the fastening flange of these insulating enclosures.
- The CYG 16 in-line joint cannot be mounted on the bulkhead mounting housings T-TYPE series because the gaskets of the latter do not fit together with the joint profile.
- The CYR 16.3 and CYR 24.4 round cable feed-throughs are difficult to position on their respective bulkhead mounting housings T-TYPE series.
- CPT 24 disposable protection cover cannot be mounted on insulating enclosures due to increased outer dimensions of these enclosures.
- MIXO series insert anchors cannot be mounted on TMAO 06/10 enclosures.
- CN insert anchors cannot be mounted on TMAO 06/10 enclosures.
- When using both cable entries of surface mounting housings, the conduit shall be of insulating type.

FOCUS ON:

1 Construction

By using the BC-MUL® moulding technique together with the use of MIL.BOX® material, **these enclosures are structurally solid and mechanically robust**, due to their increased thickness. They are particularly resistant to the main pollutants present in industrial environments. The lever enclosure pegs are built into the enclosures. The means for fastening the connector inserts to the enclosures consist of four M3 threaded metal inserts. Compared with metal construction enclosures, which – in order to comply with the electrical installation safety norms – must be earthed via a metal connection to the protective earth terminal of the inserts mounted inside the enclosures, this series of enclosures offers a solution for **total insulation constructions** ⧈ (equivalent to class II) where necessary.The thermoplastic material used is RAL 7012 dark grey colour and **UL 94V-2** grade self-extinguishing and has passed the glow wire testing (GWEPT) in accordance with the EN IEC 60695-2-11 at **850 °C**, in excess of what required by the intended uses. The **surface mounting** high construction housings are supplied **with an open threaded entry** and diametrically opposite a closed threaded entry, which can be **opened** by the user, if required (with suitable tool). Manufactured from insulating material, they do not require **special reinforced insulation** as the metal versions do, for use with series **CME higher voltage** connector inserts (screw-type terminals), available only upon request.

2 Gaskets

T-TYPE standard sealing gaskets have been produced by means of the FIPFG technology (Formed-In-Place-Foam-Gasket). They have therefore been incorporated in the base flange on bulkhead mounting housings for easier installation.

T-TYPE standard: Built-in polyurethane gaskets

3 Levers

The locking levers have been produced in self-extinguishing thermoplastic material, grey RAL 7001 colour.

4 Dimensions

The internal dimensions allow mounting of all connector inserts in their relevant sizes. The external dimensions of the bulkhead mounting housings are similar to those of the corresponding metallic enclosures; hole fixing centres are unchanged.

Hoods offer an inner cabling space similar to that of the “high” construction models of the corresponding metal enclosures. Other characteristics are in compliance with the applicable safety standard for electrical connectors, IEC/EN 61984.

5 Cable entries

The housing and hood cable entries are available with metric thread, respectively:

M25 or M32 for smaller sizes “44.27” and “57.27”.
M32 or M40 for larger sizes “77.27” and “104.27”.

The recent standard IEC/EN 61076-7-100 regarding metric cable entries for multipole electrical connectors for heavy duty uses, which standardises some main dimensions for entries and their related accessories (gaskets, pressure nuts), have been carefully considered in the product design.

6 Markings

Each enclosure carries its own part number and conformity markings.

T-TYPE insulating STANDARD APPLICATIONS

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CT, CTSE (16A) ***)**	6 poles + ⏚	**160**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

***)** only for standard insulating version TCHI

housings with single lever

hoods with 2 pegs

description	part No.	entry M	part No.	entry M
bulkhead mounting housing with thermoplastic lever	**TCHI 06 L**			
surface mounting housing with thermoplastic lever, high construction	**TMAP 06 L25**	25		
surface mounting housing with thermoplastic lever, high construction	**TMAP 06 L32**	32		
with pegs, side entry, high construction			**TMAO 06 L25**	25
with pegs, side entry, high construction			**TMAO 06 L32**	32
with pegs, top entry, high construction			**TMAV 06 L25**	25
with pegs, top entry, high construction			**TMAV 06 L32**	32

panel cut-out for bulkhead mounting housings



TCHI L



TMAO L



TMAP L

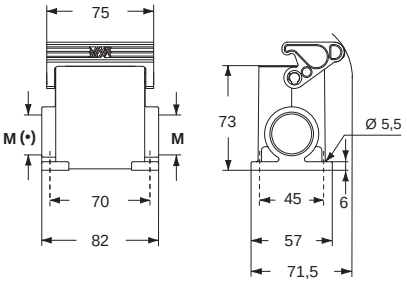

TMAV L



(•) The surface mounting, high construction housings are supplied with an open threaded entry (•) and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

c UL us Type 12

EN 60529 IP65 IEC 60529 ambient temperature limits -40 °C / +90 °C

dimensions shown in mm are not binding and may be changed without notice

T-TYPE insulating STANDARD APPLICATIONS

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CT, CTSE (16A) ***)**	6 poles + ⏚	**160**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

***)** only for standard insulating version TCHI

hoods with single lever top entry

covers

description	part No.	entry M	part No. (with eyelet)	part No. (with loop)
with thermoplastic lever and gasket, high construction	**TMAV 06 LG25**	25		
with thermoplastic lever and gasket, high construction	**TMAV 06 LG32**	32		
with pegs			**TCHC 06 L**	**TCHC 06 SL**
with thermoplastic lever and gasket				**TCHC 06 LG**

TMAV LG



TCHC L (SL)



TCHC LG



For fixing on housings

eyelet



For fixing on hoods

loop



Type 12

ambient temperature limits -40 °C / +90 °C

T-TYPE insulating STANDARD APPLICATIONS

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

***)** only for standard insulating version TCHI

housings with double lever

hoods with 4 pegs

description	part No.	entry M	part No.	entry M
bulkhead mounting housing with thermoplastic levers	**TCHI 10**			
surface mounting housing, thermoplastic levers, high construction	**TMAP 10.25**	25		
surface mounting housing, thermoplastic levers, high construction	**TMAP 10.32**	32		
with pegs, side entry, high construction			**TMAO 10.25**	25
with pegs, side entry, high construction			**TMAO 10.32**	32
with pegs, top entry, high construction			**TMAV 10.25**	25
with pegs, top entry, high construction			**TMAV 10.32**	32

panel cut-out for bulkhead mounting housings

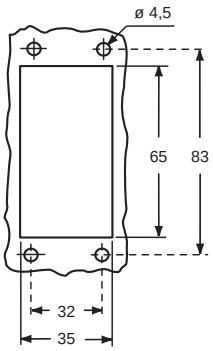

TCHI

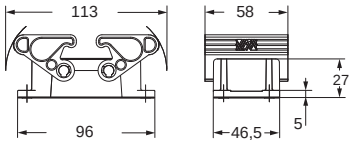

TMAO

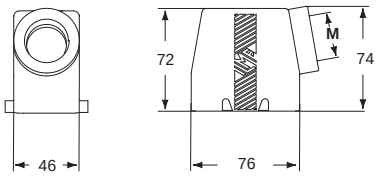

TMAP

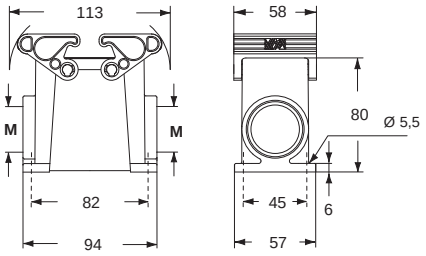

TMAV



The surface mounting, high construction housings are supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

c UL us Type 12

IP65 (EN 60529 / IEC 60529) ambient temperature limits -40 °C / +90 °C

dimensions shown in mm are not binding and may be changed without notice

T-TYPE insulating STANDARD APPLICATIONS

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

***)** only for standard insulating version TCHI

hoods with double lever top entry

covers

description	part No.	entry M	part No. (with eyelet)	part No. (with loop)
with thermoplastic levers and gasket, high construction	**TMAV 10 G25**	25		
with thermoplastic levers and gasket, high construction	**TMAV 10 G32**	32		
with 4 pegs			**TCHC 10**	**TCHC 10 S**
with 2 thermoplastic levers and gasket				**TCHC 10 G**

TMAV G



TCHC (S)



TCHC G



For fixing on housings

eyelet



For fixing on hoods

loop



Type 12

IP65 EN 60529 IEC 60529 ambient temperature limits -40 °C / +90 °C

T-TYPE insulating STANDARD APPLICATIONS

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CT, CTSE (16A) ***)**	16 poles + ⏚	**162**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

***)** only for standard insulating version TCHI

housings with double lever

hoods with 4 pegs

description	part No.	entry M	part No.	entry M
bulkhead mounting housing with thermoplastic levers	**TCHI 16**			
surface mounting housing, thermoplastic levers, high construction	**TMAP 16.32**	32		
surface mounting housing, thermoplastic levers, high construction	**TMAP 16.40**	40		
with pegs, side entry, high construction			**TMAO 16.32**	32
with pegs, side entry, high construction			**TMAO 16.40**	40
with pegs, top entry, high construction			**TMAV 16.32**	32
with pegs, top entry, high construction			**TMAV 16.40**	40

panel cut-out for bulkhead mounting housings

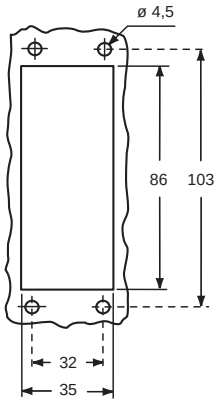

TCHI

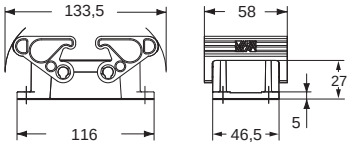

TMAO

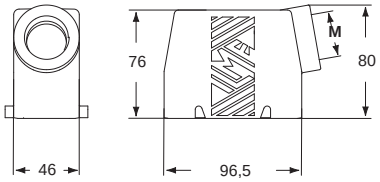

TMAP

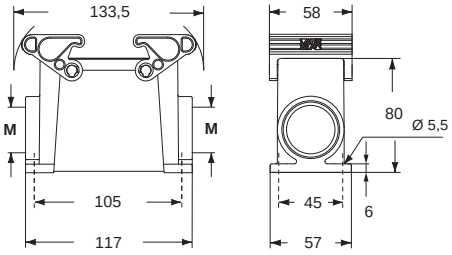

TMAV



The surface mounting, high construction housings are supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

c UL us Type 12

EN 60529 IP65 IEC 60529 ambient temperature limits -40 °C / +90 °C

dimensions shown in mm are not binding and may be changed without notice

T-TYPE insulating STANDARD APPLICATIONS

inserts		page:
CD	40 poles +	**70**
CDD	72 poles +	**79**
CDS	27 poles +	**-**
CDSH	27 poles +	**88**
CNE	16 poles +	**112**
CSE	16 poles +	**-**
CSH	16 poles +	**112**
CSH S	16 poles +	**124**
CCE	16 poles +	**132**
CMSH, CMCE	6+2 (aux) poles +	**138 - 139**
CSS	16 poles +	**150**
CT, CTSE (16A) ***)**	16 poles +	**162**
CQE	32 poles +	**170**
CQEE	40 poles +	**176**
CP	6 poles +	**178**
CX	6/12, 6/36 and 12/2 poles +	**197 - 199**
CX	4/0 and 4/2 poles +	**200 - 201**
MIXO	4 modules	**262 - 317**

***)** only for standard insulating version TCHI

hoods with double lever top entry

covers

description	part No.	entry M	part No. (with eyelet)	part No. (with loop)
with thermoplastic levers and gasket, high construction	**TMAV 16 G32**	32		
with thermoplastic levers and gasket, high construction	**TMAV 16 G40**	40		
with 4 pegs			**TCHC 16**	**TCHC 16 S**
with 2 thermoplastic levers and gasket				**TCHC 16 G**

TMAV G



TCHC (S)



TCHC G

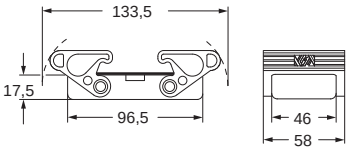

For fixing on housings

eyelet



For fixing on hoods

loop



Type 12

ambient temperature limits -40 °C / +90 °C

T-TYPE insulating STANDARD APPLICATIONS

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTSE (16A) ***)**	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

***)** only for standard insulating version TCHI

housings with double lever

hoods with 4 pegs

description	part No.	entry M	part No.	entry M
bulkhead mounting housing with thermoplastic levers	**TCHI 24**			
surface mounting housing, thermoplastic levers, high construction	**TMAP 24.32**	32		
surface mounting housing, thermoplastic levers, high construction	**TMAP 24.40**	40		
with pegs, side entry, high construction			**TMAO 24.32**	32
with pegs, side entry, high construction			**TMAO 24.40**	40
with pegs, top entry, high construction			**TMAV 24.32**	32
with pegs, top entry, high construction			**TMAV 24.40**	40

panel cut-out for bulkhead mounting housings

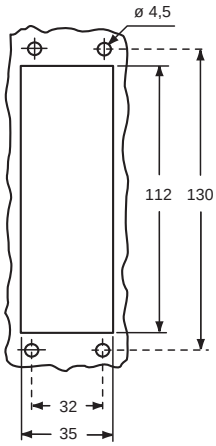

TCHI

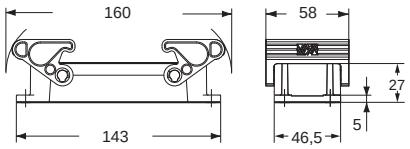

TMAO

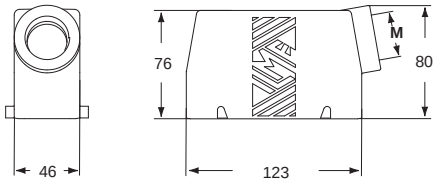

TMAP

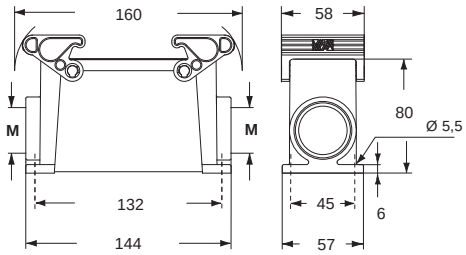

TMAV

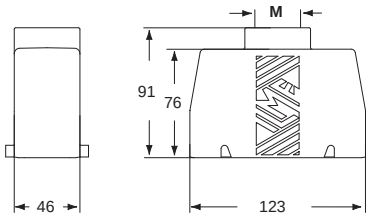

The surface mounting, high construction housings are supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

c UL us Type 12

IP65 (EN 60529 / IEC 60529) ambient temperature limits -40 °C / +90 °C

T-TYPE STANDARD

dimensions shown in mm are not binding and may be changed without notice

T-TYPE insulating STANDARD APPLICATIONS

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTSE (16A) ***)**	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

***)** only for standard insulating version TCHI

hoods with double lever top entry

covers

description	part No.	entry M	part No. (with eyelet)	part No. (with loop)
with thermoplastic levers and gasket, high construction	**TMAV 24 G32**	32		
with thermoplastic levers and gasket, high construction	**TMAV 24 G40**	40		
with 4 pegs			**TCHC 24**	**TCHC 24 S**
with 2 thermoplastic levers and gasket				**TCHC 24 G**

TMAV G

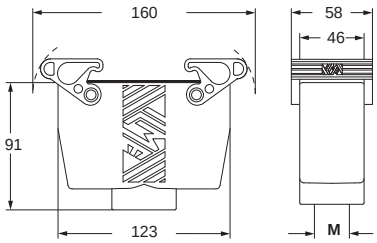

TCHC (S)



TCHC G

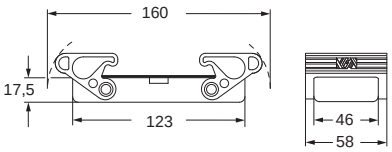

For fixing on housings

eyelet



For fixing on hoods

loop



Type 12

ambient temperature limits -40 °C / +90 °C

T-TYPE/W

Aggressive environments

AGGRESSIVE ENVIRONMENTS SUM-UP

- **Enclosures in thermoplastic material, dark grey RAL 7012 colour, with high thicknesses providing structural solidity and durability**
- **Built-in FKM fluoroelastomer sealing gaskets**
- **Locking levers in thermoplastic material colour grey RAL 7001**
- **M25, M32 and M40 threaded cable entries**
- **IP66/IP69 degree of protection according to EN 60529**
- **UL TYPE 12 degree of protection according to ANSI/UL50**
- **Each enclosure carries its own part number, thread size and conformity markings and UL type rating**
- **Ambient temperature range: -40 °C / +90 °C**

NOTE: As the characterizing element of the T-TYPE/W series is the different sealing gasket material, hoods and covers without sealing gaskets for this series are the same of T-TYPE Standard.

T-TYPE / W insulating AGGRESSIVE ENVIRONMENTS

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CT, CTSE (16A) ***)**	6 poles + ⏚	**160**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

***)** only for standard insulating version THIW

housings with single lever FKM gasket

hoods with single lever, top entry covers, FKM gasket

description	part No.	entry M	part No.	part No. (with loop)
bulkhead mounting housing with thermoplastic lever	**THIW 06 L**			
surface mounting housing, thermoplastic lever, high construction	**TAPW 06 L25**	25		
surface mounting housing, thermoplastic lever, high construction	**TAPW 06 L32**	32		
with thermoplastic lever and gasket, high construction			**TAVW 06 LG25**	25
with thermoplastic lever and gasket, high construction			**TAVW 06 LG32**	32
cover with thermoplastic lever and gasket				**THCW 06 LG**

panel cut-out for bulkhead mounting housings



THIW L



TAVW LG



TAPW L

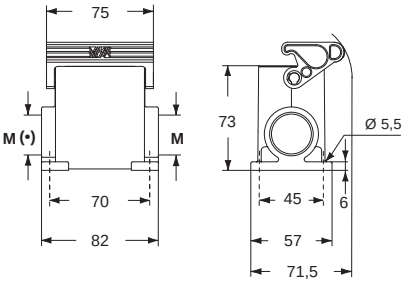

THCW LG



(•) The surface mounting, high construction housings are supplied with an open threaded entry (•) and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

TMAO Hoods (page 480)

TMAV Hoods (page 480)

TCHC L TCHC SL Covers with eyelet (page 481)

For fixing on hoods

loop



cULus Type 12

EN 60529 IP66 IP69 IEC 60529 ambient temperature limits -40 °C / +90 °C

T-TYPE / W

T-TYPE / W insulating AGGRESSIVE ENVIRONMENTS

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

***)** only for standard insulating version THIW

housings with double lever FKM gasket

hoods with double lever, top entry covers, FKM gasket

description	part No.	entry M	part No.	part No. (with loop)
bulkhead mounting housing with thermoplastic levers	**THIW 10**			
surface mounting housing, thermoplastic levers, high construction	**TAPW 10.25**	25		
surface mounting housing, thermoplastic levers, high construction	**TAPW 10.32**	32		
with thermoplastic levers and gasket, high construction			**TAVW 10 G25**	25
with thermoplastic levers and gasket, high construction			**TAVW 10 G32**	32
cover with 2 thermoplastic levers and gasket				**THCW 10 G**

panel cut-out for bulkhead mounting housings

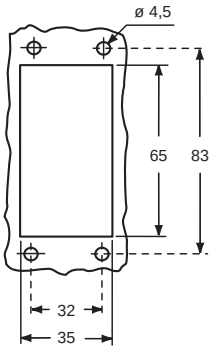

THIW



TAVW G



TAPW

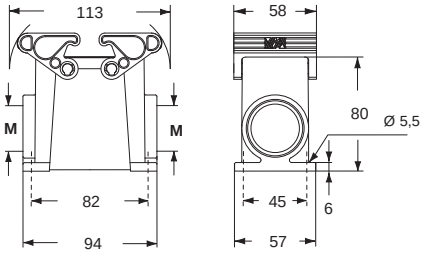

THCW G



TMAO Hoods (page 482)

TMAV Hoods (page 482)

TCHC TCHC S Covers with eyelet (page 483)

The surface mounting, high construction housings are supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

For fixing on hoods

loop



cULus Type 12

EN 60529 IP66 IP69 IEC 60529 ambient temperature limits -40 °C / +90 °C

dimensions shown in mm are not binding and may be changed without notice

T-TYPE / W insulating AGGRESSIVE ENVIRONMENTS

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CT, CTSE (16A) ***)**	16 poles + ⏚	**162**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

***)** only for standard insulating version THIW

housings with double lever
FKM gasket

hoods with double lever, top entry covers, FKM gasket

description	part No.	entry M	part No.	part No. (with loop)
bulkhead mounting housing with thermoplastic levers	**THIW 16**			
surface mounting housing, thermoplastic levers, high construction	**TAPW 16.32**	32		
surface mounting housing, thermoplastic levers, high construction	**TAPW 16.40**	40		
with thermoplastic levers and gasket, high construction			**TAVW 16 G32**	32
with thermoplastic levers and gasket, high construction			**TAVW 16 G40**	40
cover with 2 thermoplastic levers and gasket				**THCW 16 G**

panel cut-out for bulkhead mounting housings

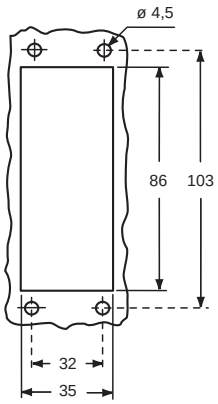

THIW

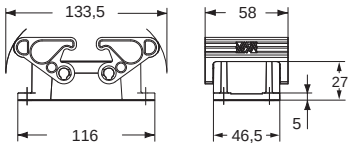

TAVW G



TAPW

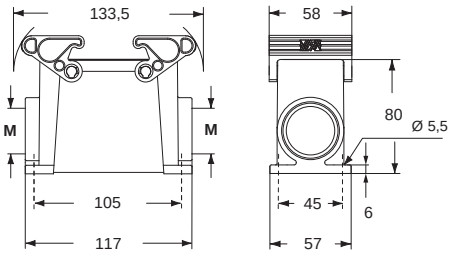

THCW G

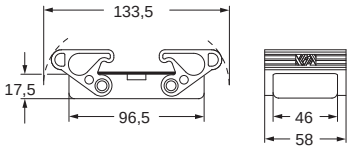

The surface mounting, high construction housings are supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

TMAO
Hoods
(page 484)

TMAV
Hoods
(page 484)

TCHC
TCHC S
Covers
with eyelet
(page 485)

For fixing on hoods

loop



cULus Type 12

EN 60529 IP66 IP69 IEC 60529 ambient temperature limits -40 °C / +90 °C

T-TYPE / W insulating AGGRESSIVE ENVIRONMENTS

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTSE (16A) ***)**	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

***)** only for standard insulating version THIW

housings with double lever
FKM gasket

hoods with double lever, top entry covers, FKM gasket

description	part No.	entry M	part No.	part No. (with loop)
bulkhead mounting housing with thermoplastic levers	**THIW 24**			
surface mounting housing, thermoplastic levers, high construction	**TAPW 24.32**	32		
surface mounting housing, thermoplastic levers, high construction	**TAPW 24.40**	40		
with thermoplastic levers and gasket, high construction			**TAVW 24 G32**	32
with thermoplastic levers and gasket, high construction			**TAVW 24 G40**	40
cover with 2 thermoplastic levers and gasket				**THCW 24 G**

panel cut-out for bulkhead mounting housings

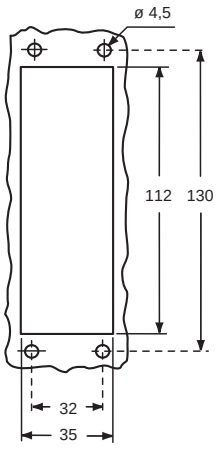

THIW

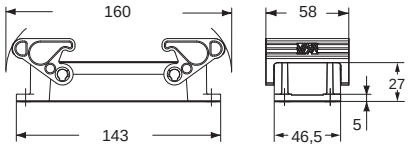

TAVW G

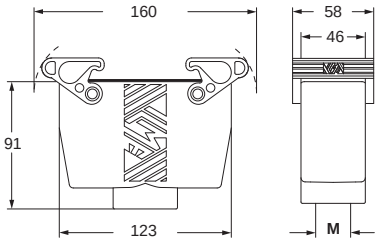

TAPW

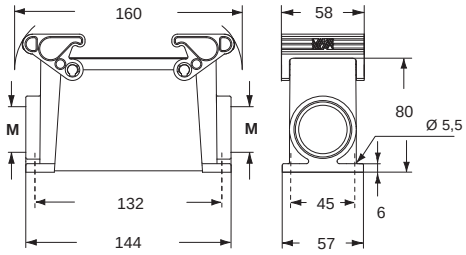

THCW G

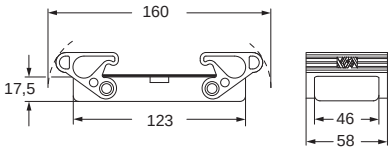

TMAO
Hoods
(page 486)

TMAV
Hoods
(page 486)

TCHC
TCHC S
Covers
with eyelet
(page 487)

Type 12

ambient temperature limits -40 °C / +90 °C

The surface mounting, high construction housings are supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

For fixing on hoods

loop



dimensions shown in mm are not binding and may be changed without notice

T-TYPE HYGIENIC

Resistance of materials to detergents/disinfectants used in the food industry

ILME T-TYPE/H and T-TYPE/C enclosure materials have been selected to guarantee compatibility with the principal alkaline or acid detergents and disinfectants used in the food industry. In particular, series T-TYPE/H and T-TYPE/C enclosures have been tested according to protocol **F&E/P3-E n. 40-1 by Ecolab,** leading multinational in the detergent sector, to verify their compatibility with the following cleaning fluids:

- **Acid foaming detergents: P3-topax 52, Topaz AC5, P3-topmaxx 520 and P3-topax 56.**
- **Alkaline foaming detergents: P3-topax 19, Topaz MD3 and Ecofoam Basic.**
- **Strong alkaline foaming detergents: P3-topax 36, Topaz HD1 and P3-topax 30.**
- **Alkaline-chloride foaming detergents-disinfectants: P3-topax 66, Ecofoam CL and P3-topax M95.**
- **Non-foaming peracetic based disinfectants: P3-oxonia active, P3-topactive OKTO and P3-topactive DES.**
- **Neutral disinfectants: P3-topax 990 and P3-topax 91.**

- Full immersion of parts in detergent/disinfectant solutions.
- Water hardness of 200ppm $CaCO_3$
- Tests performed at concentrations 30% higher than those normally recommended in technical data sheets.
- Test duration (each detergent): 28 days at 20 °C (equivalent to 6 years of daily cleaning).
- Test solution renewed every 3-4 days for oxidizing products (P3-oxonia active, P3-topactive OKTO, P3-topax 66).
- Test results evaluation: ISO 4068-1 (esthetic appearance and mass loss).

Cleanability and degrees of protection used in the food industry

ECOLAB F&E/P3-E n. 40-1 Test Protocol
see declaration of compatibility at pages 494-495

Series T-TYPE/H and T-TYPE/C enclosures have been designed to facilitate cleaning of surfaces that could potentially come into contact with food. For this purpose **Series T-TYPE/H and T-TYPE/C** enclosures have **IP66 and IP69 degrees of protection as per IEC 60529 Edition 2.2 (2013-08)** to allow jet washing, as typically used in the food industry.

The suitability of ILME products for the **cleanability** requirements stated by Machinery Directive 2006/42/EC for both Splash and Food Area zones (EN 1672-2 and EN ISO 14159) **depends on the specific installation of ILME products on the machine and must be evaluated by the machine manufacturer**.

In addition to the Hygienic version, aluminium enclosures are also available with degrees of protection up to IP68 (check for possible applicability).

HYGIENIC T-TYPE/H for food & beverage

HYGIENIC T-TYPE/C for low temperatures

Declaration of compatibility - By courtesy of ECOLAB s.r.l.

DECLARATION OF COMPATIBILITY

between ECOLAB hygiene products
and ILME enclosures for multipole connectors

For the completely safe cleaning of your plant

The ideal partner for Industrial Connections for power supply of plug connected devices, connections for auxiliary circuits and automation control:

T-type H and T-type C enclosures

Supplier of hygiene solutions for Food and Beverage industries

Products

Equipments

Services

The declaration proves the high resistance of these enclosures to Ecolab products commonly and worldwide used in Food and Beverage Industries.

ILME S.p.a.
Via Marco Antonio Colonna, 9 - 20149 Milano (MI)
www.ilme.com

Ecolab s.r.l.
Via Paracelso 6 – 20864 Agrate Brianza (MB)
www.it.ecolab.eu

Compatible products with T-type/C and T-type/H ILME enclosures

See below for the test procedure

PRODUCT	%	T-TYPE ENCLOSURE	DEFECT QUANTITY	DEFECT QUALITY	COLOR VARIATION
P3-topax 52 - Topaz AC5	6	C and H	0	0	0
P3-topax 19 - Topaz MD3	6	C and H	0	0	0
P3-topax 36 - Topaz HD1	6	C and H	0	0	0
P3-topax 91	6	C and H	0	0	0
P3-topax 990	6	C and H	0	0	0
P3-oxonia active	1	C and H	0	0	0
P3-topactive okto	3	C and H	0	0	0
P3-topax 66	6	C and H	0	0	0

DEFECT QUANTITY: 0 means - No detectable defect
DEFECT QUALITY: 0 means - Up to 10x magnification no detectable defect
COLOR VARIATION: 0 means - Unchanged, no discoloration

Test procedure

- Test performed by Ecolab Technical Application Service
- Ecolab reference method 40.1 – ISO 4068-1 for the evaluation
- Full immersion of parts in detergent/disinfectant solutions
- Water hardness of 200ppm $CaCO_3$
- 28 days total time at 20°C (equivalent to the contact time that occurs in 6 years of daily cleaning)
- Concentrations tested 30% higher than those normally recommended
- Test solution renewed every 3-4 days for oxidizing products (P3-oxonia active, P3-topactive OKTO, P3-topax 66)

Final statement

- The Ecolab Technical Application Service Italy certifies that the ILME enclosures for multipole connectors T-type/C and T-type/H are perfectly compatible with the above listed Ecolab detergents and disinfectants used in a concentration 30% higher than those normally recommended.

February 2016

HYGIENIC

Requirements on materials in contact or that may come into contact with food products

T-TYPE/H and T-TYPE/C materials have been selected to satisfy the requirements of EHEDG Guideline n° 32 “Materials of construction for food equipment in contact with food” and point 2.1.1, letter a) in Annex I of the Machinery Directive 2006/42/EC. Paragraph 91 of the Guide to the application of Machinery Directive 2006/42/EC specifies that the reference at Annex I, point 2.1.1, letter a) of the directive must be considered as a reference to EC regulation n. 1935/2004 and directive 2002/72/EC.

EU commission regulation n. 10/2011 dated 14 January 2011, concerning plastic material and objects designed for contact with food products, is a specific measure as provided for by article 5, paragraph 1 of the above-mentioned EC regulation n. 1935/2004.

It defines specific regulations for plastic materials and objects in order to guarantee their use in safe conditions and supersedes commission directive 2002/72/EC dated 6 August 2002 on plastic materials and objects designed for contact with food products. Art. 2, section 2 of the above-mentioned EU regulation n. 10/2011 specifies that rubber and silicone do not fall within the field of application of the regulation. EU regulation n. 10/2011 provides for the use of materials in positive lists of technological monomers, additives and adjuvants and the passing of global and specific migration tests in food simulants.

ILME T-TYPE/H and T-TYPE/C series enclosure materials have been selected according to EU n. 10/2011 regulation requirements and each component has been tested according to EU regulation n. 10/2011 and EC regulation n. 1935/2004.

Furthermore, T-TYPE/H and T-TYPE/C series gasket materials have been formulated according to FDA Guideline 21 CFR §177.2600 and T-TYPE enclosures and levers materials complying with FDA, 21 CFR, §177.1520 (a)(3)(i)(c)(1), (b) and (c)3.1a.

HYGIENIC

Risk Assessment and Critical Control Points in the food industry

Companies that work in the food sector must implement HACCP, i.e. Hazard Analysis and Critical Control Points system (EC Regulation 852/2004 on food product hygiene in force since 01/01/2006) and can voluntarily apply for various certificates (ISO 22000, BRC, ISF, etc.).

All those involved in primary food production (harvesting, milking, breeding), its preparation, transformation, manufacturing, packaging, storage, transport, distribution, handling, sales or supply, including consumer catering, are required to implement an HACCP system, i.e. a series of procedures aimed at preventing food contamination hazards. HACCP is based on monitoring food processing points where biological, chemical or physical contamination hazards may arise. In 2006, HACCP was made mandatory for companies that deal with the food for animals (production of raw materials, mixtures and additives).

A company required to implement HACCP can initially divide its food processing machinery into three zones from the point of view of risk for food product hygiene. The choice of the zone in which the wiring and connectors are installed depends on the risk assessment the manufacturer must conduct as per Machinery Directive 2006/42/EC which, in chapter 2.1, sets out the additional requirements for the food industry (see Table 1).

Table 1. According to EN 1672-2:2009 - Food processing machinery - Basic concepts - Part 2: Hygiene requirements

Application Zones	Zone Requirements	Usable Products
No Food Area: Zone where there is no contact risk with food.	No additional requirement for the food industry.	Enclosures series T-TYPE, T-TYPE/W, C-TYPE, BIG, IP68, C7 IP67, W-TYPE, EMC, COB, ...
Splash Area: Zone where components may come into contact with food but there is no risk that the food that came into contact with the components in this area returns to the production cycle.	In this zone, components also come into contact with cleaning agents used in the food industry and must therefore be cleanable and resistant to the washing process (see "Resistance of materials to detergents/ disinfectants used in the food industry" and "Cleanability and degrees of protection used in the food industry").	New Hygienic version enclosures series T-TYPE/H and T-TYPE/C.
Food Area: Zone where components may come into contact with food, with the risk that the food that came into contact with the components in this area returns to the production cycle.	In this zone, in addition to complying with the cleanability and washing requirements, the components are also subject to a series of more stringent requirements aimed at making negligible the risk of food contamination in the process (see paragraph "Requirements on materials in contact or that may come into contact with food products").	For more information about T-TYPE/C in special version, please contact our Offices.

HYGIENIC

T-TYPE/H & T-TYPE/C

The evolution of T-TYPE insulating enclosures meets food and beverage requirements

The new Hygienic multi-pole connector enclosures version (series T-TYPE/H and T-TYPE/C) has been designed for installation on food industry machines and systems.

For this purpose, the following improvements to the T-TYPE series have been made in order to satisfy the requirements laid down by chapter 2.1 of Machinery Directive 2006/42/EC for the machines on which they are installed:

- material cleanability and resistance to the cleaning and sanitising agents normally used in the food industry;
- materials in terms of the requirements for accidental contact with food products.

The T-TYPE/H and T-TYPE/C series enclosures fit different sealing gaskets.

For T-Type/H series enclosures, the sealing gasket is in HNBR rubber, a material with excellent resistance to both acidic and alkaline detergents as well as any animal and vegetable fats it could come into contact with in food industry applications.

For T-TYPE/C series enclosures, the sealing gasket is made by silicone rubber, a material with good resistance to acidic and alkaline detergents as well as animal and vegetable fats. It is also characterised by its improved resistance to low temperatures (series suitable for uses as low as -50 °C), conditions that can arise in food industries that use the cold chain.

A dedicated variant of this new Hygienic version may be used where a high risk of accidental contact with food is occuring during production (see Table 1, Application Zones, Food Area). For more information about this possible special version, please contact our Offices.

In accordance with the requirements set forth in EHEDG Guideline n. 32 “Materials of construction for food equipment in contact with food” (EHEDG = European Hygienic Engineering & Design Group), the closing levers and sealing gaskets are coloured blue to easily identify any accidental contaminations in food products and to facilitate the visual identification of their complete cleanliness.

For this purpose, the following improvements to the T-TYPE series have been made in order to satisfy the requirements laid down by chapter 2.1 of **Machinery Directive 2006/42/EC** for the machines on which they are installed:

- material cleanability and resistance to the cleaning and sanitising agents normally used in the food industry;
- materials in terms of the requirements for accidental contact with food products.

T-TYPE/H - PRODUCTION LINES APPLICATIONS

SUM-UP

- **Enclosures in thermoplastic material, dark grey RAL 7012 colour, with high thicknesses providing structural solidity and durability**
- **Sealing gaskets made by HNBR rubber formulated in accordance with FDA Guideline 21 CFR §177.2600**
- **Levers in thermoplastic material, blue RAL 5015 colour**
- **M25, M32 and M40 threaded cable entries**
- **IP66 and IP69 degree of protection according to EN 60529**
- **Each enclosure carries its own part number, thread/size and conformity markings**
- **Ambient temperature range: -40 °C / +70 °C**

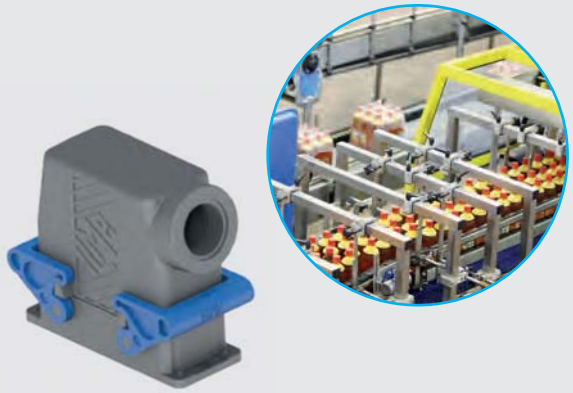

T-TYPE/C - LOW TEMPERATURE APPLICATIONS

SUM-UP

- **Enclosures in thermoplastic material, dark grey RAL 7012**
- **The Hygienic T-TYPE/C Series enclosures have been specifically designed for food and beverage ambient temperature as low as -50 °C (range: -50 °C / +70 °C)**
- **Enclosures in thermoplastic material, dark grey RAL 7012 colour, with high thicknesses providing structural solidity and durability**
- **IP66 and IP69 degree of protection according to EN 60529**
- **This version differs from the Hygienic T-TYPE/H one for the sealing gaskets made by in accordance with FDA Guideline 21 CFR §177.2600**
- **ILME T-TYPE/C series enclosure materials have been selected according to EU n. 10/2011 regulation requirements and each component has been tested according to EU regulation n. 10/2011 and EC regulation n. 1935/2004**

NOTE: As the characterizing elements of the Hygienic Series are the different sealing gasket material and the different locking lever, hoods and covers without sealing gaskets and locking levers are the same of series T-TYPE Standard.

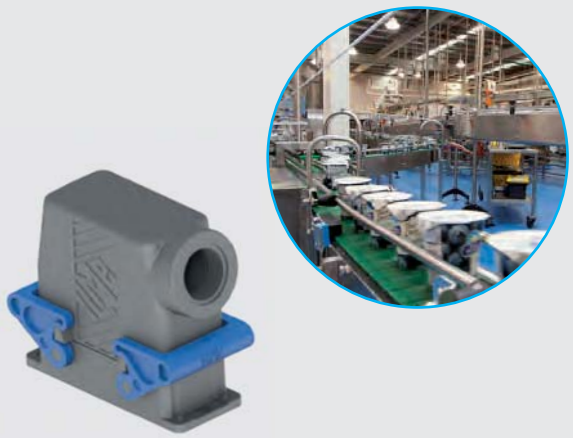

HYGIENIC

T-TYPE/H & T-TYPE/C

FOCUS ON:

1 Construction

By using the BC-MUL® moulding technique together with the use of MIL.BOX® material, **these enclosures are structurally solid and mechanically robust**, due to their increased thickness.
They are particularly resistant to the main pollutants present in industrial environments. The lever enclosure pegs are built into the enclosures.
The means for fastening the connectors to the enclosures consist of four M3 threaded metal inserts. Compared with metal construction enclosures, which – in order to comply with electrical installation safety norms– must be earthed via a metal connection to the protective earth terminal of the connector insert inside the enclosure, this series of enclosures offers a solution for **total insulation constructions** ⧈ (equivalent to class II) where necessary.
The thermoplastic material used is RAL 7012 dark grey colour and has passed **glow wire** testing (GWEPT) in accordance with the EN IEC 60695-2-11 at **850 °C**, in excess of what required by the intended uses.
The surface mounting, high construction housings are supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

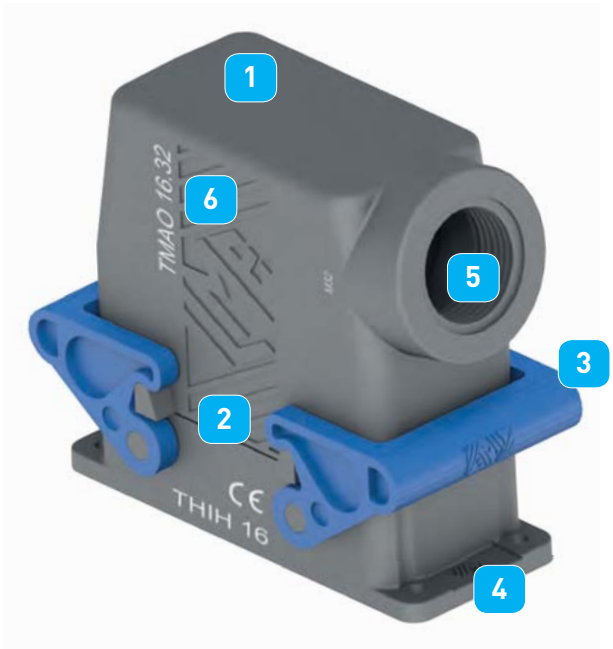

2 Gaskets

Gaskets have been produced in **HNBR rubber or SILICONE rubber** and have been incorporated in the base flange on bulkhead mounting housings for easier installation.

3 Levers

The locking levers have been produced in **self-extinguishing thermoplastic material,** blue RAL 5015 colour.
In accordance with the requirements set forth in **EHEDG Guideline n. 32** "Materials of construction for food equipment in contact with food" (EHEDG = European Hygienic Engineering & Design Group), the closing levers and sealing gaskets are coloured blue to easily identify any accidental contaminations in food products and to facilitate the visual identification of their complete cleanliness.

4 Dimensions

The internal dimensions allow mounting of all connector inserts in their relevant sizes. The external dimensions of the bulkhead mounting housings are similar to those of the corresponding metallic enclosures; hole fixing centres are unchanged. Hoods offer an inner cabling space similar to that of the "high" construction models of the corresponding metal enclosures. Other characteristics are in compliance with the applicable safety standard for electrical connectors, **IEC/EN 61984.**

5 Cable entries

The housing and hood cable entries are available with metric thread, respectively:

- **M25 or M32** for smaller sizes "44.27" and "57.27".
- **M32 or M40** for larger sizes "77.27" and "104.27".

The recent standard **IEC/EN 61076-7-100** regarding metric cable entries for multipole electrical connectors for heavy duty uses, which standardises some main dimensions for entries and their related accessories (gaskets, pressure nuts), have been carefully considered in the product design.

6 Markings

Each enclosure carries its own part number and conformity markings.

T-TYPE / H production lines HYGIENIC SERIES

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CT, CTSE (16A) ***)**	6 poles + ⏚	**160**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

***)** only for standard insulating version THIH

housings with single lever
HNBR gasket

hoods with single lever, top entry
covers, HNBR gasket

description	part No.	entry M	part No.	part No. (with loop)
bulkhead mounting housing with thermoplastic lever	**THIH 06 L**			
surface mounting housing, thermoplastic lever, high construction	**TAPH 06 L25**	25		
surface mounting housing, thermoplastic lever, high construction	**TAPH 06 L32**	32		
with thermoplastic lever and gasket, high construction			**TAVH 06 LG25**	25
with thermoplastic lever and gasket, high construction			**TAVH 06 LG32**	32
cover with thermoplastic lever and gasket				**THCH 06 LG**

panel cut-out for bulkhead mounting housings



THIH L



TAVH LG



TAPH L

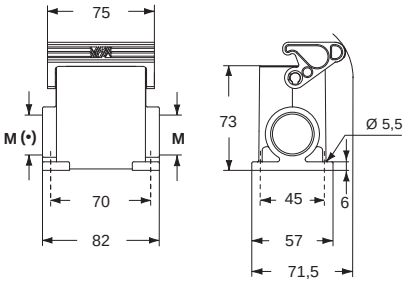

THCH LG



(•) The surface mounting, high construction housings are supplied with an open threaded entry (•) and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

TMAO
Hoods
(page 480)

TMAV
Hoods
(page 480)

TCHC
TCHC S
Covers
with eyelet
(page 481)

For fixing on hoods

loop



Type 12

ambient temperature limits -40 °C / +70 °C

T-TYPE / H production lines HYGIENIC SERIES

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

***)** only for standard insulating version THIH

housings with double lever HNBR gasket

hoods with double lever, top entry covers, HNBR gasket

description	part No.	entry M	part No.	part No. (with loop)
bulkhead mounting housing with thermoplastic levers	**THIH 10**			
surface mounting housing, thermoplastic levers, high construction	**TAPH 10.25**	25		
surface mounting housing, thermoplastic levers, high construction	**TAPH 10.32**	32		
with thermoplastic levers and gasket, high construction			**TAVH 10 G25**	25
with thermoplastic levers and gasket, high construction			**TAVH 10 G32**	32
with 2 thermoplastic levers and gasket				**THCH 10 G**

panel cut-out for bulkhead mounting housings

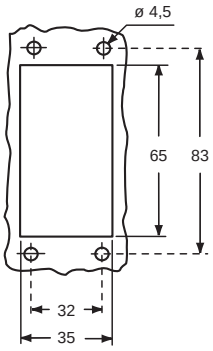

THIH

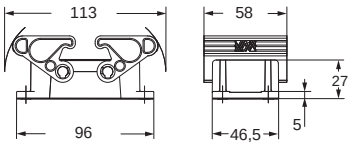

TAVH G



TAPH

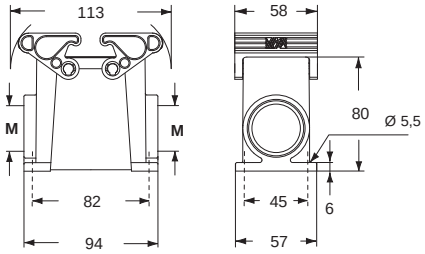

THCH G



TMAO Hoods (page 482)

TMAV Hoods (page 482)

TCHC TCHC S Covers with eyelet (page 483)

The surface mounting, high construction housings are supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

For fixing on hoods

loop



c UL us Type 12

EN 60529 IP66 IP69 IEC 60529 ambient temperature limits -40 °C / +70 °C

dimensions shown in mm are not binding and may be changed without notice

T-TYPE / H production lines HYGIENIC SERIES

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CT, CTSE (16A) ***)**	16 poles + ⏚	**162**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

***)** only for standard insulating version THIH

housings with double lever HNBR gasket

hoods with double lever, top entry covers, HNBR gasket

description	part No.	entry M	part No.	part No. (with loop)
bulkhead mounting housing with thermoplastic levers	**THIH 16**			
surface mounting housing, thermoplastic levers, high construction	**TAPH 16.32**	32		
surface mounting housing, thermoplastic levers, high construction	**TAPH 16.40**	40		
with thermoplastic levers and gasket, high construction			**TAVH 16 G32**	32
with thermoplastic levers and gasket, high construction			**TAVH 16 G40**	40
cover with 2 thermoplastic levers and gasket				**THCH 16 G**

panel cut-out for bulkhead mounting housings

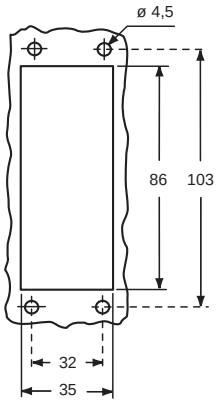

THIH



TAVH G



TAPH

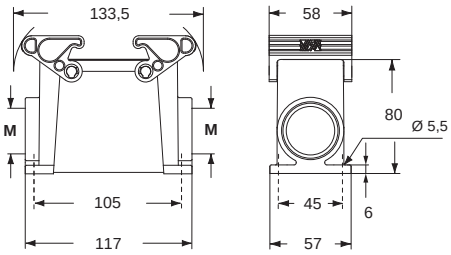

THCH G



The surface mounting, high construction housings are supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

TMAO Hoods **(page 484)**

TMAV Hoods **(page 484)**

TCHC TCHC S Covers with eyelet **(page 485)**

For fixing on hoods

loop



cULus Type 12

EN 60529 IP66 IP69 IEC 60529 ambient temperature limits -40 °C / +70 °C

T-TYPE / H production lines HYGIENIC SERIES

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTSE (16A) ***)**	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

***)** only for standard insulating version THIH

housings with double lever HNBR gasket

hoods with double lever, top entry covers, HNBR gasket

description	part No.	entry M	part No.	part No. (with loop)
bulkhead mounting housing with thermoplastic levers	**THIH 24**			
surface mounting housing, thermoplastic levers, high construction	**TAPH 24.322**	32		
surface mounting housing, thermoplastic levers, high construction	**TAPH 24.40**	40		
with thermoplastic levers and gasket, high construction			**TAVH 24 G32**	32
with thermoplastic levers and gasket, high construction			**TAVH 24 G40**	40
cover with 2 thermoplastic levers and gasket				**THCH 24 G**

panel cut-out for bulkhead mounting housings

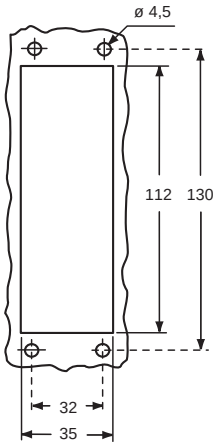

THIH

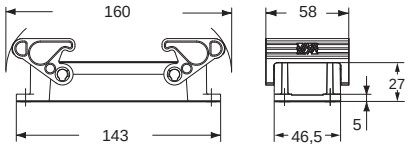

TAVH G

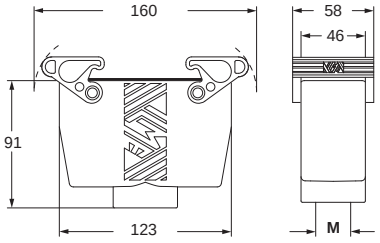

TAPH

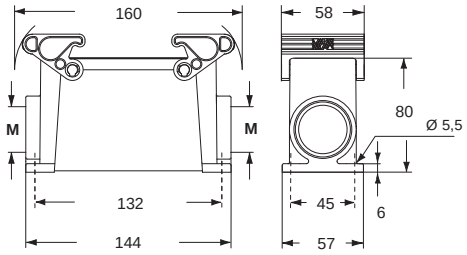

THCH G

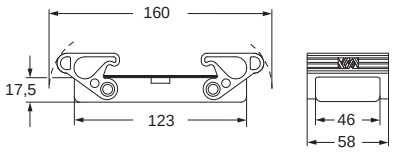

The surface mounting, high construction housings are supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

TMAO Hoods (page 486)

TMAV Hoods (page 486)

TCHC TCHC S Covers with eyelet (page 487)

For fixing on hoods

loop



cULus Type 12

EN 60529 IP66 IP69 IEC 60529 ambient temperature limits -40 °C / +70 °C

dimensions shown in mm are not binding and may be changed without notice

AH M25IF(L) - AH M32IF(L) cable glands HYGIENIC SERIES

enclosures:	page:
HYGIENIC T-TYPE / H IP66/IP69 (only M25 or M32)	501 - 504

HYGIENIC M25 cable gland

HYGIENIC M32 cable gland

description	part No.	M threading	part No.	M threading
cable glands M25X1,5				
for cable ø 12,0-15,0	**AH M25IF**	M25		
for cable ø 15,0-18,0	**AH M25IFL**	M25		
cable glands M32X1,5				
for cable ø 18,0-21,0			**AH M32IF**	M32
for cable ø 20,0-23,0			**AH M32IFL**	M32

NOTE: For details about their installation refer to the instruction sheet accompanying the product:
- ECOLAB compliant
- EHEDG compliant
- IP68, IP69 degree of protection
- ambient temperature limit: -20 °C ... +85 °C
- c UL us (UL Recognized Component for USA and Canada), c UL us (UL Listed Product for USA and Canada), EAC certified

Designed and certified in accordance with the EHEDG guidelines

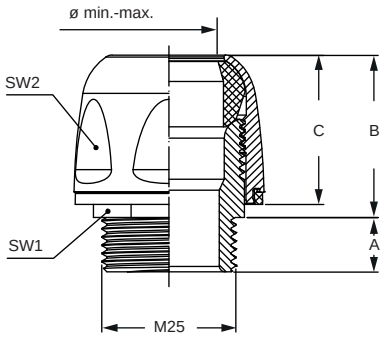



part No.	A	B	C	SW1	SW2	ø E	ø min.-max.
AH M25IF	10	30	27	24	32	34,9	12,0-15,0
AH M25IFL	10	30	27	24	32	34,9	15,0-18,0

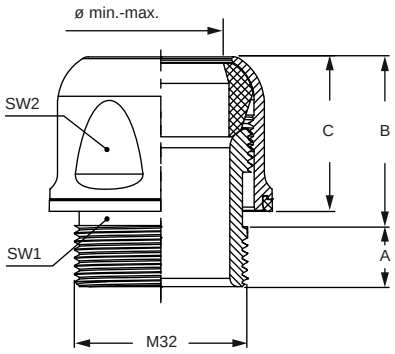



part No.	A	B	C	SW1	SW2	ø E	ø min.-max.
AH M32IF	11	32	28	30	38	40,9	18,0-21,0
AH M32IFL	11	32	28	30	38	40,9	20,0-23,0

T-TYPE / C low-temperature HYGIENIC SERIES

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CT, CTSE (16A) ***)**	6 poles + ⏚	**160**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

***)** only for standard insulating version THIC

housings with single lever SILICONE gasket

hoods with single lever, top entry covers, SILICONE gasket

description	part No.	entry M	part No.	part No. (with loop)
bulkhead mounting housing with thermoplastic lever	**THIC 06 L**			
surface mounting housing, thermoplastic lever, high construction	**TAPC 06 L25**	25		
surface mounting housing, thermoplastic lever, high construction	**TAPC 06 L32**	32		
with thermoplastic lever and gasket, high construction			**TAVC 06 LG25**	25
with thermoplastic lever and gasket, high construction			**TAVC 06 LG32**	32
cover with thermoplastic lever and gasket				**THCC 06 LG**

panel cut-out for bulkhead mounting housings



THIC L



TAVC LG



TAPC L

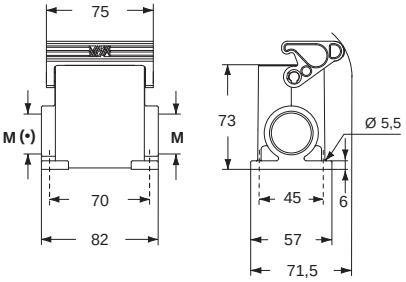

THCC LG



(•) The surface mounting, high construction housings are supplied with an open threaded entry (•) and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

TMAO Hoods (page 480)

TMAV Hoods (page 480)

TCHC TCHC S Covers with eyelet (page 481)

For fixing on hoods

loop



cULus Type 12

EN 60529 IP66 IP69 IEC 60529 ambient temperature limits -50 °C / +70 °C

dimensions shown in mm are not binding and may be changed without notice

T-TYPE / C low-temperature HYGIENIC SERIES

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

***)** only for standard insulating version THIC

housings with double lever SILICONE gasket

hoods with double lever, top entry covers, SILICONE gasket

description	part No.	entry M	part No.	part No. (with loop)
bulkhead mounting housing with thermoplastic levers	**THIC 10**			
surface mounting housing, thermoplastic levers, high construction	**TAPC 10.25**	25		
surface mounting housing, thermoplastic levers, high construction	**TAPC 10.32**	32		
with thermoplastic levers and gasket, high construction			**TAVC 10 G25**	25
with thermoplastic levers and gasket, high construction			**TAVC 10 G32**	32
with 2 thermoplastic levers and gasket				**THCC 10 G**

panel cut-out for bulkhead mounting housings

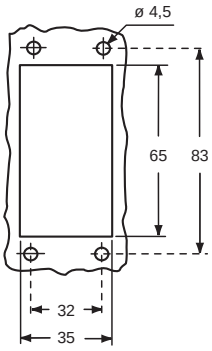

THIC



TAVC G



TAPC

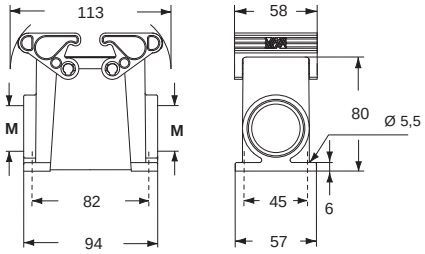

THCC G



TMAO Hoods (page 482)

TMAV Hoods (page 482)

TCHC TCHC S Covers with eyelet (page 483)

The surface mounting, high construction housings are supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

For fixing on hoods

loop



c UL us Type 12

EN 60529 IP66 IP69 IEC 60529 ambient temperature limits -50 °C / +70 °C

T-TYPE / C low-temperature HYGIENIC SERIES

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CT, CTSE (16A) ***)**	16 poles + ⏚	**162**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

***)** only for standard insulating version THIC

housings with double lever SILICONE gasket

hoods with double lever, top entry covers, SILICONE gasket

description	part No.	entry M	part No.	part No. (with loop)
bulkhead mounting housing with thermoplastic levers	**THIC 16**			
surface mounting housing, thermoplastic levers, high construction	**TAPC 16.32**	32		
surface mounting housing, thermoplastic levers, high construction	**TAPC 16.40**	40		
with thermoplastic levers and gasket, high construction			**TAVC 16 G32**	32
with thermoplastic levers and gasket, high construction			**TAVC 16 G40**	40
cover with 2 thermoplastic levers and gasket				**THCC 16 G**

panel cut-out for bulkhead mounting housings

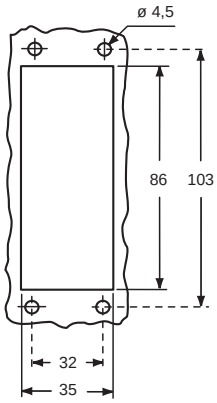

THIC



TAVC G



TAPC

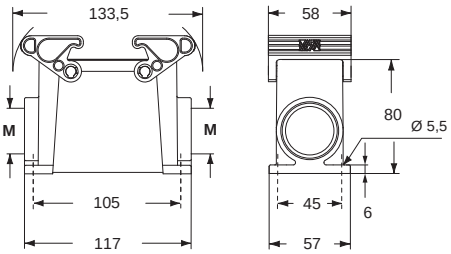

THCC G

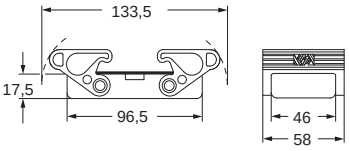

The surface mounting, high construction housings are supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

TMAO Hoods **(page 484)**

TMAV Hoods **(page 484)**

TCHC TCHC S Covers with eyelet **(page 485)**

For fixing on hoods

loop



cULus Type 12

EN 60529 IP66 IP69 IEC 60529 ambient temperature limits -50 °C / +70 °C

dimensions shown in mm are not binding and may be changed without notice

T-TYPE / C low-temperature HYGIENIC SERIES

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTSE (16A) ***)**	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

***)** only for standard insulating version THIC

housings with double lever SILICONE gasket

hoods with double lever, top entry covers, SILICONE gasket

description	part No.	entry M	part No.	part No. (with loop)
bulkhead mounting housing with thermoplastic levers	**THIC 24**			
surface mounting housing, thermoplastic levers, high construction	**TAPC 24.32**	32		
surface mounting housing, thermoplastic levers, high construction	**TAPC 24.40**	40		
with thermoplastic levers and gasket, high construction			**TAVC 24 G32**	32
with thermoplastic levers and gasket, high construction			**TAVC 24 G40**	40
cover with 2 thermoplastic levers and gasket				**THCC 24 G**

panel cut-out for bulkhead mounting housings

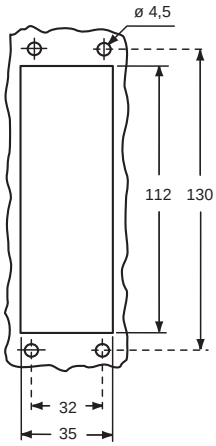

THIC

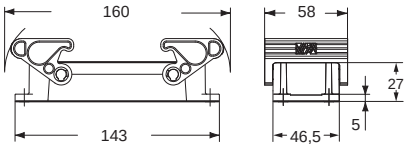

TAVC G

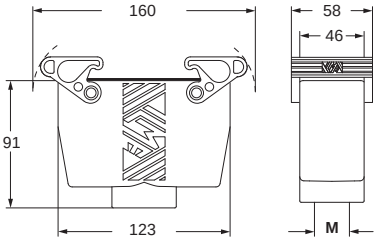

TAPC

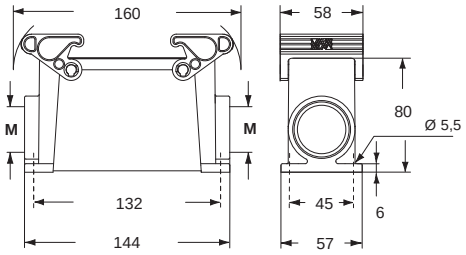

THCC G

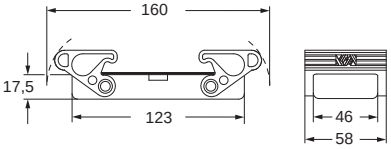

TMAO Hoods (page 486)

TMAV Hoods (page 486)

TCHC TCHC S Covers with eyelet (page 487)

The surface mounting, high construction housings are supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

For fixing on hoods

loop



c UL us Type 12

EN 60529 IP66 IP69 IEC 60529 ambient temperature limits -50 °C / +70 °C

CR..BPE PE earth jumpers

inserts		page:
CD	40, 64 poles + ⏚	**70, 72**
CDD	24, 42, 72, 108 poles + ⏚	**76 - 81**
CDS	9, 18, 27, 42 poles + ⏚	**-**
CDSH	9, 18, 27, 42 poles + ⏚	**86 - 89**
CNE	6, 10, 16, 24 poles + ⏚	**110 - 113**
CSE	6, 10, 16, 24 poles + ⏚	**-**
CSH	6, 10, 16, 24 poles + ⏚	**110 - 113**
CSH S	6, 10, 16, 24 poles + ⏚	**122 - 125**
CCE	6, 10, 16, 24 poles + ⏚	**130 - 133**
CMSH	3, 6, 10 +2 (aux) poles + ⏚	**136 - 140**
CMCE	3, 6, 10 +2 (aux) poles + ⏚	**137 - 141**
CSS	6, 10, 16, 24 poles + ⏚	**148 - 151**
CT, CTSE	6, 10, 16, 24 poles + ⏚	**160 - 163**
CQE	10, 18, 32, 46 poles + ⏚	**168 - 171**
CQEE	40, 64 poles + ⏚	**176 - 177**
CP	6 poles + ⏚	**178**
CX	8/24, 6/36, 12/2 poles + ⏚	**194 - 199**

PE optional earth jumpers

description	part No.
galvanized brass, to be optionally used with T-TYPE enclosures series:	
for inserts “44.27” size	**CR 06 BPE**
for inserts “57.27” size	**CR 10 BPE**
for inserts “77.27” size	**CR 16 BPE**
for inserts “104.27” size	**CR 24 BPE**

CR...BPE accessories PE (protective earth) jumpers could be mounted under the connector inserts for the connection of the two insert’s PE plates.

To guarantee to proper alignment of the insert inside the enclosure, it is necessary to use both jumpers supplied (in the same housing or hood); the jumpers are not usable individually.

Furthermore the user is responsible for verifying the continuity of the PE connection ⏚ (male and female) independently of using CR...BPE earth jumpers.

Optional earth jumpers

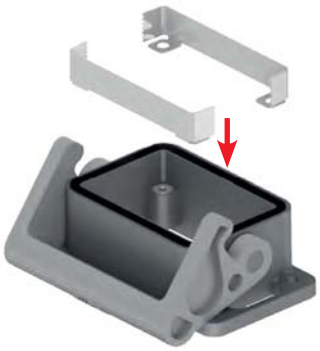

dimensions shown in mm are not binding and may be changed without notice

W-TYPE

ENCLOSURES for aggressive environments

A cornerstore against corrosion

Series W-TYPE connector enclosures for aggressive environments is specially designed for industrial applications where particularly aggressive external agents are present (e.g. salty environments, etc.).

The range includes enclosures in the 7 basic sizes (size 21.21 for CKA..W and MKA..W models, sizes 44.27, 57.27, 77.27 and 104.27 for CH..W, CA..W and MH..W, MA..W models, sizes 49.16 and 66.16 for CZ..W and MZ..W models) and in the 3 double sizes (sizes 66.40 also known as 50 poles, 77.62 a.k.a. 32 poles, 104.62 a.k.a. 48 poles).

Series W-TYPE enclosures may be bulkhead mounting, surface-mounting or hood type with side or top entry. They are distinguished by the jet black RAL 9005 colour and have the following characteristics:

- chromate conversion treatment of castings RoHS 2 compliant, providing 50% improved corrosion in resistance in salt spray tests (according to UNI EN ISO 9227) compared to the previous green coloured versions;
- thermosetting epoxy powder coating (with improved resistance to chemicals compared to epoxy polyester of the standard enclosures series);
- FKM fluoroelastomer gaskets (with improved resistance to chemicals and aging);
- ambient temperature limits from -40 °C to +125 °C.

Other constructional characteristics are:

1) CKA..W and MKA..W series

- 21.21 inserts size
- stainless steel monoblock locking lever

2) CH..W, CA..W and MH..W, MA..W series

- 44.27, 57.27, 77.27, 104.27, single inserts sizes and 77.62, 104.62, 66.40 double inserts sizes;
- CLASS type locking levers (stainless steel lever body, springs and pins, lever handle by fibreglass reinforced thermoplastic material);
- stainless steel riveted pegs;
- supplementary insulation inside enclosures.

3) CZ..W and MZ..W series

- 49.16, 66.16 inserts size;
- stainless steel monoblock locking lever (body, handle, springs), rolls and pins;
- stainless steel riveted pegs;
- supplementary insulation inside enclosures.

Series W-TYPE enclosures are approved by UL with c UL us Recognized Component mark for USA and Canada, with protection type ratings UL Type 4 (= NEMA 4), UL Type 4X (= NEMA 4X) and UL Type 12 (= NEMA 12) according to the American standard ANSI/UL 50 and ANSI/UL 50E and the corresponding Canadian Standards CSA C22.2 No.94.1 and CSA C22.2 No.94.2.

Upon connector complete and fitted with suitably rated cable glands or conduit fittings, series W-TYPE enclosures guarantee a degree of protection IP44 (for size 21.21, IP66/IP67 using CKR 65(D) kit), or IP66 (all other sizes) as well as IP69 according to EN 60529 (the IPX9 test recently added to this standard covers resistance to high pressure and temperature water jetting, jets applied at 80 °C (± 5 °C) at a pressure of 80 bar to 100 bar, 30 s for each angle of inclination 0°, 30°, 60° and 90° with reference to the horizontal plane).

Series W-TYPE enclosures can accommodate all connector inserts with either crimp, screw, spring or the innovative SQUICH® connection.

Series W-TYPE enclosures, being not equipped with internal tabs and thanks to the additional insulation strips placed inside, are also suitable for series CME 830V rated inserts.

CKA - MKA W-TYPE for aggressive environments

inserts		page:
CK	3 poles + ⏚	**58**
CK	4 poles + ⏚	**58**
CKS	3 poles + ⏚	**-**
CKS	4 poles + ⏚	**-**
CKSH	3 poles + ⏚	**63**
CKSH	4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

bulkhead mounting housings straight and angled

hoods

description	part No. (entry Pg 11)	part No. (entry M20)	part No. (entry Pg 11)	part No. (entry M20 / M25)
with stainless steel lever and gasket	**CKAXW 03 I**			
without cable entry, with stainless steel lever and gasket	**CKAXW 03 IA**			
with cable entry, with stainless steel lever and gasket	**CKAXW 03 IAP**	**MKAXW IAP20**		
with cable entry, with stainless steel lever and gasket, bulkhead hole closed	**CKAXW 03 AP**	**MKAXW AP20**		
with pegs, top entry			**CKAW 03 V**	**MKAW V20**
with pegs, top entry				**MKAW V25**
with pegs, side entry			**CKAW 03 VA**	**MKAW VA20**
with stainless steel lever, top entry			**CKAXW 03 VG**	**MKAXW VG20**
gasket and screw kit for IP66/IP67/IP69 [1] for CK, CKSH, CQ4, CQ inserts	**CKR 65**		**CKR 65**	
gasket and screw kit for IP66/IP67/IP69 [1] for CD 08 inserts	**CKR 65 D**		**CKR 65 D**	

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M.

NOTE: Housing type may vary upon specific part No.

versions with glued gasket (DESINA®) upon request

panel cut-out for bulkhead mounting housings



Type 12
Type 4/4X only
with CKR 65 (D)

IP66/IP67/IP69 with CKR 65 (D) [1]

CKAXW I



CKAXW IA

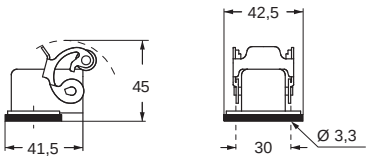

CKAXW IAP (CKAXW AP) and **MKAXW IAP (MKAXW AP)**

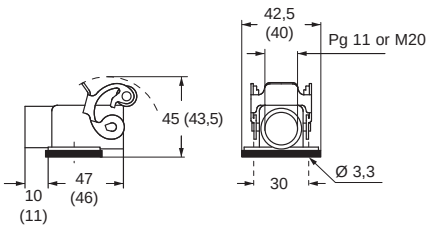

CKAW V and **MKAW V20 - V25**

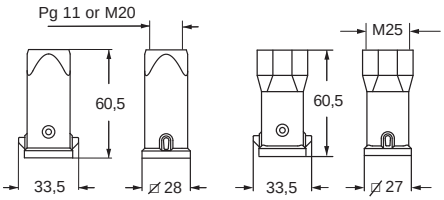

CKAW VA and **MKAW VA**



CKAXW VG and **MKAXW VG**



dimensions shown in mm are not binding and may be changed without notice

CKAX - CKAXX W-TYPE for aggressive environments

inserts		page:
CK	3 poles + ⏚	**58**
CK	4 poles + ⏚	**58**
CKS	3 poles + ⏚	**-**
CKS	4 poles + ⏚	**-**
CKSH	3 poles + ⏚	**63**
CKSH	4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

angled bulkhead mounting housings stainless steel lever

angled bulkhead mounting housings stainless steel rigid lever

description	part No.	part No.
without cable entry, fixing by 4 screws	**CKAXW 03 IA4**	**CKAXXW 03IA4**
gasket and screw kit for IP66/IP67/IP69 [1] for CK, CKSH, CQ4, CQ inserts	**CKR 65**	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 [1] for CD 08 inserts	**CKR 65 D**	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type may vary upon specific part No.

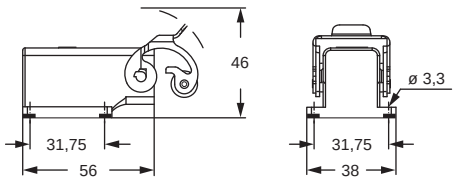

panel cut-out for enclosures



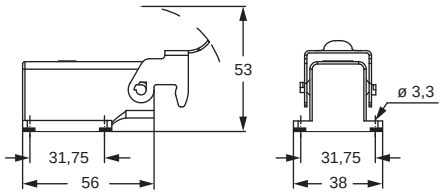

panel cut-out for enclosures



EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) [1]

W-TYPE

MKAX W-TYPE for aggressive environments

inserts		page:
CK	3 poles + ⏚	**58**
CK	4 poles + ⏚	**58**
CKS	3 poles + ⏚	**-**
CKS	4 poles + ⏚	**-**
CKSH	3 poles + ⏚	**63**
CKSH	4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

angled surface mounting housings stainless steel lever

angled surface mounting housings stainless steel lever

description	part No. (entry M25)	part No. (entry M25)
with cable entry, fixing by 4 screws	**MKAXW IAP25**	
with cable entry, fixing by 4 screws, bulkhead hole closed (without gasket)		**MKAXW AP25**
gasket and screw kit for IP66/IP67/IP69 [1] for CK, CKSH, CQ4, CQ, inserts	**CKR 65**	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 [1] for CD 08 inserts	**CKR 65 D**	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type may vary upon specific part No.

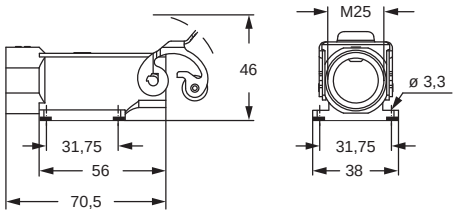

panel cut-out for enclosures



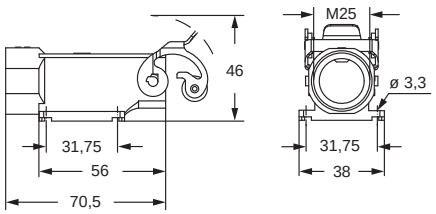

panel cut-out for enclosures



EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) [1]

dimensions shown in mm are not binding and may be changed without notice

MKAXX W-TYPE for aggressive environments

inserts		page:
CK	3 poles + ⏚	58
CK	4 poles + ⏚	58
CKS	3 poles + ⏚	-
CKS	4 poles + ⏚	-
CKSH	3 poles + ⏚	63
CKSH	4 poles + ⏚	63
CD	8 poles	67
CQ4	2 poles + ⏚	182
CQ4 H	2 poles + ⏚	183
CQ4	3 poles + ⏚	184
CQ	5 poles + ⏚	186
CQ	7 poles + ⏚	187
CQ	12 poles + ⏚	189
CQ	21 poles + ⏚	190

angled surface mounting housings stainless steel rigid lever

angled surface mounting housings stainless steel rigid lever

description	part No. (entry M25)	part No. (entry M25)
with cable entry, fixing by 4 screws	**MKAXXW IAP25**	
with cable entry, fixing by 4 screws, bulkhead hole closed (without gasket)		**MKAXXW AP25**
gasket and screw kit for IP66/IP67 [1] for CK, CKSH, CQ4, CQ, inserts	**CKR 65**	**CKR 65**
gasket and screw kit for IP66/IP67 [1] for CD 08 inserts	**CKR 65 D**	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type may vary upon specific part No.

MKA IAP

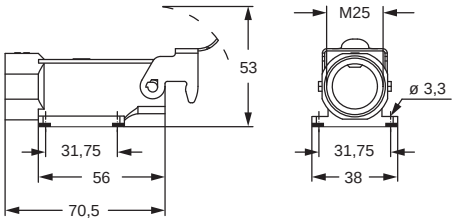

panel cut-out for enclosures



MKAXX IAP

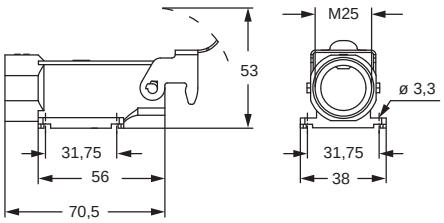

panel cut-out for enclosures



IP66/IP67/IP69 with CKR 65 (D) [1]

MKAX W-TYPE for aggressive environments

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

if the counterpart has glued gasket:

CJ KF	**223**
CJK 8FT	**228**
CLK 04 SC	**239**
CX 1/2 BD	**243**
CXL 2/4 SF/SM	**250**
CXL SF/SM	**250**
CXL 2/4 PF/PM	**251**
CXL 2/4 PFH/PMH	**251**
CXL PF/PM	**251**

bulkhead mounting housings
stainless steel lever

description	part No. (entry M32)
M32 fixing thread (•) 1)	**MKAXW IF**
gasket and screw kit for IP66/IP67/IP69 1)	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 1) specific for CD 08 inserts	**CKR 65 D**

1) To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M.

NOTE: Housing type may vary upon specific part No.

(•) Locknut supplied on request, see Cable glands catalogue (article AS M32N metallic).

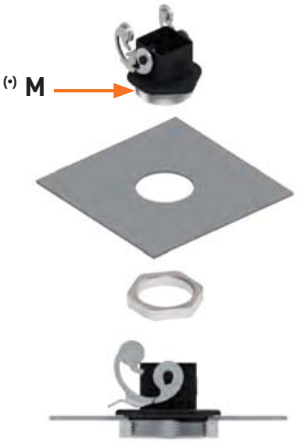



panel cut-out for enclosures



cURus
Type 4/4X/12 pending

EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) 1)

W-TYPE

dimensions shown in mm are not binding and may be changed without notice

MKAXX W-TYPE for aggressive environments

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

if the counterpart has glued gasket:

CJ KF	**223**
CJK 8FT	**228**
CLK 04 SC	**239**
CX 1/2 BD	**243**
CXL 2/4 SF/SM	**250**
CXL SF/SM	**250**
CXL 2/4 PF/PM	**251**
CXL 2/4 PFH/PMH	**251**
CXL PF/PM	**251**

bulkhead mounting housings
stainless steel rigid lever

description	part No. (entry M32)
M32 fixing thread (•) 1)	**MKAXXW IF**
gasket and screw kit for IP66/IP67/IP69 1)	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 1) specific for CD 08 inserts	**CKR 65 D**

1) To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M.

NOTE: Housing type may vary upon specific part No.



panel cut-out for enclosures



(•) Locknut supplied on request, see Cable glands catalogue (article AS M32N metallic).

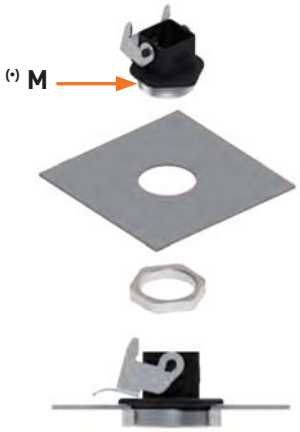

cURus
Type 4/4X/12 pending

EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) 1)

MKAX - MKAXX W-TYPE for aggressive environments

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

if the counterpart has glued gasket:

CJ KM	**223**
CJK 8MT	**226**
CJK 8IMT	**226, 228**
CLK 04 SC	**239**
CX 1/2 BD	**243**
CXL 2/4 SF/SM	**250**
CXL SF/SM	**250**
CXL 2/4 PF/PM	**251**
CXL 2/4 PFH/PMH	**251**
CXL PF/PM	**251**

hoods
stainless steel lever

hoods
galvanized steel rigid lever

description	part No. (entry M25)	part No. (entry M25)
top entry	**MKAXW VG25**	**MKAXXW VG25**
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 08 inserts	**CKR 65 D**	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M





NOTE: Housing type may vary upon specific part No.

cURus
Type 12 / Type 4/4X only with CKR 65 (D)
pending

EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) [1]

W-TYPE

dimensions shown in mm are not binding and may be changed without notice

CZ7 - MZ7 CZ - MZ and CZA - MZA W-TYPE for aggressive environments

inserts		page:
CD	15 poles + ⏚	68
CDA	10 poles + ⏚	98
CSAH	10 poles + ⏚	99
CDC	10 poles + ⏚	104
MIXO	1 module	264 - 316

The covers for L and LG versions cannot be used together with coding pins. If this application is required, please contact ILME SpA.

housings and cover

hoods and cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with lever and gasket	**CZ7IW 15 L**	--						
surface mounting housing, with lever	**CZ7PW 15 L2**	16 x 2	**MZ7PW 15L225**	25 x 2				
cover with pegs and gasket (for 1 lever enclosures) [1]	**CZCW 15 L**							
enclosure with pegs and gasket, side entry					**CZOW 15 L**	16	**MZOW 15 L20**	20
enclosure with pegs and gasket, side entry							**MZOW 15 L25**	25
enclosure with pegs and gasket, side entry, high construction					**CZAOW 15 L21**	21	**MZAOW 15 L25**	25
enclosure with pegs and gasket, top entry					**CZVW 15 L**	13,5	**MZVW 15 L20**	20
enclosure with pegs and gasket, top entry, high construction					**CZAVW 15 L21**	21	**MZAVW 15 L25**	25
cover with lever (for enclosures with pegs) [2]					**CZ7CW 15 LG**			

panel cut-out for bulkhead mounting housings

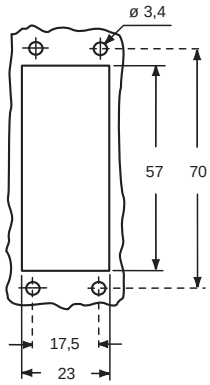

For fixing on housings

eyelet 1)



For fixing on hoods

loop 2)



Type 4/4X/12

IP65 — insulating cable gland or fittings without gasket

IP66 IP67 IP69 — cable gland with O-Ring gasket

CZ7IW L

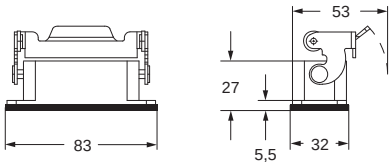

CZ7PW L and **MZ7PW L**

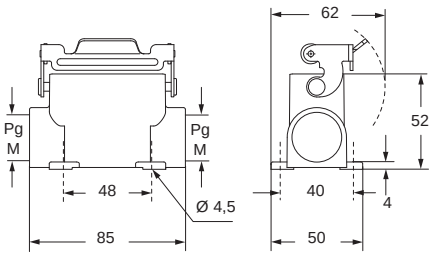

CZCW L



CZOW L and **MZOW L**



CZAOW L - MZAOW L and **CZAVW L - MZAVW L**

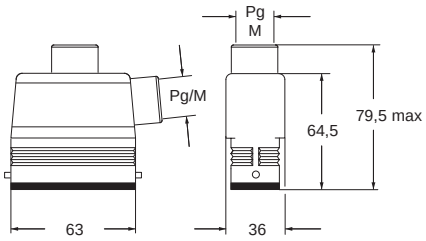

CZVW L and **MZVW L**



CZ7CW LG

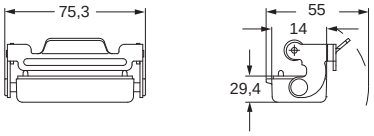

W-TYPE

CZ7 - MZ7 CZ - MZ and CZA - MZA W-TYPE for aggressive environments

inserts		page:
CD	25 poles + ⏚	69
CDD	38 poles + ⏚	77
CDA	16 poles + ⏚	100
CSAH	16 poles + ⏚	101
CDC	16 poles + ⏚	105

The covers for L and LG versions cannot be used together with coding pins. If this application is required, please contact ILME SpA.

housings and cover

hoods and cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with lever and gasket	**CZ7IW 25 L**	--						
surface mounting housing, with lever	**CZ7PW 25 L2**	16 x 2	**MZ7PW 25L225**	25 x 2				
cover with pegs (for 1 lever enclosures) 1)	**CZCW 25 L**							
enclosure with pegs and gasket, side entry					**CZOW 25 L**	16	**MZOW 25 L20**	20
enclosure with pegs and gasket, side entry							**MZOW 25 L25**	25
enclosure with pegs and gasket, side entry, high construction					**CZAOW 25 L21**	21	**MZAOW 25 L25**	25
enclosure with pegs and gasket, top entry					**CZVW 25 L**	16	**MZVW 25 L20**	20
enclosure with pegs and gasket, top entry, high construction					**CZAVW 25 L21**	21	**MZAVW 25 L25**	25
cover with lever (for enclosures with pegs) 2)					**CZ7CW 25 LG**			

panel cut-out for bulkhead mounting housings

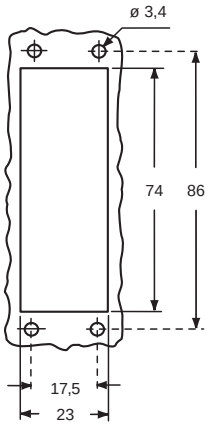

For fixing on housings

eyelet 1)



For fixing on hoods

loop 2)



cULus Type 4/4X/12

EN 60529 IP65 IEC 60529 insulating cable gland or fittings without gasket

EN 60529 IP66 IP67 IP69 IEC 60529 cable gland with O-Ring gasket

CZ7IW L

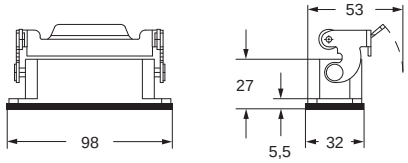

CZ7PW L and **MZ7PW L**

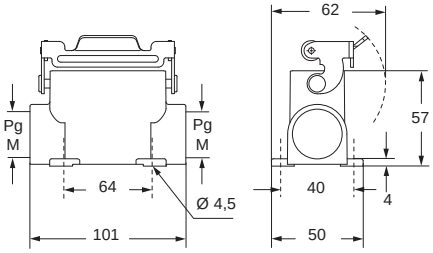

CZCW L



CZOW L and **MZOW L**



CZAOW L - MZAOW L and **CZAVW L - MZAVW L**

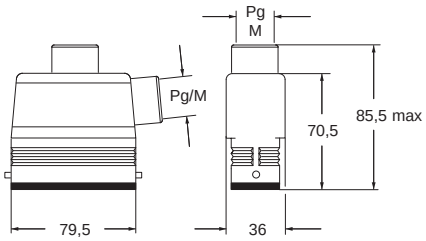

CZVW L and **MZVW L** *



* can only be used with a complete cable gland (to be purchased separately)

CZ7CW LG

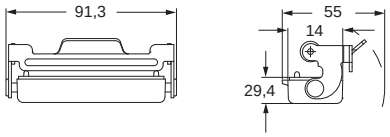

dimensions shown in mm are not binding and may be changed without notice

CH - CA and MA W-TYPE for aggressive environments

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CT, CTSE (16A) ***)**	6 poles + ⏚	**160**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

***)** only for enclosure CHIW 06 L

housings and cover

hoods and cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with lever and gasket	**CHIW 06 L**	--						
surface mounting housing, with lever, high construction	**CAPW 06 L**	21	**MAPW 06 L32**	32				
cover with pegs (for 1 lever enclosures) 1)	**CHCW 06 L**							
enclosure with pegs, side entry, high construction					**CAOW 06 L21**	21	**MAOW 06 L32**	32
enclosure with pegs, top entry, high construction					**CAVW 06 L21**	21	**MAVW 06 L32**	32
cover with lever (for enclosures with pegs) 2)					**CHCW 06 LG**			
enclosure with lever and gasket, side entry, high construction					**CAVW 06 LG**	21	**MAVW 06 LG32**	32

panel cut-out for bulkhead mounting housings



CHIW L

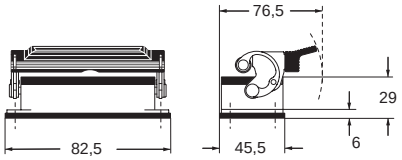

CAOW L and **MAOW L**

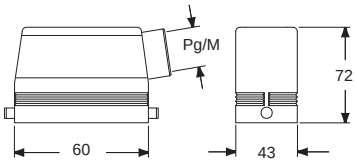

CAPW L and **MAPW L**

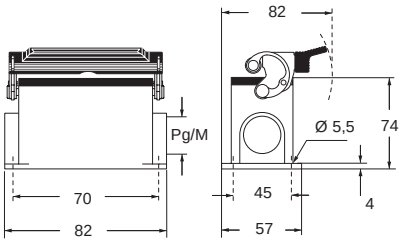

CAVW L and **MAVW L**

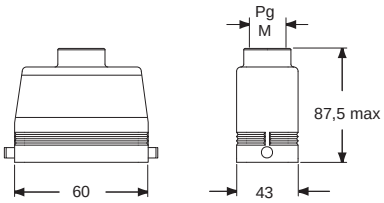

CHCW L

CHCW LG

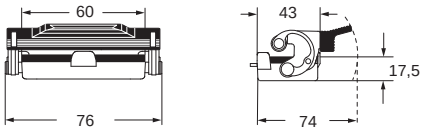

For fixing on housings

eyelet 1)



For fixing on hoods

loop 2)



CAVW LG and **MAVW LG**

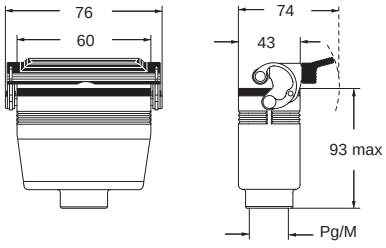

Type 4/4X/12

IP65 insulating cable gland or fittings without gasket

IP66 IP69 cable gland with O-Ring gasket

W-TYPE

CH - CA and MA W-TYPE for aggressive environments

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

***)** only for enclosure CHIW 10

housings and cover

hoods and cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with levers and gasket	**CHIW 10**	--						
surface mounting housing, with levers, high construction	**CAPW 10.21**	21	**MAPW 10.32**	32				
cover with 4 pegs (for enclosures with 2 levers) [1]	**CHCW 10**							
enclosure with pegs, side entry, high construction					**CAOW 10.21**	21	**MAOW 10.32**	32
enclosure with pegs, top entry, high construction					**CAVW 10.21**	21	**MAVW 10.32**	32
cover with 2 levers (for enclosures with 4 pegs) [2]					**CHCW 10 G**			
enclosure with levers and gasket, top entry, high construction					**CAVW 10 G**	21	**MAVW 10 G32**	32

panel cut-out for bulkhead mounting housings

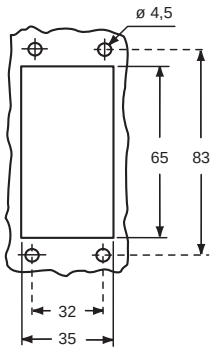

CHIW

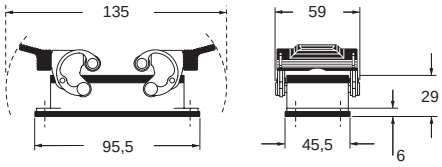

CAOW and **MAOW**



CAPW and **MAPW**

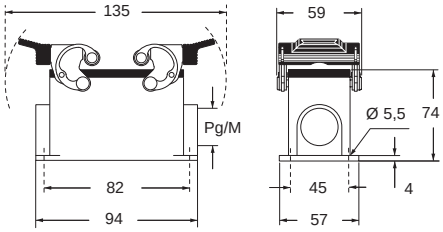

CAVW and **MAVW**



For fixing on housings

eyelet 1)



For fixing on hoods

loop 2)



CHCW

CHCW G

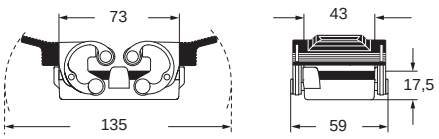

CAVW G and **MAVW G**

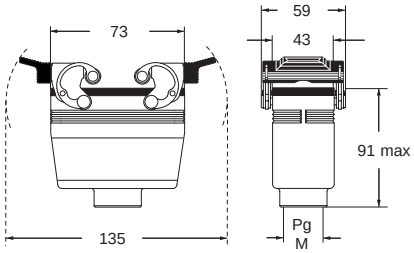

cULus Type 4/4X/12

EN 60529 IP65 IEC 60529 — insulating cable gland or fittings without gasket

EN 60529 IP66 IP69 IEC 60529 — cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CH - CA and MH - MA W-TYPE for aggressive environments

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CT, CTS (10A) ***)**	40 poles + ⏚	**156**
CT, CTSE (16A) ***)**	16 poles + ⏚	**162**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

***)** only for enclosure CHIW 16

housings and cover

hoods and cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with levers and gasket	**CHIW 16**	--						
surface mounting housing, with levers, high construction	**CAPW 16.21**	21	**MAPW 16.32**	32				
cover with 4 pegs (for enclosures with 2 levers) [1]	**CHCW 16**							
enclosure with pegs, side entry					**CHOW 16**	21	**MHOW 16.25**	25
enclosure with pegs, side entry							**MHOW 16.32**	32
enclosure with pegs, side entry, high construction					**CAOW 16.29**	29	**MAOW 16.32**	32
enclosure with pegs, side entry, high construction							**MAOW 16.40**	40
enclosure with pegs, top entry					**CHVW 16**	21	**MHVW 16.25**	25
enclosure with pegs, top entry							**MHVW 16.32**	32
enclosure with pegs, top entry, high construction					**CAVW 16.29**	29	**MAVW 16.32**	32
enclosure with pegs, top entry, high construction							**MAVW 16.40**	40
cover with 2 levers (for enclosures with 4 pegs [2]					**CHCW 16 G**			
enclosure with levers and gasket, top entry, high construction					**CAVW 16 G29**	29	**MAVW 16 G32**	32

panel cut-out for bulkhead mounting housings

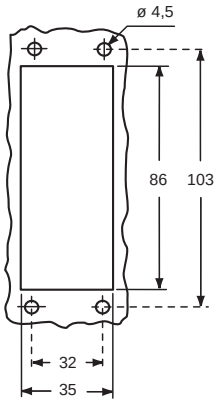

For fixing on housings

eyelet 1)



For fixing on hoods

loop 2)



Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

CHIW

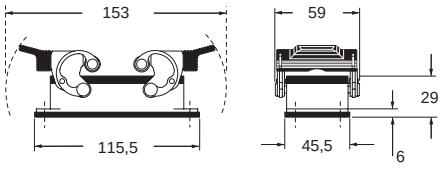

CAPW and **MAPW**

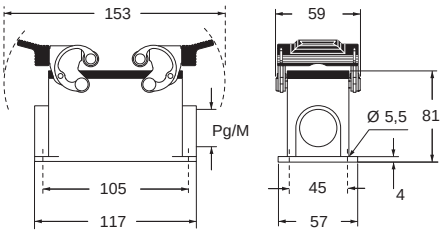

CHCW



CHOW (CAOW) and **MHOW (MAOW)**

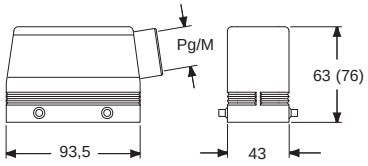

CHVW (CAVW) and **MHVW (MAVW)**

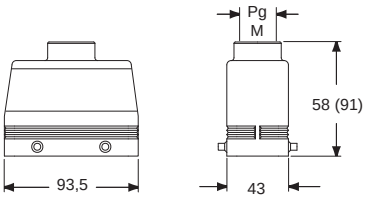

CHCW G

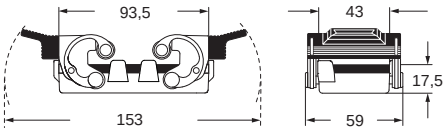

CAVW G and **MAVW G**

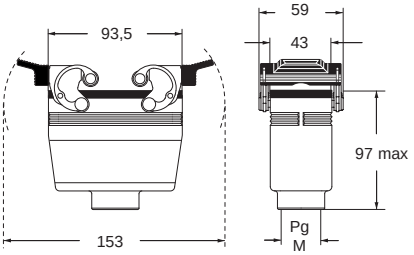

W-TYPE

CH - CA and MH - MA W-TYPE for aggressive environments

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTS (10A) ***)**	64 poles + ⏚	**157**
CT, CTSE (16A) ***)**	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

***)** only for enclosure CHIW 24

housings and cover

hoods and cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with levers and gasket	**CHIW 24**	--						
surface mounting housing, with levers, high construction	**CAPW 24.21**	21	**MAPW 24.32**	32				
cover with 4 pegs (for enclosures with 2 levers) [1]	**CHCW 24**							
enclosure with pegs, side entry					**CHOW 24**	21	**MHOW 24.25**	25
enclosure with pegs, side entry							**MHOW 24.32**	32
enclosure with pegs, side entry, high construction					**CAOW 24.29**	29	**MAOW 24.32**	32
enclosure with pegs, side entry, high construction							**MAOW 24.40**	40
enclosure with pegs, top entry					**CHVW 24**	21	**MHVW 24.25**	25
enclosure with pegs, top entry							**MHVW 24.32**	32
enclosure with pegs, top entry, high construction					**CAVW 24.29**	29	**MAVW 24.32**	32
enclosure with pegs, top entry, high construction							**MAVW 24.40**	40
cover with 2 levers (for enclosures with 4 pegs) [2]					**CHCW 24 G**			
enclosure with levers and gasket, top entry					**CHVW 24 G**	21	**MHVW 24 G32**	32

panel cut-out for bulkhead mounting housings

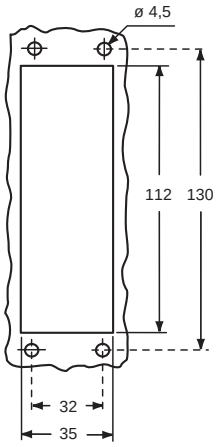

For fixing on housings

eyelet 1)



For fixing on hoods

loop 2)



cULus Type 4/4X/12

IP65 (EN 60529 / IEC 60529) insulating cable gland or fittings without gasket

IP66 IP69 (EN 60529 / IEC 60529) cable gland with O-Ring gasket

CHIW

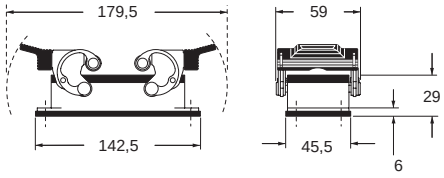

CAPW and **MAPW**

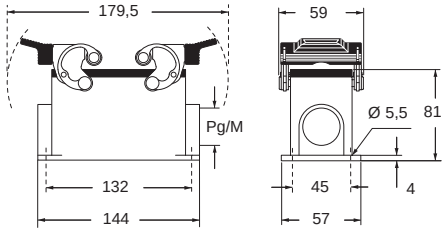

CHCW



CHOW (CAOW) and **MHOW (MAOW)**



CHVW (CAVW) and **MHVW (MAVW)**

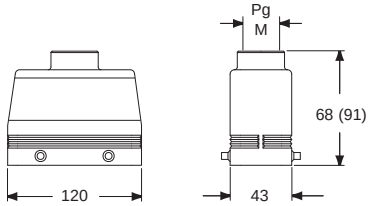

CHCW G

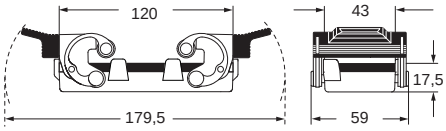

CHVW G and **MHVW G**

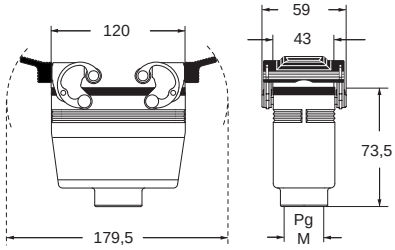

dimensions shown in mm are not binding and may be changed without notice

CH and W-TYPE for aggressive environments

inserts		page:
CD	80 poles + ⏚	**73**
CDD	144 poles + ⏚	**82**
CDS	54 poles + ⏚	**-**
CDSH	54 poles + ⏚	**90**
CNE	32 poles + ⏚	**114**
CSE	32 poles + ⏚	**-**
CSH	32 poles + ⏚	**114**
CSH S	32 poles + ⏚	**126**
CCE	32 poles + ⏚	**134**
CSS	32 poles + ⏚	**152**
CTSE (16A) ***)**	32 poles + ⏚	**164**
CQE	64 poles + ⏚	**172**
CME	12+4 (aux) poles + ⏚	**142**
CMSH	12+4 (aux) poles + ⏚	**142**
CMCE	12+4 (aux) poles + ⏚	**143**
CP	12 poles + ⏚	**179**
MIXO	4 + 4 modules	**262 - 317**

***)** only for enclosure CHIW 32

insert dimensions:
2 x (77,5 x 27) mm

housings and cover

hoods and cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with levers and gasket surface mounting housing, with levers	**CHIW 32** **CHPW 32**	-- 36	**MHPW 32.50**	50				
cover with 4 pegs (for enclosures with 2 levers) [1]	**CHCW 32**							
enclosure with pegs, side entry enclosure with pegs, top entry					**CHOW 32** **CHVW 32**	36 36	**MHOW 32.40** **MHVW 32.40**	40 40
cover with 2 levers (for enclosures with 4 pegs) [2]					**CHCW 32 G**			
enclosure with levers and gasket, top entry					**CHVW 32 G**	36	**MHVW 32 G40**	40

panel cut-out for bulkhead mounting housings

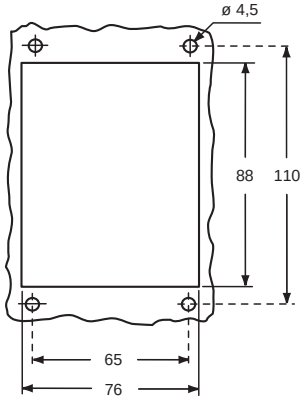

CHIW

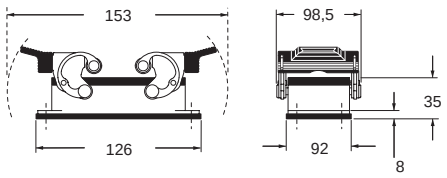

CHOW and **MHOW**

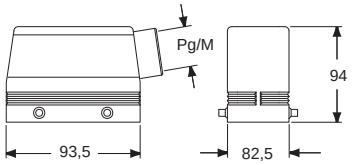

CHPW and **MHPW**

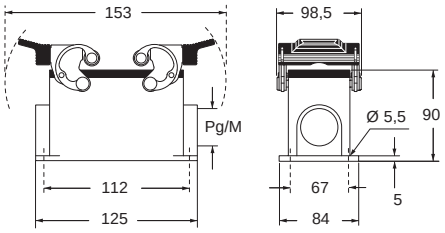

CHVW and **MHVW**

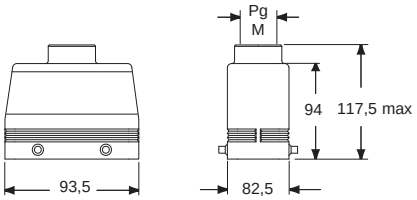

CHCW



CHCW G

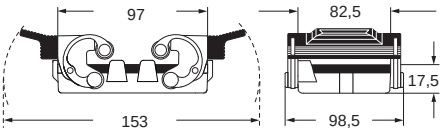

For fixing on housings

eyelet [1]



For fixing on hoods

loop [2]



CHVW G and **MHVW G**

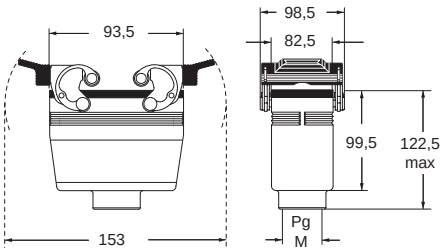

Type 4/4X/12

IP65 insulating cable gland or fittings without gasket

IP66 IP69 cable gland with O-Ring gasket

CH and MH W-TYPE for aggressive environments

inserts		page:
CD	128 poles + ⏚	**74**
CDD	216 poles + ⏚	**83**
CDS	84 poles + ⏚	**-**
CDSH	84 poles + ⏚	**91**
CNE	48 poles + ⏚	**115**
CSE	48 poles + ⏚	**-**
CSH	48 poles + ⏚	**115**
CSH S	48 poles + ⏚	**127**
CCE	48 poles + ⏚	**135**
CME	20+4 (aux) poles + ⏚	**144**
CMSH	20+4 (aux) poles + ⏚	**144**
CSS	48 poles + ⏚	**153**
CTSE (16A) ***)**	48 poles + ⏚	**165**
CQE	92 poles + ⏚	**173**
MIXO	6 + 6 modules	**262 - 317**

***)** only for enclosure CHIW 48 LS

insert dimensions:
2 x (104 x 27) mm

bulkhead and surface mounting housings

hoods

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housings, with lever, gasket and cover	**CHIW 48 LS**	--						
surface mounting housings, with lever and cover	**CHPW 48 LS**	36 x 1/2	**MHPW 48 LS40**	40 x 1/2				
side entry, with pegs					**CHOW 48 L**	36	**MHOW 48 L40**	40
top entry, with pegs					**CHVW 48 L**	36	**MHVW 48 L40**	40

panel cut-out for bulkhead mounting housings

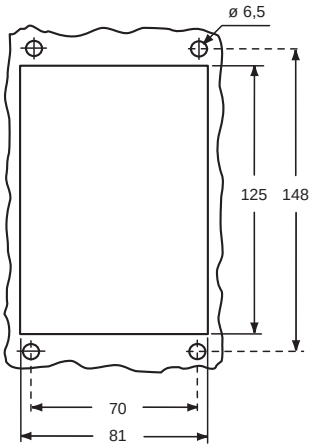

CHIW LS

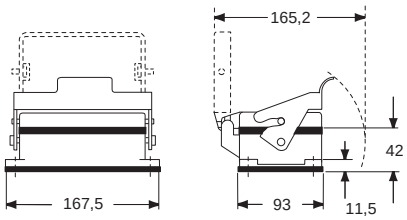

CHOW L and **MHOW L**

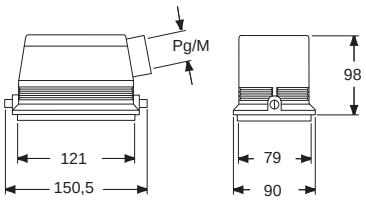

CHPW LS and **MHPW LS**

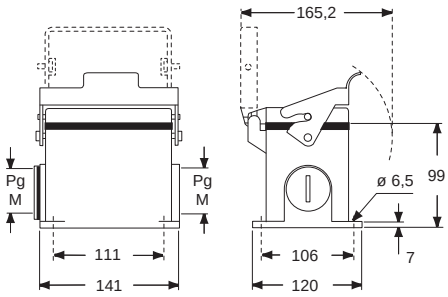

CHVW L and **MHVW L**

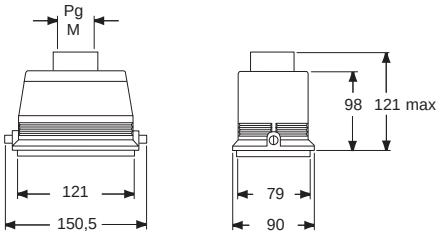

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CH - CA and MH - MA W-TYPE for aggressive environments

inserts		page:
CD	50 poles + ⏚	**71**
CDD	76 poles + ⏚	**80**
CDA	32 poles + ⏚	**102**
CSAH	32 poles + ⏚	**103**
CDC	32 poles + ⏚	**106**

insert dimensions:
2 x (66 x 16) mm

CHCW 50 and CHCW 50 G covers cannot be used together with coding pins. If this application is required, please contact ILME SpA.

housings and cover

hoods and cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housings with levers and gasket	**CHIW 50**	--						
surface mounting housing, with levers	**CHPW 50.21**	21	**MHPW 50.32**	32				
surface mounting housing, with levers	**CHPW 50.229**	29 x 2	**MHPW 50.240**	40 x 2				
cover with 4 pegs (for housings with 2 levers) 1)	**CHCW 50**							
enclosure with 4 pegs, side entry					**CHOW 50**	21	**MHOW 50.25**	25
enclosure with 4 pegs, side entry							**MHOW 50.32**	32
enclosure with 4 pegs, side entry, high construction					**CAOW 50.29**	29	**MAOW 50.32**	32
enclosure with 4 pegs, top entry, high construction					**CAVW 50.29**	29	**MAVW 50.32**	32
cover with 2 levers (for enclosures with 4 pegs) 2)					**CHCW 50 G**			

panel cut-out for bulkhead mounting housings

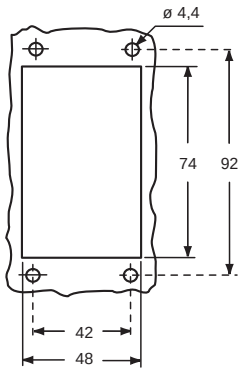

For fixing on housings

eyelet 1)



For fixing on hoods

loop 2)



CHIW

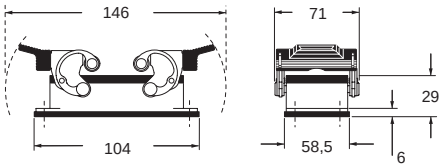

CHOW (CAOW) and **MHOW (MAOW)**

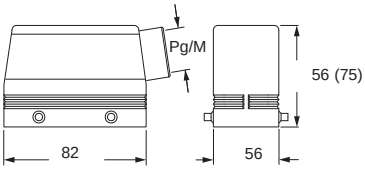

CHPW and **MHPW**

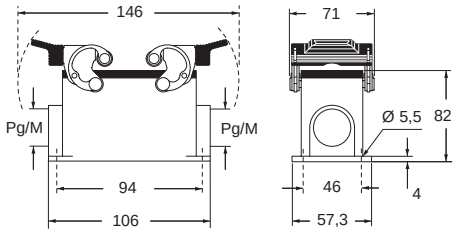

CAVW and **MAVW**

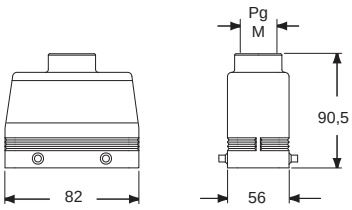

CHCW

CHCW G

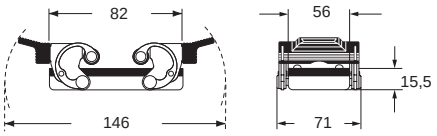

cULus Type 4/4X/12

IP65 (EN 60529 / IEC 60529) insulating cable gland or fittings without gasket

IP66 IP69 (EN 60529 / IEC 60529) cable gland with O-Ring gasket

W-TYPE

E-Xtreme® series
TECHNICAL FEATURES

The protection is granted also in case of impact with stones and sand. The materials are able to withstand UV radiations, a wide temperature range and harsh chemicals.

The E-Xtreme® series is available in the **full range** of ILME aluminum hoods and housings versions.

Applicable test standards

EN 61984:2009-06	Connectors - Safety requirements and tests
EN 60529: 1991 + A1: 2000 + A2: 2013	Degrees of protection provided by enclosures (IP code)
EN ISO 9227: 2012	Corrosion tests in artificial atmospheres - Salt spray tests
ASTM B117-16	Standard practice for operating salt spray (fog) apparatus
EN 60512 (series)	Connectors for electronic equipment - Tests and measurement
EN 60068-2-68: 1996	Environmental testing - Part 2-68: Tests - Test L: Dust and sand
EN ISO 20567-1: 2005	Paints and varnishes -- Determination of stone-chip resistance of coatings -- Part 1: Multi-impact testing

General specifications

Material	Aluminum die-cast
Painting	Epoxy powder coating
Colour	RAL 7016 (dark grey)
Locking lever, springs and pegs	Stainless steel
Lever handle	C-TYPE lever: Polyamide V-TYPE lever: Stainless steel
Gasket	FKM
Silicone-based compounds	Free (except version for -60 °C... +180 °C)
EN ISO 9227: 2012	3.000 hours (V-TYPE lever and hood with moulded pegs) 2.000 hours (C-TYPE lever and hood with riveted stainless steel bolts)
Temperature limits	-40 °C... +125 °C (-60 °C... +180 °C with silicone gasket)
Degree of protection according to IEC/EN 60529 (in mated and locked condition)	IP44, IP65/IP69, IP66/IP69, IP66/IP67/IP69, IP66/IP68/IP69
Stone chipping test	ISO 20567-1
Dust and sand blasting test	EN 60068-2-68
Vibration test	EN 61373 cat. 1B, 3 axis EN 60068-2-6 10÷500 Hz 0,35mm/5g break point 60, 1 Hz 3 axis
Shock test	EN 61373 cat. 1B, 3 axis
UV resistance	EN ISO 4892-2, EN 50467 on locked housings
Ozone resistance	EN 50467 on locked housings
Chemical resistance	Cleaning fluids, anti-freezing fluids, mineral and synthetic oils, cooling fluids, diesel fuel

E-Xtreme® series

ADVANTAGES

Metal hoods and housings intended for **extremely demanding environments,** with special protective treatment under painting.

Their **special patented protective coating** assures a high level of protection against the corrosion even in case of long term exposure to salt mist.

- **3.000 hours in salt spray tests**
- **IP66, IP67, IP69** degree of protection (EN 60529)
- corrosion-proof aluminium with a **special coating** under the powder painting colour **RAL 7016 dark grey**
- **FKM** gasket (-40 °C...+180 °C) or **silicone** gasket (-60 °C...+180 °C)
- **V-TYPE lever or C-TYPE lever,** hoods with moulded pegs or riveted stainless steel bolts
- **durable protection** against damage caused by stone chip, icing, salt mist, UV radiations and harsh gases

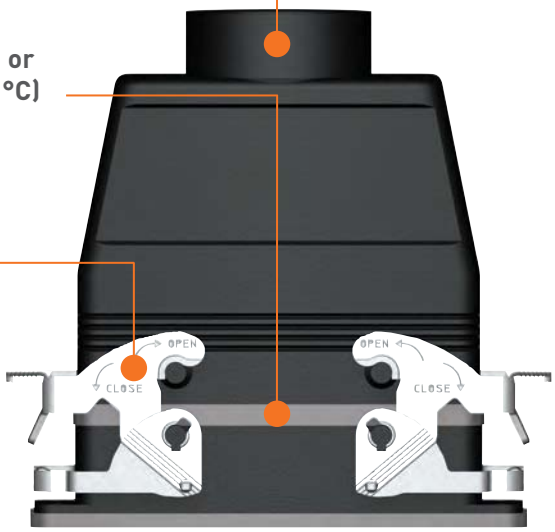

- icing
- very low temperatures
- salt mist
- impact resistant
- UV radiations
- chemical resistant

C7 and M7 - M7A IP67 enclosures V-TYPE lever version E-Xtreme®

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with single lever in stainless steel

3.000 HOURS

surface mounting housings with single lever in stainless steel

2.000 HOURS

description	part No.	part No.	entry M
with lever and gasket, size “44.27”	**C7IE 06 L**		
with lever, size “44.27”		**M7PE 06 L20**	20
with lever, size “44.27”		**M7PE 06 L220**	20 x 2
with lever, high construction, size “44.27”		**M7APE 06 L32**	32
with lever, high construction, size “44.27”		**M7APE 06L232**	32 x 2
with lever, high construction, size “44.27”		**M7APE 06 L40**	40
with lever, high construction, size “44.27”		**M7APE 06L240**	40 x 2

- the lever, due to the vertical closing movement, offers an IP66/IP67 degree of protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME hoods in die cast aluminum with pegs (without adapter, for further information please contact ILME S.p.A.)
- 3.000 hours in salt spray tests (EN ISO 9227) for bulkhead enclosures with V-TYPE lever and hood with moulded pegs (low number of mating cycles)
- 2.000 hours in salt spray tests (EN ISO 9227) for surface mounting housings
- temperature limits: -40 °C ... +125 °C on request -60 °C ... +180 °C with silicone gasket (125 °C - 180 °C with RY inserts)

C7IE L

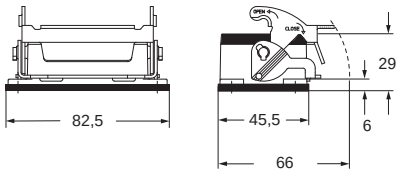

panel cut-out for bulkhead mounting housings



M7PE L - M7APE L

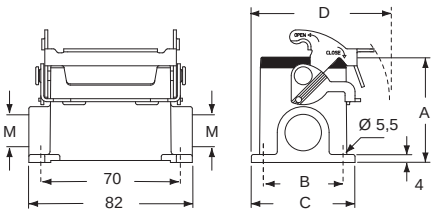

type	A	B	C	D
M7PE 06 L	53	40	52	70
M7APE 06 L	74	45	57	72,5

For bulkhead mounting housings, IP66/IP67 degree of protection is guaranteed for mounting on a sufficiently rigid panel; use suitable length M4 screws (negligible surface buckling when subjected to tightening couple on the fixing screws of 0,8 - 1,2 Nm or deformation caused by the weight of the complete connector).
In case of insufficient rigidity use of C7.. FL counterflanges (page 443) is recommended, in which case use suitable length M4 screws and M4 (on the enclosure) and M4 (on the counterflange) flat/spring washers with M4 locknut.
In addition, the panel surface in contact with the counterflange gasket of the bulkhead mounting housings must be free from defects (deep scratches, grooves, burrs) that could negatively affect the performance of the gasket.

c UL us Type 4/4X/12

EN 60529 IP66 IP67 IP69 IEC 60529

dimensions shown in mm are not binding and may be changed without notice

MH - MF standard version E-Xtreme®

inserts		page:
CDD	24 poles + ⏚	76
CDS	9 poles + ⏚	-
CDSH	9 poles + ⏚	86
CDSH NC	6 poles + ⏚	95
CNE	6 poles + ⏚	110
CSE	6 poles + ⏚	-
CSH	6 poles + ⏚	110
CSH S	6 poles + ⏚	122
CCE	6 poles + ⏚	130
CSS	6 poles + ⏚	148
CQE	10 poles + ⏚	168
MIXO	2 modules	262 - 317

hoods with 2 moulded pegs

3.000 HOURS

hoods with 2 moulded pegs

3.000 HOURS

description	part No.	entry M	part No.	entry M
with pegs, side entry	**MHOE 06 L20M**	20		
with pegs, side entry	**MHOE 06 L25M**	25		
with pegs, side entry, high construction, without adapter 1)			**MFOE 06 L32M**	32
with pegs, side entry, high construction, without adapter 1)			**MFOE 06 L40M**	40
with pegs, top entry 2)	**MHVE 06 L20M**	20		
with pegs, top entry 2)	**MHVE 06 L25M**	25		
with pegs, top entry, high construction, without adapter 1)			**MFVE 06 L32M**	32
with pegs, top entry, high construction, without adapter 1)			**MFVE 06 L40M**	40

1) enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

2) cannot be used with MIXO series

- 3.000 hours in salt spray tests (EN ISO 9227) for bulkhead enclosures with V-TYPE lever and hood with moulded pegs (low number of mating cycles)
- 2.000 hours in salt spray tests (EN ISO 9227) with other E-Xtreme® housings
- temperature limits: -40 °C ... +125 °C on request -60 °C ... +180 °C with silicone gasket (125 °C - 180 °C with RY inserts)
- alternatively, hoods with pegs are coupled with fixed enclosures:
  - C7 E-Xtreme®, IP66/IP67, page 530
  - C-TYPE E-Xtreme®, IP66, page 542

MHOE L..M



MFOE L..M

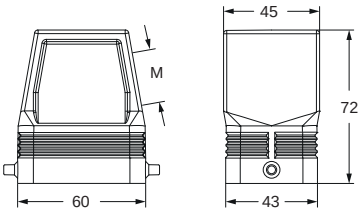

MHVE L..M



MFVE L..M

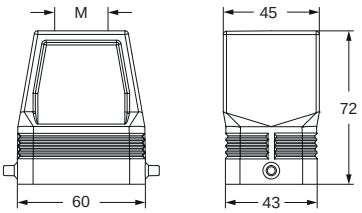

Type 4/4X/12

IP67 if hoods with fused pegs and without adapters coupled with IP67 housings

according to the type of lever also IP69 according to IEC/EN 60529

C7 and M7 - M7A IP67 enclosures V-TYPE lever version E-Xtreme®

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with 2 levers in stainless steel

3.000 HOURS

surface mounting housings with 2 levers in stainless steel

2.000 HOURS

description	part No.	part No.	entry M
with levers and gasket, size “57.27”	**C7IE 10**		
with levers, size “57.27”		**M7PE 10.20**	20
with levers, size “57.27”		**M7PE 10.220**	20 x 2
with levers, high construction, size “57.27”		**M7APE 10.32**	32
with levers, high construction, size “57.27”		**M7APE 10.232**	32 x 2
with levers, high construction, size “57.27”		**M7APE 10.40**	40
with levers, high construction, size “57.27”		**M7APE 10.240**	40 x 2

- the lever, due to the vertical closing movement, offers an IP66/IP67 degree of protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME hoods in die cast aluminum with pegs (without adapter, for further information please contact ILME S.p.A.)
- 3.000 hours in salt spray tests (EN ISO 9227) for bulkhead enclosures with V-TYPE lever and hood with moulded pegs (low number of mating cycles)
- 2.000 hours in salt spray tests (EN ISO 9227) for surface mounting housings
- temperature limits: -40 °C ... +125 °C on request -60 °C ... +180 °C with silicone gasket (125 °C - 180 °C with RY inserts)

C7IE

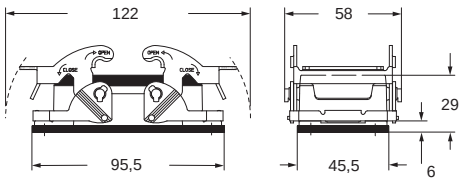

panel cut-out for bulkhead mounting housings

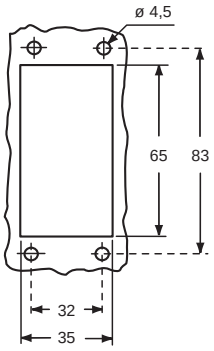

For bulkhead mounting housings, IP66/IP67 degree of protection is guaranteed for mounting on a sufficiently rigid panel; use suitable length M4 screws (negligible surface buckling when subjected to tightening couple on the fixing screws of 0,8 - 1,2 Nm or deformation caused by the weight of the complete connector).
In case of insufficient rigidity use of C7.. FL counterflanges (page 443) is recommended, in which case use suitable length M4 screws and M4 (on the enclosure) and M4 (on the counterflange) flat/spring washers with M4 locknut.
In addition, the panel surface in contact with the counterflange gasket of the bulkhead mounting housings must be free from defects (deep scratches, grooves, burrs) that could negatively affect the performance of the gasket.

M7PE - M7APE

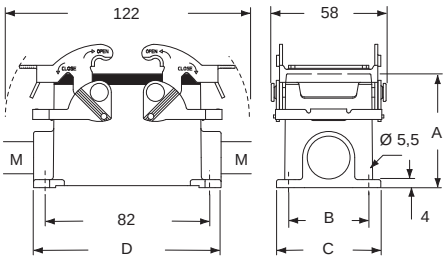

type	A	B	C	D
M7PE 10	57	40	52	93,5
M7APE 10	74	45	57	94

Type 4/4X/12

EN 60529 IP66 IP67 IP69 IEC 60529

dimensions shown in mm are not binding and may be changed without notice

MH - MF standard version E-Xtreme®

inserts		page:
CDD	42 poles + ⏚	78
CDS	18 poles + ⏚	-
CDSH	18 poles + ⏚	87
CNE	10 poles + ⏚	111
CSE	10 poles + ⏚	-
CSH	10 poles + ⏚	111
CSH S	10 poles + ⏚	123
CCE	10 poles + ⏚	131
CMSH	3+2 (aux) poles + ⏚	136
CMCE	3+2 (aux) poles + ⏚	137
CSS	10 poles + ⏚	149
CQE	18 poles + ⏚	169
CX	8/24 poles + ⏚	194
MIXO	3 modules	262 - 317

hoods with 4 moulded pegs

3.000 HOURS

hoods with 4 moulded pegs

3.000 HOURS

description	part No.	entry M	part No.	entry M
with pegs, side entry	**MHOE 10.20M**	20		
with pegs, side entry	**MHOE 10.25M**	25		
with pegs, side entry, high construction, without adapter 1)			**MFOE 10.25M**	32
with pegs, side entry, high construction, without adapter 1)			**MFOE 10.40M**	40
with pegs, top entry 2)	**MHVE 10.20M**	20		
with pegs, top entry	**MHVE 10.25M**	25		
with pegs, top entry, high construction, without adapter 1)			**MFVE 10.32M**	32
with pegs, top entry, high construction, without adapter 1)			**MFVE 10.40M**	40

1) enclosure without adapter, threaded on the body, to be used only with a complete cable gland.
2) can only be used with a complete cable gland (to be purchased separately)

- 3.000 hours in salt spray tests (EN ISO 9227) for bulkhead enclosures with V-TYPE lever and hood with moulded pegs (low number of mating cycles)
- 2.000 hours in salt spray tests (EN ISO 9227) with other E-Xtreme® housings
- temperature limits: -40 °C ... +125 °C on request -60 °C ... +180 °C with silicone gasket (125 °C - 180 °C with RY inserts)
- alternatively, hoods with pegs are coupled with fixed enclosures:
  - C7 E-Xtreme®, IP66/IP67, page 532
  - C-TYPE E-Xtreme®, IP66, page 543

MHOE..M

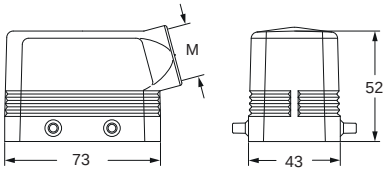

MFOE..M

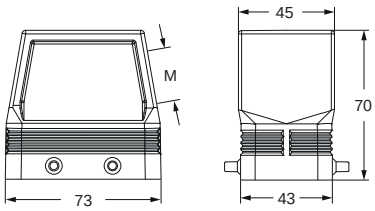

MHVE..M

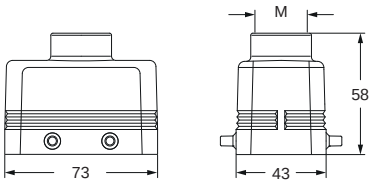

MFVE..M

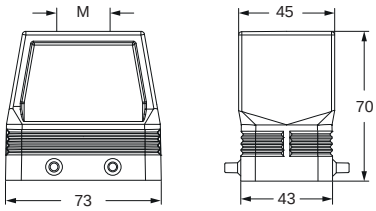

Type 4/4X/12

IP67 if hoods with fused pegs and without adapters coupled with IP67 housings
according to the type of lever also IP69 according to IEC/EN 60529

C7 and M7 - M7A IP67 enclosures V-TYPE lever version E-Xtreme®

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CT, CTS (10A) ***)**	40 poles + ⏚	**156**
CT, CTSE (16A) ***)**	16 poles + ⏚	**162**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with 2 levers in stainless steel

3.000 HOURS

surface mounting housings with 2 levers in stainless steel

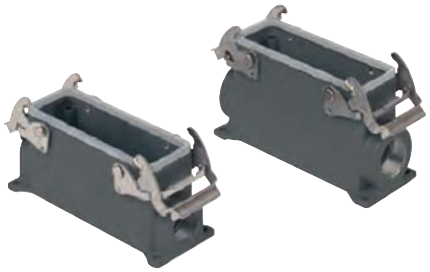

2.000 HOURS

description	part No.	part No.	entry M
with levers and gasket, size “77.27”	**C7IE 16**		
with levers, size ”77.27“		**M7PE 16.25**	25
with levers, size ”77.27“		**M7PE 16.225**	25 x 2
with levers, high construction, size ”77.27“		**M7APE 16.32**	32
with levers, high construction, size ”77.27“		**M7APE 16.232**	32 x 2
with levers, high construction, size ”77.27“		**M7APE 16.40**	40
with levers, high construction, size ”77.27“		**M7APE 16.240**	40 x 2

- the lever, due to the vertical closing movement, offers an IP66/IP67 degree of protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME hoods in die cast aluminum with pegs (without adapter, for further information please contact ILME S.p.A.)
- 3.000 hours in salt spray tests (EN ISO 9227) for bulkhead enclosures with V-TYPE lever and hood with moulded pegs (low number of mating cycles)
- 2.000 hours in salt spray tests (EN ISO 9227) for surface mounting housings
- temperature limits: -40 °C ... +125 °C on request -60 °C ... +180 °C with silicone gasket (125 °C - 180 °C with RY inserts)

C7IE

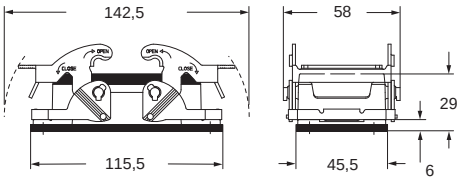

panel cut-out for bulkhead mounting housings

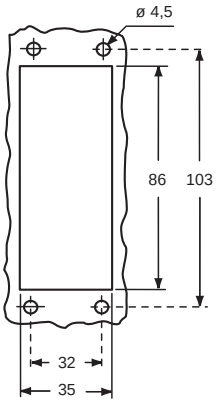

For bulkhead mounting housings, IP66/IP67 degree of protection is guaranteed for mounting on a sufficiently rigid panel; use suitable length M4 screws (negligible surface buckling when subjected to tightening couple on the fixing screws of 0,8 - 1,2 Nm or deformation caused by the weight of the complete connector).
In case of insufficient rigidity use of C7.. FL counterflanges (page 443) is recommended, in which case use suitable length M4 screws and M4 (on the enclosure) and M4 (on the counterflange) flat/spring washers with M4 locknut.
In addition, the panel surface in contact with the counterflange gasket of the bulkhead mounting housings must be free from defects (deep scratches, grooves, burrs) that could negatively affect the performance of the gasket.

M7PE - M7APE

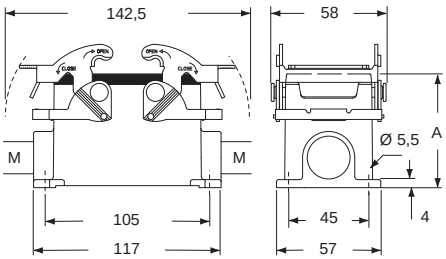

type	A
M7PE 16	63
M7APE 16	81

Type 4/4X/12

EN 60529 IP66 IP67 IP69 IEC 60529

MH - MF standard version E-Xtreme®

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

hoods with 4 moulded pegs

3.000 HOURS

hoods with 4 moulded pegs

3.000 HOURS

description	part No.	entry M	part No.	entry M
with pegs, side entry	**MHOE 16.25M**	25		
with pegs, side entry	**MHOE 16.32M**	32		
with pegs, side entry, high construction, without adapter 1)			**MFOE 16.32M**	32
with pegs, side entry, high construction, without adapter 1)			**MFOE 16.40M**	40
with pegs, top entry 2)	**MHVE 16.25M**	25		
with pegs, top entry	**MHVE 16.32M**	32		
with pegs, top entry, high construction, without adapter 1)			**MFVE 16.32M**	32
with pegs, top entry, high construction, without adapter 1)			**MFVE 16.32M**	40

1) enclosure without adapter, threaded on the body, to be used only with a complete cable gland.
2) can only be used with a complete cable gland (to be purchased separately)

- 3.000 hours in salt spray tests (EN ISO 9227) for bulkhead enclosures with V-TYPE lever and hood with moulded pegs (low number of mating cycles)
- 2.000 hours in salt spray tests (EN ISO 9227) with other E-Xtreme® housings
- temperature limits: -40 °C ... +125 °C on request -60 °C ... +180 °C with silicone gasket (125 °C - 180 °C with RY inserts)
- alternatively, hoods with pegs are coupled with fixed enclosures:
  - C7 E-Xtreme®, IP66/IP67, page 534
  - C-TYPE E-Xtreme®, IP66, page 544

MHOE..M

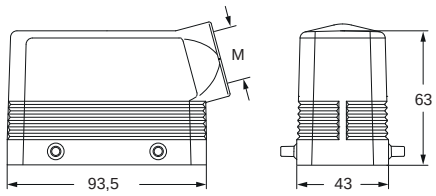

MFOE..M

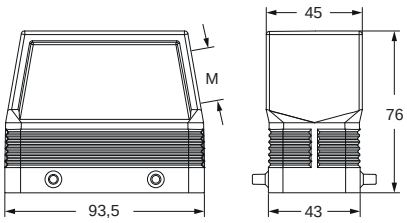

MHVE..M

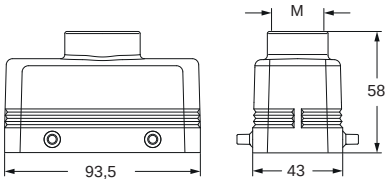

MFVE..M

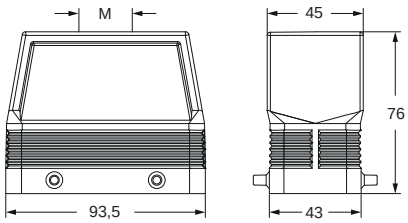

Type 4/4X/12

IP67 if hoods with fused pegs and without adapters coupled with IP67 housings
according to the type of lever also IP69 according to IEC/EN 60529

E-Xtreme®

C7 and M7 - M7A IP67 enclosures V-TYPE lever version E-Xtreme®

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTS (10A) ***)**	64 poles + ⏚	**157**
CT, CTSE (16A) ***)**	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204 and 206**
MIXO	6 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings with 2 levers in stainless steel

3.000 HOURS

surface mounting housings with 2 levers in stainless steel

2.000 HOURS

description	part No.	part No.	entry M
with levers and gasket, size ”104.27”	**C7IE 24**		
with levers, size ”104.27“		**M7PE 24.25**	25
with levers, size ”104.27“		**M7PE 24.225**	25 x 2
with levers, high construction, size ”104.27“		**M7APE 24.32**	32
with levers, high construction, size ”104.27“		**M7APE 24.232**	32 x 2
with levers, high construction, size ”104.27“		**M7APE 24.40**	40
with levers, high construction, size ”104.27“		**M7APE 24.240**	40 x 2

- the lever, due to the vertical closing movement, offers an IP66/IP67 degree of protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME hoods in die cast aluminum with pegs (without adapter, for further information please contact ILME S.p.A.)
- 3.000 hours in salt spray tests (EN ISO 9227) for bulkhead enclosures with V-TYPE lever and hood with moulded pegs (low number of mating cycles)
- 2.000 hours in salt spray tests (EN ISO 9227) for surface mounting housings
- temperature limits: -40 °C ... +125 °C on request -60 °C ... +180 °C with silicone gasket (125 °C - 180 °C with RY inserts)

C7IE

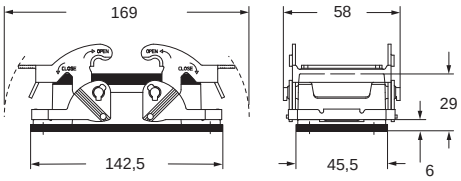

panel cut-out for bulkhead mounting housings

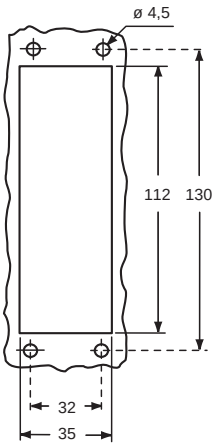

For bulkhead mounting housings, IP66/IP67 degree of protection is guaranteed for mounting on a sufficiently rigid panel; use suitable length M4 screws (negligible surface buckling when subjected to tightening couple on the fixing screws of 0,8 - 1,2 Nm or deformation caused by the weight of the complete connector).
In case of insufficient rigidity use of C7.. FL counterflanges (page 443) is recommended, in which case use suitable length M4 screws and M4 (on the enclosure) and M4 (on the counterflange) flat/spring washers with M4 locknut.
In addition, the panel surface in contact with the counterflange gasket of the bulkhead mounting housings must be free from defects (deep scratches, grooves, burrs) that could negatively affect the performance of the gasket.

M7PE - M7APE

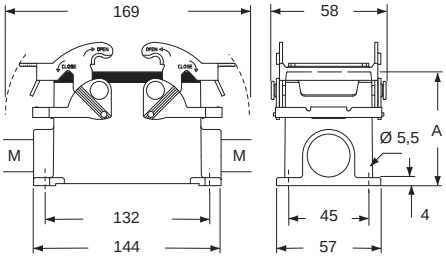

type	A
M7PE 24	63
M7APE 24	81

Type 4/4X/12

EN 60529 IP66 IP67 IP69 IEC 60529

MH - MF standard version E-Xtreme®

inserts		page:
CD	64 poles + ⏚	72
CDD	108 poles + ⏚	81
CDS	42 poles + ⏚	-
CDSH	42 poles + ⏚	89
CNE	24 poles + ⏚	113
CSE	24 poles + ⏚	-
CSH	24 poles + ⏚	113
CSH S	24 poles + ⏚	125
CCE	24 poles + ⏚	133
CMSH	10+2 (aux) poles + ⏚	140
CMCE	10+2 (aux) poles + ⏚	141
CSS	24 poles + ⏚	151
CQE	46 poles + ⏚	171
CQEE	64 poles + ⏚	177
CX	4/8 and 6/6 poles + ⏚	204 and 206
MIXO	6 modules	262 - 317

hoods with 4 moulded pegs

3.000 HOURS

hoods with 4 moulded pegs

3.000 HOURS

description	part No.	entry M	part No.	entry M
with pegs, side entry	**MHOE 24.25M**	25		
with pegs, side entry	**MHOE 24.32M**	32		
with pegs, side entry, high construction, without adapter 1)			**MFOE 24.32M**	32
with pegs, side entry, high construction, without adapter 1)			**MFOE 24.40M**	40
with pegs, top entry 2)	**MHVE 24.25M**	25		
with pegs, top entry	**MHVE 24.32M**	32		
with pegs, top entry	**MHVE 24.40M**	40		
with pegs, top entry, high construction, without adapter 1)			**MFVE 24.32M**	32
with pegs, top entry, high construction, without adapter 1)			**MFVE 24.40M**	40

1) enclosure without adapter, threaded on the body, to be used only with a complete cable gland.
2) can only be used with a complete cable gland (to be purchased separately)

- 3.000 hours in salt spray tests (EN ISO 9227) for bulkhead enclosures with V-TYPE lever and hood with moulded pegs (low number of mating cycles)
- 2.000 hours in salt spray tests (EN ISO 9227) with other E-Xtreme® housings
- temperature limits: -40 °C ... +125 °C on request -60 °C ... +180 °C with silicone gasket (125 °C - 180 °C with RY inserts)
- alternatively, hoods with pegs are coupled with fixed enclosures:
  - C7 E-Xtreme®, IP66/IP67, page 536
  - C-TYPE E-Xtreme®, IP66, page 545

MHOE..M

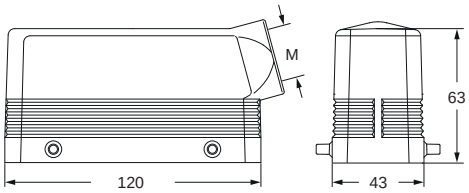

MFOE..M

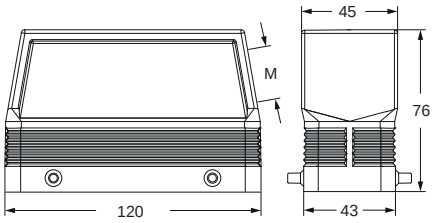

MHVE..M

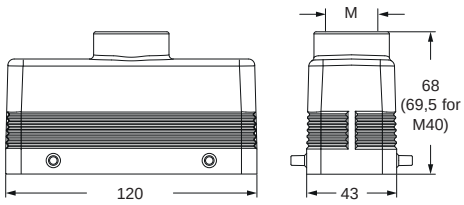

MFVE..M

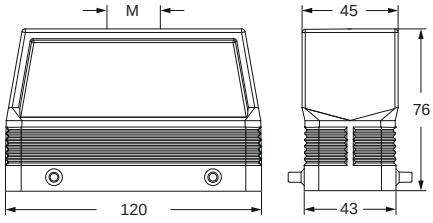

Type 4/4X/12

IP67 if hoods with fused pegs and without adapters coupled with IP67 housings
according to the type of lever also IP69 according to IEC/EN 60529

CK - CKA and MKA for aggressive environments E-Xtreme®

inserts		page:
CK	3 poles + ⏚	58
CK	4 poles + ⏚	58
CKS	3 poles + ⏚	-
CKS	4 poles + ⏚	-
CKSH	3 poles + ⏚	63
CKSH	4 poles + ⏚	63
CD	8 poles	67
CQ4	2 poles + ⏚	182
CQ4 H	2 poles + ⏚	183
CQ4	3 poles + ⏚	184
CQ	5 poles + ⏚	186
CQ	7 poles + ⏚	187
CQ	12 poles + ⏚	189
CQ	21 poles + ⏚	190

bulkhead mounting housings straight and angled

2.000 HOURS

hoods

2.000 HOURS

description	part No.	part No. (entry M20)	part No.	part No. (entry M20)
with stainless steel lever and gasket without cable entry, with stainless steel lever and gasket with cable entry, with stainless steel lever and gasket with cable entry, stainless steel lever and gasket bulkhead hole closed	**CKAXE 03 I** **CKAXE 03 IA**	 **MKAXE IAP20** **MKAXE AP20**		
with pegs, top entry angled, with pegs, side entry				**MKAE V20** **MKAE VA20**
with stainless steel lever, top entry				**MKAXE VG20**
gasket and screw kit for IP66/IP67/IP69 [1] for CK, CKSH, CQ4, CQ 05, inserts	**CKR 65**		**CKR 65**	
gasket and screw kit for IP66/IP67/IP69 [1] for CD 08 inserts	**CKR 65 D**		**CKR 65 D**	

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type may vary upon specific part No.

- 2.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C

CR 03 W
FKM optional gasket for male inserts (to replace the gasket already provided with the insert)

Type 12
Type 4/4X only
with CKR 65 (D)

IP66/IP67/IP69 with CKR 65 (D) [1]

CKAXE I



CKAXE IA

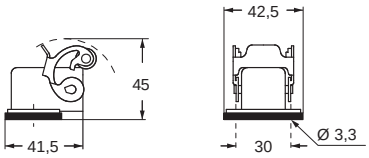

MKAXE IAP (MKAXE AP)

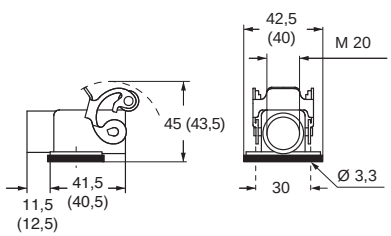

panel cut-out for bulkhead mounting housings



MKAE V



MKAE VA



MKAXE VG



dimensions shown in mm are not binding and may be changed without notice

CK and MKA for aggressive environments E-Xtreme®

inserts		page:
CK	3 poles + ⏚	**58**
CK	4 poles + ⏚	**58**
CKS	3 poles + ⏚	**-**
CKS	4 poles + ⏚	**-**
CKSH	3 poles + ⏚	**63**
CKSH	4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

angled bulkhead mounting housings

2.000 HOURS

description	part No. (entry M20 / M25)
stainless steel lever, M20 fixing thread (•) 1)	**MKAXE IAF20**
stainless steel lever, M25 fixing thread (•) 1)	**MKAXE IAF25**
gasket and screw kit for IP66/IP67/IP69 1) for CK, CKSH, CQ4, CQ 05, inserts	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 1) for CD 07/08 inserts	**CKR 65 D**

(•) locknut supplied on request, see catalogue cable glands (articles AS M20N and AS M25N metallic, AS M20L and AS M25L insulating).

1) To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type may vary upon specific part No.

- 2.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C

CR 03 W
FKM optional gasket for male inserts (to replace the gasket already provided with the insert)

Type 12
Type 4/4X only with CKR 65 (D)

IP66/IP67/IP69 with CKR 65 (D) 1)

MKAXE IAF

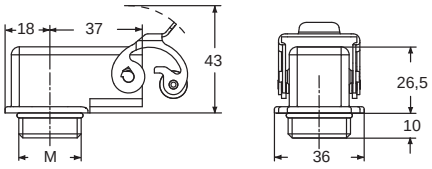

panel cut-out



USE OF THE LOCKNUT

CZ7 - MZ7 and MZ - MZA for aggressive environments E-Xtreme®

inserts		page:
CD	15 poles + ⏚	68
CDA	10 poles + ⏚	98
CSAH	10 poles + ⏚	99
CDC	10 poles + ⏚	104
MIXO	1 module	264 - 316

The covers for L and LG versions cannot be used together with coding pins. If this application is required, please contact ILME SpA.

housings with single lever in stainless steel and cover

2.000 HOURS

hoods with riveted locking pegs and cover

2.000 HOURS

description	part No.	part No	entry M	part No.	entry M
bulkhead mounting housing, with lever and gasket surface mounting housing, with lever	**CZ7IE 15 L**	**MZ7PE 15L225**	25 x 2		
cover with pegs and gasket (for 1 lever enclosures) 1)	**CZCE 15 L**				
with pegs and gasket, side entry				**MZOE 15 L20**	20
with pegs and gasket, side entry				**MZOE 15 L25**	25
with pegs and gasket, side entry, high construction				**MZAOE 15 L25**	25
with pegs and gasket, top entry				**MZVE 15 L20**	20
with pegs and gasket, side entry, high construction				**MZAVE 15 L25**	25
cover with lever (for enclosures with pegs) 2)				**CZ7CE 15 LG**	

- The rigid lever, offers an IP66/IP67/IP69 degree of protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME standard hoods in die cast aluminum with pegs (without adapter, for further information please contact ILME S.p.A.)
- 2.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C
- mechanical life: ≥ 500 cycles

CZ7IE L

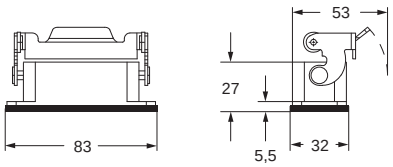

panel cut-out for bulkhead mounting housings

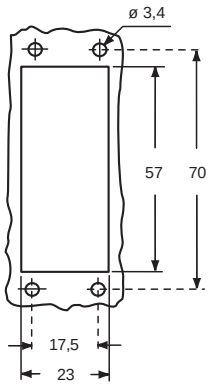

MZOE L



MZAOE L and **MZAVE L**

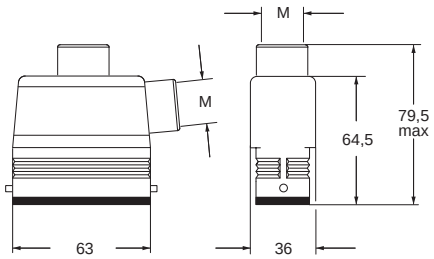

MZ7PE L

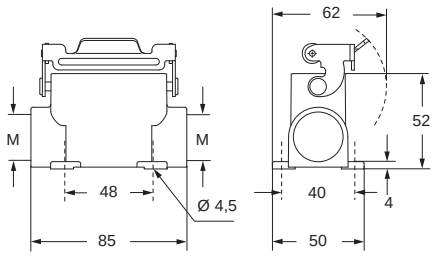

MZVE L



CZCE L



CZ7CE LG

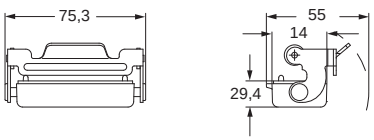

For fixing on housings

eyelet 1)



For fixing on hoods

loop 2)



Type 4/4X/12

EN 60529 IP65 IEC 60529 — insulating cable gland or fittings without gasket

EN 60529 IP66 IP67 IP69 IEC 60529 — cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CZ7 - MZ7 and MZ - MZA for aggressive environments E-Xtreme®

inserts		page:
CD	25 poles + ⏚	69
CDD	38 poles + ⏚	77
CDA	16 poles + ⏚	100
CSAH	16 poles + ⏚	101
CDC	16 poles + ⏚	105

The covers for L and LG versions cannot be used together with coding pins. If this application is required, please contact ILME SpA.

housings with single lever in stainless steel and cover

2.000 HOURS

hoods with riveted locking pegs and cover

2.000 HOURS

description	part No.	part No	entry M	part No.	entry M
bulkhead mounting housing, with lever and gasket surface mounting housing, with lever	**CZ7IE 25 L**	**MZ7PE 25L225**	25 x 2		
cover with pegs and gasket (for 1 lever enclosures) 1)	**CZCE 25 L**				
with pegs and gasket, side entry				**MZOE 25 L20**	20
with pegs and gasket, side entry				**MZOE 25 L25**	25
with pegs and gasket, side entry, high construction				**MZAOE 25 L25**	25
with pegs and gasket, top entry 3)				**MZVE 25 L20**	20
with pegs and gasket, side entry, high construction				**MZAVE 25 L25**	25
cover with lever (for enclosures with pegs) 2)				**CZ7CE 25 LG**	

3) can only be used with a complete cable gland (to be purchased separately)

- The rigid lever, offers an IP66/IP67/IP69 degree of protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME standard hoods in die cast aluminum with pegs (without adapter, for further information please contact ILME S.p.A.)
- 2.000 hours in salt spray tests (EN ISO 9227: 2012)
- temperature limits: -40 °C ... +125 °C
- mechanical life: ≥ 500 cycles

CZ7IE L

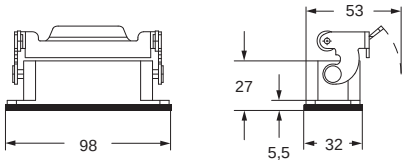

panel cut-out for bulkhead mounting housings

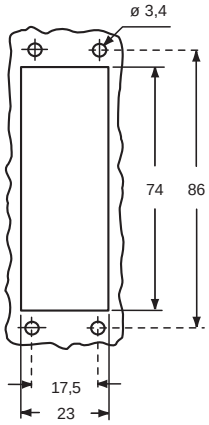

MZOE L



MZAOE L and **MZAVE L**

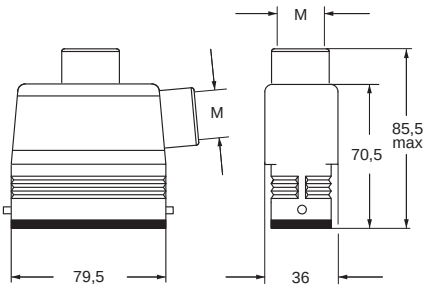

MZVE L 3)

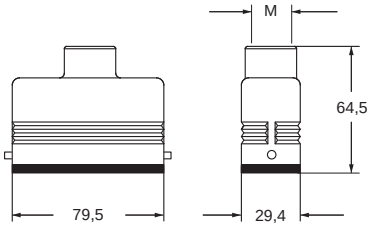

MZ7PE L

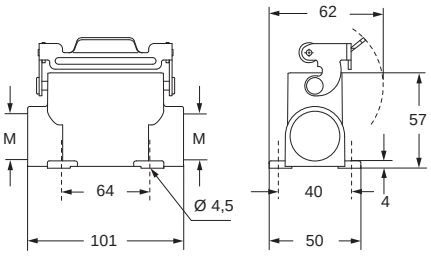

CZCE L



CZ7CE LG

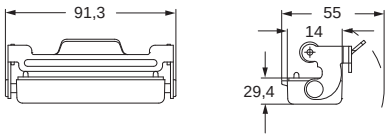

For fixing on housings

eyelet 1)



For fixing on hoods

loop 2)



cULus Type 4/4X/12

IP65 (EN 60529 / IEC 60529) insulating cable gland or fittings without gasket

IP66 IP67 IP69 (EN 60529 / IEC 60529) cable gland with O-Ring gasket

CH and MA for aggressive environments E-Xtreme®

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CT, CTSE (16A) ***)**	6 poles + ⏚	**160**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

***)** only for enclosure CHIE 06 L

housings with single lever and cover

2.000 HOURS

hoods with riveted locking pegs and cover

2.000 HOURS

description	part No.	part No	entry M	part No.	entry M
bulkhead mounting housing, with lever and gasket surface mounting housing, with lever, high construction	**CHIE 06 L**	**MAPE 06 L32**	32		
cover with pegs (for 1 lever enclosures) 1)	**CHCE 06 L**				
with pegs, side entry, high construction with pegs, top entry, high construction				**MAOE 06 L32** **MAVE 06 L32**	32 32
cover with lever (for enclosures with pegs) 2)				**CHCE 06 LG**	
with lever and gasket, top entry, high construction				**MAVE 06 LG32**	32

- 2.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C
- mechanical life: ≥ 500 cycles

Alternatively, hoods with pegs are coupled with fixed enclosures:
- C7 E-Xtreme®, IP66/IP67 stainless steel lever, page 530

CHIE L

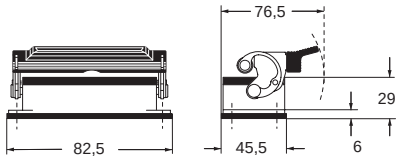

panel cut-out for bulkhead mounting housings



MAPE L

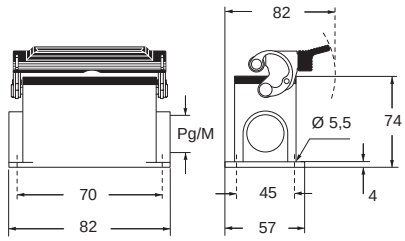

CHCE L

MAOE L

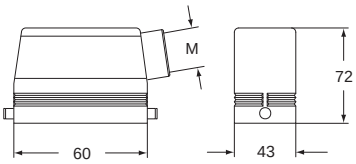

MAVE L

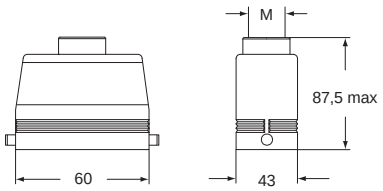

CHCE LG

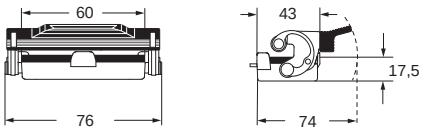

MAVE LG

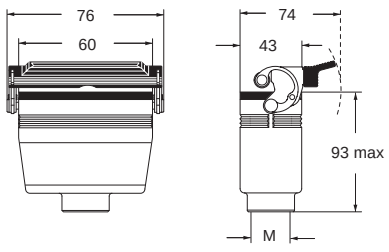

For fixing on housings

eyelet 1)



For fixing on hoods

loop 2)



cULus Type 4/4X/12

IP65 (EN 60529 / IEC 60529) insulating cable gland or fittings without gasket

IP66 IP67 IP69 (EN 60529 / IEC 60529) cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CH and MA for aggressive environments E-Xtreme®

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

***)** only for enclosure CHIE 10

housings with 2 levers and cover

2.000 HOURS

hoods with riveted locking peg and cover

2.000 HOURS

description	part No.	part No	entry M	part No.	entry M
bulkhead mounting housing, with levers and gasket surface mounting housing, with levers, high construction	**CHIE 10**	**MAPE 10.32**	32		
cover with 4 pegs (for enclosures with 2 levers) 1)	**CHCE 10**				
with pegs, side entry, high construction with pegs, top entry, high construction				**MAOE 10.32** **MAVE 10.32**	32 32
cover with 2 levers (for enclosures with 4 pegs) 2)				**CHCE 10 G**	
with levers and gasket, top entry, high construction				**MAVE 10 G32**	32

- 2.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C
- mechanical life: ≥ 500 cycles

Alternatively, hoods with pegs are coupled with fixed enclosures:
- C7 E-Xtreme®, IP66/IP67 stainless steel lever, page 532

For fixing on housings

eyelet 1)



For fixing on hoods

loop 2)



Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

CHIE

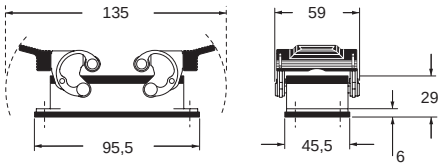

panel cut-out for bulkhead mounting housings

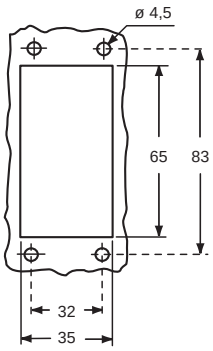

MAPE

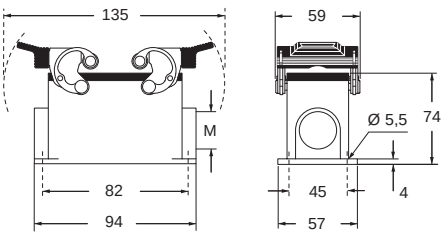

CHCE

MAOE



MAVE



CHCE G

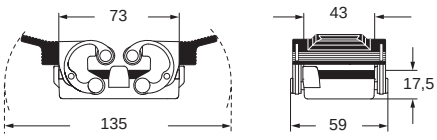

MAVE G

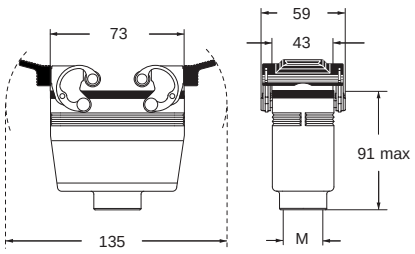

E-Xtreme®

CH and MH - MA for aggressive environments E-Xtreme®

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CT, CTS (10A) ***)**	40 poles + ⏚	**156**
CT, CTSE (16A) ***)**	16 poles + ⏚	**162**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

***)** only for enclosure CHIE 16

housings with 2 levers and cover

2.000 HOURS

hoods with riveted locking pegs and cover

2.000 HOURS

description	part No.	part No	entry M	part No.	entry M
bulkhead mounting housing, with levers and gasket	**CHIE 16**				
surface mounting housing, with levers, high construction		**MAPE 16.32**	32		
cover with 4 pegs (for enclosures with 2 levers) 1)	**CHCE 16**				
with pegs, side entry				**MHOE 16.25**	25
with pegs, side entry				**MHOE 16.32**	32
with pegs, side entry, high construction				**MAOE 16.32**	32
with pegs, side entry, high construction				**MAOE 16.40**	40
with pegs, top entry				**MHVE 16.25**	25
with pegs, top entry				**MHVE 16.32**	32
with pegs, top entry, high construction				**MAVE 16.32**	32
with pegs, top entry, high construction				**MAVE 16.40**	40
cover with 2 levers (for enclosures with 4 pegs 2)				**CHCE 16 G**	
with levers and gasket, top entry, high construction				**MAVE 16 G32**	32

- 2.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C
- mechanical life: ≥ 500 cycles

Alternatively, hoods with pegs are coupled with fixed enclosures:
- C7 E-Xtreme®, IP66/IP67 stainless steel lever, page 534

For fixing on housings

eyelet 1)



For fixing on hoods

loop 2)



Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

CHIE

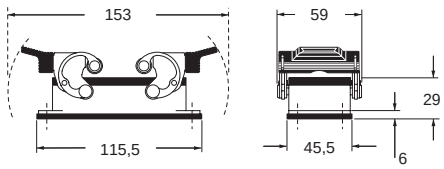

panel cut-out for bulkhead mounting housings

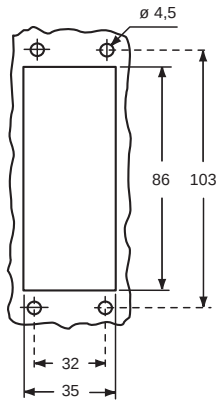

MAPE

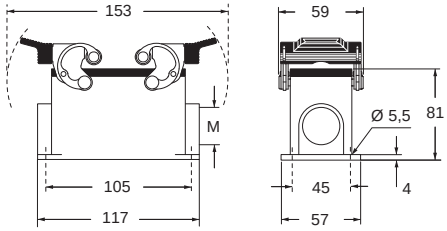

CHCE

MHOE (MAOE)



MHVE (MAVE)



CHCE G



MAVE G

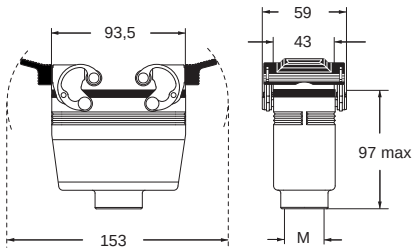

dimensions shown in mm are not binding and may be changed without notice

CH and MH - MA for aggressive environments E-Xtreme®

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTS (10A) ***)**	64 poles + ⏚	**157**
CT, CTSE (16A) ***)**	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204 and 206**
MIXO	6 modules	**262 - 317**

***)** only for enclosure CHIE 24

housings with 2 levers and cover

2.000 HOURS

hoods with riveted locking pegs and cover

2.000 HOURS

description	part No.	part No	entry M	part No.	entry M
bulkhead mounting housing, with levers and gasket	**CHIE 24**				
surface mounting housing, with levers, high construction		**MAPE 24.32**	32		
cover with 4 pegs (for enclosures with 2 levers) 1)	**CHCE 24**				
with pegs, side entry				**MHOE 24.25**	25
with pegs, side entry				**MHOE 24.32**	32
with pegs, side entry, high construction				**MAOE 24.32**	32
with pegs, side entry, high construction				**MAOE 24.40**	40
with pegs, top entry				**MHVE 24.25**	25
with pegs, top entry				**MHVE 24.32**	32
with pegs, top entry, high construction				**MAVE 24.32**	32
with pegs, top entry, high construction				**MAVE 24.40**	40
cover with 2 levers (for enclosures with 4 pegs) 2)				**CHCE 24 G**	
with levers and gasket, top entry, high construction				**MAVE 24 G32**	32

- 2.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C
- mechanical life: ≥ 500 cycles

Alternatively, hoods with pegs are coupled with fixed enclosures:
- C7 E-Xtreme®, IP66/IP67 stainless steel lever, page 536

For fixing on housings

eyelet 1)



For fixing on hoods

loop 2)



Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

CHIE

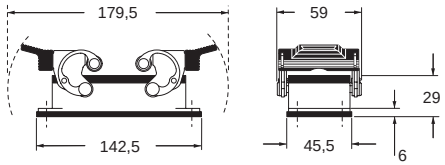

panel cut-out for bulkhead mounting housings

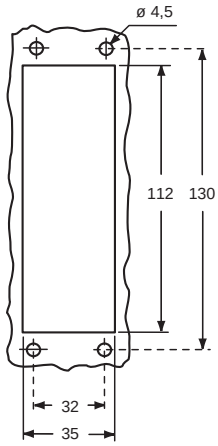

MAPE

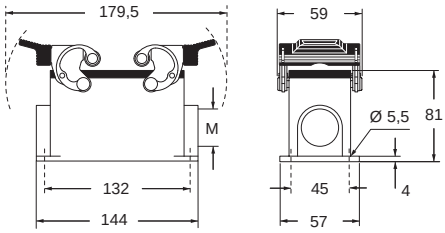

CHCE



MHOE (MAOE)



MHVE (MAVE)



CHCE G

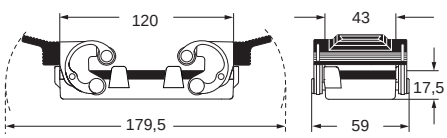

MAVE G

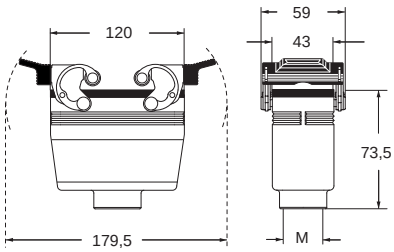

CH and MH for aggressive environments E-Xtreme®

inserts		page:
CD	80 poles + ⏚	**73**
CDD	144 poles + ⏚	**82**
CDS	54 poles + ⏚	**-**
CDSH	54 poles + ⏚	**90**
CNE	32 poles + ⏚	**114**
CSE	32 poles + ⏚	**-**
CSH	32 poles + ⏚	**114**
CSH S	32 poles + ⏚	**126**
CCE	32 poles + ⏚	**134**
CSS	32 poles + ⏚	**152**
CTSE (16A) ***)**	32 poles + ⏚	**164**
CQE	64 poles + ⏚	**172**
CME	12+4 (aux) poles + ⏚	**142**
CMSH	12+4 (aux) poles + ⏚	**142**
CMCE	12+4 (aux) poles + ⏚	**143**
CP	12 poles + ⏚	**179**
MIXO	4 + 4 modules	**262 - 317**

***)** only for enclosure CHIE 32

insert dimensions:
2 x (77,5 x 27) mm

housings with 2 levers and cover

2.000 HOURS

hoods with riveted locking pegs and cover

2.000 HOURS

description	part No.	part No	entry M	part No.	entry M
bulkhead mounting housing, with levers and gasket surface mounting housing, with levers, high construction	**CHIE 32**	**MHPE 32.50**	50		
cover with 4 pegs (for enclosures with 2 levers) 1)	**CHCE 32**				
with pegs, side entry with pegs, top entry				**MHOE 32.40** **MHVE 32.40**	40 40
cover with 2 levers (for enclosures with 4 pegs) 2)				**CHCE 32 G**	
with levers and gasket, top entry				**MHVE 32 G40**	40

- 2.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C
- mechanical life: ≥ 500 cycles

CHIE

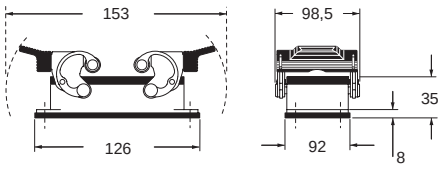

panel cut-out for bulkhead mounting housings

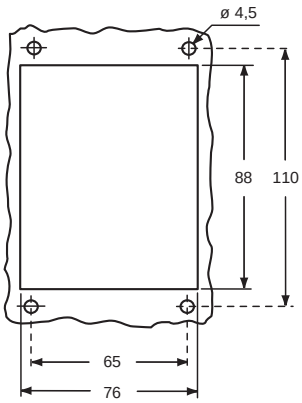

MHPE

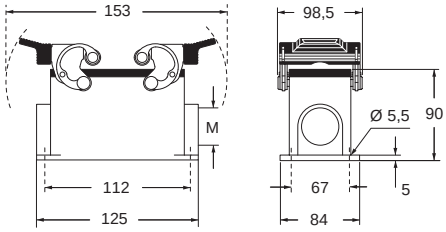

CHCE



MHOE



MHVE

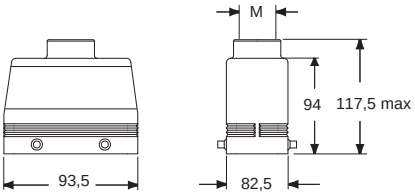

CHCE G

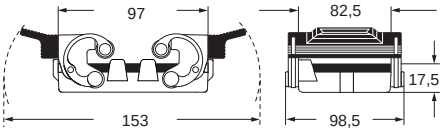

MHVE G

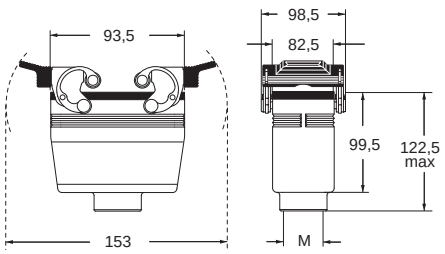

For fixing on housings

eyelet 1)



For fixing on hoods

loop 2)



Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CH and MH for aggressive environments E-Xtreme®

inserts		page:
CD	128 poles + ⏚	**74**
CDD	216 poles + ⏚	**83**
CDS	84 poles + ⏚	**-**
CDSH	84 poles + ⏚	**91**
CNE	48 poles + ⏚	**115**
CSE	48 poles + ⏚	**-**
CSH	48 poles + ⏚	**115**
CSH S	48 poles + ⏚	**127**
CCE	48 poles + ⏚	**135**
CME	20+4 (aux) poles + ⏚	**144**
CMSH	20+4 (aux) poles + ⏚	**144**
CSS	48 poles + ⏚	**153**
CTSE (16A) ***)**	48 poles + ⏚	**165**
CQE	92 poles + ⏚	**173**
MIXO	6 + 6 modules	**262 - 317**

***)** only for enclosure CHIE 48 LS

insert dimensions:
2 x (104 x 27) mm

housings with single lever

2.000 HOURS

hoods with riveted locking pegs

2.000 HOURS

description	part No.	part No	entry M	part No.	entry M
bulkhead mounting housings, with lever, gasket and cover	**CHIE 48 LS**				
surface mounting housings, with lever and cover		**MHPE 48 LS40**	40 x 2		
with pegs, side entry				**MHOE 48 L40**	40
with pegs, top entry				**MHVE 48 L40**	40

- 2.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C
- mechanical life: ≥ 500 cycles

CHIE LS

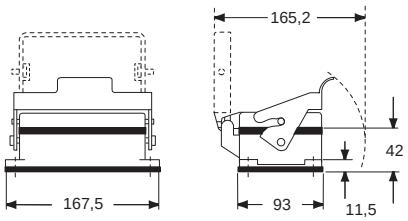

panel cut-out for bulkhead mounting housings

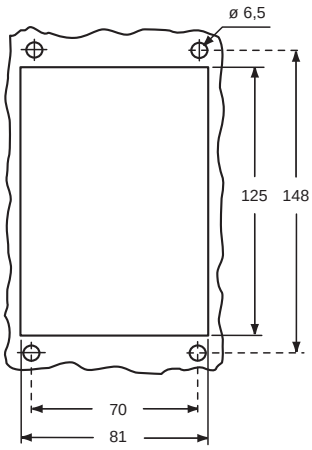

MHPE LS

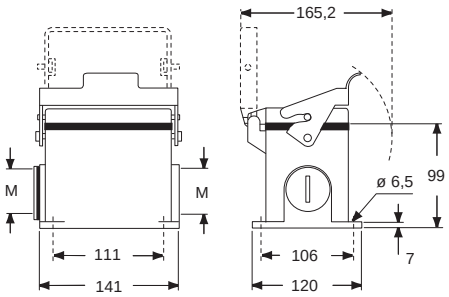

MHOE L

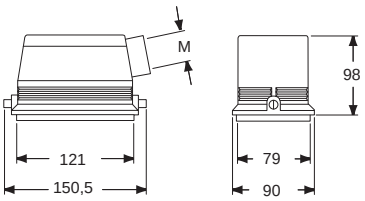

MHVE L

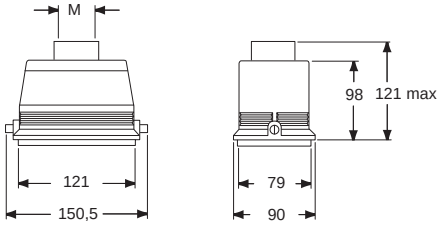

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

CH and MH - MA for aggressive environments E-Xtreme®

inserts		page:
CD	50 poles + ⏚	71
CDD	76 poles + ⏚	80
CDA	32 poles + ⏚	102
CSAH	32 poles + ⏚	103
CDC	32 poles + ⏚	106

insert dimensions:
2 x (66 x 16) mm

housings with 2 levers and cover

2.000 HOURS

hoods with riveted locking pegs and cover

2.000 HOURS

description	part No.	part No	entry M	part No.	entry M
bulkhead mounting housings, with levers and gasket	**CHIE 50**				
bulkhead mounting housings, with levers		**MHPE 50.32**	32		
surface mounting housing, with levers		**MHPE 50.240**	40 x 2		
cover with 4 pegs (for housings with 2 levers) 1)	**CHCE 50**				
with pegs, side entry				**MHOE 50.25**	25
with pegs, side entry				**MHOE 50.32**	32
with pegs, side entry, high construction				**MAOE 50.320**	32
with pegs, top entry, high construction				**MAVE 50.32**	32
cover with 2 levers (for enclosures with 4 pegs) 2)				**CHCE 50 G**	

- 2.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C
- mechanical life: ≥ 500 cycles

For fixing on housings

eyelet 1)



For fixing on hoods

loop 2)



Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

CHIE

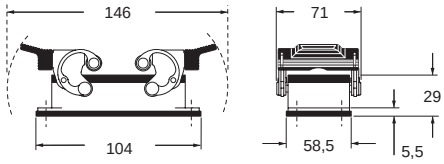

panel cut-out for bulkhead mounting housings

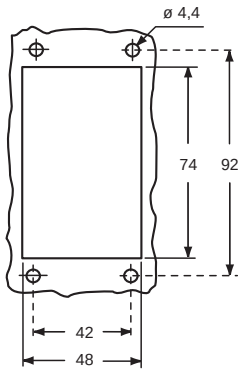

MHPE

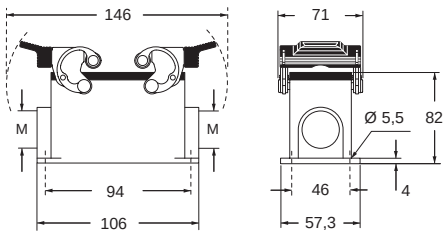

MHPE



MHOE (MAOE)



MAVE



CHCE G

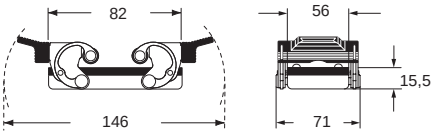

dimensions shown in mm are not binding and may be changed without notice

OPEN
CLOSE
OPEN
CLOSE

CG and MG high protection IP68 version E-Xtreme®

inserts		page:
CDD	24 poles + ⏚	76
CDS	9 poles + ⏚	-
CDSH	9 poles + ⏚	86
CDSH NC	6 poles + ⏚	95
CNE	6 poles + ⏚	110
CSE	6 poles + ⏚	-
CSH	6 poles + ⏚	110
CSH S	6 poles + ⏚	122
CCE	6 poles + ⏚	130
CSS	6 poles + ⏚	148
CQE	10 poles + ⏚	168
MIXO	2 modules	262 - 317

bulkhead mounting housings screw locking

3.000 HOURS

surface mounting housings screw locking

3.000 HOURS

description	part No.	part No.	entry M
with gasket, size “44.27”	CGIE 06		
size “44.27”		MGPE 06.32	32

- 3.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C
  on request -60 °C ... +180 °C with silicone gasket
  (>125 °C up to 180 °C with RY inserts)

CGIE



panel cut-out for bulkhead mounting housings

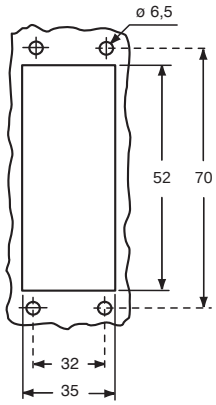

MGPE

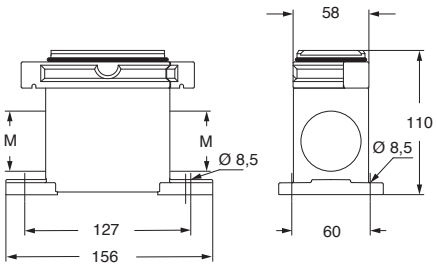

CGCP FX
Dust protection cover
(from page 697)

EN 60529 IP66 IP68 IP69 IEC 60529 according to IEC/EN 60529

dimensions shown in mm are not binding and may be changed without notice

CG and MG high protection IP68 version E-Xtreme®

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

hoods, screw locking

3.000 HOURS

covers, screw locking

3.000 HOURS

description	part No.	entry M	part No.
with side entry			
size “44.27”	**MGOE 06.25**	25	
size “44.27”	**MGOE 06.32**	32	
with top entry			
size “44.27”	**MGVE 06.25**	25	
size “44.27”	**MGVE 06.32**	32	
size “44.27”	**MGVE 06.40**	40	
size “44.27”			**CGCE 06**

- 3.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C
  on request -60 °C ... +180 °C with silicone gasket
  (>125 °C up to 180 °C with RY inserts)

MGOE and **MGVE**

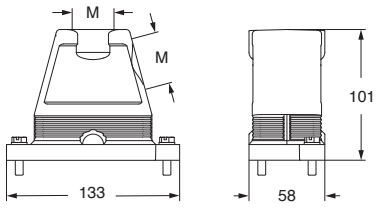

CGCE



CGCP MB
Dust protection cover
(from page 697)

EN 60529 IP66 IP68 IP69 IEC 60529 according to IEC/EN 60529

CG and MG high protection IP68 version E-Xtreme®

inserts		page:
CDD	42 poles + ⏚	78
CDS	18 poles + ⏚	-
CDSH	18 poles + ⏚	87
CNE	10 poles + ⏚	111
CSE	10 poles + ⏚	-
CSH	10 poles + ⏚	111
CSH S	10 poles + ⏚	123
CCE	10 poles + ⏚	131
CMSH	3+2 (aux) poles + ⏚	136
CMCE	3+2 (aux) poles + ⏚	137
CSS	10 poles + ⏚	149
CQE	18 poles + ⏚	169
CX	8/24 poles + ⏚	194
MIXO	3 modules	262 - 317

bulkhead mounting housings screw locking

3.000 HOURS

surface mounting housings screw locking

3.000 HOURS

description	part No.	part No.	entry M
with gasket, size “57.27”	**CGIE 10**		
size “57.27”		**MGPE 10.32**	32

- 3.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C
  on request -60 °C ... +180 °C with silicone gasket
  (>125 °C up to 180 °C with RY inserts)

CGIE



panel cut-out for bulkhead mounting housings

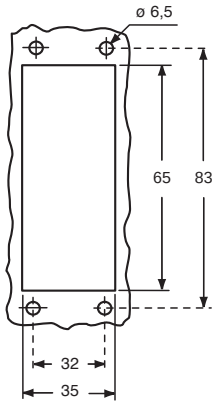

MGPE

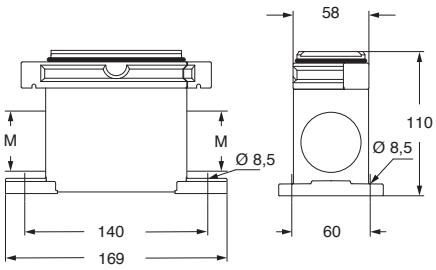

CGCP FX
Dust protection cover
(from page 697)

according to IEC/EN 60529

dimensions shown in mm are not binding and may be changed without notice

CG and MG high protection IP68 version E-Xtreme®

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

hoods, screw locking

3.000 HOURS

covers, screw locking

3.000 HOURS

description	part No.	entry M	part No.
with side entry			
size “57.27”	**MGOE 10.25**	25	
size “57.27”	**MGOE 10.32**	32	
with top entry			
size “57.27”	**MGVE 10.25**	25	
size “57.27”	**MGVE 10.32**	32	
size “57.27”	**MGVE 10.40**	40	
size “57.27”			**CGCE 10**

- 3.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C
  on request -60 °C ... +180 °C with silicone gasket
  (>125 °C up to 180 °C with RY inserts)

MGOE and **MGVE**

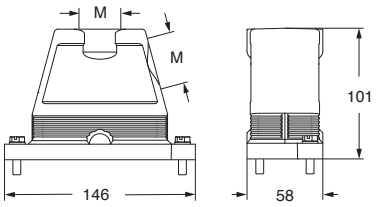

CGCE



CGCP MB
Dust protection cover
(from page 697)

EN 60529 IP66 IP68 IP69 IEC 60529 according to IEC/EN 60529

CG and MG high protection IP68 version E-Xtreme®

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

bulkhead mounting housings screw locking

3.000 HOURS

surface mounting housings screw locking

3.000 HOURS

description	part No.	part No.	entry M
with gasket, size “77.27”	**CGIE 16**		
size “77.27”		**MGPE 16.40**	40

- 3.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C
  on request -60 °C ... +180 °C with silicone gasket
  (>125 °C up to 180 °C with RY inserts)

CGIE



panel cut-out for bulkhead mounting housings

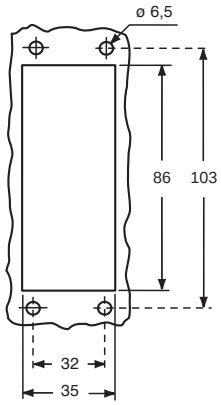

MGPE

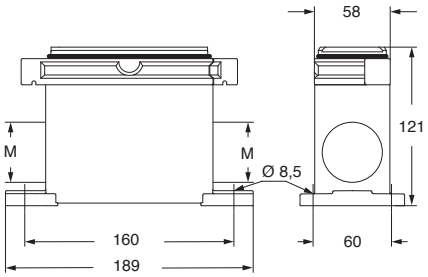

CGCP FX
Dust protection cover
(from page 697)

according to IEC/EN 60529

dimensions shown in mm are not binding and may be changed without notice

CG and MG high protection IP68 version E-Xtreme®

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

hoods, screw locking

3.000 HOURS

covers, screw locking

3.000 HOURS

description	part No.	entry M	part No.
with side entry			
size “77.27”	**MGOE 16.32**	32	
size “77.27”	**MGOE 16.40**	40	
size “77.27”	**MGOE 16.50**	50	
with top entry			
size “77.27”	**MGVE 16.25**	25	
size “77.27”	**MGVE 16.225**	25 x 2	
size “77.27”	**MGVE 16.32**	32	
size “77.27”	**MGVE 16.40**	40	
size “77.27”	**MGVE 16.50**	50	
size “77.27”			**CGCE 16**

- 3.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C
  on request -60 °C ... +180 °C with silicone gasket
  (>125 °C up to 180 °C with RY inserts)

MGOE and **MGVE**

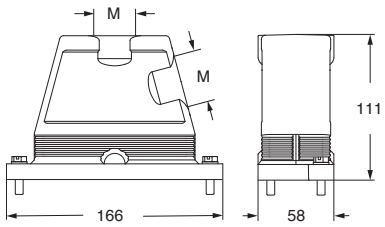

CGCE



CGCP MB
Dust protection cover
(from page 697)

according to IEC/EN 60529

CG and MG high protection IP68 version E-Xtreme®

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

bulkhead mounting housings
screw locking

3.000 HOURS

surface mounting housings
screw locking

3.000 HOURS

description	part No.	part No.	entry M
with gasket, size “104.27”	**CGIE 24**		
size “104.27”		**MGPE 24.40**	40
size “104.27”		**MGPE 24.240**	40 x 2

- 3.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C
  on request -60 °C ... +180 °C with silicone gasket
  (>125 °C up to 180 °C with RY inserts)

CGIE



panel cut-out for bulkhead mounting housings

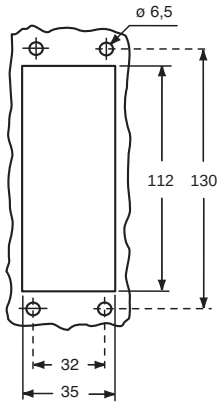

MGPE

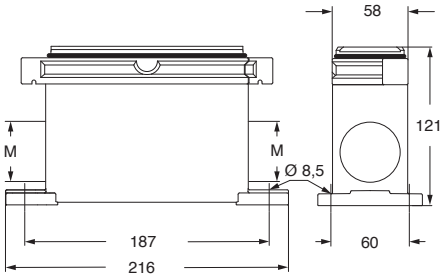

CGCP FX
Dust protection cover
(from page 697)

according to IEC/EN 60529

dimensions shown in mm are not binding and may be changed without notice

CG and MG high protection IP68 version E-Xtreme®

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

hoods, screw locking

3.000 HOURS

covers, screw locking

3.000 HOURS

description	part No.	entry M	part No.
with side entry			
size “104.27”	**MGOE 24.32**	32	
size “104.27”	**MGOE 24.40**	40	
size “104.27”	**MGOE 24.50**	50	
with top entry			
size “104.27”	**MGVE 24.325**	25 x 3	
size “104.27”	**MGVE 24.32**	32	
size “104.27”	**MGVE 24.232**	32 x 2	
size “104.27”	**MGVE 24.40**	40	
size “104.27”	**MGVE 24.240**	40 x 2	
size “104.27”	**MGVE 24.50**	50	
size “104.27”			**CGCE 24**

- 3.000 hours in salt spray tests (EN ISO 9227)
- temperature limits: -40 °C ... +125 °C
  on request -60 °C ... +180 °C with silicone gasket
  (>125 °C up to 180 °C with RY inserts)

MGOE and **MGVE**

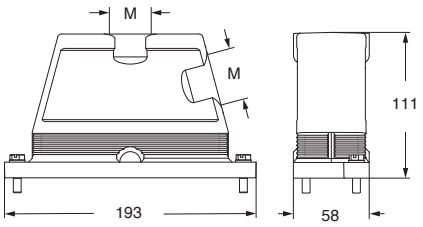

CGCE



CGCP MB
Dust protection cover
(from page 697)

according to IEC/EN 60529

EMC

Directives and standards

The concept of **Electromagnetic Compatibility** (EMC) is the reversal in the positive sense of what was until recently known as **Electromagnetic Interference** (EMI): **we have electromagnetic compatibility** between a device and the environment (including surrounding equipment) when there is no reciprocal electromagnetic interference or when this is within tolerable limits.

In other words, **to obtain electromagnetic compatibility,** measures must be adopted aimed at bringing the electrical or electronic equipment to levels of **emission** and electromagnetic **immunity** against electromagnetic interference such that it continues to function properly without causing disturbance to other equipment present in the surrounding environment.

In the electrical equipment of industrial machines, rectangular multipole connectors with their metallic enclosures are widely used due to their high standards of safety, reliability, mechanical robustness and resistance to corrosion and pollution.

These connectors are passive electromechanical components: they do not generate electromagnetic interference and are not disturbed in their function. Taken by themselves, therefore, they fall outside the scope of Directive 2014/30/EU on electromagnetic compatibility and the CE marking is therefore not required for EMC aspects: it still applies, however, under the Low Voltage Directive 2014/30/EU.

It is rather the devices and industrial equipment mentioned above, in which the connectors are for the most part used (e.g. on-board electric panels) which, taken as a whole, must be CE marked also for EMC aspects, having to meet the essential requirements of the EMC Directive.

For the EMC in **industrial environments** two European standards are in force, not intended for specific equipment, which regulate the **emissions** and **immunity** of devices.

These are therefore generic standards, one for **emissions EN 61000-6-4**:2007 + A1:2011 (class. CEI 210-66:2007 + 210-66;V1:2011, equivalent to IEC 61000-4:2006 + A1:2010) and one for **immunity EN 61000-6-2**:2005 (class. CEI 210-54:2006, equivalent to IEC 61000-6-2:2005) [1)].

These apply in the absence of provisions in the particular EMC product standards or in the total absence of the latter.

For industrial equipment, when appliances are not intentionally designed to generate radio frequencies[2)], the latter case applies (no particular standards). In the European standards for switchgear and controlgear (EN 60947-1) and in those for the electrical equipment of machines EN 60204-1 emission and immunity limits have been for some time in the process of being issued, as well as their verification, if necessary, with reference to above mentioned EMC standards for industrial environment.

EMC testing should not be performed on individual components, but rather on the entire apparatus, sometimes not without inconsiderable logistical difficulties, due to their size, reproducing as far as possible their operation in real operating conditions.

It is therefore incorrect to assign limits of electromagnetic emission and immunity imposed on the equipment on, for example, electrical connectors used as components of the equipment.

*1) There are two similar standards for the other standardized environment, defined as **residential, commercial and light industrial environment**, respectively EN 61000-6-3:2007 + A1:2011 (class. CEI 210-65:2007 + CEI 2010-61;V1:2011) for emissions (equivalent to IEC 61000-6-3:2006 + A1:2010) and EN 61000-6-1:2007 (class. CEI 210-64:2007) for immunity (equivalent to IEC 61000-6-1:2006).*

2) In which case for such devices, called ISM (industrial, scientific, medical) the – EN 55011:2007 standard for emission of radio interference would apply.

Electromagnetic interference and ILME connectors

Many years ago the entry into force of the first EMC European Directive, with requirement for electrical and electronic equipment to comply with the levels of electromagnetic pollution dictated by the standards, brought renewed interest in all the appropriate steps to mitigate the effects of electromagnetic interference.

Electromagnetic interference can occur in two forms: **conducted or radiated**. With reference to connectors, **conducted interference** transmitted on conductors wired to the connectors, is, for example: harmonics, superimposed on the voltage of the power supply at 50 Hz, caused by withdrawal of biased current or by electromechanical or electronic switches, or radio frequency interference noise which is inductively or capacitively coupled with the cable, overlapping transported signals.

This is characterized by frequency and amplitude (intensity) and can be filtered to some extent, in both in the outgoing (emission) and incoming (immunity) directions, only via in-line passive electrical filters, which the designer of the electrical equipment must foresee since he is the only one with a knowledge of all the terms of the problem [3].

Radiated interference, transmitted in the form of electromagnetic waves, is characterized by the values of amplitude of associated electric (V/m) and magnetic fields and with the frequency or frequency band (rarely is this located on a single frequency, more often it occupies a band). This may come from inside the device: in this case it is necessary to mitigate emissions. Or from the outside, in which case it is necessary to raise immunity.

By test convention, **interference with frequency up to 30 MHz** is considered to be conducted and **irradiated with frequency above 30 MHz up to 1 GHz.**

The sources of electromagnetic interference are classified as **intentional** and **unintentional**.

The first (e.g. radio-telecommunication antennas, mobile phones) use high frequency electromagnetic fields for functional reasons. For the second (e.g. ignition of internal combustion engines, electric arc furnaces) they are a by-product.

In most industrial applications, compared to the overall EMC issues of a device, connectors (inserts + enclosures), taken by themselves, are not the priority concern of the designer.

The enclosures of the low-frequency industrial connectors, taking shape as a barrier to a “shell”, are implicitly a “peripheral” aspect: the designer of electrical equipment / electronics will take care first of all the “core” of the EMC problem, that of the active components tinside of their systems, by limiting the emissions and enhance immunity.

In fact, to have significant problems due to radiation through the opening constituted by a connector enclosure on a control panel, there must be a particularly “efficient” radiofrequency source inside the panel.

Essentially, significant design errors must have been committed regarding the EMC of the entire equipment.

In certain cases the coupling of connectors may constitute the weak link in the chain, for example where it is not possible for functional reasons to further reduce interference of the electronics inside the control panel. In these cases one must rely on the efficiency of the shield. Even if the equipment manufacturer uses shielded fabrication and high quality shielded cables, continuity and homogeneity of such shielding could be significantly degraded precisely in the passage between free connector and panel.

In dealing with electromagnetic compatibility of electrical equipment of an industrial machine, a second aspect to be addressed as a priority is the presence of large quantities of interface cabling.

In these cases, the significant attenuation of the shield necessary for the cables must not be jeopardised by the connector enclosures due to imperfect earthing of the cable shield.

It should nevertheless be pointed out that increasing shielding may not be sufficient to solve possible problems and should be considered as a complementary choice.

[3] *For example, for trapezoidal D-Sub type connectors for digital data transmission, there are connectors on the market which incorporate “general purpose” filters for any conducted interference.*

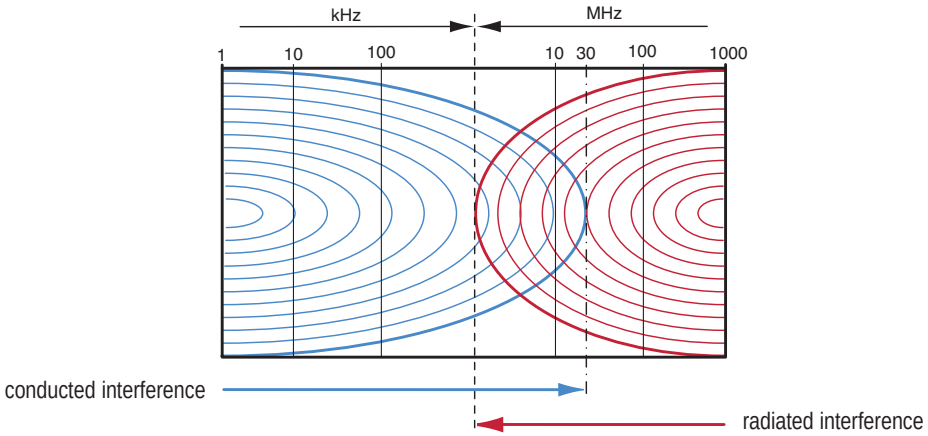

Electromagnetic shielding of connectors: fundamental principles

To consider the electromagnetic compatibility aspects of an electrical/electronic device in the final verification rather than in the design phase almost always leads to a substantial increase in overall development time and costs.

The designer who deals with electromagnetic compatibility issues should use the same rules and the same precautions regardless of whether the equipment is subsequently shielded.

Numerous products meet electromagnetic compatibility standards without the use of shielding. However, when all other limiting interventions are impossible or uneconomical, recourse to increased efficiency of the electromagnetic shield is the only answer.

An **electromagnetic shield** is a barrier to the transmission of electromagnetic fields.

To generalise the concept to include conducted emissions, a filter can be considered as a shield. We will restrict ourselves here to considering a shield as a barrier to radiated emissions.

The metallic containers which completely enclose an electrical/electronic device or a part thereof **constitute an electromagnetic shield**, with the task of preventing the emissions of electrical/electronic devices or a part thereof to radiate outside the equipment container itself.

A cable connected to a device is part of the same for the purposes of electromagnetic compatibility.

A flexible multicore cable is shielded by surrounding the insulated conductors with a conductive metal mesh.

An electromagnetic shield is characterized by a parameter which measures its efficiency.

The shielding attenuation is the ratio between the radiated power generated inside a device and the residual radiated power outside the unit. The attenuation introduced by a shield can be measured by comparing the absence and presence of the shield.

Shielding attenuation is measured in dB (decibel). 20 dB is equivalent to an order of magnitude, i.e. attenuation of a factor of 10, 40 dB = attenuation of a factor of 100, etc.

To obtain large shielding attenuation values (e.g. 100 dB) the shield must completely enclose the electronic device and not have any means of access from the outside, such as openings, joints, cracks or cables. Any means of access through a shield, if not properly treated, can drastically reduce the efficiency of the shield.

The passage of a cable through a shield must be properly considered. One common method is to place filters on the cable at which it crosses the shield. Another is to use shielded cables, with their shields connected for the entire perimeter to the equipment shield.

To reduce radiated emissions of a cable, the cable shield must be connected to a point with zero potential (an ideal ground therefore, not the “signal” ground of an electronic circuit).

To achieve electromagnetic shielding conductive materials (metals) are used.

Shielding attenuation depends mainly on the electrical conductivity of the material and the thickness of the shield.

Rectangular or square connectors – special case – intrinsically *anisotropic*, are more difficult to shield and less predictable in behaviour than circular connectors (isotropic geometry) used, not by accident, with coaxial terminations for RF applications.

Connector enclosures are typically made of aluminium die cast alloy, an excellent metal for shielding electric fields because it is an excellent conductor. It is also better than steel in shielding phenomena of an impulsive nature (typical example is electrostatic discharge) which cause interference in the high frequency spectrum and is among the most insidious and dangerous.

It is important to ensure electrical continuity along the boundary of the enclosure, not only to ensure high shielding attenuation but also to avoid accumulation of static electricity.

It is important not to “economically” tip the balance of a screening system which is only as effective as its weakest component.

A good shielded cable has a shield attenuation greater than that attributable to the connector, but only for very small lengths of cable (e.g. one metre). When the length of the shielded cable increases, shield attenuation is significantly reduced.

This indicates that it is much more important to improve the shield quality of cables, which are mainly responsible for radiated interference emissions and in an electrical system are often present in considerable quantity, before that of the connector.

What dramatically increases the efficiency of shielding is the quality of its connection to the conductor: EMC cable glands create a very homogeneous and continuous contact between the cable shield and connector enclosure.

EMC connector enclosures and accessories

In light of the foregoing, ILME has developed for the designers of the electrical/electronic equipment of machines the new series of EMC connector enclosures and accessories.
Available as bulkhead mounting housings and hood versions in the various sizes 44.27, 57.27, 77.27 and 104.27, they maintain the robustness and reliability of standard types whilst possessing increased high frequency shielding characteristics.
In the development of EMC enclosures recourse to geometrical modifications compared to the standard versions has been avoided so as not to affect their dimensional compatibility with the latter: in using EMC enclosures the equipment designer need not foresee any changes in layout due to increased dimensions and need not renounce the convenience of the traditional locking lever closures.
The increase in shielding attenuation is achieved primarily by providing a homogeneous and as uniform as possible electrical continuity of earthing to the cable shield in the connection between cable and hood and between hood and housing.
At the contact between the bulkhead-mounting housings and the fixing surface a special conductive gasket is foreseen.

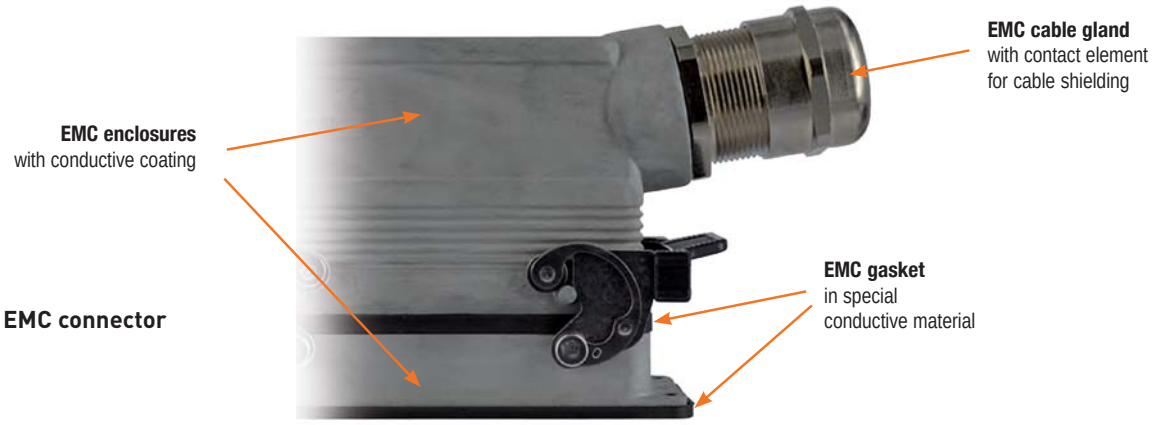

The enclosure surfaces are treated to make them extremely conductive while maintaining the necessary corrosion resistance.

The bulkhead mounting housing has a special conductive gasket.

For best results the surface underneath the gasket should be conductive. Since the use of this enclosure system presupposes the use of shielded cables, the hood should comprise a special cable gland with anchoring device for the cable shield.

These metal cable glands ensure IP66 protection rating, are resistant to corrosion and equipped internally with a contact element with geometry that ensures uniform earthing of the cable conductor shield on the metal shell of the hood.

Even with standard enclosures (not EMC), the contact with an EMC cable gland between the cable shield and the connector housing, permanently earthed through to the connector insert inside, produces an attenuation of electromagnetic interference on average higher (by approx. 6 – 15 dB up to 600 MHz, corresponding to a factor of 2 – 5,6) than the attenuation achieved by connecting the shield mesh directly to the earth terminal of the connector insert.

The reasons for this are:

- the uniform 360° contact via the contact device of the EMC cable gland avoids what instead happens when the shield mesh is earthed to the earth terminal of the connector, i.e. the discontinuity of the shield which necessarily opens precisely around the connector;
- more efficient distribution of induced current circulating on the shield mesh;
- directly involving the metal shell constituted by the enclosure avoids transmitting interference to the connector, as happens when the shield is connected to the earth terminal of the connector.

Experimental tests

Tests for measurement of the shielding of ILME special EMC enclosures for multipole rectangular connectors for industrial use were conducted at the CESI EMC Laboratory in Milan, national notified body for certification under the EMC Directive. Shielding attenuation of a component is defined as the ratio of the power radiated within the component and the maximum interference power outside the component in the room (**VG 95214-11**).

For a connector it can be expressed, in analogy with cables, as a function of transfer impedance, which is the ratio between the voltage induced in the shield and the current flowing outside the same. The transfer impedance measurement is a widely used and accepted method to determine shielding attenuation of coaxial cables and connectors.

Only recently, due to the increase in digital data transmission speeds and the increase in frequencies of transmitted signals, the issue of identifying efficient and repeatable methods for measuring shielding efficiency, also for connectors traditionally considered low frequency, has been addressed at a regulatory level.

An experimental method for determining surface transfer impedance of coupled low frequency connectors is still being studied by IEC.

The method chosen by ILME for verification of its system of EMC enclosures and accessories is the **line injection method** based on German military standards **VG 95214-10** and **VG 95214-11.**

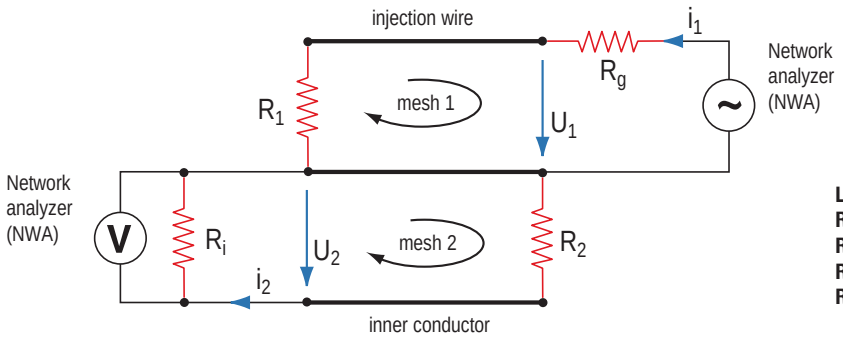

Legend:
R_g = output impedance of the signal generator (NWA port1)
R_1 = termination resistance of the generator circuit (mesh 1)
R_i = input impedance of the measuring instrument (NWA port 2)
R_2 = termination resistance of the generator circuit (mesh 2)

A signal with a frequency of 0,1 MHz to 1000 MHz generated by port 1 of the measuring device (a network analyzer with 75 Ω output impedance) circulates in the mesh 1 consisting of an insulated conductor (injection wire) resting on the surface of two coupled enclosures (shield), terminating on a calibrated (and shielded) resistance of 75 Ω. As a result of the current i_1 injected in the mesh 1, an induced voltage U_2 is generated in the mesh 2, consisting of an inner pick-up conductor connected to two contacts at the center of the connector inserts, terminated on another calibrated resistance of 75 Ω (shielded), in turn earthed on the coupled enclosures which act as a shield. The voltage is measured on port 2 of the measuring device for S parameters (scattering parameters). The network analyzer sees the device under test as a filter and calculates the measurement providing a graph illustrating the shielding attenuation (measured in dB) as a function of frequency in MHz.

The tests were performed on:
- coupled standard enclosures
- coupled EMC enclosures

The results are summarized in the diagrams below.

Figure 1 - Standard enclosure diagram

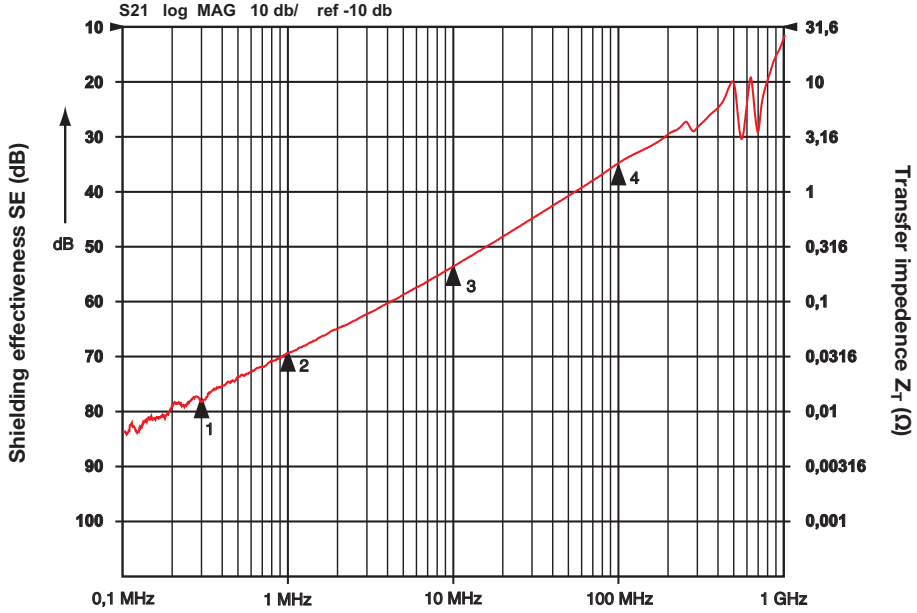

1_:-78.167 dB
300 kHz

2_:-69.369 dB
1 MHz

3_:-53.543 dB
10 MHz

4_:-34.719 dB
100 MHz

Figure 2 - EMC enclosure diagram

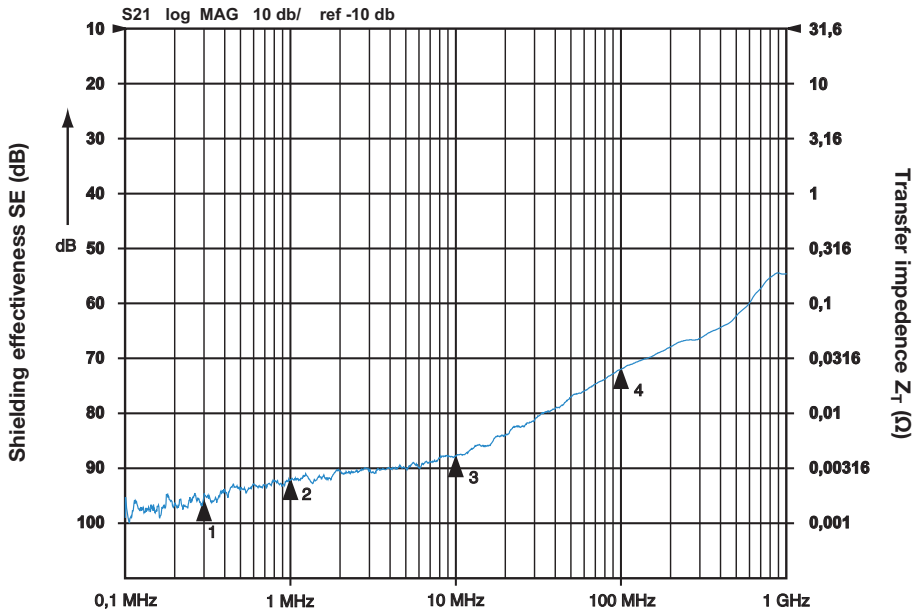

1_:-93.988 dB
300 kHz

2_:-91.86 dB
1 MHz

3_:-87.557 dB
10 MHz

4_:-71.649 dB
100 MHz

To highlight the influence of the cable gland the shielding attenuation measurements were repeated on:

- coupled standard enclosures with standard cable gland and cable shield earthed to the earth terminal of the connector
  see curve A
- coupled standard enclosures with EMC cable gland and cable shield earthed to the cable gland
  see curve B
- coupled EMC enclosures with EMC cable gland and cable shield earthed to the cable gland
  see curve C

The results are summarized in the diagrams of Figure 3 below.

Figure 3 - Overview diagrams

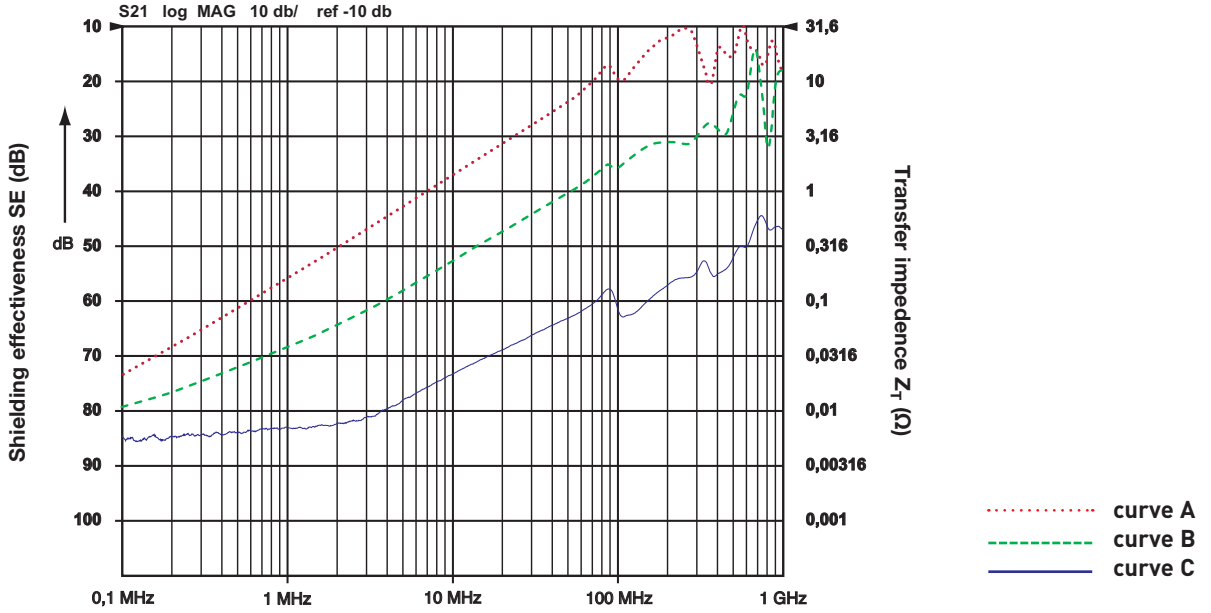

NOTE
For the relationship between Shielding effectiveness SE and Transfer impedence (Ω) see also IEC 60512-23-3: SE = 40 - $20_{log}10Z_T$ (dB)

Conclusions

The measurements suggest the following considerations:

- standard enclosures already provide good levels of shielding attenuation;
- when used with EMC cable glands, standard enclosures clearly increase their shielding attenuation;
- EMC enclosures, with better shielding attenuation values, provide further improvements.

CKA -CKAX and MKA - MKAX EMC version for electromagnetic compatibility

inserts		page:
CK	3 poles + ⏚	**58**
CK	4 poles + ⏚	**58**
CKS	3 poles + ⏚	**-**
CKS	4 poles + ⏚	**-**
CKSH	3 poles + ⏚	**63**
CKSH	4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

bulkhead mounting housings straight and angled

hoods

description	part No. (entry Pg 11)	part No. (entry M20)	part No. (entry Pg 11)	part No. (entry M20 / M25)
with stainless steel lever and gasket	**CKAXS 03 I**			
without cable entry, with stainless steel lever and gasket	**CKAXS 03 IA**			
with cable entry, with stainless steel lever and gasket	**CKAXS 03 IAP**	**MKAXS IAP20**		
with cable entry, with stainless steel lever and gasket bulkhead hole closed	**CKAXS 03 AP**	**MKAXS AP20**		
with pegs, top entry			**CKAS 03 V**	**MKAS V20**
with pegs, top entry				**MKAS V25**
with pegs, side entry			**CKAS 03 VA**	**MKAS VA20**
with stainless steel lever, top entry			**CKAXS 03 VG**	**MKAXS VG20**
gasket and screw kit for IP66/IP67/IP69 [1] for CK, CKSH, CQ4, CQ inserts	**CKR 65**		**CKR 65**	
gasket and screw kit for IP66/IP67/IP69 [1] for CD 08 inserts	**CKR 65 D**		**CKR 65 D**	

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type may vary upon specific part No.

versions with glued gasket (DESINA®) upon request

panel cut-out for bulkhead mounting housings



Type 12
Type 4/4X only
with CKR 65 (D)

IP66/IP67/IP69 with CKR 65 (D) [1]

CKAXS I



CKAXS IA

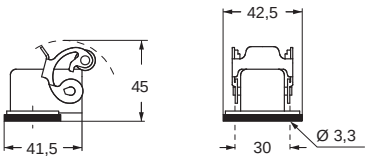

CKAXS IAP (CKAXS AP) and **MKAXS IAP (MKAXS AP)**

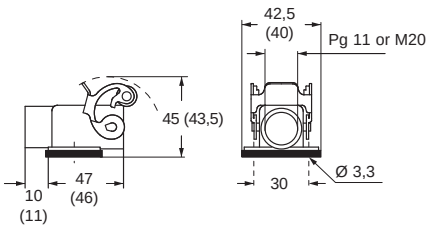

CKAS V and **MKAS V** **MKAS V25**

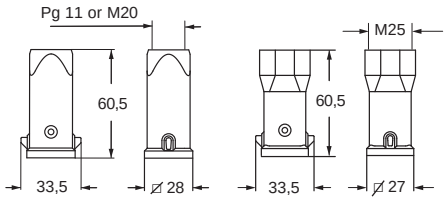

CKAS VA and **MKAS VA**



CKAXS VG and **MKAXS VG**



dimensions shown in mm are not binding and may be changed without notice

CKAX - CKA - CKAXX EMC version for electromagnetic compatibility

inserts		page:
CK	3 poles + ⏚	58
CK	4 poles + ⏚	58
CKS	3 poles + ⏚	-
CKS	4 poles + ⏚	-
CKSH	3 poles + ⏚	63
CKSH	4 poles + ⏚	63
CD	8 poles	67
CQ4	2 poles + ⏚	182
CQ4 H	2 poles + ⏚	183
CQ4	3 poles + ⏚	184
CQ	5 poles + ⏚	186
CQ	7 poles + ⏚	187
CQ	12 poles + ⏚	189
CQ	21 poles + ⏚	190

angled bulkhead mounting housings with stainless steel lever

angled bulkhead mounting housings with galvanized steel rigid lever and stainless steel rigid lever

GALVANIZED 2)

STAINLESS 3)

description	part No.	part No.
without cable entry, fixing by 4 screws	**CKAXS 03 IA4**	
without cable entry, fixing by 4 screws 2)		**CKAS 03 IA4**
without cable entry, fixing by 4 screws 3)		**CKAXXS 03IA4**
gasket and screw kit for IP66/IP67/IP69 1) for CK, CKSH, CQ4, CQ inserts	**CKR 65**	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 1) for CD 08 inserts	**CKR 65 D**	**CKR 65 D**

1) To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type may vary upon specific part No.

CKAXS IA4

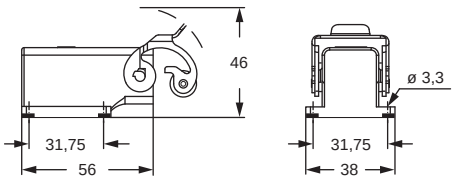

panel cut-out for enclosures



CKAS IA4 - CKAXXS IA4

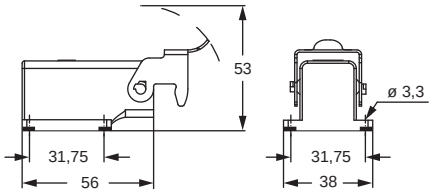

panel cut-out for enclosures



EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) 1)

MKAX EMC version for electromagnetic compatibility

inserts		page:
CK	3 poles + ⏚	**58**
CK	4 poles + ⏚	**58**
CKS	3 poles + ⏚	**-**
CKS	4 poles + ⏚	**-**
CKSH	3 poles + ⏚	**63**
CKSH	4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**
CJ KF		**223**
CJK 8FT		**228**
CLK 04 SC		**239**
CX 1/2 BD		**243**
CXL 2/4 SF/SM		**250**
CXL SF/SM		**250**
CXL 2/4 PF/PM		**251**
CXL 2/4 PFH/PMH		**251**
CXL PF/PM		**251**

angled surface mounting housings with stainless steel lever

angled surface mounting housings with stainless steel lever

description	part No. (entry M25)	part No. (entry M25)
with cable entry, fixing by 4 screws	**MKAXS IAP25**	
with cable entry, fixing by 4 screws, bulkhead hole closed (without gasket)		**MKAXS AP25**
gasket and screw kit for IP66/IP67/IP69 [1] for CK, CKSH, CQ4, CQ, inserts	**CKR 65**	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 [1] for CD 08 inserts	**CKR 65 D**	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type may vary upon specific part No.

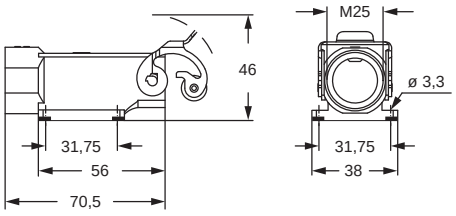

panel cut-out for enclosures



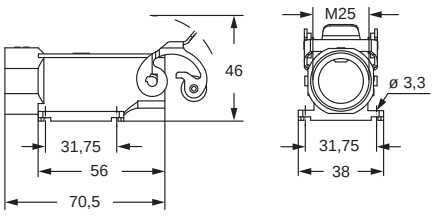

panel cut-out for enclosures



EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) [1]

EMC

dimensions shown in mm are not binding and may be changed without notice

MKA - MKAXX EMC version for electromagnetic compatibility

inserts		page:
CK	3 poles + ⏚	58
CK	4 poles + ⏚	58
CKS	3 poles + ⏚	-
CKS	4 poles + ⏚	-
CKSH	3 poles + ⏚	63
CKSH	4 poles + ⏚	63
CD	8 poles	67
CQ4	2 poles + ⏚	182
CQ4 H	2 poles + ⏚	183
CQ4	3 poles + ⏚	184
CQ	5 poles + ⏚	186
CQ	7 poles + ⏚	187
CQ	12 poles + ⏚	189
CQ	21 poles + ⏚	190
CJ KF		223
CJK 8FT		228
CLK 04 SC		239
CX 1/2 BD		243
CXL 2/4 SF/SM		250
CXL SF/SM		250
CXL 2/4 PF/PM		251
CXL 2/4 PFH/PMH		251
CXL PF/PM		251

angled surface mounting housings with galvanized steel rigid lever

angled surface mounting housings with stainless steel rigid lever

description	part No. (entry M25)	part No. (entry M25)
with cable entry, fixing by 4 screws	**MKAS IAP25**	
with cable entry, fixing by 4 screws, bulkhead hole closed (without gasket)	**MKAS AP25**	
with cable entry, fixing by 4 screws		**MKAXXS IAP25**
with cable entry, fixing by 4 screws, bulkhead hole closed (without gasket)		**MKAXXS AP25**
gasket and screw kit for IP66/IP67 [1] for CK, CKSH, CQ4, CQ, inserts	**CKR 65**	**CKR 65**
gasket and screw kit for IP66/IP67 [1] for CD 08 inserts	**CKR 65 D**	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type may vary upon specific part No.

MKAS IAP

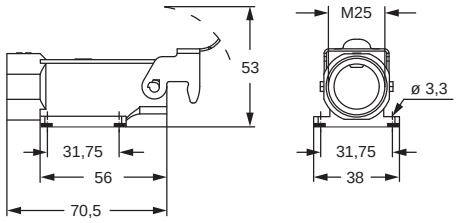

panel cut-out for enclosures



MKAXXS IAP

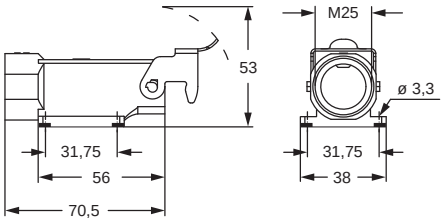

panel cut-out for enclosures



MKAS AP

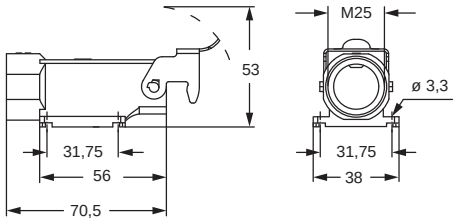

panel cut-out for enclosures



MKAXXS AP

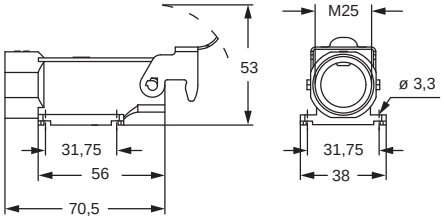

panel cut-out for enclosures



EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) [1]

EMC

MKAX EMC version for electromagnetic compatibility

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

if the counterpart has glued gasket:

CJ KF	**223**
CJK 8FT	**228**
CLK 04 SC	**239**
CX 1/2 BD	**243**
CXL 2/4 SF/SM	**250**
CXL SF/SM	**250**
CXL 2/4 PF/PM	**251**
CXL 2/4 PFH/PMH	**251**
CXL PF/PM	**251**

bulkhead mounting housings with stainless steel lever

description	part No. (entry M32)
M32 fixing thread (•) 1)	**MKAXS IF**
gasket and screw kit for IP66/IP67/IP69 1)	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 1) specific for CD 08 inserts	**CKR 65 D**

1) To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type may vary upon specific part No.

(•) Locknut supplied on request, see Cable glands catalogue (article AS M32N metallic).

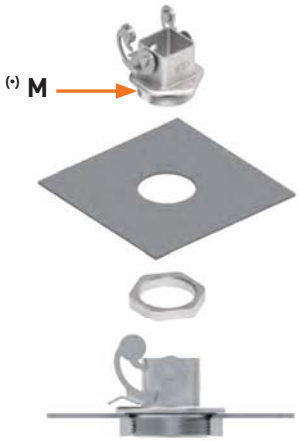



panel cut-out for enclosures



cURus
Type 4/4X/12 pending

EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) 1)

EMC

dimensions shown in mm are not binding and may be changed without notice

MKA - MKAXX EMC version for electromagnetic compatibility

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

if the counterpart has glued gasket:

CJ KF	**223**
CJK 8FT	**228**
CLK 04 SC	**239**
CX 1/2 BD	**243**
CXL 2/4 SF/SM	**250**
CXL SF/SM	**250**
CXL 2/4 PF/PM	**251**
CXL 2/4 PFH/PMH	**251**
CXL PF/PM	**251**

bulkhead mounting housings with galvanized steel rigid lever

bulkhead mounting housings with stainless steel rigid lever

description	part No. (entry M32)	part No. (entry M32)
M32 fixing thread (•) 1)	**MKAS IF**	
M32 fixing thread (•) 1)		**MKAXXS IF**
gasket and screw kit for IP66/IP67/IP69 1)	**CKR 65**	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 1) specific for CD 08 inserts	**CKR 65 D**	**CKR 65 D**

1) To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type may vary upon specific part No.

(•) Locknut supplied on request, see Cable glands catalogue (article AS M32N metallic).

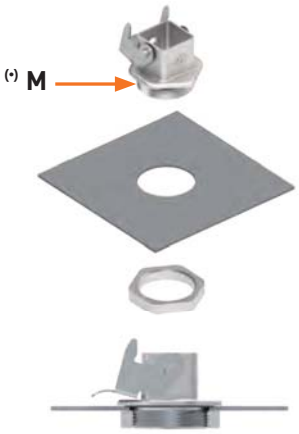



panel cut-out for enclosures





panel cut-out for enclosures



cURus
Type 4/4X/12 pending

EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) 1)

EMC

MKAX EMC version for electromagnetic compatibility

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**
if the counterpart has glued gasket:		
CJ KF		**223**
CJK 8FT		**228**
CLK 04 SC		**239**
CX 1/2 BD		**243**
CXL 2/4 SF/SM		**250**
CXL SF/SM		**250**
CXL 2/4 PF/PM		**251**
CXL 2/4 PFH/PMH		**251**
CXL PF/PM		**251**

bulkhead mounting housings with stainless steel lever

description	part No. (entry M20)
M20 cable entry [1]	**MKAXS IVG20**
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 08 inserts	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type may vary upon specific part No.

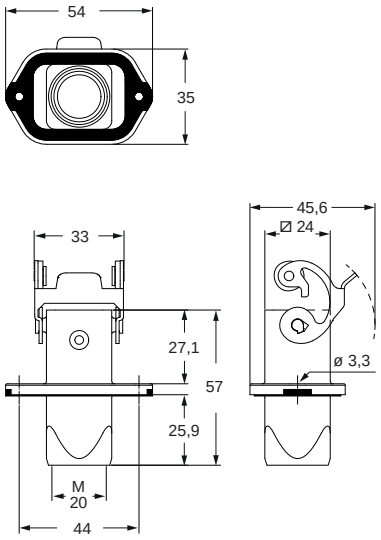

panel cut-out for enclosures



cURus
Type 12 / Type 4/4X only with CKR 65 (D) pending

EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) [1]

MKA - MKAXX EMC version for electromagnetic compatibility

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

if the counterpart has glued gasket:

CJ KF	**223**
CJK 8FT	**228**
CLK 04 SC	**239**
CX 1/2 BD	**243**
CXL 2/4 SF/SM	**250**
CXL SF/SM	**250**
CXL 2/4 PF/PM	**251**
CXL 2/4 PFH/PMH	**251**
CXL PF/PM	**251**

bulkhead mounting housings with galvanized steel rigid lever

bulkhead mounting housings with stainless steel rigid lever

description	part No. (entry M20)	part No. (entry M20)
M20 cable entry [1]	**MKAS IVG20**	
M20 cable entry [1]		**MKAXXS IVG20**
gasket and screw kit for IP66/IP67/IP69 [1]	**CKR 65**	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 [1] specific for CD 08 inserts	**CKR 65 D**	**CKR 65 D**

[1] To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type may vary upon specific part No.

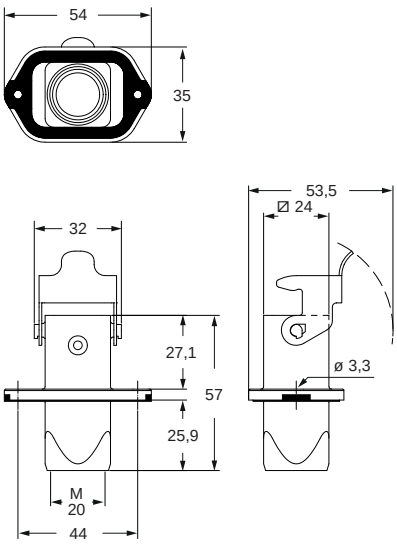

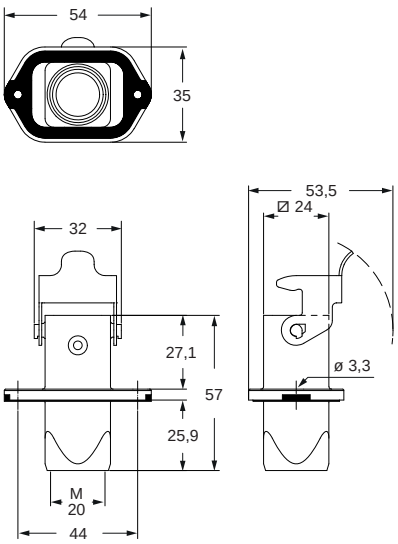

panel cut-out for enclosures



panel cut-out for enclosures



cURus
Type 12 / Type 4/4X only with CKR 65 (D) pending

EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) [1]

EMC

MKAX - MKA - MKAXX EMC version for electromagnetic compatibility

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**

if the counterpart has glued gasket:

CJ KM	**223**
CJK 8MT	**226**
CJK 8IMT	**226, 228**
CLK 04 SC	**239**
CX 1/2 BD	**243**
CXL 2/4 SF/SM	**250**
CXL SF/SM	**250**
CXL 2/4 PF/PM	**251**
CXL 2/4 PFH/PMH	**251**
CXL PF/PM	**251**

hoods
with stainless steel lever

hoods
with galvanized steel rigid lever
and stainless steel rigid lever

GALVANIZED 2)

STAINLESS 3)

description	part No. (entry M25)	part No. (entry M25)
top entry	**MKAXS VG25**	
top entry 2)		**MKAS VG25**
top entry 3)		**MKAXXS VG25**
gasket and screw kit for IP66/IP67/IP69 1)	**CKR 65**	**CKR 65**
gasket and screw kit for IP66/IP67/IP69 1) for CD 08 inserts	**CKR 65 D**	**CKR 65 D**

1) To obtain the IP66/IP67/IP69 degree of protection, a kit with insert fixing screw and gasket can be purchased separately.
Several inserts size “21.21” are already supplied with fixing screw and gasket, which ensures IP66/IP67/IP69 degree of protection. See list below, not including any special version:
- CQF/M 07, CQF/M 12
- CJ KF/M
- CJK 8FT /8IFT /8MT /8IMT, CJK 8M
- CUK 2FT /3FT
- CX 1/2 BDF/M
- CLK 04 SCF /SCF-H /SCM
- CXL 2/4 PF /PM /PFH /PMH /SF /SM, CXL SF/M

NOTE: Housing type may vary upon specific part No.

MKAXS VG



CKAS IA4 - CKAXXS IA4



cURus
Type 12 / Type 4/4X only with CKR 65 (D) pending

EN 60529 IP44 IEC 60529 IP66/IP67/IP69 with CKR 65 (D) 1)

CQ EMC version for electromagnetic compatibility

inserts		page:
CQ 04/2	4 poles + 2 poles + ⏚	191
CQ 08	8 poles + ⏚	192
CQ 17	17 poles + ⏚	193

metallized insulating enclosures

bulkhead mounting housings with single lever

angled bulkhead mounting housings with single lever

description	part No.	part No.	entry Pg
with lever and gasket	**CQS 08 I**		
without cable gland, with lever, angled		**CQS 08 IA**	
with cable entry, with lever, angled		**CQS 08 IAP**	21

ASSEMBLY INSTRUCTIONS

When using an EMC “CQS 08” series enclosure with a male insert, replace the standard gasket provided on the male insert with a conductive gasket CR 08 EMC, to be ordered separately (see page 575).



CQS I

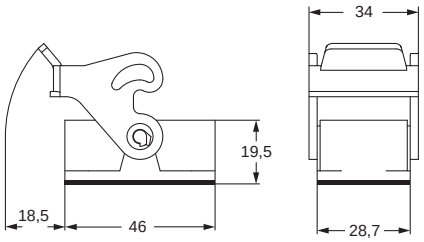

panel cut-out for CQ I enclosure



CQS IA

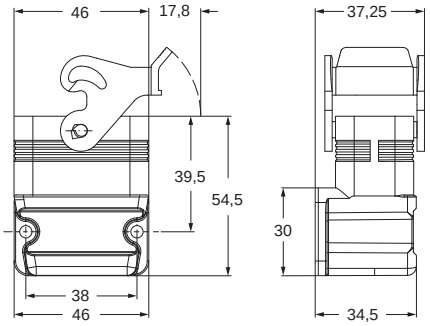

CQS IAP

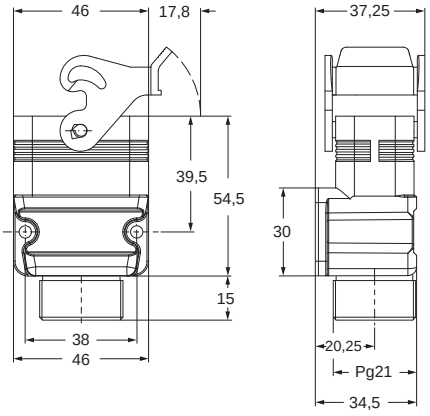

panel cut-out for CQ IA - CQ IAP enclosure



c UL us Type 12

EN 60529 IP66 IP67 IEC 60529

EMC

CQ EMC version for electromagnetic compatibility

inserts		page:
CQ 04/2	4 poles + 2 poles + ⏚	**191**
CQ 08	8 poles + ⏚	**192**
CQ 17	17 poles + ⏚	**193**

metallized insulating enclosures

hoods with 2 pegs

hoods with single lever

description	part No.	entry Pg	part No.	entry Pg
with pegs, side entry [1]	**CQS 08 VA**	16		
with pegs, top entry [1]	**CQS 08 V**	21		
with lever, top entry [1]			**CQS 08 VG**	21

[1] Pg male thread on exterior enclosure

CQS VA

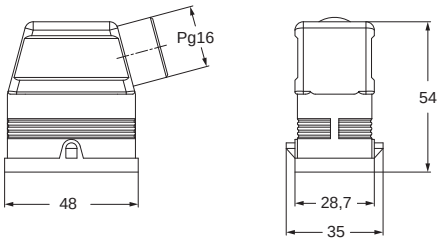

CQS VG

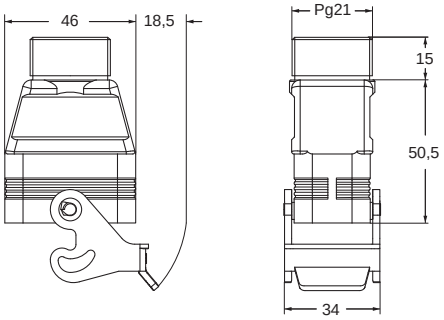

CQS V

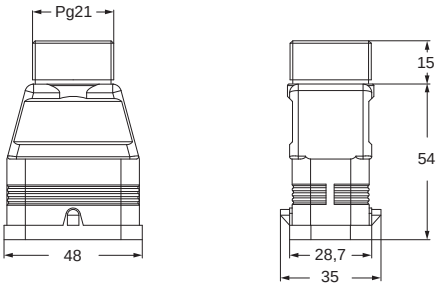

ASSEMBLY INSTRUCTIONS

When using an EMC “CQS 08” series enclosure with a male insert, replace the standard gasket provided on the male insert with a conductive gasket CR 08 EMC, to be ordered separately (see page 575).



Type 12

IP66
IP67

dimensions shown in mm are not binding and may be changed without notice

CR - CRQ EMC version for electromagnetic compatibility

conductive gasket for CQM male inserts

thermoplastic resin cable glands

description	part No.	part No.
conductive gasket for CQM male inserts	**CR 08 EMC**	
cable gland head and gasket for CQS 08 VA enclosure cable gland head and gasket for CQS 08 V, VG and IAP enclosure		**CRQ 16** **CRQ 21**

CR 08 EMC



CRQ 16 and **CRQ 21**

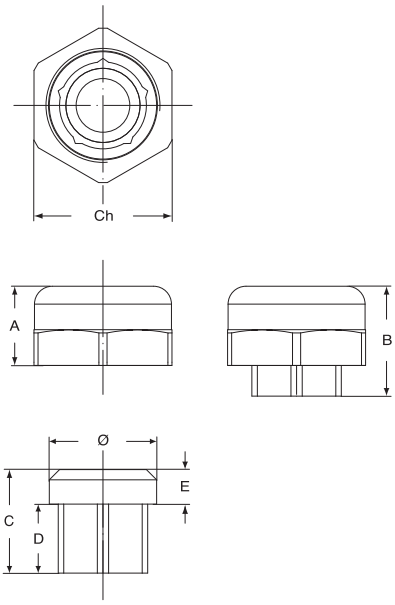

part No.	A	B	C	D	E	Ø	Ch
CRQ 16	15,5	21,5	20,25	13,5	6,75	21	27
CRQ 21	18,2	27,5	25	15,5	9	26,5	33

cable diameters for cable glands:
- **CRQ 16**: 10 - 14,5 mm (4 - 7 mm on request)
- **CRQ 21**: 14 - 18 mm (7 - 10 mm on request)

ASSEMBLY INSTRUCTIONS

Place the cable shield mesh between the CRQ cable gland gasket and the seat of the gasket itself.

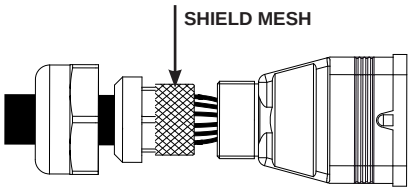

CZ - MZ and CZF - MZF EMC version for electromagnetic compatibility

inserts		page:
CD	15 poles + ⏚	**68**
CDA	10 poles + ⏚	**98**
CSAH	10 poles + ⏚	**99**
CDC	10 poles + ⏚	**104**
MIXO	1 module	**264 - 316**

The covers for L and LG versions cannot be used together with coding pins. If this application is required, please contact ILME S.p.A.

housings and cover

hoods and cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with lever and gasket	**CZ7IS 15 L**		--					
surface mounting housing with lever	**CZ7PS 15 L2**	16 x 2	**MZ7PS 15L225**	25 x 2				
cover with pegs and gasket (for 1 lever enclosures) 1)	**CZCS 15 L**							
enclosure with pegs and gasket, side entry					**CZOS 15 L**	16	**MZOS 15 L20**	20
enclosure with pegs and gasket, side entry							**MZOS 15 L25**	25
enclosure with pegs and gasket, side entry, high construction, without adapter 3)					**CZFOS 15 L21**	21	**MZFOS 15 L25**	25
enclosure with pegs and gasket, top entry					**CZVS 15 L**	13,5	**MZVS 15 L20**	20
enclosure with pegs and gasket, top entry, high construction, without adapter 3)					**CZFVS 15L221**	21	**MZFVS 15 L25**	25
cover with lever (for enclosures with pegs) 2)					**CZ7CS 15 LG**			

3) enclosure without adapter, threaded on the enclosure body, to be used only with a complete cable gland.

panel cut-out for bulkhead mounting housings

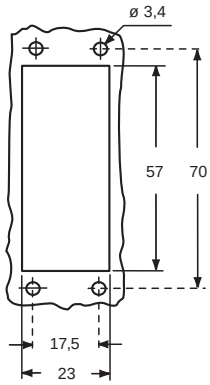

For fixing on housings

1) **eyelet**



For fixing on hoods

2) **loop**



Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

CZ7IS L

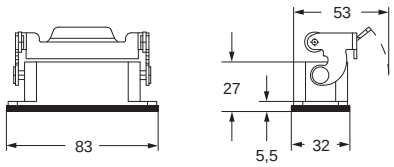

CZ7PS L and **MZ7PS L**

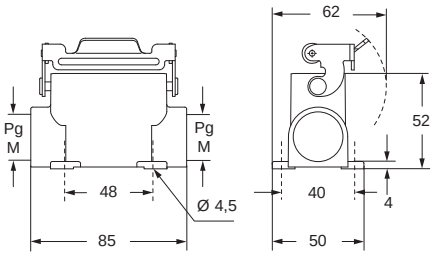

CZCS L



CZOS L and **MZOS L**



CZFOS L - MZFOS L and **CZFVS L - MZFVS L**



CZVS L and **MZVS L**



CZ7CS LG

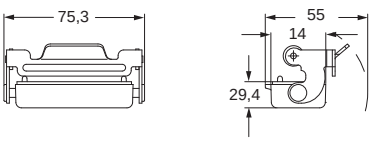

dimensions shown in mm are not binding and may be changed without notice

CZ-CZA-CZF and MZ-MZA-MZF EMC version for electromagnetic compatibility

inserts		page:
CD	25 poles + ⏚	69
CDD	38 poles + ⏚	77
CDA	16 poles + ⏚	100
CSAH	16 poles + ⏚	101
CDC	16 poles + ⏚	105

The covers for L and LG versions cannot be used together with coding pins. If this application is required, please contact ILME S.p.A.

housings and cover

hoods and cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with lever and gasket	**CZ7IS 25 L**		--					
surface mounting housing, with lever, high construction	**CZ7PS 25 L2**	16 x 2	**MZ7PS 25L225**	25 x 2				
cover with pegs (for 1 lever enclosures) [1]	**CZCS 25 L**							
enclosure with pegs and gasket, side entry					**CZOS 25 L**	16	**MZOS 25 L20**	20
enclosure with pegs and gasket, side entry							**MZOS 25 L25**	25
enclosure with pegs and gasket, side entry, high construction, without adapter [3]					**CZFOS 25 L21**	21	**MZFOS 25 L25**	25
enclosure with pegs and gasket, top entry					**CZVS 25 L**	16		
enclosure with pegs and gasket, top entry [4]							**MZVS 25 L20**	20
enclosure with pegs and gasket, top entry, high construction, without adapter [3]					**CZFVS 25 L21**	21	**MZFVS 25 L25**	25
cover with lever (for enclosures with pegs) [2]					**CZ7CS 25 LG**			

[3] enclosure without adapter, threaded on the enclosure body, to be used only with a complete cable gland.
[4] can only be used with a complete cable gland (to be purchased separately)

panel cut-out for bulkhead mounting housings

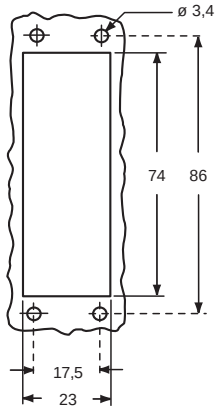

For fixing on housings

[1] **eyelet**



For fixing on hoods

[2] **loop**



cULus Type 4/4X/12

IP65 EN 60529 IEC 60529 — insulating cable gland or fittings without gasket

IP66 IP67 IP69 EN 60529 IEC 60529 — cable gland with O-Ring gasket

CZ7IS L

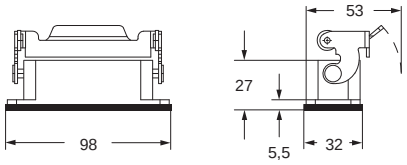

CZ7PS L and **MZ7PS L**

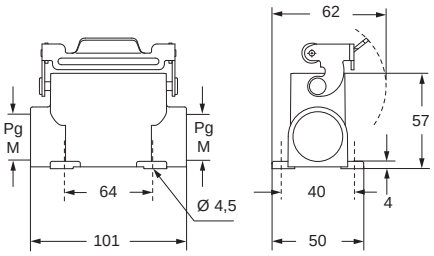

CZCS L



CZOS L and **MZOS L**



CZFOS L - MZFOS L and **CZFVS L - MZFVS L**



CZVS L and **MZVS L** [4]



CZ7CS LG

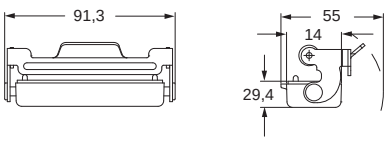

EMC

CH - CA - CF and MA - MF EMC version for electromagnetic compatibility

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CT, CTSE (16A) ***)**	6 poles + ⏚	**160**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

***)** only for enclosure CHIS 06 L

housings and cover

hoods and cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with lever and gasket	**CHIS 06 L**	--						
surface mounting housing, with lever, high construction	**CAPS 06 L**	21	**MAPS 06 L32**	32				
cover with pegs (for 1 lever enclosures) [1]	**CHCS 06 L**							
enclosure with pegs, side entry, high construction, without adaptor [3]					**CFOS 06 L21**	21	**MFOS 06 L32**	32
enclosure with pegs, top entry, high construction, without adaptor [3]					**CFVS 06 L21**	21	**MFVS 06 L32**	32
cover with lever (for enclosures with pegs) [2]					**CHCS 06 LG**			

[3] enclosure without adapter, threaded on the enclosure body, to be used only with a complete cable gland.

panel cut-out for bulkhead mounting housings



For fixing on housings

1) **eyelet**



For fixing on hoods

2) **loop**



Type 4/4X/12

IP65 insulating cable gland or fittings without gasket

IP66 IP69 cable gland with O-Ring gasket

CHIS L

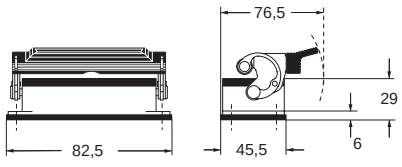

CAPS L and **MAPS L**

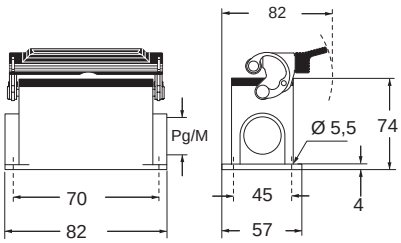

CHCS L

CFOS L and **MFOS L**



CFVS L and **MFVS L**



CHCS LG

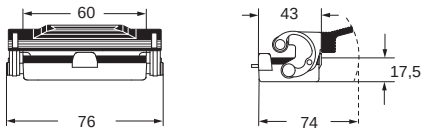

dimensions shown in mm are not binding and may be changed without notice

CH - CA and MA EMC version for electromagnetic compatibility

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

***)** only for enclosure CHIS 10

housings and cover



hoods and cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with levers and gasket	**CHIS 10**	--						
surface mounting housing, with levers, high construction	**CAPS 10.21**	21	**MAPS 10.32**	32				
cover with 4 pegs (for enclosures with 2 levers) 1)	**CHCS 10**							
enclosure with pegs, side entry, high construction					**CAOS 10.21**	21	**MAOS 10.32**	32
enclosure with pegs, top entry, high construction					**CAVS 10.21**	21	**MAVS 10.32**	32
cover with 2 levers (for enclosures with 4 pegs) 2)					**CHCS 10 G**			

panel cut-out for bulkhead mounting housings

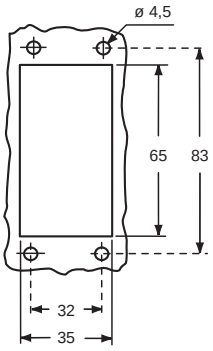

CHIS

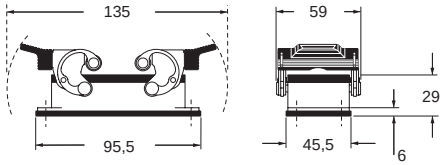

CAOS and **MAOS**



CAPS and **MAPS**

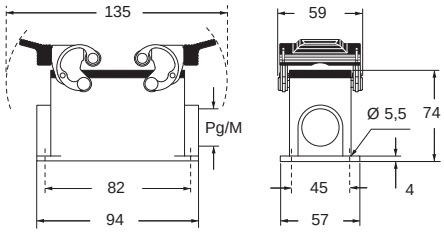

CAVS and **MAVS**



CHCS

CHCS G

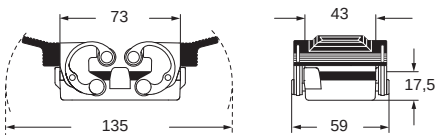

For fixing on housings

1) **eyelet**



For fixing on hoods

2) **loop**



Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

CH - CA and MH - MA EMC version for electromagnetic compatibility

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CT, CTS (10A) ***)**	40 poles + ⏚	**156**
CT, CTSE (16A) ***)**	16 poles + ⏚	**162**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

***)** only for enclosure CHIS 16

housings and cover

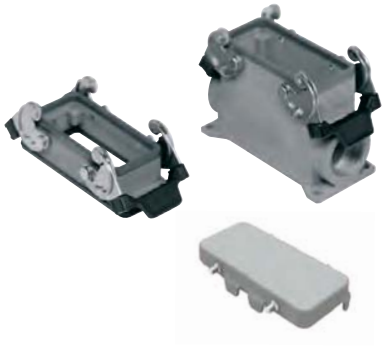

hoods and cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with levers and gasket	**CHIS 16**	--						
surface mounting housing, with levers, high construction	**CAPS 16.21**	21	**MAPS 16.32**	32				
cover with 4 pegs (for enclosures with 2 levers) [1]	**CHCS 16**							
enclosure with pegs, side entry					**CHOS 16**	21	**MHOS 16.25**	25
enclosure with pegs, side entry							**MHOS 16.32**	32
enclosure with pegs, side entry, high construction					**CAOS 16.29**	29	**MAOS 16.32**	32
enclosure with pegs, side entry, high construction							**MAOS 16.40**	40
enclosure with pegs, top entry					**CHVS 16**	21	**MHVS 16.25**	25
enclosure with pegs, top entry							**MHVS 16.32**	32
enclosure with pegs, top entry, high construction					**CAVS 16.29**	29	**MAVS 16.32**	32
enclosure with pegs, top entry, high construction							**MAVS 16.40**	40
cover with 2 levers (for enclosures with 4 pegs) [2]					**CHCS 16 G**			

panel cut-out for bulkhead mounting housings

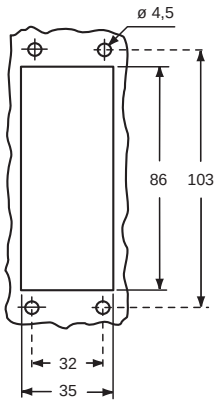

CHIS

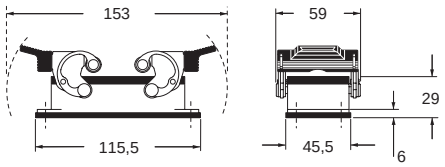

CAPS and **MAPS**

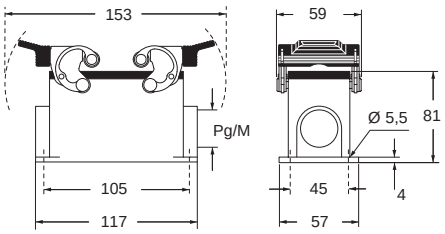

CHCS



CHOS (CAOS) and **MHOS (MAOS)**

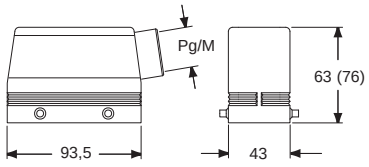

CHVS (CAVS) and **MHVS (MAVS)**

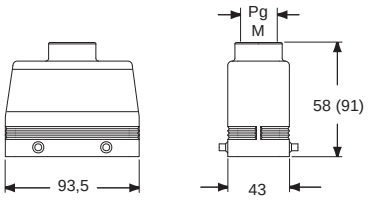

CHCS G

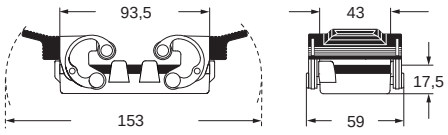

For fixing on housings

1) **eyelet**



For fixing on hoods

2) **loop**



Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CH - CA and MH - MA EMC version for electromagnetic compatibility

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTS (10A) ***)**	64 poles + ⏚	**157**
CT, CTSE (16A) ***)**	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204 and 206**
MIXO	6 modules	**262 - 317**

***)** only for enclosure CHIS 24

housings and cover

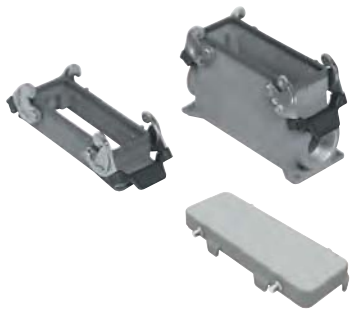

hoods and cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with levers and gasket	**CHIS 24**	--						
surface mounting housing, with levers, high construction	**CAPS 24.21**	21	**MAPS 24.32**	32				
cover with 4 pegs (for enclosures with 2 levers) [1]	**CHCS 24**							
enclosure with pegs, side entry					**CHOS 24**	21	**MHOS 24.25**	25
enclosure with pegs, side entry							**MHOS 24.32**	32
enclosure with pegs, side entry, high construction					**CAOS 24.29**	29	**MAOS 24.32**	32
enclosure with pegs, side entry, high construction							**MAOS 24.40**	40
enclosure with pegs, top entry					**CHVS 24**	21	**MHVS 24.25**	25
enclosure with pegs, top entry							**MHVS 24.32**	32
enclosure with pegs, top entry, high construction					**CAVS 24.29**	29	**MAVS 24.32**	32
enclosure with pegs, top entry, high construction							**MAVS 24.40**	40
cover with 2 levers (for enclosures with 4 pegs) [2]					**CHCS 24 G**			

panel cut-out for bulkhead mounting housings

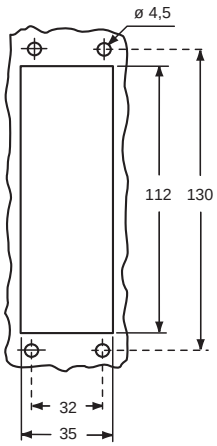

For fixing on housings

1) **eyelet**



For fixing on hoods

2) **loop**



Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

CHIS

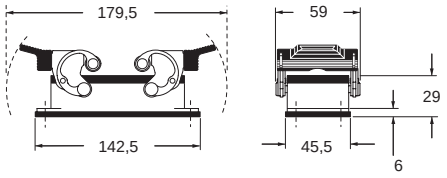

CAPS and **MAPS**

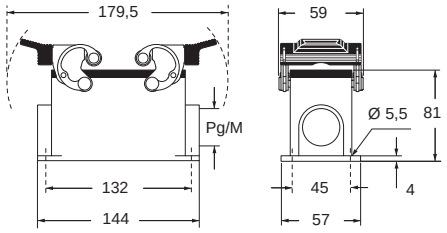

CHCS



CHOS (CAOS) and **MHOS (MAOS)**



CHVS (CAVS) and **MHVS (MAVS)**

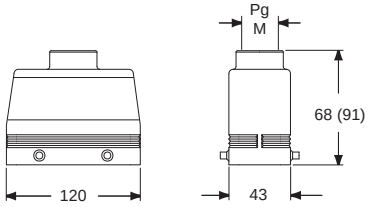

CHCS G

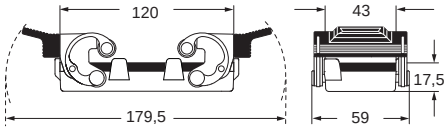

EMC

180 °C

The heat shield

Series specifically developed for industrial applications where the ambient temperatures are particularly harsh (from -40°C to +180°C).

Available in the sizes “21.21”, “44.27”, “57.27”, “77.27”, “104.27” and “104.62”, to be used in combination with the available connector inserts suitable for high temperatures up to **180 °C** made by self-extinguishing thermoplastic material (>PPS< polyphenylene sulphide).

All these enclosures except those sized “21.21” have supplementary insulating strips inside.

This enclosure series is distinguished by the red colour.

- c UL us certified for USA and Canada for **Type 12** (indoor use), **Type 4** and **Type 4X** (outdoor use) (equivalent to NEMA 12, 4, and 4X and) protection ratings, marked on the packaging label. **IP44** (size “21.21”), **IP65** (other sizes) degree of protection according to **EN IEC 60529**.

SUM-UP OF MATERIALS USED

- **Enclosure body made of die cast aluminium alloy**
- **Chromate conversion coating, RoHS 2 conform, on the enclosure body die casts**
- **Coated with special high temperatures resistant, red coloured thermosetting powder**
- **Flange and interface sealing gaskets (as applicable) in FPK, anti-aging heat resistant fluoroelastomer**
- **Locking device with lever(s), springs and pegs in stainless steel**
- **Single-block locking lever handles in stainless steel (for “21.21” sized CKA...R/ MKA...R, “44.16” sized CZ...R and MZ...R, and “104.62” sized CH...R 48 ... and, MH...R 48 ... versions)**
- **Locking lever handles in die-cast aluminium alloy with the same special coating as the enclosure body (for CH...R 10, 16, 24 and MH...R 10, 16, 24 versions)**

CKA and MKA 180 °C version

inserts		page:
CK RY	3 poles + ⏚	**60**
CK RY	4 poles + ⏚	**60**

bulkhead mounting housings straight and angled

hoods



description	part No. (entry Pg 11)	part No. (entry M20)	part No. (entry Pg 11)	part No. (entry M20)
with stainless steel lever and gasket [1]	**CKAXR 03 I**			
without cable entry, with stainless steel lever and gasket [1]	**CKAXR 03 IA**			
with cable entry, with stainless steel lever and gasket [1]	**CKAXR 03 IAP**	**MKAXR IAP20**		
with cable entry, with stainless steel lever and gasket bulkhead hole closed [1]	**CKAXR 03 AP**	**MKAXR AP20**		
with pegs, top entry [1]			**CKAR 03 V**	**MKAR V20**
with pegs, side entry [1]			**CKAR 03 VA**	**MKAR VA20**
with stainless steel lever, top entry [1]			**CKAXR 03 VG**	**MKAXR VG20**

[1] Enclosures with IP44 protection rating

panel cut-out for bulkhead mounting housings



CKAXR I



CKAXR IA

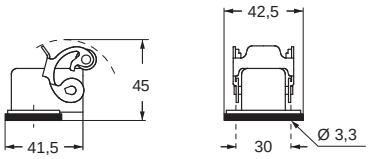

CKAXR IAP (CKAXR AP) and **MKAXR IAP (MKAXR AP)**

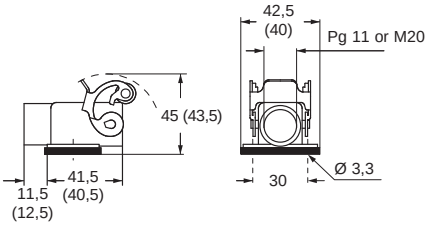

CKAR V and **MKAR V**



CKAR VA and **MKAR VA**



CKAXR VG and **MKAXR**



cULus Type 12

EN 60529 IP44 IEC 60529

MKAX 180 °C version

inserts		page:
CK RY	3 poles + ⏚	**60**
CK RY	4 poles + ⏚	**60**

bulkhead mounting housings with stainless steel lever

description	part No. (entry - M32)
M32 fixing thread (•)	**MKAXR IF**

(•) Locknut supplied on request, see Cable glands catalogue (article AS M32N metallic)



panel cut-out for enclosures



cURus
Type 12 pending

EN 60529 IP44 IEC 60529

180 °C

dimensions shown in mm are not binding and may be changed without notice

MKAXX 180 °C version

inserts		page:
CK RY	3 poles + ⏚	**60**
CK RY	4 poles + ⏚	**60**

bulkhead mounting housings with stainless steel rigid lever

description	part No. (entry - M32)
M32 fixing thread (•)	**MKAXXR IF**

(•) Locknut supplied on request, see Cable glands catalogue (article AS M32N metallic)



panel cut-out for enclosures



cURus
Type 12 pending

EN 60529 IP44 IEC 60529

CZ - CZA, CH - CA and MZ - MZA, MH - MA 180 °C version

inserts		page:
CNE RY	6 poles + ⏚	116

bulkhead and surface mounting housings and cover

hoods and cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with lever and gasket	**CZIR 06 L**	--						
surface mounting housing, with lever	**CZPR 06 L**	16	**MZPR 06 L20**	20				
surface mounting housing, with lever, high construction	**CZAPR 06 L**	21	**MZAPR 06 L32**	32				
cover with pegs (for enclosures) [1]	**CHCR 06 L**							
enclosure with pegs, side entry					**CHOR 06 L13**	13.5	**MHOR 06 L20**	20
enclosure with pegs, top entry, high construction					**CAOR 06 L21**	21	**MAOR 06 L32**	32
enclosure with pegs, top entry					**CHVR 06 L13**	13.5	**MHVR 06 L20**	20
enclosure with pegs, top entry, high construction					**CAVR 06 L21**	21	**MAVR 06 L32**	32
cover with lever (for hoods) [2]					**CZCR 06 LG**			

panel cut-out for bulkhead mounting housings



CZIR L

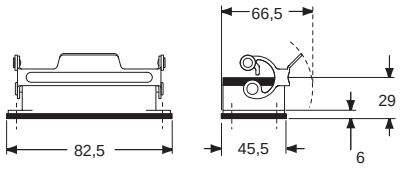

CHOR L (CAOR L) and **MHOR L (MAOR L)**

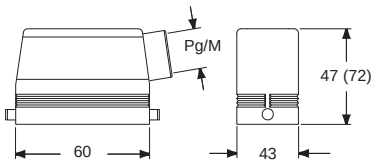

CZPR L - CZAPR L and **MZPR L - MZAPR L**

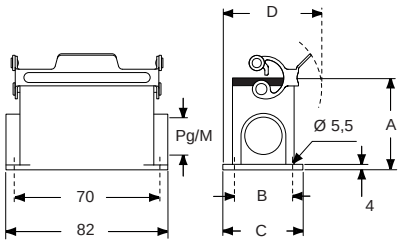

CHVR L (CAVR L) and **MHVR L (MAVR L)**

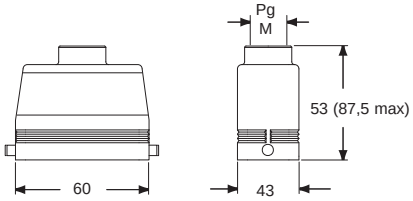

type	A	B	C	D
CZPR L / MZPR L	53	40	52	69,5
CZAPR L / MZAPR L	74	45	57	72

For fixing on housings

1) **eyelet**



For fixing on hoods

2) **loop**



CHCR L

CZCR LG

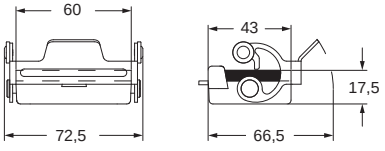

Type 4/4X/12

IP65 EN 60529 IEC 60529

180 °C

dimensions shown in mm are not binding and may be changed without notice

CH - CA and MH - MA 180 °C version

inserts		page:
CNE RY	10 poles + ⏚	117

bulkhead and surface mounting housings and cover

hoods and cover



description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with levers and gasket	**CHIR 10**	--						
surface mounting housing, with levers	**CHPR 10**	16	**MHPR 10.20**	20				
surface mounting housing, with levers, high construction	**CAPR 10.21**	21	**MAPR 10.32**	32				
cover with 4 pegs (for enclosures) [1]	**CHCR 10**							
enclosure with pegs, side entry					**CHOR 10**	16	**MHOR 10.20**	20
enclosure with pegs, side entry, high construction					**CAOR 10.21**	21	**MAOR 10.32**	32
enclosure with pegs, top entry					**CHVR 10**	16		
enclosure with pegs, top entry [3]							**MHVR 10.20**	20
enclosure with pegs, top entry, high construction					**CAVR 10.21**	21	**MAVR 10.32**	32
cover with 2 levers (for hoods) [2]					**CHCR 10 G**			

[3] can only be used with a complete cable gland (to be purchased separately)

panel cut-out for bulkhead mounting housings

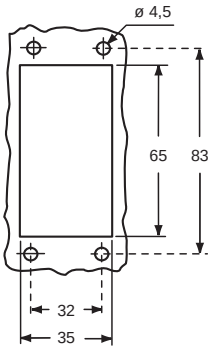

For fixing on housings

[1] **eyelet**



For fixing on hoods

[2] **loop**



Type 4/4X/12

IP65 EN 60529 IEC 60529

CHIR

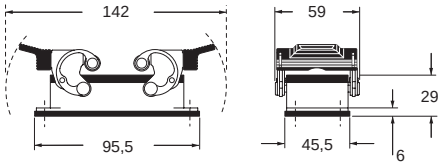

CHOR (CAOR) and MHOR (MAOR)

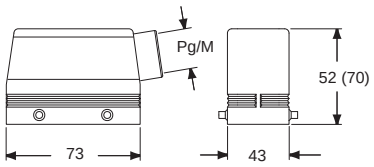

CHPR - CAPR and MHPR - MAPR

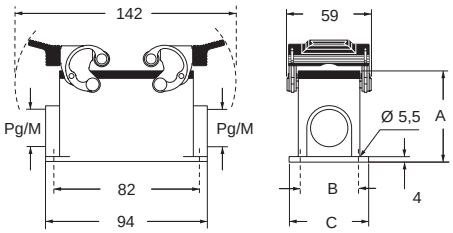

type	A	B	C
CHPR / MHPR	57	40	52
CAPR / MAPR	74	45	57

CHVR (CAVR) and MHVR[3] (MAVR)

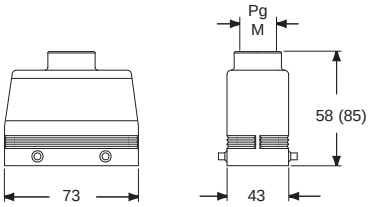

CHCR



CHCR G

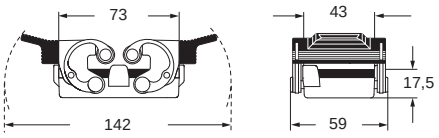

CH - CA and MH - MA 180 °C version

inserts		page:
CNE RY	16 poles + ⏚	**118**
CP RY	6 poles + ⏚	**178**
CX RY	4/0 and 4/2 poles + ⏚	**202 - 203**

bulkhead and surface mounting housings and cover

hoods and cover

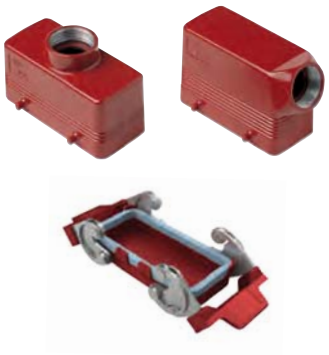

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with levers and gasket	**CHIR 16**	--						
surface mounting housing, with levers, high construction	**CAPR 16.21**	21	**MAPR 16.32**	32				
cover with 4 pegs (for enclosures) 1)	**CHCR 16**							
enclosure with pegs, side entry					**CHOR 16**	21	**MHOR 16.25**	25
enclosure with pegs, side entry, high construction					**CAOR 16.21**	21	**MAOR 16.40**	40
enclosure with pegs, top entry					**CHVR 16**	21	**MHVR 16.25**	25
enclosure with pegs, top entry, high construction					**CAVR 16.21**	21	**MAVR 16.40**	40
cover with 2 levers (for hoods) 2)					**CHCR 16 G**			

panel cut-out for bulkhead mounting housings

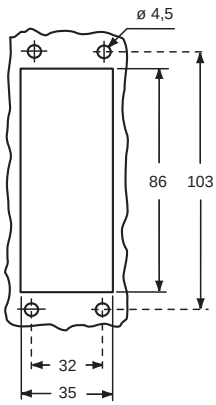

CHIR

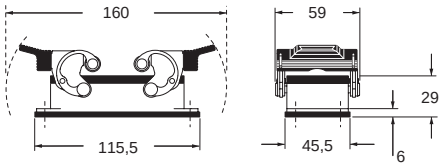

CAPR and **MAPR**

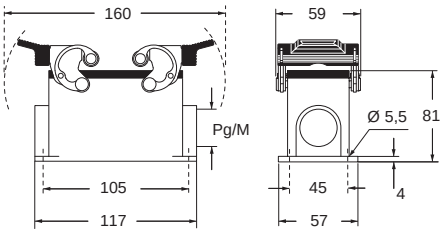

CHCR



CHOR (CAOR) and **MHOR (MAOR)**

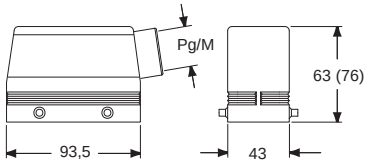

CHVR (CAVR) and **MHVR (MAVR)**

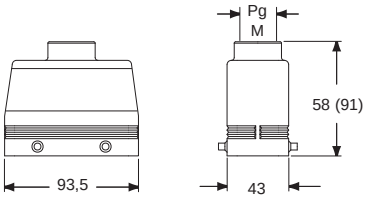

CHCR G

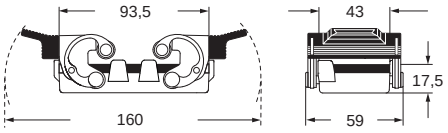

For fixing on housings

1) **eyelet**



For fixing on hoods

2) **loop**



Type 4/4X/12

EN 60529 IP65 IEC 60529

dimensions shown in mm are not binding and may be changed without notice

CH - CA and MH - MA 180 °C version

inserts		page:
CNE RY	24 poles + ⏚	**119**
CX RY	4/8 poles + ⏚	**204**

bulkhead and surface mounting housings and cover

hoods and cover

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with levers and gasket	**CHIR 24**	--						
surface mounting housing, with levers, high construction	**CAPR 24.21**	21	**MAPR 24.32**	32				
cover with 4 pegs (for enclosures) [1]	**CHCR 24**							
enclosure with pegs, side entry					**CHOR 24**	21	**MHOR 24.25**	25
enclosure with pegs, side entry, high construction					**CAOR 24.29**	29	**MAOR 24.40**	40
enclosure with pegs, top entry					**CHVR 24**	21	**MHVR 24.25**	25
enclosure with pegs, top entry, high construction					**CAVR 24.29**	29	**MAVR 24.40**	40
cover with 2 levers (for hoods) [2]					**CHCR 24 G**			

panel cut-out for bulkhead mounting housings

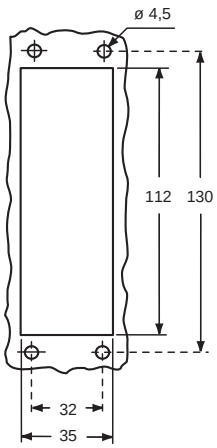

CHIR

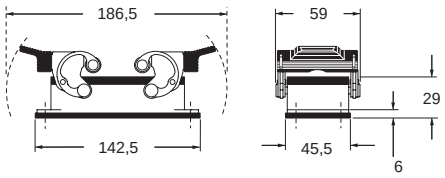

CHOR (CAOR) and **MHOR (MAOR)**



CAPR and **MAPR**

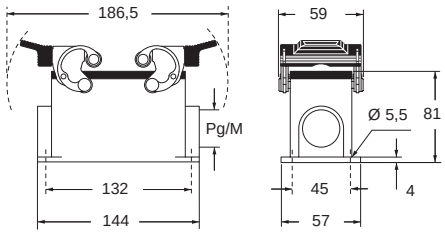

CHVR (CAVR) and **MHVR (MAVR)**

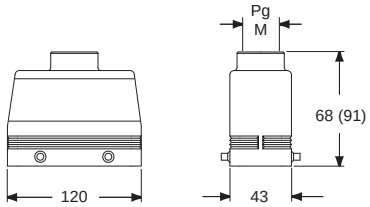

CHCR

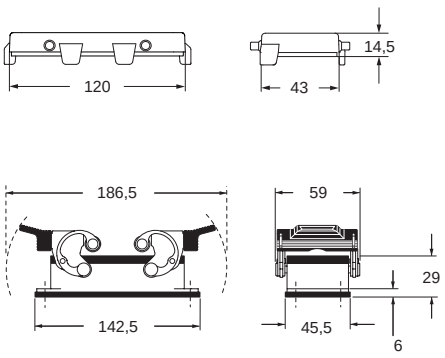

CHCR G

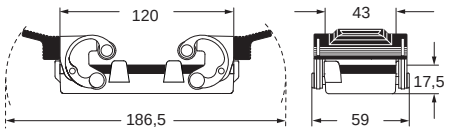

For fixing on housings

1) **eyelet**



For fixing on hoods

2) **loop**



Type 4/4X/12

EN 60529 IP65 IEC 60529

CH and MH 180 °C version

inserts		page:
CNE RY	48 poles + ⏚	**120**

insert dimensions:
2 x (104 x 27) mm

bulkhead and surface mounting housings

hoods

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housings, with lever and cover	**CHIR 48 LS**	--						
surface mounting housings, with lever and cover	**CHPR 48 LS**	36 x 1/2	**MHPR 48 LS40**	40 x 1/2				
side entry, with pegs					**CHOR 48 L**	36	**MHOR 48 L40**	40
top entry, with pegs					**CHVR 48 L**	36	**MHVR 48 L40**	40

panel cut-out for bulkhead mounting housings

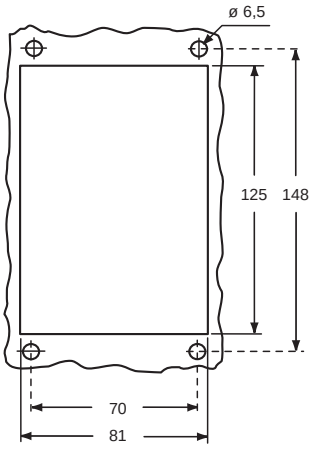

CHIR LS

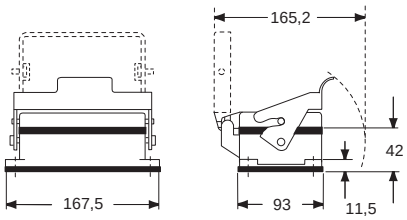

CHOR L and **MHOR L**

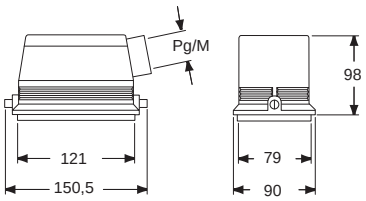

CHPR LS and **MHPR LS**

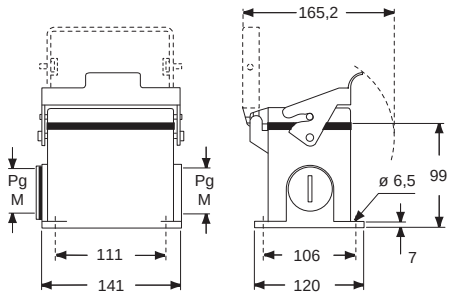

CHVR L and **MHVR L**

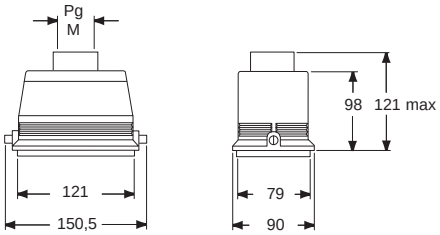

Type 4/4X/12

EN 60529 IP65 IEC 60529

180 °C

dimensions shown in mm are not binding and may be changed without notice

HNM series

In and out

Housings (bulkhead-mount or surface mount) equipped with **V-TYPE single locking lever** with special **anti-friction treatment**

to be mated to

Hoods with **riveted anti-friction pegs**, that facilitate the frequent opening and closing.

This **HNM** series of connector enclosures has been developed to be used in combination with the **HNM** series of multipole connector inserts equipped with relevant **HNM** series of removable crimp contacts, to provide the same reliable protection of the standard series but for a consistently extended, **high number of matings.**

When the number of 500 mating cycles guaranteed life of standard connector hoods and housings is insufficient to provide a reasonably long life span in those connector applications that by function are foreseen to be subject to very frequent connections and disconnections, it is necessary to opt for a solution able to increase that guaranteed lifetime.

The **HNM** series of connector enclosures achieves this goal, extending the guaranteed number of matings up to 10 000.
The locking means, comprising both the locking lever and locking pegs are chosen and treated so as to reduce wear due to friction at minimum, thanks to the use of the clever proprietary design of the **V-TYPE locking lever**, that already in standard enclosures is able to provide extremely reduced wear on the corresponding locking pegs, producing a very limited friction, furtherly reduced by the application of a special anti-friction lubrication treatment.

The counterpart hoods for locking on the long side are already provided by riveted anti-friction rolling pegs, as well furtherly improved by the special anti-friction lubrication treatment.

RV - RVA HNM (High Number of Matings)

inserts		page:
RDD	24 poles + ⏚	**210**
RCE	6 poles + ⏚	**214**
MIXO HNM	2 modules	**321 - 333**

bulkhead mounting housings with single lever in stainless steel

10.000 MATINGS WITH HNM INSERTS

surface mounting housings with single lever in stainless steel

10.000 MATINGS WITH HNM INSERTS

description	part No.	part No.	entry M
with lever and gasket, size “44.27”	**RVI 06 L**		
with lever, size “44.27”		**RVP 06 L20**	20
with lever, size “44.27”		**RVP 06 L220**	20 x 2
with lever, high construction, size “44.27”		**RVAP 06 L32**	32
with lever, high construction, size “44.27”		**RVAP 06 L232**	32 x 2

panel cut-out for bulkhead mounting housings



RVI L

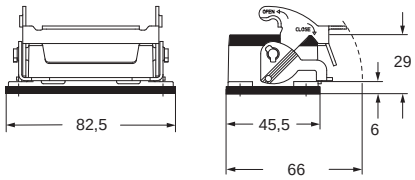

RVP L - RVAP L

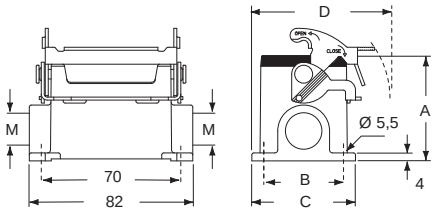

type	A	B	C	D
RVP 06 L	53	40	52	70
RVAP 06 L	74	45	57	72,5

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

RH - RF HNM (High Number of Matings)

inserts		page:
RDD	24 poles + ⏚	**210**
RCE	6 poles + ⏚	**214**
MIXO HNM	2 modules	**321 - 333**

hoods with 2 pegs

10.000 MATINGS WITH HNM INSERTS

hoods with 2 pegs

10.000 MATINGS WITH HNM INSERTS

description	part No.	entry M	part No.	entry M
with pegs, side entry	**RHO 06 L25**	25		
with pegs, top entry [1]	**RHV 06 L25**	25		
with pegs, side entry, high construction, without adapter [2]			**RFO 06 L32**	32
with pegs, top entry, high construction, without adapter [2]			**RFV 06 L32**	32

[1] cannot be used with MIXO series.

[2] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

RHO L



RFO L

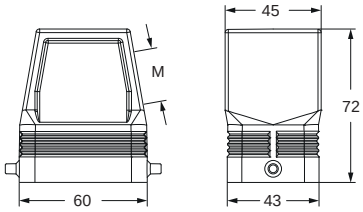

RHV L



RFV L

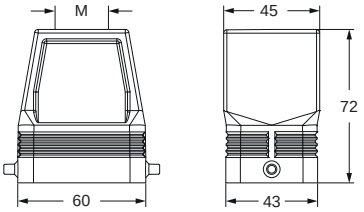

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

RV - RVA HNM (High Number of Matings)

inserts		page:
RDD	42 poles + ⏚	**211**
RCE	10 poles + ⏚	**215**
MIXO HNM	3 modules	**321 - 333**

bulkhead mounting housings with single lever in stainless steel

10.000 MATINGS WITH HNM INSERTS

surface mounting housings with single lever in stainless steel

10.000 MATINGS WITH HNM INSERTS

description	part No.	part No.	entry M
with lever, size “57.27”	**RVI 10 L**		
with lever, size “57.27”		**RVP 10 L20**	20
with lever, size “57.27”		**RVP 10 L220**	20 x 2
with lever, high construction, size “57.27”		**RVAP 10 L32**	32
with lever, high construction, size “57.27”		**RVAP 10 L232**	32 x 2

panel cut-out for bulkhead mounting housings

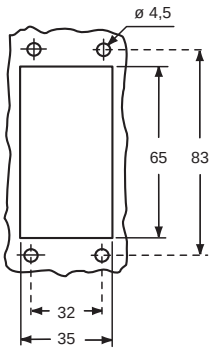

RVI L

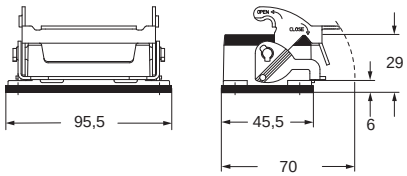

RVP L - RVAP L

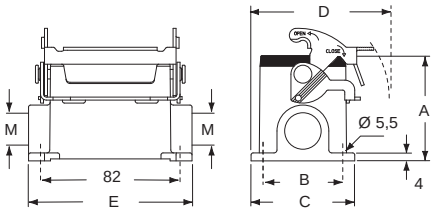

type	A	B	C	D	E
RVP 10 L	57	40	52	73	93,5
RVAP 10 L	74	45	57	75,5	94

HNM

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

RH - RF HNM (High Number of Matings)

inserts		page:
RDD	42 poles + ⏚	**211**
RCE	10 poles + ⏚	**215**
MIXO HNM	3 modules	**321 - 333**

hoods with 2 pegs

10.000 MATINGS WITH HNM INSERTS

hoods with 2 pegs

10.000 MATINGS WITH HNM INSERTS

description	part No.	entry M	part No.	entry M
with pegs, side entry	**RHO 10 L25**	25		
with pegs, top entry	**RHV 10 L25**	25		
with pegs, side entry, high construction, without adapter [1]			**RFO 10 L32**	32
with pegs, top entry, high construction, without adapter [1]			**RFV 10 L32**	32

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

RHO L

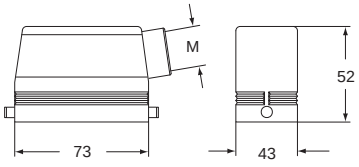

RFO L

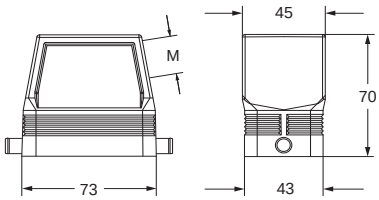

RHV L



RFV L

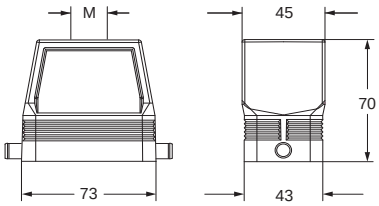

Type 4/4X/12

IP65 insulating cable gland or fittings without gasket

IP66 IP69 cable gland with O-Ring gasket

RV - RVA HNM (High Number of Matings)

inserts		page:
RD	40 poles + ⏚	**208**
RDD	72 poles + ⏚	**212**
RCE	16 poles + ⏚	**216**
RQEE	40 poles + ⏚	**218**
RX	12 poles + 2 poles + ⏚	**221**
MIXO HNM	4 modules	**321 - 333**

bulkhead mounting housings with single lever in stainless steel

10.000 MATINGS WITH HNM INSERTS

surface mounting housings with single lever in stainless steel

10.000 MATINGS WITH HNM INSERTS

description	part No.	part No.	entry M
with lever, size “77.27”	**RVI 16 L**		
with lever, size “77.27”		**RVP 16 L25**	25
with lever, size “77.27”		**RVP 16 L225**	25 x 2
with lever, high construction, size “77.27”		**RVAP 16 L32**	32
with lever, high construction, size “77.27”		**RVAP 16 L232**	32 x 2

panel cut-out for bulkhead mounting housings

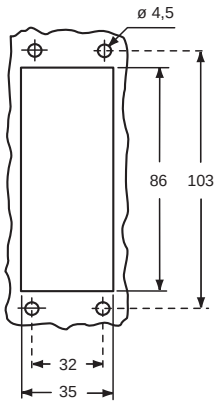

RVI L

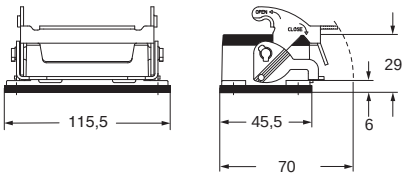

RVP L - RVAP L

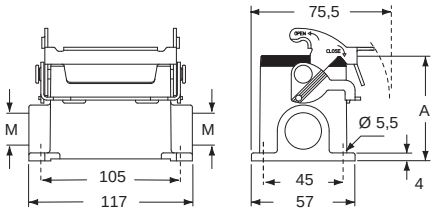

type	**A**
RVP 16 L	63
RVAP 16 L	81

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

RH - RF HNM (High Number of Matings)

inserts		page:
RD	40 poles + ⏚	**208**
RDD	72 poles + ⏚	**212**
RCE	16 poles + ⏚	**216**
RQEE	40 poles + ⏚	**218**
RX	12 poles + 2 poles + ⏚	**221**
MIXO HNM	4 modules	**321 - 333**

hoods with 2 pegs

10.000 MATINGS WITH HNM INSERTS

hoods with 2 pegs

10.000 MATINGS WITH HNM INSERTS

description	part No.	entry M	part No.	entry M
with pegs, side entry	**RHO 16 L32**	32		
with pegs, top entry	**RHV 16 L32**	32		
with pegs, side entry, high construction, without adapter [1]			**RFO 16 L32**	32
with pegs, top entry, high construction, without adapter [1]			**RFV 16 L32**	32

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

RHO L

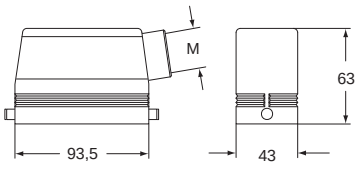

RFO L

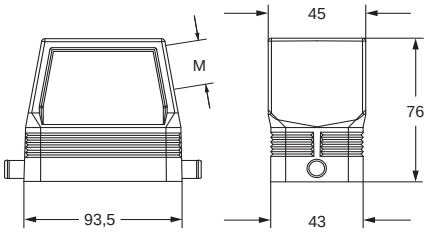

RHV L



RFV L

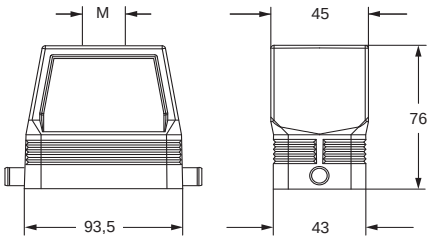

HNM

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

RV - RVA HNM (High Number of Matings)

inserts		page:
RD	64 poles + ⏚	**209**
RDD	108 poles + ⏚	**213**
RCE	24 poles + ⏚	**217**
RQEE	64 poles + ⏚	**219**
MIXO HNM	6 modules	**321 - 333**

bulkhead mounting housings with single lever in stainless steel

10.000 MATINGS WITH HNM INSERTS

surface mounting housings with single lever in stainless steel

10.000 MATINGS WITH HNM INSERTS

description	part No.	part No.	entry M
with lever, size “104.27”	**RVI 24 L**		
with lever, size “104.27”		**RVP 24 L25**	25
with lever, size “104.27”		**RVP 24 L225**	25 x 2
with lever, high construction, size “104.27”		**RVAP 24 L32**	32
with lever, high construction, size “104.27”		**RVAP 24 L232**	32 x 2

panel cut-out for bulkhead mounting housings

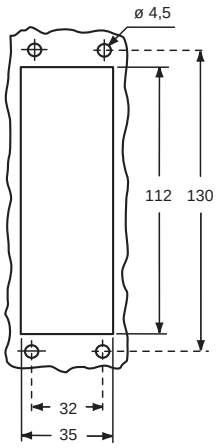

RVI L

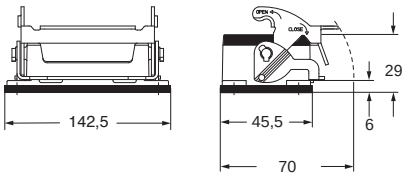

RVP L - RVAP L

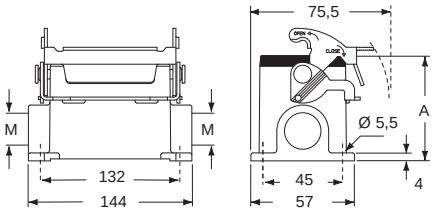

type	**A**
RVP 24 L	63
RVAP 24 L	81

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

RH - RF HNM (High Number of Matings)

inserts		page:
RD	64 poles + ⏚	**209**
RDD	108 poles + ⏚	**213**
RCE	24 poles + ⏚	**217**
RQEE	64 poles + ⏚	**219**
MIXO HNM	6 modules	**321 - 333**

hoods with 2 pegs

10.000 MATINGS WITH HNM INSERTS

hoods with 2 pegs

10.000 MATINGS WITH HNM INSERTS

description	part No.	entry M	part No.	entry M
with pegs, side entry	**RHO 24 L32**	32		
with pegs, top entry	**RHV 24 L32**	32		
with pegs, side entry, high construction, without adapter [1]			**RFO 24 L40**	40
with pegs, top entry, high construction, without adapter [1]			**RFV 24 L40**	40

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

RHO L

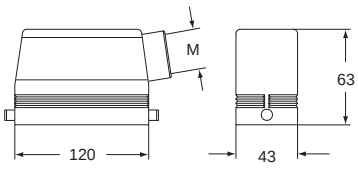

RFO L

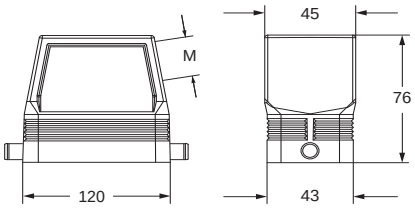

RHV L



RFV L

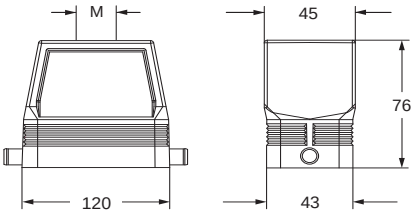

Type 4/4X/12

IP65 — insulating cable gland or fittings without gasket

IP66 IP69 — cable gland with O-Ring gasket

RAC dummy hoods HNM (High Number of Matings)

enclosures	page:
size “44.27”	592 - 593
size “57.27”	594 - 595
size “77.27”	596 - 597
size “104.27”	598 - 599

hoods without entry, to be pierced

10.000 MATINGS WITH HNM INSERTS

description	part No. with 2 pegs
with pegs for levers	
used with enclosures size “44.27”	**RAC 06 L**
used with enclosures size “57.27”	**RAC 10 L**
used with enclosures size “77.27”	**RAC 16 L**
used with enclosures size “104.27”	**RAC 24 L**

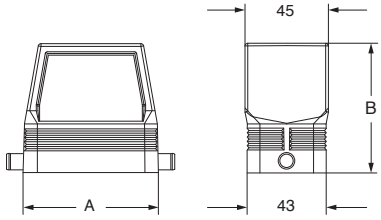

part No.	A	B
RAC 06 L	60	72
RAC 10 L	73	70
RAC 16 L	93,5	76
RAC 24 L	120	76

HNM

Type 4/4X/12

IP65 insulating cable gland or fittings without gasket

IP66 IP69 cable gland with O-Ring gasket

dimensions shown in mm are not binding and may be changed without notice

CAUTION: As the frames are floating, **the PE earthing connection of the metal surfaces on which they are mounted** (mounting bases) **must be performed separately** and cannot be done by connecting the PE earthing contact to the corresponding connector inserts.

NOTE: The supply includes 1 frame and 4 shoulder screws with cylindrical head and notch to fix the frame in place.

For use with MIXO inserts CX 04 X, please contact ILME S.p.A.

self-centring floating frame

10.000 MATINGS WITH HNM INSERTS

description	part No.
in stainless steel, to be mounted on:	
inserts size “44.27” [1] and MIXO frames for 2 inserts	**CR 06 DF**
inserts size “57.27” [1] and MIXO frames for 3 inserts	**CR 10 DF**
inserts size “77.27” [1] and MIXO frames for 4 inserts	**CR 16 DF**
inserts size “104.27” [1] and MIXO frames for 6 inserts	**CR 24 DF**

[1] Except CT, CTS and CTSE

Technical specifications
- materials:
  - floating frame, inserts: stainless steel
  - fixing screws: zinc-plated steel
- mechanical endurance: up to 10.000 cycles with HNM inserts
- compensation range:
  - x axis: ± 1,5 mm
  - y axis: ± 1,5 mm

Characteristics
- Suitable, depending on size, for all standard and MIXO connector inserts and frames, except series CT, CTS and CTSE.
- Designed to be used in the transportation, printing and power electronic industries (for example boxes for rack cabinets) and in all industrial applications that require, during assembly or maintenance, the connection of connectors without possibility of controlling the alignment.
- Enables the **self-centring coupling of two corresponding** connectors without the use of enclosures; they freely move on their base plate (± 1,5 mm on both axes) ensuring the **alignment of the coupling**.

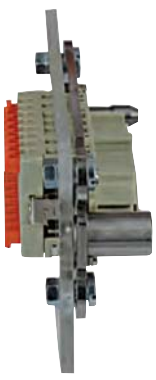

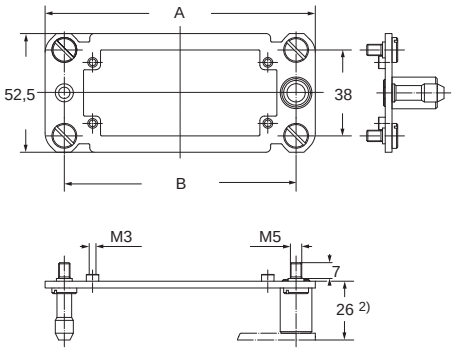

[2] distance for electric and fibre optic contacts: max 27 mm;
distance for pneumatic contacts: max 26,5 mm.

panel cut-out

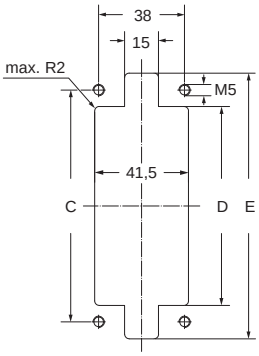

part No.	A	B	C	D	E
CR 06 DF	86	69	69	54,5	84
CR 10 DF	99	82	82	67,5	97
CR 16 DF	119,5	102,5	102,5	88	117,5
CR 24 DF	146	129	129	114,5	144

CENTRAL LEVER series

Easy access for robotics

Series specifically designed for industrial applications with limited installation space.

These enclosures can be installed, placed side-by-side and handled in a single operation.

Furthermore, the lever's shape reduces the effort required to uncouple the inner fittings.

SUM-UP OF MATERIALS USED FOR CH..YC, CA..YC and MA..YC, CA..YX and MF..YX series

- **Made of die cast aluminium alloy**
- **With epoxy-polyester powder coating**
- **Gaskets in anti-aging, oil-resistant, grease-resistant and fuel-resistant vinyl nitrile elastomer**
- **Locking device with single stainless steel lever**

CH - CA and MA CENTRAL LEVER

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
MIXO	3 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings for central lever

surface mounting housings, with two entries for central lever

description	part No.	part No.	entry Pg	part No.	entry M
bulkhead mounting with pegs	**CHI 06 YC**				
surface mounting, high construction, with pegs		**CAP 06 YC229**	29x2	**MAP 06 YC232**	32x2

panel cut-out for bulkhead mounting housings

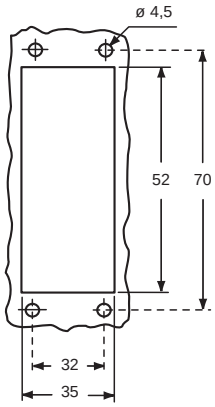

CHI YC



CAP YC and **MAP YC**

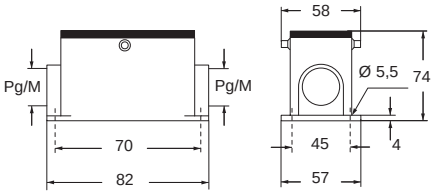

Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts and CRM CX and CRF CX pins with MIXO inserts to reduce movements when fitting and removing the connectors and to avoid contact damages.

Within this scope, the DIN 43 652 standard requires a maximum angular longitudinal fluctuation of ±5°.

c UL us Type 4/4X/12

EN 60529 IP65 IEC 60529

CA and MA CENTRAL LEVER

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
MIXO	3 modules	**262 - 317**

hoods with central lever

hoods with central lever

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
side entry, high construction	**CAO 06 YX21**	21	**MAO 06 YX25**	25				
side entry, high construction	**CAO 06 YX29**	29	**MAO 06 YX32**	32				
top entry, high construction					**CAV 06 YX21**	21	**MAV 06 YX25**	25
top entry, high construction					**CAV 06 YX29**	29	**MAV 06 YX32**	32

Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts and CRM CX and CRF CX pins with MIXO inserts to reduce movements when fitting and removing the connectors and to avoid contact damages.

Within this scope, the DIN 43 652 standard requires a maximum angular longitudinal fluctuation of ±5°.

CAO..YX and **MAO..YX**

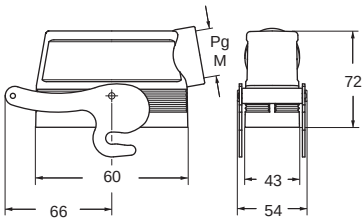

CAV..YX and **MAV..YX**

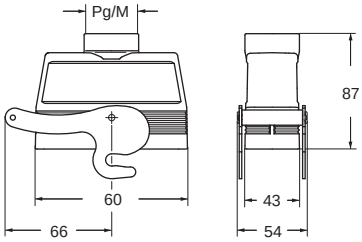

Type 4/4X/12

EN 60529 IP65 IEC 60529

dimensions shown in mm are not binding and may be changed without notice

CA - MA and CF - MF CENTRAL LEVER

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
MIXO	3 modules	**262 - 317**

hoods for central lever

hoods for central lever

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs, top entry, high construction	**CAV 06 GYC21**	21	**MAV 06 GYC25**	25				
with pegs, top entry, high construction	**CAV 06 GYC29**	29	**MAV 06 GYC32**	32				
with pegs, top entry, high construction			**MAV 06 GYC40**	40				
with pegs, top entry, high construction, without adapter [1]					**CFV 06 GYC21**	21	**MFV 06 GYC25**	25
with pegs, top entry, high construction, without adapter [1]					**CFV 06 GYC29**	29	**MFV 06 GYC32**	32
with pegs, top entry, high construction, without adapter [1]							**MFV 06 GYC40**	40

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts and CRM CX and CRF CX pins with MIXO inserts to reduce movements when fitting and removing the connectors and to avoid contact damages.

Within this scope, the EN 175301-801 standard (former DIN 43 652) requires a maximum angular fluctuation of ±5° on the long side, ±2° on the short side.

CAV..GYC and **MAV..GYC**

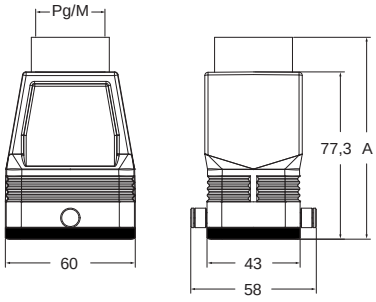

part No.	A
CAV 06 GYC21	92,3
CAV 06 GYC29	93,8
MAV 06 GYC25	92,3
MAV 06 GYC32	93,3
MAV 06 GYC40	96,3

CFV..GYC and **MFV..GYC**

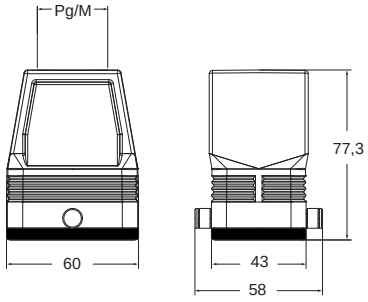

Type 4/4X/12 pending

IP65 EN 60529 IEC 60529

CH - CA and MA CENTRAL LEVER

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings for central lever

surface mounting housings, with two entries, for central lever

description	part No.	part No.	entry Pg	part No.	entry M
bulkhead mounting with pegs	**CHI 10 YC**				
surface mounting, high construction, with pegs		**CAP 10 YC229**	29x2	**MAP 10 YC232**	32x2

panel cut-out for bulkhead mounting housings

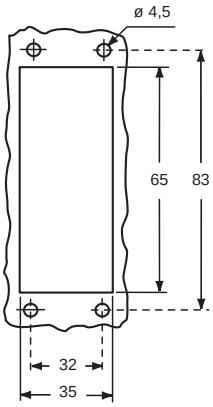

CHI YC



CAP YC and **MAP YC**

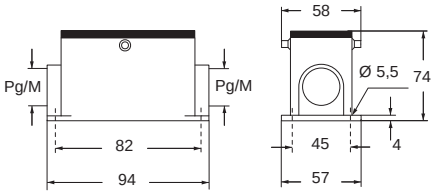

Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts and CRM CX and CRF CX pins with MIXO inserts to reduce movements when fitting and removing the connectors and to avoid contact damages.

Within this scope, the DIN 43 652 standard requires a maximum angular longitudinal fluctuation of ±5°.

Type 4/4X/12

IP65

dimensions shown in mm are not binding and may be changed without notice

CA and MA CENTRAL LEVER

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

hoods with central lever

hoods with central lever

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
side entry, high construction	**CAO 10 YX21**	21	**MAO 10 YX32**	32				
side entry, high construction	**CAO 10 YX29**	29	**MAO 10 YX40**	40				
top entry, high construction					**CAV 10 YX21**	21	**MAV 10 YX32**	32
top entry, high construction					**CAV 10 YX29**	29	**MAV 10 YX40**	40

Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts and CRM CX and CRF CX pins with MIXO inserts to reduce movements when fitting and removing the connectors and to avoid contact damages.

Within this scope, the DIN 43 652 standard requires a maximum angular longitudinal fluctuation of ±5°.

CAO..YX and **MAO..YX**

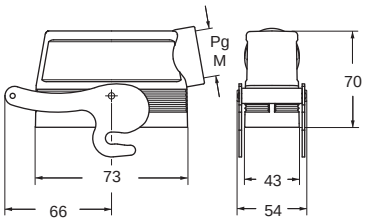

CAV..YX and **MAV..YX**

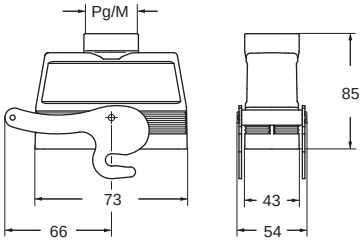

Type 4/4X/12

IP65 EN 60529 IEC 60529

CENTRAL LEVER

CA - MA and CF - MF CENTRAL LEVER

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

hoods for central lever

hoods for central lever

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs, top entry, high construction	**CAV 10 GYC21**	21	**MAV 10 GYC25**	25				
with pegs, top entry, high construction	**CAV 10 GYC29**	29	**MAV 10 GYC32**	32				
with pegs, top entry, high construction			**MAV 10 GYC40**	40				
with pegs, top entry, high construction, without adapter [1]					**CFV 10 GYC21**	21	**MFV 10 GYC25**	25
with pegs, top entry, high construction, without adapter [1]					**CFV 10 GYC29**	29	**MFV 10 GYC32**	32
with pegs, top entry, high construction, without adapter [1]							**MFV 10 GYC40**	40

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts and CRM CX and CRF CX pins with MIXO inserts to reduce movements when fitting and removing the connectors and to avoid contact damages.

Within this scope, the EN 175301-801 standard (former DIN 43 652) requires a maximum angular fluctuation of ±5° on the long side, ±2° on the short side.

CAV..GYC and **MAV GYC**

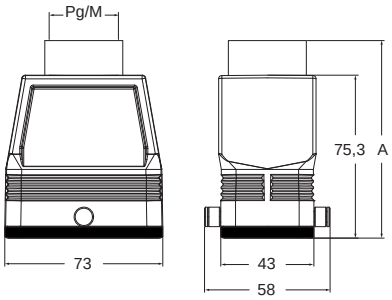

part No.	A
CAV 10 GYC21	90,3
CAV 10 GYC29	91,8
MAV 10 GYC25	90,3
MAV 10 GYC32	91,3
MAV 10 GYC40	94,3

CFV..GYC and **MFV..GYC**

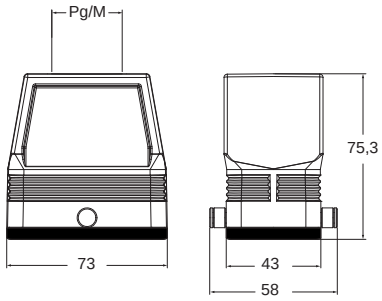

Type 4/4X/12 pending

EN 60529 IP65 IEC 60529

dimensions shown in mm are not binding and may be changed without notice

CH - CA and MA CENTRAL LEVER

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CT, CTS (10A) ***)**	40 poles + ⏚	**156**
CT, CTSE (16A) ***)**	16 poles + ⏚	**162**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings for central lever

surface mounting housings, with two entries for central lever

description	part No.	part No.	entry Pg	part No.	entry M
bulkhead mounting with pegs	**CHI 16 YC**				
surface mounting, high construction, with pegs		**CAP 16 YC229**	29x2	**MAP 16 YC232**	32x2

panel cut-out for bulkhead mounting housings

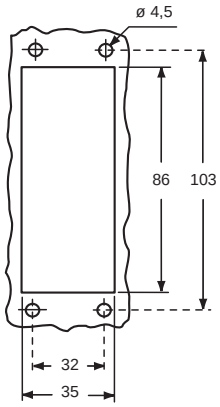

CHI YC



CAP YC and **MAP YC**

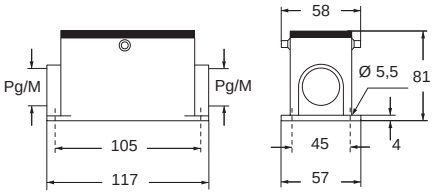

Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts and CRM CX and CRF CX pins with MIXO inserts to reduce movements when fitting and removing the connectors and to avoid contact damages.

Within this scope, the DIN 43 652 standard requires a maximum angular longitudinal fluctuation of ±5°.

Type 4/4X/12

EN 60529 IP65 IEC 60529

CA and MA CENTRAL LEVER

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

hoods with central lever

hoods with central lever

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
side entry, high construction	**CAO 16 YX21**	21	**MAO 16 YX32**	32				
side entry, high construction	**CAO 16 YX29**	29	**MAO 16 YX40**	40				
top entry, high construction					**CAV 16 YX21**	21	**MAV 16 YX32**	32
top entry, high construction					**CAV 16 YX29**	29	**MAV 16 YX40**	40

Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts and CRM CX and CRF CX pins with MIXO inserts to reduce movements when fitting and removing the connectors and to avoid contact damages.

Within this scope, the DIN 43 652 standard requires a maximum angular longitudinal fluctuation of ±5°.

CAO..YX and **MAO..YX**

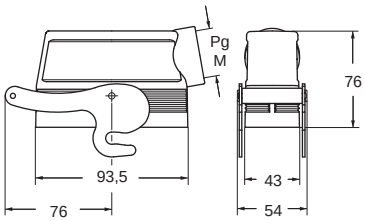

CAV..YX and **MAV..YX**

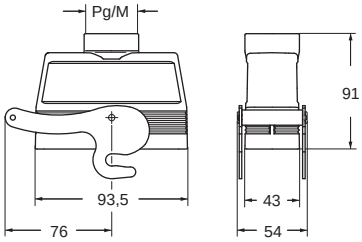

Type 4/4X/12

IP65 EN 60529 IEC 60529

dimensions shown in mm are not binding and may be changed without notice

CA - MA and CF - MF CENTRAL LEVER

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

hoods for central lever

hoods for central lever

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs, top entry, high construction	**CAV 16 GYC21**	21	**MAV 16 GYC25**	25				
with pegs, top entry, high construction	**CAV 16 GYC29**	29	**MAV 16 GYC32**	32				
with pegs, top entry, high construction			**MAV 16 GYC40**	40				
with pegs, top entry, high construction, without adapter [1]					**CFV 16 GYC21**	21	**MFV 16 GYC25**	25
with pegs, top entry, high construction, without adapter [1]					**CFV 16 GYC29**	29	**MFV 16 GYC32**	32
with pegs, top entry, high construction, without adapter [1]							**MFV 16 GYC40**	40

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts and CRM CX and CRF CX pins with MIXO inserts to reduce movements when fitting and removing the connectors and to avoid contact damages.

Within this scope, the EN 175301-801 standard (former DIN 43 652) requires a maximum angular fluctuation of ±5° on the long side, ±2° on the short side.

CAV..GYC and **MAV..GYC**

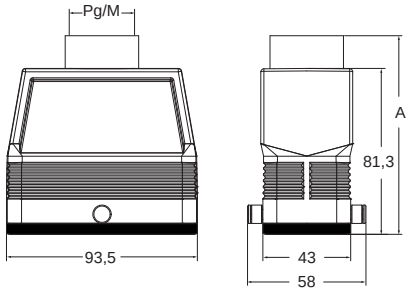

part No.	A
CAV 16 GYC21	96,3
CAV 16 GYC29	97,8
MAV 16 GYC25	96,3
MAV 16 GYC32	97,6
MAV 16 GYC40	100,3

CFV..GYC and **MFV..GYC**

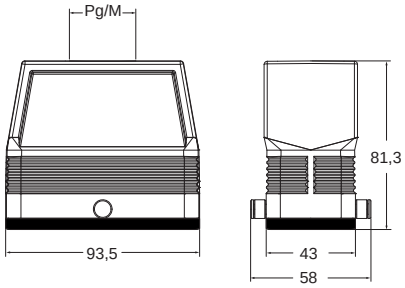

Type 4/4X/12 pending

IP65 EN 60529 IEC 60529

CENTRAL LEVER

CH - CA and MA CENTRAL LEVER

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTS (10A) ***)**	64 poles + ⏚	**157**
CT, CTSE (16A) ***)**	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

***)** can be used only in bulkhead mounting housings

bulkhead mounting housings for central lever

surface mounting housings, with two entries, for central lever

description	part No.	part No.	entry Pg	part No.	entry M
bulkhead mounting with pegs	**CHI 24 YC**				
surface mounting, high construction, with pegs		**CAP 24 YC229**	29x2	**MAP 24 YC232**	32x2

panel cut-out for bulkhead mounting housings

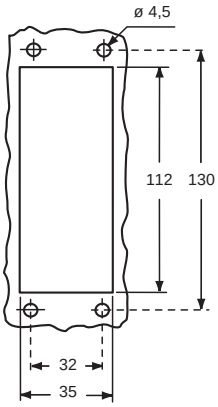

CHI YC



CAP YC and **MAP YC**

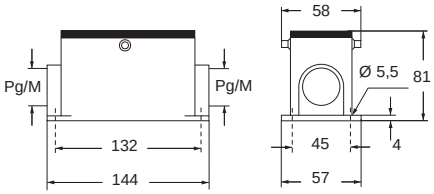

Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts and CRM CX and CRF CX pins with MIXO inserts to reduce movements when fitting and removing the connectors and to avoid contact damages.

Within this scope, the DIN 43 652 standard requires a maximum angular longitudinal fluctuation of ±5°.

Type 4/4X/12

IP65

dimensions shown in mm are not binding and may be changed without notice

CA and MA - CI and MI CENTRAL LEVER

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

hoods with central lever

inclined hoods with central lever

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
side entry, high construction	**CAO 24 YX21**	21	**MAO 24 YX32**	32				
side entry, high construction	**CAO 24 YX29**	29	**MAO 24 YX40**	40				
top entry, high construction	**CAV 24 YX21**	21	**MAV 24 YX32**	32				
top entry, high construction	**CAV 24 YX29**	29	**MAV 24 YX40**	40				
side entry, high construction							**MIO 24 YX40**	40
side entry, high construction					**CIO 24 YX36**	36	**MIO 24 YX50**	50
top entry, high construction							**MIV 24 YX40**	40
top entry, high construction					**CIV 24 YX36**	36	**MIV 24 YX50**	50

Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts and CRM CX and CRF CX pins with MIXO inserts to reduce movements when fitting and removing the connectors and to avoid contact damages.

Within this scope, the DIN 43 652 standard requires a maximum angular longitudinal fluctuation of ±5°.

CAO..YX and **MAO..YX**

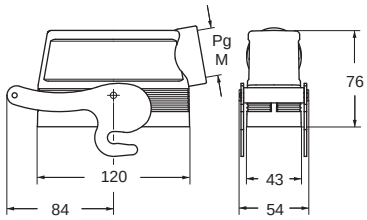

CIO..YX and **MIO..YX**

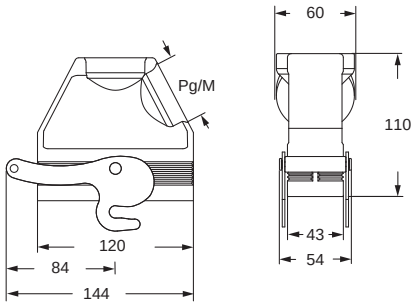

CAV..YX and **MAV..YX**

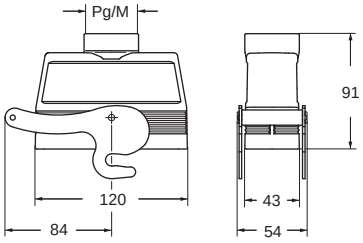

CIV..YX and **MIV..YX**

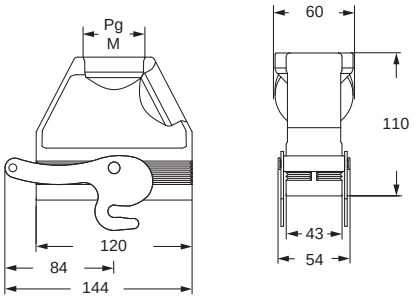

c UL us Type 4/4X/12

EN 60529 IP65 IEC 60529

EN 60529 IP66 IP69 IEC 60529

CENTRAL LEVER

CA - MA and CF - MF CENTRAL LEVER

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

hoods for central lever

hoods for central lever

description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs, top entry, high construction	**CAV 24 GYC21**	21	**MAV 24 GYC25**	25				
with pegs, top entry, high construction	**CAV 24 GYC29**	29	**MAV 24 GYC32**	32				
with pegs, top entry, high construction			**MAV 24 GYC40**	40				
with pegs, top entry, high construction, without adapter [1]					**CFV 24 GYC21**	21	**MFV 24 GYC25**	25
with pegs, top entry, high construction, without adapter [1]					**CFV 24 GYC29**	29	**MFV 24 GYC32**	32
with pegs, top entry, high construction, without adapter [1]							**MFV 24 GYC40**	40

[1] enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts and CRM CX and CRF CX pins with MIXO inserts to reduce movements when fitting and removing the connectors and to avoid contact damages.

Within this scope, the EN 175301-801 standard (former DIN 43 652) requires a maximum angular fluctuation of ±5° on the long side, ±2° on the short side.

CAV..GYC and **MAV..GYC**

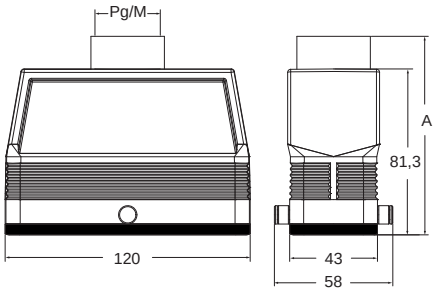

part No.	A
CAV 24 GYC21	96,3
CAV 24 GYC29	97,8
MAV 24 GYC25	96,3
MAV 24 GYC32	97,6
MAV 24 GYC40	100,3

CFV..GYC and **MFV..GYC**

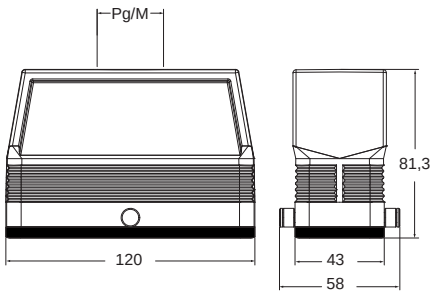

Type 4/4X/12 pending

EN 60529 IP65 IEC 60529

dimensions shown in mm are not binding and may be changed without notice

Locking device for single stainless steel central locking lever

- **locking device,** made in **stainless steel,** with **proprietary design,** that can be easily placed on the side of the central lever of a “104.27” hood in order to lock the opening movement of the locking lever, thus avoiding any unwanted and potentially hazardous accidental opening of the connector coupling under working condition;

- **possibility to apply, optionally, a padlock (CR BLC622,** separately available, 6 mm shackle diameter, 22 mm arc clearance) with **anti-tamper function,** to secure the locking against any unauthorized attempt to open the locking lever and disconnect the connector coupling;

- **two versions available:**
  with eyelet cord end, **CR YLK24 (see page 667)**
  for the fastening to a housing of a central lever coupling when not in use;

  with “loop” cord end, **CR YLK24 SL (see page 667)**
  for the fastening to a hood when not in use (around the incoming cable).

LS-TYPE series

On stage

The **LS-TYPE** enclosures are the ideal solution for the entertainment industry (lighting system power supply and related mixer and dimmer panels), including theatre stages, film sets, radio and TV studios, discos, trade fair booths, concert halls and night public events, both indoors and outdoors, etc.

All parts are in elegant RAL 9005 black to make them suitable for situations and locations where they should not be visible in the dark.

Functional characteristics
For use with inserts in self-extinguishing thermoplastic material (PPS polyphenylene sulphide).

UL certified for USA and Canada for NEMA 4, NEMA 4X and NEMA 12 degrees of protection (enclosure type ratings) printed on the packaging.
IP65/IP69 degree of protection.

SUM-UP OF MATERIALS USED FOR CK..R, CZ..R, CH..R, CA..R and MK..R, MZ..R, MH..R, MA..R series

- **Made of die cast aluminium alloy**
- **Chromate conversion coating, RoHS 2 conform treatment of die cast**
- **Coated with special thermosetting powder coating with high resistant to high temperatures**
- **Gaskets in anti-aging FKM fluoroelastomer**
- **Locking device with levers, springs and pins in stainless steel**
- **Single-block locking levers in stainless steel (for CZ..R, CH..R 48 and MZ..R, MH..R 48 versions)**
- **Lever handles in aluminium with special die-cast coating (for CH..R 10, 16, 24 and MH..R 10, 16, 24 versions)**
- **Supplementary insulation inside enclosures**

CH..N - MA..N and MH..N - MF..N LS-TYPE version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
MIXO	3 modules	**262 - 317**

***)** only in the CHIN 06 LCH and CHIN 06 L enclosure

housings with 2 pegs and 1 lever

hoods with 2 pegs

description	part No.	entry M	part No.	entry M
bulkhead mounting housing, with 2 pegs	**CHIN 06 LCH**			
bulkhead mounting housing, with lever	**CHIN 06 L**			
surface mounting housing, high construction, with lever	**MAPN 06 L32**	32		
with pegs, side entry			**MHON 06 L25**	25
with pegs, top entry			**MHVN 06 L25**	25
with pegs, side entry, high construction, without adapter 1)			**MFON 06 L25**	25
with pegs, top entry, high construction, without adapter 1)			**MFVN 06 L25**	25

1) enclosure without adapter, threaded on the enclosure body, to be used only with a complete cable gland.

- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever

CHIN LCH



CHIN L

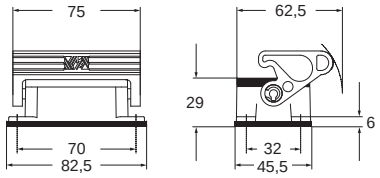

MAPN L32

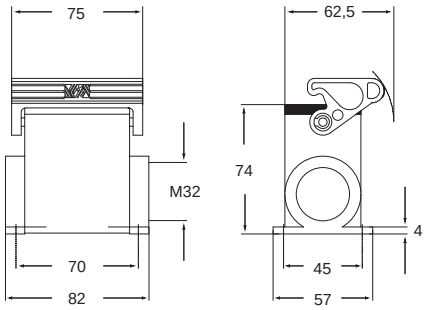

MHON L25

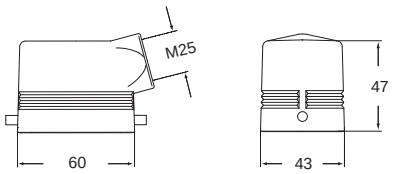

MHVN L25

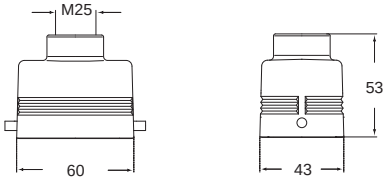

MFON L25



MFVN L25



CR LN Spare part lever for “44.27” enclosures with levers



panel cut-out for bulkhead mounting housings CHIN LCH and CHIN L



Type 4/4X/12

IP65 EN 60529 IEC 60529

LS-TYPE

dimensions shown in mm are not binding and may be changed without notice

CH..N and MH..N - MF..N LS-TYPE version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
MIXO	3 modules	**262 - 317**

hoods with single lever

covers

description	part No.	entry M	part No. (with eyelet)	part No. (with loop)
with lever and gasket, top entry	**MHVN 06 LG25**	25		
with lever and gasket, top entry, high construction, without adapter [1]	**MFVN 06 LG25**	25		
covers with pegs			**CHCN 06 L**	
covers with lever				**CHCN 06 LG**

[1] enclosure without adapter, threaded on the enclosure body, to be used only with a complete cable gland.

- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever

MHVN LG25



MFVN LG25



CHCN L



CHCN LG

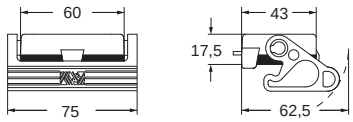

CR LN
Spare part lever for “44.27” enclosures with levers



For fixing on housings

eyelet



For fixing on hoods

loop



Type 4/4X/12

EN 60529 IP65 IEC 60529

CH..N - MA..N and MH..N - MF..N LS-TYPE version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CT, CTSE (16A) ***)**	10 poles + ⏚	**161**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

***)** only in the CHIN 10 CH and CHIN 10 enclosure

housings with 4 pegs and 2 levers

hoods with 4 pegs

description	part No.	entry M	part No.	entry M
bulkhead mounting housing, with 4 pegs	**CHIN 10 CH**			
bulkhead mounting housing, with 2 levers	**CHIN 10**			
surface mounting housing, high construction, with 2 levers	**MAPN 10.32**	32		
with pegs, side entry			**MHON 10.25**	25
with pegs, top entry			**MHVN 10.25**	25
with pegs, side entry, high construction, without adapter 1)			**MFON 10.32**	32
with pegs, top entry, high construction, without adapter 1)			**MFVN 10.32**	32

1) enclosure without adapter, threaded on the enclosure body, to be used only with a complete cable gland.

- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever

CHIN CH



CHIN

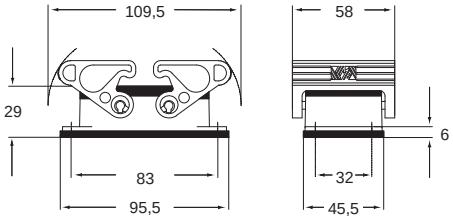

MAPN

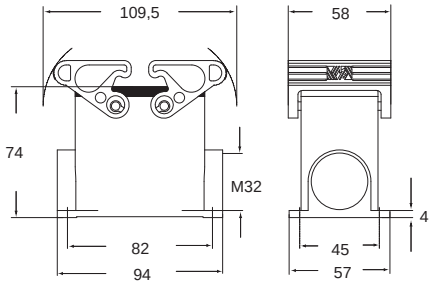

panel cut-out for bulkhead mounting housings CHIN CH and CHIN



MHON

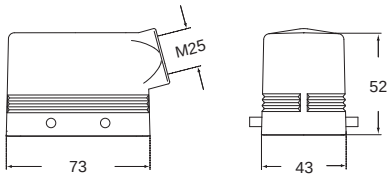

MHVN

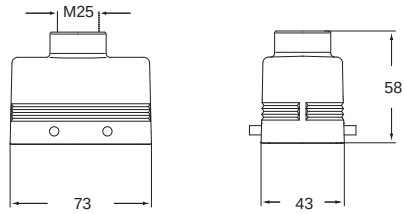

MFON

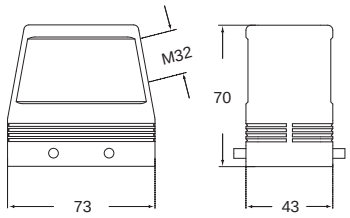

MFVN

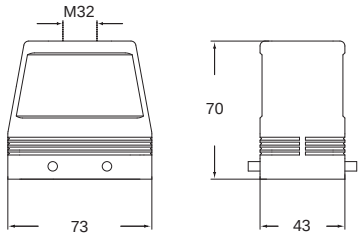

CR LN Spare part lever for “57.27” enclosures with levers



Type 4/4X/12

IP65 EN 60529 IEC 60529

dimensions shown in mm are not binding and may be changed without notice

CH..N and MH..N - MF..N LS-TYPE version

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

hoods with 2 levers

covers

description	part No.	entry M	part No. (with eyelet)	part No. (with loop)
with levers and gasket, top entry	**MHVN 10 G25**	25		
with levers and gasket, top entry, high construction, without adapter [1]	**MFVN 10 G220**	20 x 2		
with levers and gasket, top entry, high construction, without adapter [1]	**MFVN 10 G32**	32		
covers with pegs			**CHCN 10**	
covers with 2 levers				**CHCN 10 G**

[1] enclosure without adapter, threaded on the enclosure body, to be used only with a complete cable gland.

- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever

MHVN G25

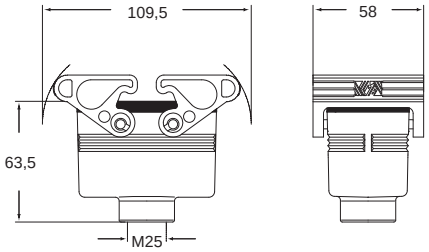

MFVN 10 G220

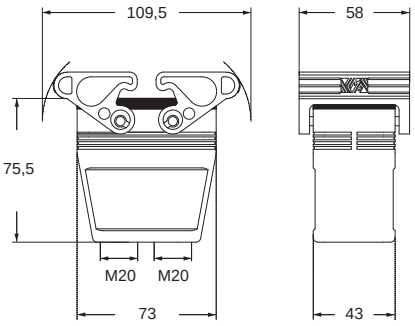

MFVN G32

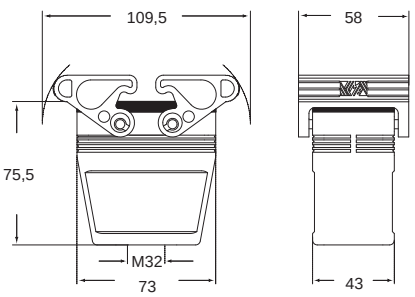

CHCN



CHCN G

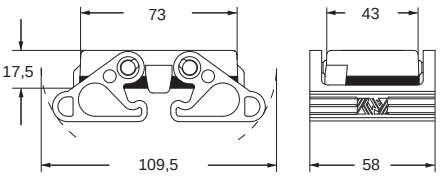

CR LN
Spare part lever for “57.27” enclosures with levers



For fixing on housings

eyelet



For fixing on hoods

loop



Type 4/4X/12

IP65 EN 60529 IEC 60529

CH..N - MA..N and MH..N - MF..N LS-TYPE version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CT, CTS (10A) ***)**	40 poles + ⏚	**156**
CT, CTSE (16A) ***)**	16 poles + ⏚	**162**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

***)** only in the CHIN 16 CH and CHIN 16 enclosure

housings with 4 pegs and 2 levers

hoods with 4 pegs

description	part No.	entry M	part No.	entry M
bulkhead mounting housing, with 4 pegs	**CHIN 16 CH**			
bulkhead mounting housing, with 2 levers	**CHIN 16**			
surface mounting housing, high construction, with 2 levers	**MAPN 16.32**	32		
with pegs, side entry			**MHON 16.32**	32
with pegs, top entry			**MHVN 16.32**	32
with pegs, side entry, high construction, without adapter [1]			**MFON 16.32**	32
with pegs, top entry, high construction, without adapter [1]			**MFVN 16.32**	32

[1] enclosure without adapter, threaded on the enclosure body, to be used only with a complete cable gland.

- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever

CHIN CH

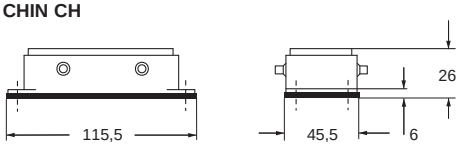

CHIN

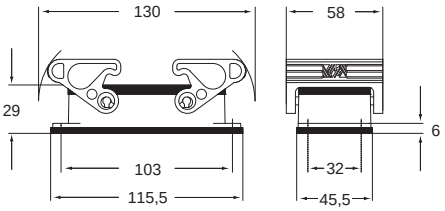

MAPN

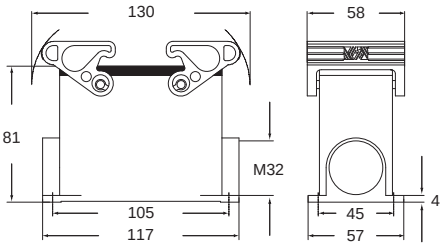

panel cut-out for bulkhead mounting housings CHIN CH and CHIN

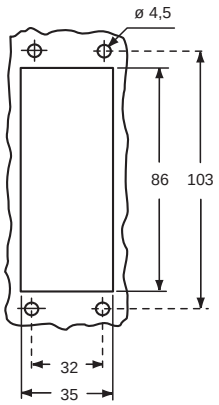

MHON

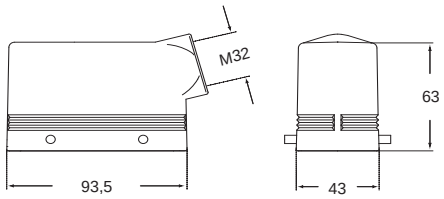

MHVN

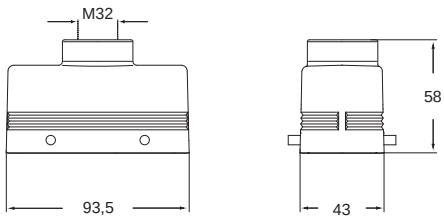

MFON

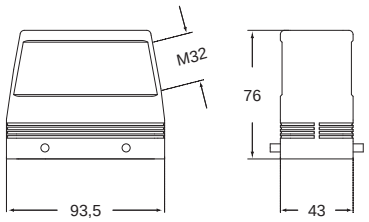

MFVN



CR LN Spare part lever for “77.27” enclosures with levers



Type 4/4X/12

IP65 EN 60529 IEC 60529

dimensions shown in mm are not binding and may be changed without notice

CH..N and MH..N - MF..N LS-TYPE version

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

hoods with 2 levers

covers

description	part No.	entry M	part No. (with eyelet)	part No. (with loop)
with levers and gasket, top entry	**MHVN 16 G32**	32		
with levers and gasket, top entry, high construction, without adapter [1]	**MFVN 16 G225**	25 x 2		
with levers and gasket, top entry, high construction, without adapter [1]	**MFVN 16 G32**	32		
covers with pegs			**CHCN 16**	
covers with 2 levers				**CHCN 16 G**

[1] enclosure without adapter, threaded on the enclosure body, to be used only with a complete cable gland.

- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever

MHVN G32

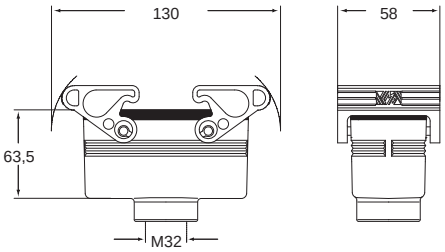

MFVN 16 G225

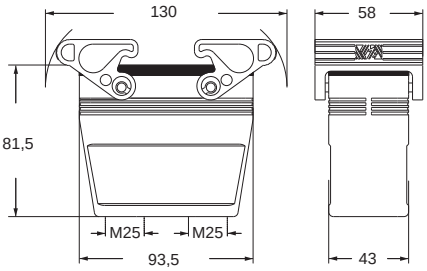

MFVN G32

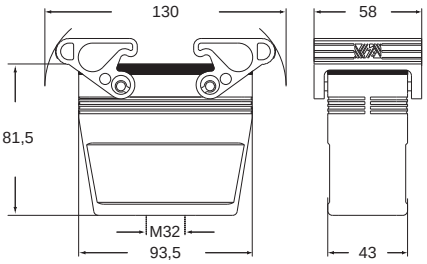

CHCN



CHCN G

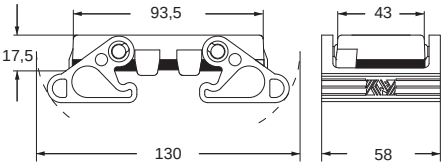

CR LN
Spare part lever for “77.27” enclosures with levers



For fixing on housings

eyelet



For fixing on hoods

loop



Type 4/4X/12

EN 60529 IP65 IEC 60529

CH..N - MA..N and MH..N - MF..N LS-TYPE version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CT, CTS (10A) ***)**	64 poles + ⏚	**157**
CT, CTSE (16A) ***)**	24 poles + ⏚	**163**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204 and 206**
MIXO	6 modules	**262 - 317**

***)** only in the CHIN 24 CH and CHIN 24 enclosure

housings with 4 pegs and 2 levers

hoods with 4 pegs

description	part No.	entry M	part No.	entry M
bulkhead mounting housing, with 4 pegs	**CHIN 24 CH**			
bulkhead mounting housing, with 2 levers	**CHIN 24**			
surface mounting housing, high construction, with 2 levers	**MAPN 24.32**	32		
with pegs, side entry			**MHON 24.32**	32
with pegs, top entry			**MHVN 24.32**	32
with pegs, side entry, high construction, without adapter [1]			**MFON 24.32**	32
with pegs, top entry, high construction, without adapter [1]			**MFVN 24.32**	32

[1] enclosure without adapter, threaded on the enclosure body, to be used only with a complete cable gland.

- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever

CHIN CH

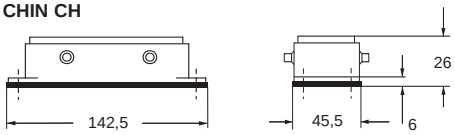

CHIN

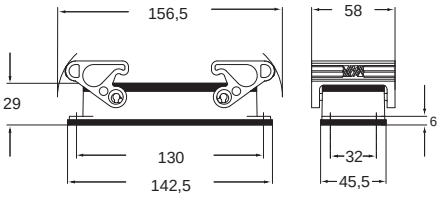

MAPN

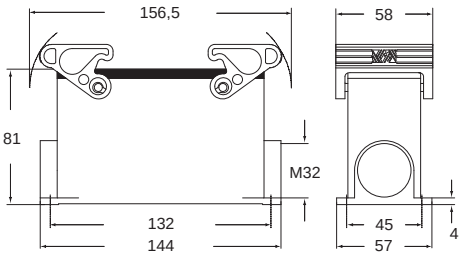

panel cut-out for bulkhead mounting housings CHIN CH and CHIN

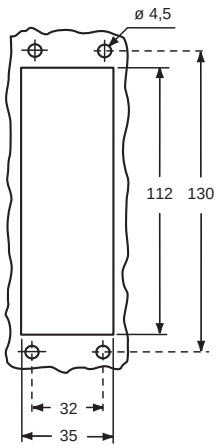

MHON

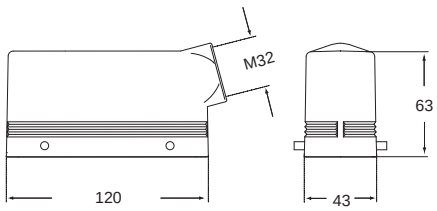

MHVN

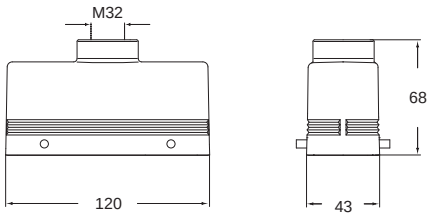

MFON

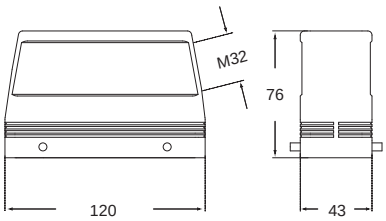

MFVN

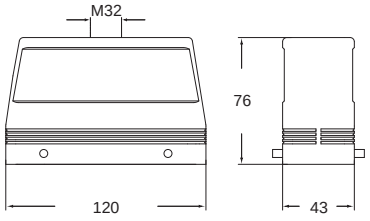

CR LN Spare part lever for “104.27” enclosures with levers



Type 4/4X/12

IP65 EN 60529 IEC 60529

dimensions shown in mm are not binding and may be changed without notice

CH..N and MH..N - MF..N LS-TYPE version

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204 and 206**
MIXO	6 modules	**262 - 317**

hoods with 2 levers

covers

description	part No.	entry M	part No. (with eyelet)	part No. (with loop)
with levers and gasket, top entry	**MHVN 24 G32**	32		
with levers and gasket, top entry, high construction, without adapter [1]	**MFVN 24 G232**	32 x 2		
with levers and gasket, top entry, high construction, without adapter [1]	**MFVN 24 G32**	32		
covers with pegs			**CHCN 24**	
covers with 2 levers				**CHCN 24 G**

[1] enclosure without adapter, threaded on the enclosure body, to be used only with a complete cable gland.

- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever

MHVN G32

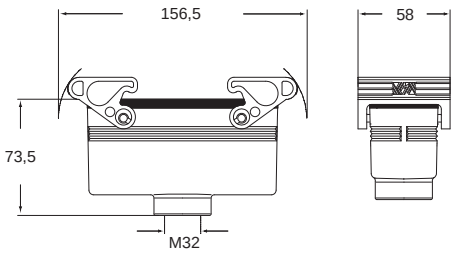

MFVN 24 G232

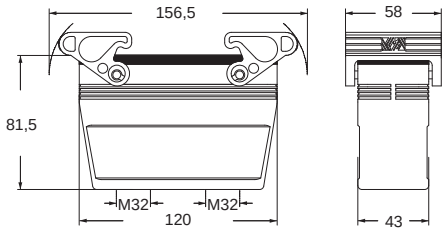

MFVN G32

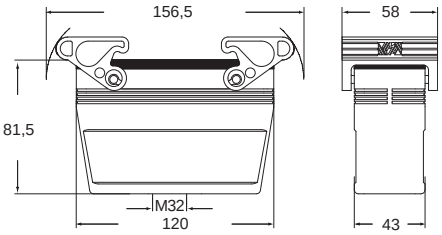

CHCN



CHCN G

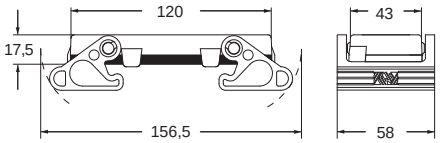

CR LN Spare part lever for “104.27” enclosures with levers



For fixing on housings

eyelet



For fixing on hoods

loop



Type 4/4X/12

EN 60529 IP65 IEC 60529

CGK/MGK (“21.21”) series
and CG/MG (“44.27”, “57.27”, “77.27”, “104.27”) series

CGK/MGK and CG/MG series of free and fixed enclosures (hoods and housings) for heavy-duty rectangular connectors combine water tightness to **IP68** according EN IEC 60529, the “versatile” complete IP degree of protection of these enclosures being actually IP66/IP68/IP69, high mechanical sturdiness and enhanced immunity to electromagnetic disturbances and shielding of the surrounding against emission (EMC features).

The enclosures ensure the highest degree of protection from external interferences; more specifically, they protect people from accessing the hazardous components housed inside the enclosures (protection against shock by direct contact) and they protect the internal connector inserts from the ingress of foreign matters (dust tightness) and from the harmful effects of ingress of fluids (water tightness).

The water tightness between the bulkhead-mounting housings and the panel is ensured by an O-ring seal held in position in a slot within the bulkhead-mounting housing base.

A second O-ring seal fitted around the mating edges of the enclosure ensures the water tightness between the free and the fixed enclosure when the connector is mated and locked.

To ensure the water tightness when the enclosure is fitted onto a cabinet panel, the optional mounting frame with four M6 threaded blind holes may need to be installed inside the panel.

The fastening screws must be fitted inside the enclosure and, through the fastening holes to be drilled on the panel, must be tightened onto the M6 mounting frame internal thread instead of the usual fastening nuts. The bulkhead-mounting fixed enclosure fastening holes have been drilled within the perimeter of the O-ring seal, in order to avoid having to use further seals.

Although these enclosures are larger than the standard enclosures, to leave more space for the cables, and the walls are thicker to achieve more mechanical robustness, the fixing points have remained the same as those of the standard enclosures. The series is offered with two types of locking systems: **bayonet** and **screw**.

The two closing points are located in asymmetrical positions on the short side of the housing so as to ensure an optimal water tightness while keeping the lowest footprint to allow more compactness in case of multiple enclosures placed one close to the other on the short side. The locking means of both versions are made of high quality stainless steel and are firmly fastened inside the free enclosure. These locking means can be fitted and removed by using either a 1,5 mm flat blade screwdriver or a 10 mm hexagonal key. The fixed and free enclosures of series CG/MG are made of foundry grade aluminium alloy, particularly resistant to seawater corrosion.

Series CGK/MGK enclosures are made of zinc alloy. The finish of CG/MG series is made from epoxy powder, which gives the enclosures high scratch and shock resistant properties as well as good chemical resistance.

The finish of CGK/MGK series (size “21.21”) is made by black chrome plating RoHS 2 conform.

The metal covers are made with the same quality materials as the enclosures, and are fitted with a short cord to make it always retrievable.

Scope of application

External interconnections in vehicles, in harsh environments and in humid areas and with sensitive interconnections requiring shielding from electromagnetic interference.

They are particularly suitable for the applications in the railway industry and any application requiring high resistance to pressure, impact and corrosion, with IP66/**IP68**/IP69 protection rating.

They also ensure a good shielding for electromagnetic compatibility.

The IP68 degree of protection marked or assigned to the enclosure is ensured if the enclosures are correctly installed and the cable entry devices have equal or higher IP rating.

Degree of protection compliant with EN IEC 60529

When mated and locked, the CGK/MGK (“21.21”) and the CG/MG enclosures protect the connector inserts fitted inside from outside interference, such as mechanical shocks, foreign bodies, humidity, dust, water or other fluids such as cleaning or cooling agents, oils, etc.

The IP68 degree of protection ensured by the enclosures is fully described in the EN IEC 60529 standard, which classifies the enclosures according to their protection against the entry of foreign bodies and water.

IP68 = Total protection against dust, and against the access to hazardous parts with access probe of Ø 1,0 mm (1st characteristic numeral), and protection against the effects of continuous submersion in water (duration ≥ 30 min upon agreement and water depth ≥ 1 m upon agreement) (2nd characteristic numeral).

These enclosures have also successfully passed the tests required for the **IPX6** degree of protection (tightness to powerful water jets) and for the **IPX9** degree of protection (high pressure and temperature water jets) according to EN IEC 60529. Their full “versatile” degree of protection is therefore **IP66/IP68/IP69**.

The following table shows only the IP 68 level of protection. Please see page 46 for the complete table of the different levels of protection specified by the IP standard.

FIRST Index figure	Degree of protection SOLIDS		SECOND Index figure	Degree of protection WATER	
6		Protected against access to hazardous parts with a wire dust-tight (total protection against dust)	8		Protected against the effects of continuous immersion in water at depth and/or duration upon agreement.

CG/MG (“44.27”, “57.27”, “77.27”, “104.27”) series

1. Threaded cable entry hole, available in different Pg diameters (types with prefix starting with “**C**”) or metric thread (types with prefix starting with “**M**”) compliant with EN 60423 standard, for cable entry devices compliant with EN IEC 62444 standard (former EN 50262), for vertical or horizontal layout.
2. Sturdy, corrosion proof foundry grade aluminium alloy enclosures, with RoHS 2 conform chromate treatment. The following types are available: wall mounted, flush mounted fixed and free enclosures with free protective cover.
3. Oven cured thermosetting paint with epoxy powder, colour black RAL 9005, which gives the enclosures a high mechanical strength and makes them resistant to external agents (only CG/MG).
4. The inserts are made of UL certified self-extinguishing fibreglass reinforced thermoplastics, and feature an operating temperature range between -40 °C and +125 °C.
5. Insert profile polarised with asymmetrical guides to avoid incorrect matings. The inserts have a mechanical life equal to or higher than 500 mating cycles.
6. Inserts are manufactured in compliance with European standard EN IEC 61984 (former DIN VDE 0627), certified and identified with UL and CSA marks, as well as EAC (Eurasian Customs Union) and CQC (China) marks, according to type and series.
7. Special NBR elastomer, anti-ageing, oil and fuel resistant seals which, together with the cable entry devices (not supplied) ensure mated connectors IP66/**IP68**/IP69 degree of protection. The seals are internally positioned to give a better protection from sunlight and outside elements.
8. Locking is available in two solutions: **screw-type** with hexagonal head stainless steel screws or **bayonet-type**. The slotted hexagonal head screws can be fitted and removed by using either a 1,5 mm thick blade screwdriver or a 10 mm hexagonal key, and can be easily accessed even when fitted on enclosures with horizontally exited cables. Tightening torque 2,5 Nm.

SCREW CLOSURE

BAYONET CLOSURE

9. Captive insert fastening screws, with anti-slackening spring washer.
10. Contact position identified with numbers or codes on both sides of each insert and printed with a laser system or from a die.

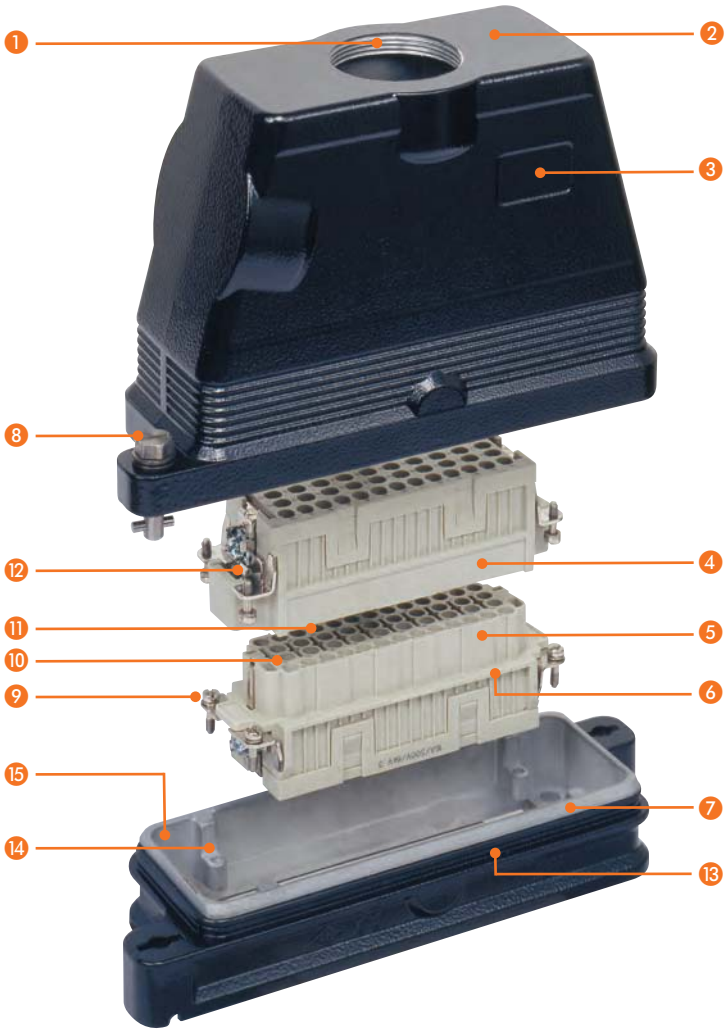

11. Silver or gold plated brass contacts connected to the wires by means of captive screws supplied already slackened, with spring terminal (SQUICH®), by means of crimping (crimp contacts available separately), or with a built-in 45° terminal block (still with screw or spring terminal).
12. Pre-leading (FMLB) protective earth terminal with a wide contact surface.
13. Fixed, bulkhead-mount enclosure with fastening screws inside the gasket.
14. Wider enclosures to give more space for the cabling.
15. They ensure a good screening for electromagnetic compatibility, resistance to vibrations in compliance with EN 61373 railway standard and to pressurised water (IPX9).

CGK and MGK high protection IP68 version

inserts		page:
CK	3 and 4 poles + ⏚	58
CKS	3 and 4 poles + ⏚	-
CKSH	3 and 4 poles + ⏚	63
CD *	8 poles	67
CQ4	2 poles + ⏚	182
CQ4 H	2 poles + ⏚	183
CQ4	3 poles + ⏚	184
CQ	5 poles + ⏚	186
CQ	7 poles + ⏚	187
CQ	12 poles + ⏚	189
CQ	21 poles + ⏚	190
CJ KF (can be used only in I enclosures)		223
CJK 8MT		226
CJK 8IMT		226, 228
CUK 2FT		236
CUK 3FT		236
CLK 04 SC		239
CX 1/2 BD		243

* To ensure IP68 degree of protection with CD 08 insert, purchase the kit CKR 65 D.

In this case do not use the screw supplied with the enclosure.

bulkhead mounting housings

angled bulkhead mounting housings

description	part No.	part No.	entry Pg	part No.	entry M
bulkhead mounting housing	**CGK I**				
without cable entry (on request)		**CGK IA**			
with cable entry, bottom closed		**CGK IAP13**	13,5	**MGK IAP20**	20

ANGLED BULKHEAD MOUNTING HOUSINGS

- Eliminate the gasket and the fixing screw; provided with the insert.
- To fix the insert, use the screw with gasket provided with the enclosure (except CD 08 see note above).

CGKCP FX
dust protection cover
(page 697)

Type 4/4X/12

according to IEC/EN 60529

CGK I



panel cut-out for CGK I enclosures



CGK IA

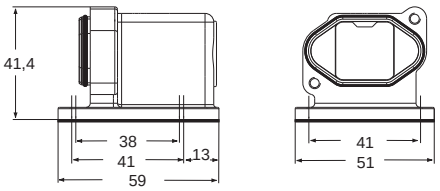

panel cut-out for CGK IA enclosures



CGK IAP and **MGK IAP**

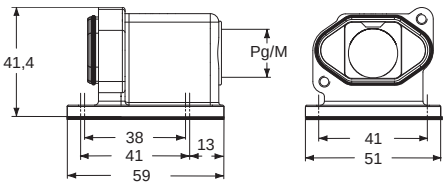

panel cut-out for CGK/MGK IAP enclosures



IP68

dimensions shown in mm are not binding and may be changed without notice

CGK and MGK high protection IP68 version (screw locking)

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD *	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**
CJ KM (can be used only in hoods)		**223**
CJK 8MT		**226**
CJK 8IMT		**226, 228**
CUK 2FT		**236**
CUK 3FT		**236**
CLK 04 SC		**239**
CX 1/2 BD		**243**

***** To ensure IP68 degree of protection with CD 08 insert, purchase the kit CKR 65 D.

In this case do not use the screw supplied with the enclosure.

hoods

hoods

description	part No.	entry Pg	part No	entry M	part No.	entry M
top entry	**CGK V13**	13,5	**MGK V20**	20		
top entry					**MGK V25**	25

- Eliminate the gasket and the fixing screw; provided with the insert
- To fix the insert, use the screw with gasket provided with the enclosure (except CD 08 see note above).





CGKCP MB
dust protection cover
(page 697)

c UL us Type 4/4X/12

EN 60529 IP66 IP68 IP69 IEC 60529 according to IEC/EN 60529

c UL us Type 12
Type 4/4X only with CKR 65 (D) pending

EN 60529 IP66 IP68 IP69 IEC 60529 according to IEC/EN 60529

IP68

CGK high protection IP68 version (bayonet locking)

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD *	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**
CJ KF (can be used only in I enclosures)		**223**
CJK 8MT		**226**
CJK 8IMT		**226, 228**
CUK 2FT		**236**
CUK 3FT		**236**
CLK 04 SC		**239**
CX 1/2 BD		**243**

***** To ensure IP68 degree of protection with CD 08 insert, purchase the kit CKR 65 D.

In this case do not use the screw supplied with the enclosure.

bulkhead mounting housings

description	part No.
bulkhead mounting housing	**CGK I B**

- Eliminate the gasket and the fixing screw; provided with the insert
- To fix the insert, use the screw with gasket provided with the enclosure (except CD 08 see note above).





panel cut-out for CGK I B enclosures



CGKCP FX
dust protection cover
(page 697)

Type 4/4X/12

according to IEC/EN 60529

dimensions shown in mm are not binding and may be changed without notice

CGK and MGK high protection IP68 version (bayonet locking)

inserts		page:
CK	3 and 4 poles + ⏚	**58**
CKS	3 and 4 poles + ⏚	**-**
CKSH	3 and 4 poles + ⏚	**63**
CD *	8 poles	**67**
CQ4	2 poles + ⏚	**182**
CQ4 H	2 poles + ⏚	**183**
CQ4	3 poles + ⏚	**184**
CQ	5 poles + ⏚	**186**
CQ	7 poles + ⏚	**187**
CQ	12 poles + ⏚	**189**
CQ	21 poles + ⏚	**190**
CJ KM (can be used only in hoods)		**223**
CJK 8MT		**226**
CJK 8IMT		**226, 228**
CUK 2FT		**236**
CUK 3FT		**236**
CLK 04 SC		**239**
CX 1/2 BD		**243**

***** To ensure IP68 degree of protection with CD 08 insert, purchase the kit CKR 65 D.

In this case do not use the screw supplied with the enclosure.

hoods

hoods

description	part No.	entry Pg	part No	entry M	part No.	entry M
top entry	**CGK V13 B**	13,5	**MGK V20 B**	20		
top entry					**MGK V25 B**	25

- Eliminate the gasket and the fixing screw; provided with the insert
- To fix the insert, use the screw with gasket provided with the enclosure (except CD 08 see note above).





CGKCP MB
dust protection cover
(page 697)

Type 4/4X/12

according to IEC/EN 60529

Type 12
Type 4/4X only with CKR 65 (D) pending

according to IEC/EN 60529

IP68

CG and MG high protection IP68 version (screw locking)

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

bulkhead mounting housings

surface mounting housings

description	part No.	part No.	entry Pg	part No.	entry M
with gasket, size “44.27”	**CGI 06**				
size “44.27”		**CGP 06.29**	29	**MGP 06.32**	32

CGI



CGP and **MGP**

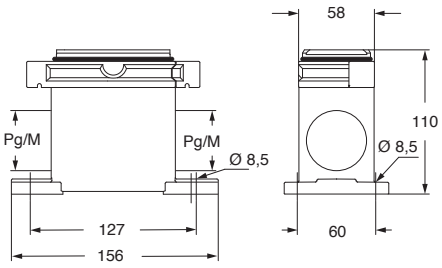

panel cut-out for bulkhead mounting housings

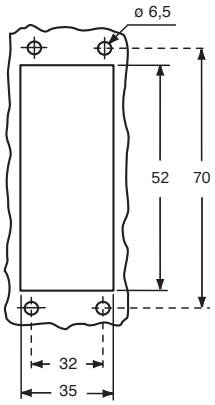

CGCP FX
Dust protection cover
(from page 697)

Type 4/4X/12

according to IEC/EN 60529

IP68

dimensions shown in mm are not binding and may be changed without notice

CG and MG high protection IP68 version (screw locking)

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

hoods

covers

description	part No.	entry Pg	part No	entry M	part No.
with side entry					
size “44.27”	**CGO 06.16**	16	**MGO 06.25**	25	
size “44.27”	**CGO 06.21**	21	**MGO 06.32**	32	
size “44.27”	**CGO 06.29**	29			
with top entry					
size “44.27”	**CGV 06.16**	16	**MGV 06.25**	25	
size “44.27”	**CGV 06.21**	21	**MGV 06.32**	32	
size “44.27”	**CGV 06.29**	29	**MGV 06.40**	40	
size “44.27”					**CGC 06**

CGO/MGO and **CGV/MGV**

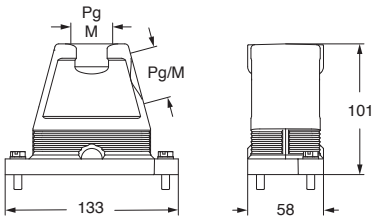

CGC



CGCP FX
Dust protection cover
(from page 697)

Type 4/4X/12

according to IEC/EN 60529

CG high protection IP68 version (bayonet locking)

inserts		page:
CDD	24 poles + ⏚	76
CDS	9 poles + ⏚	-
CDSH	9 poles + ⏚	86
CDSH NC	6 poles + ⏚	95
CNE	6 poles + ⏚	110
CSE	6 poles + ⏚	-
CSH	6 poles + ⏚	110
CSH S	6 poles + ⏚	122
CCE	6 poles + ⏚	130
CSS	6 poles + ⏚	148
CQE	10 poles + ⏚	168
MIXO	2 modules	262 - 317

bulkhead mounting housings

description	part No.
with gasket, size “44.27”	**CGI 06 B**

CGI B



panel cut-out for bulkhead mounting housings

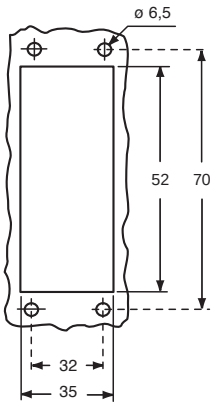

CGCP FX
Dust protection cover
(from page 697)

Type 4/4X/12

according to IEC/EN 60529

dimensions shown in mm are not binding and may be changed without notice

CG and MG high protection IP68 version (bayonet locking)

inserts		page:
CDD	24 poles + ⏚	**76**
CDS	9 poles + ⏚	**-**
CDSH	9 poles + ⏚	**86**
CDSH NC	6 poles + ⏚	**95**
CNE	6 poles + ⏚	**110**
CSE	6 poles + ⏚	**-**
CSH	6 poles + ⏚	**110**
CSH S	6 poles + ⏚	**122**
CCE	6 poles + ⏚	**130**
CSS	6 poles + ⏚	**148**
CQE	10 poles + ⏚	**168**
MIXO	2 modules	**262 - 317**

hoods

covers

description	part No.	entry Pg	part No	entry M	part No.
with side entry					
size “44.27”	**CGO 06.16 B**	16	**MGO 06.25 B**	25	
size “44.27”	**CGO 06.21 B**	21	**MGO 06.32 B**	32	
size “44.27”	**CGO 06.29 B**	29			
with top entry					
size “44.27”	**CGV 06.16 B**	16	**MGV 06.25 B**	25	
size “44.27”	**CGV 06.21 B**	21	**MGV 06.32 B**	32	
size “44.27”	**CGV 06.29 B**	29	**MGV 06.40 B**	40	
size “44.27”					**CGC 06 B**

CGO/MGO B and **CGV/MGV B**

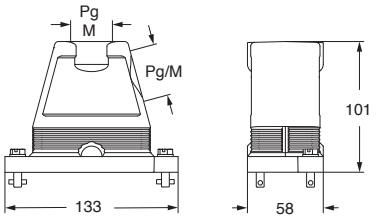

CGC B



CGCP MB
Dust protection cover
(from page 697)

Type 4/4X/12

according to IEC/EN 60529

IP68

CG and MG high protection IP68 version (screw locking)

inserts		page:
CDD	42 poles + ⏚	78
CDS	18 poles + ⏚	-
CDSH	18 poles + ⏚	87
CNE	10 poles + ⏚	111
CSE	10 poles + ⏚	-
CSH	10 poles + ⏚	111
CSH S	10 poles + ⏚	123
CCE	10 poles + ⏚	131
CMSH	3+2 (aux) poles + ⏚	136
CMCE	3+2 (aux) poles + ⏚	137
CSS	10 poles + ⏚	149
CQE	18 poles + ⏚	169
CX	8/24 poles + ⏚	194
MIXO	3 modules	262 - 317

bulkhead mounting housings

surface mounting housings

description	part No.	part No.	entry Pg	part No.	entry M
with gasket, size “57.27”	**CGI 10**				
size ”57.27”		**CGP 10.29**	29	**MGP 10.32**	32

CGI



CGP and **MGP**

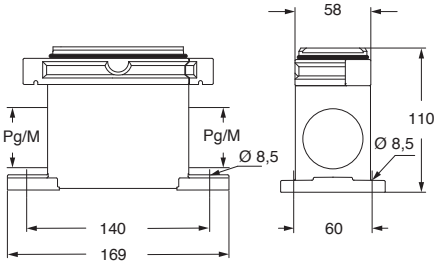

panel cut-out for bulkhead mounting housings

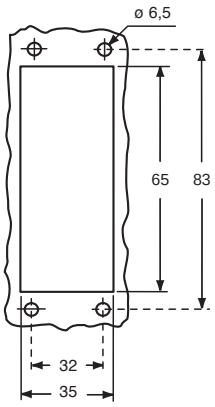

CGCP FX
Dust protection cover
(from page 697)

Type 4/4X/12

according to IEC/EN 60529

IP68

dimensions shown in mm are not binding and may be changed without notice

CG and MG high protection IP68 version (screw locking)

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

hoods

covers

description	part No.	entry Pg	part No	entry M	part No.
with side entry					
size “57.27”	**CGO 10.16**	16	**MGO 10.25**	25	
size “57.27”	**CGO 10.21**	21	**MGO 10.32**	32	
size “57.27”	**CGO 10.29**	29			
with top entry					
size “57.27”	**CGV 10.16**	16	**MGV 10.25**	25	
size “57.27”	**CGV 10.21**	21	**MGV 10.32**	32	
size “57.27”	**CGV 10.29**	29	**MGV 10.40**	40	
size “57.27”					**CGC 10**

CGO/MGO and **CGV/MGV**

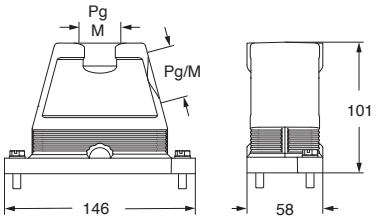

CGC



CGCP MB
Dust protection cover
(from page 697)

Type 4/4X/12

according to IEC/EN 60529

IP68

CG high protection IP68 version (bayonet locking)

inserts		page:
CDD	42 poles + ⏚	78
CDS	18 poles + ⏚	-
CDSH	18 poles + ⏚	87
CNE	10 poles + ⏚	111
CSE	10 poles + ⏚	-
CSH	10 poles + ⏚	111
CSH S	10 poles + ⏚	123
CCE	10 poles + ⏚	131
CMSH	3+2 (aux) poles + ⏚	136
CMCE	3+2 (aux) poles + ⏚	137
CSS	10 poles + ⏚	149
CQE	18 poles + ⏚	169
CX	8/24 poles + ⏚	194
MIXO	3 modules	262 - 317

bulkhead mounting housings

description	part No.
with gasket, size “57.27”	**CGI 10 B**

CGI B



panel cut-out for bulkhead mounting housings

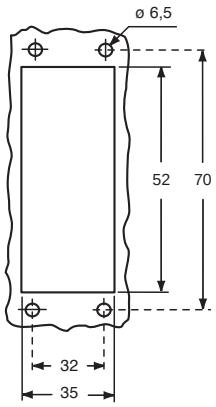

CGCP FX
Dust protection cover
(from page 697)

Type 4/4X/12

according to IEC/EN 60529

IP68

dimensions shown in mm are not binding and may be changed without notice

CG and MG high protection IP68 version (bayonet locking)

inserts		page:
CDD	42 poles + ⏚	**78**
CDS	18 poles + ⏚	**-**
CDSH	18 poles + ⏚	**87**
CNE	10 poles + ⏚	**111**
CSE	10 poles + ⏚	**-**
CSH	10 poles + ⏚	**111**
CSH S	10 poles + ⏚	**123**
CCE	10 poles + ⏚	**131**
CMSH	3+2 (aux) poles + ⏚	**136**
CMCE	3+2 (aux) poles + ⏚	**137**
CSS	10 poles + ⏚	**149**
CQE	18 poles + ⏚	**169**
CX	8/24 poles + ⏚	**194**
MIXO	3 modules	**262 - 317**

hoods

covers

description	part No.	entry Pg	part No	entry M	part No.
with side entry					
size “57.27”	**CGO 10.16 B**	16	**MGO 10.25 B**	25	
size “57.27”	**CGO 10.21 B**	21	**MGO 10.32 B**	32	
size “57.27”	**CGO 10.29 B**	29			
with top entry					
size “57.27”	**CGV 10.16 B**	16	**MGV 10.25 B**	25	
size “57.27”	**CGV 10.21 B**	21	**MGV 10.32 B**	32	
size “57.27”	**CGV 10.29 B**	29	**MGV 10.40 B**	40	
size “57.27”					**CGC 10 B**

CGO/MGO B and **CGV/MGV B**

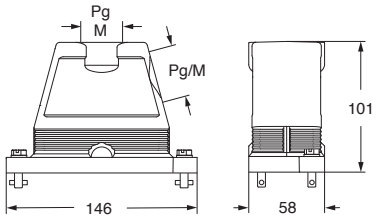

CGC B



CGCP MB
Dust protection cover
(from page 697)

Type 4/4X/12

according to IEC/EN 60529

IP68

CG and MG high protection IP68 version (screw locking)

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

bulkhead mounting housings

surface mounting housings

description	part No.	part No.	entry Pg	part No.	entry M
with gasket, size “77.27”	**CGI 16**				
size ”77.27”		**CGP 16.36**	36	**MGP 16.40**	40

CGI



CGP and **MGP**

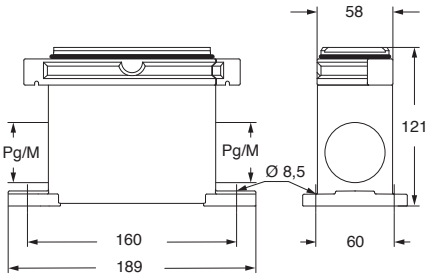

panel cut-out for bulkhead mounting housings

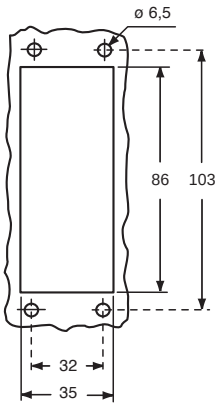

CGCP FX
Dust protection cover
(from page 697)

Type 4/4X/12

according to IEC/EN 60529

IP68

dimensions shown in mm are not binding and may be changed without notice

CG and MG high protection IP68 version (screw locking)

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

hoods

covers

description	part No.	entry Pg	part No	entry M	part No.
with side entry					
size “77.27”	**CGO 16.21**	21	**MGO 16.32**	32	
size “77.27”	**CGO 16.29**	29	**MGO 16.40**	40	
size “77.27”	**CGO 16.36**	36	**MGO 16.50**	50	
with top entry					
size “77.27”			**MGV 16.25**	25	
size “77.27”			**MGV 16.225**	25 x 2	
size “77.27”	**CGV 16.21**	21	**MGV 16.32**	32	
size “77.27”	**CGV 16.221**	21 x 2			
size “77.27”	**CGV 16.29**	29	**MGV 16.40**	40	
size “77.27”	**CGV 16.36**	36	**MGV 16.50**	50	
size “77.27”					**CGC 16**

CGO/MGO and **CGV/MGV**

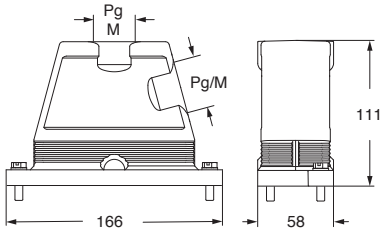

CGC



CGCP MB
Dust protection cover
(from page 697)

Type 4/4X/12

according to IEC/EN 60529

IP68

CG high protection IP68 version (bayonet locking)

inserts		page:
CD	40 poles + ⏚	70
CDD	72 poles + ⏚	79
CDS	27 poles + ⏚	-
CDSH	27 poles + ⏚	88
CNE	16 poles + ⏚	112
CSE	16 poles + ⏚	-
CSH	16 poles + ⏚	112
CSH S	16 poles + ⏚	124
CCE	16 poles + ⏚	132
CMSH, CMCE	6+2 (aux) poles + ⏚	138 - 139
CSS	16 poles + ⏚	150
CQE	32 poles + ⏚	170
CQEE	40 poles + ⏚	176
CP	6 poles + ⏚	178
CX	6/12, 6/36 and 12/2 poles + ⏚	197 - 199
CX	4/0 and 4/2 poles + ⏚	200 - 201
MIXO	4 modules	262 - 317

bulkhead mounting housings

description	part No.
with gasket, size “77.27”	**CGI 16 B**

CGI B



panel cut-out for bulkhead mounting housings

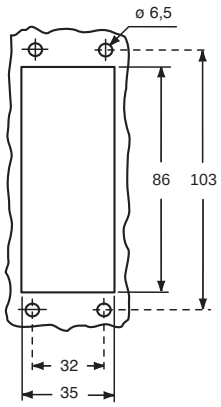

CGCP FX
Dust protection cover
(from page 697)

Type 4/4X/12

according to IEC/EN 60529

dimensions shown in mm are not binding and may be changed without notice

CG and MG high protection IP68 version (bayonet locking)

inserts		page:
CD	40 poles + ⏚	**70**
CDD	72 poles + ⏚	**79**
CDS	27 poles + ⏚	**-**
CDSH	27 poles + ⏚	**88**
CNE	16 poles + ⏚	**112**
CSE	16 poles + ⏚	**-**
CSH	16 poles + ⏚	**112**
CSH S	16 poles + ⏚	**124**
CCE	16 poles + ⏚	**132**
CMSH, CMCE	6+2 (aux) poles + ⏚	**138 - 139**
CSS	16 poles + ⏚	**150**
CQE	32 poles + ⏚	**170**
CQEE	40 poles + ⏚	**176**
CP	6 poles + ⏚	**178**
CX	6/12, 6/36 and 12/2 poles + ⏚	**197 - 199**
CX	4/0 and 4/2 poles + ⏚	**200 - 201**
MIXO	4 modules	**262 - 317**

hoods

covers

description	part No.	entry Pg	part No	entry M	part No.
with side entry					
size “77.27”	**CGO 16.21 B**	21	**MGO 16.32 B**	32	
size “77.27”	**CGO 16.29 B**	29	**MGO 16.40 B**	40	
size “77.27”	**CGO 16.36 B**	36	**MGO 16.50 B**	50	
with top entry					
size “77.27”			**MGV 16.25 B**	25	
size “77.27”			**MGV 16.225 B**	25 x 2	
size “77.27”	**CGV 16.21 B**	21	**MGV 16.32 B**	32	
size “77.27”	**CGV 16.221 B**	21 x 2			
size “77.27”	**CGV 16.29 B**	29	**MGV 16.40 B**	40	
size “77.27”	**CGV 16.36 B**	36	**MGV 16.50 B**	50	
size “77.27”					**CGC 16 B**

CGO/MGO B and **CGV/MGV B**

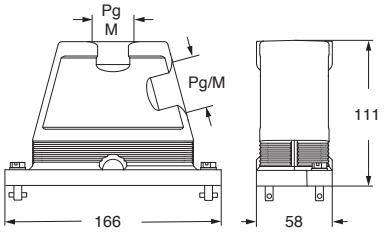

CGC B



CGCP MB
Dust protection cover
(from page 697)

Type 4/4X/12

according to IEC/EN 60529

IP68

CG and MG high protection IP68 version (screw locking)

inserts		page:
CD	64 poles + ⏚	72
CDD	108 poles + ⏚	81
CDS	42 poles + ⏚	-
CDSH	42 poles + ⏚	89
CNE	24 poles + ⏚	113
CSE	24 poles + ⏚	-
CSH	24 poles + ⏚	113
CSH S	24 poles + ⏚	125
CCE	24 poles + ⏚	133
CMSH	10+2 (aux) poles + ⏚	140
CMCE	10+2 (aux) poles + ⏚	141
CSS	24 poles + ⏚	151
CQE	46 poles + ⏚	171
CQEE	64 poles + ⏚	177
CX	4/8 and 6/6 poles + ⏚	204, 206
MIXO	6 modules	262 - 317

bulkhead mounting housings

surface mounting housings

description	part No.	part No.	entry Pg	part No.	entry M
with gasket, size “104.27”	**CGI 24**				
size “104.27”		**CGP 24.36**	36	**MGP 24.40**	40
size “104.27”		**CGP 24.236**	36 x 2	**MGP 24.240**	40 x 2

CGI



panel cut-out for bulkhead mounting housings

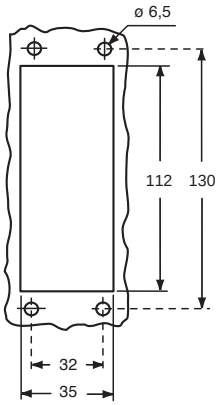

CGP and **MGP**

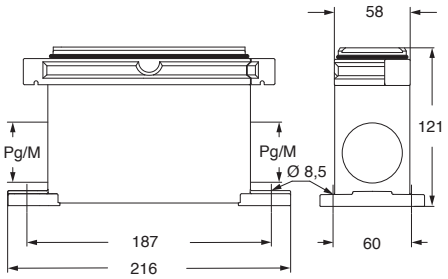

CGCP FX
Dust protection cover
(from page 697)

Type 4/4X/12

according to IEC/EN 60529

IP68

dimensions shown in mm are not binding and may be changed without notice

CG and MG high protection IP68 version (screw locking)

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

hoods

covers

description	part No.	entry Pg	part No	entry M	part No.
with side entry					
size “104.27”	**CGO 24.21**	21	**MGO 24.32**	32	
size “104.27”	**CGO 24.29**	29	**MGO 24.40**	40	
size “104.27”	**CGO 24.36**	36	**MGO 24.50**	50	
with top entry					
size “104.27”			**MGV 24.325**	25 x 3	
size “104.27”	**CGV 24.21**	21	**MGV 24.32**	32	
size “104.27”			**MGV 24.232**	32 x 2	
size “104.27”	**CGV 24.29**	29	**MGV 24.40**	40	
size “104.27”	**CGV 24.229**	29 x 2	**MGV 24.240**	40 x 2	
size “104.27”	**CGV 24.36**	36	**MGV 24.50**	50	
size “104.27”					**CGC 24**

CGO/MGO and **CGV/MGV**

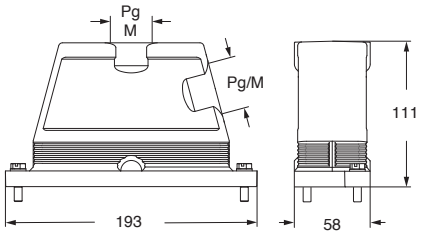

CGC



CGCP MB
Dust protection cover
(from page 697)

Type 4/4X/12

according to IEC/EN 60529

CG high protection IP68 version (bayonet locking)

inserts		page:
CD	64 poles + ⏚	72
CDD	108 poles + ⏚	81
CDS	42 poles + ⏚	-
CDSH	42 poles + ⏚	89
CNE	24 poles + ⏚	113
CSE	24 poles + ⏚	-
CSH	24 poles + ⏚	113
CSH S	24 poles + ⏚	125
CCE	24 poles + ⏚	133
CMSH	10+2 (aux) poles + ⏚	140
CMCE	10+2 (aux) poles + ⏚	141
CSS	24 poles + ⏚	151
CQE	46 poles + ⏚	171
CQEE	64 poles + ⏚	177
CX	4/8 and 6/6 poles + ⏚	204, 206
MIXO	6 modules	262 - 317

bulkhead mounting housings

description	part No.
with gasket, size “77.27”	CGI 24 B

CGI B



panel cut-out for bulkhead mounting housings

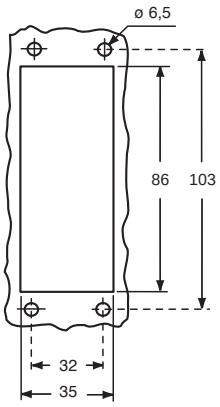

CGCP FX
Dust protection cover
(from page 697)

Type 4/4X/12

according to IEC/EN 60529

dimensions shown in mm are not binding and may be changed without notice

CG and MG high protection IP68 version (bayonet locking)

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

hoods

covers

description	part No.	entry Pg	part No	entry M	part No.
with side entry					
size “104.27”	**CGO 24.21 B**	21	**MGO 24.32 B**	32	
size “104.27”	**CGO 24.29 B**	29	**MGO 24.40 B**	40	
size “104.27”	**CGO 24.36 B**	36	**MGO 24.50 B**	50	
with top entry					
size “104.27”			**MGV 24.325 B**	25 x 3	
size “104.27”	**CGV 24.21 B**	21	**MGV 24.32 B**	32	
size “104.27”			**MGV 24.232 B**	32 x 2	
size “104.27”	**CGV 24.29 B**	29	**MGV 24.40 B**	40	
size “104.27”	**CGV 24.229 B**	29 x 2	**MGV 24.240 B**	40 x 2	
size “104.27”	**CGV 24.36 B**	36	**MGV 24.50 B**	50	
size “104.27”					**CGC 24 B**

CGO/MGO B and **CGV/MGV B**

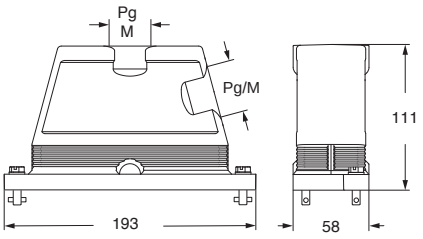

CGC B



CGCP MB
Dust protection cover
(from page 697)

Type 4/4X/12

according to IEC/EN 60529

IP68

CG..FL counterflanges high protection IP68 version

bulkhead mounting housings:	page:
size “44.27”	632 - 635
size “57.27”	636 - 639
size “77.27”	640 - 643
size “104.27”	644 - 647

counterflanges
for bulkhead mounting housings

description	part No.
size “44.27”	**CG 06 FL**
size “57.27”	**CG 10 FL**
size “77.27”	**CG 16 FL**
size “104.27”	**CG 24 FL**

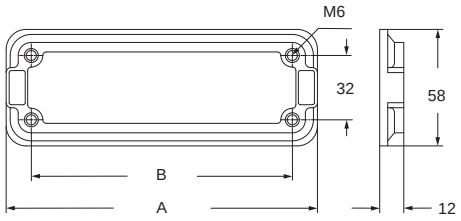

part No.	A	B
CG 06 FL	96	70
CG 10 FL	109	83
CG 16 FL	129	103
CG 24 FL	156	130

IP68

c UL us Type 4/4X/12

dimensions shown in mm are not binding and may be changed without notice

COB series

Functionality counts

The **COB** system of panel supports makes it possible to use multipole connectors within electric panels without the traditional metallic enclosures as protection is assured by the electric panel itself or other container.

N.B.: Connectors must not be connected and disconnected under load or when live.

The **COB** system is approved by **UL** as support for multipole connectors (UL ECBT2 and ECBT8 file E115072), as well as by **DNV-GL** and **Bureau Veritas** maritime applications on board ships.

The **COB** system may be assembled in the three following ways:

- On panels with window snap fastening device (**Figure 1**).
- On DIN EN 60715 rails, both lengthways and crossways to the support (**Figure 2**).
- On fixed panels using screws (**Figure 2**).

SUM-UP

- **reduction in cost and space with respect to metallic enclosures plus traditional terminal blocks enabling "modular" wiring inside panels, very handy in case of maintenance: fast replacement of devices and entire sections leading to shorter downtime;**
- **possibility of pre-wiring and testing of the connectors at bench, fastening the commissioning of the installation on site;**
- **easy wiring inspection and tests with coupled connectors, thanks to rear access to the inserts by the overturning (connector hinged and locked on the base support);**
- **fast mounting in panels thanks to the snap fastening device on the DIN EN 60715 rails;**
- **sturdy support structure, specific to the size of each insert, it does not require any preparation;**
- **broad passage for housing of conductor cables;**
- **mobile parts prearranged for the clamping of bundles of conductors of multi-core cables, to prevent contact with the connector contacts.**

The COB system satisfies the most varied installation needs thanks to the interchangeability of the connector inserts. The inserts can be installed as per the table aside.

In addition, the **COB...BC** supports may house the ILME **CR..AD1** and **CR..AD2** series plates for the D-SUB inserts (miniature-connectors).

Product details

1. **COB, TSF** or **COB TSFS** insert support blocks (with cable clamp) for mobile mounting, in self-extinguishing thermoplastic material.
2. Passage for cable support bands (from 2,2 to 4,8 mm).
3. Locations for insertion of identification tags (size 9 x 20 mm).
4. Threaded metallic inserts for screws to fix the connectors and possibility of coded connection with the use of specific pins (ILME part: CR 20, CRM, CRF, CR 20 CX, CRM CX and CRF CX) when identical connectors are used.
5. **COB TCQ** insert carrier block for window mounting in self-extinguishing thermoplastic material, with spring snap fastening.
6. Locking device with levers in self-extinguishing thermoplastic material for insert coupling.
7. Sturdy cable clamp for clamping multipolar cables with a diameter of up to 25 mm or bundles of unipolar conductors.
8. **COB..CMS** enclosure for mobile mounting, in self-extinguishing thermoplastic material, IP20 degree of protection.
9. Free passage for mounting wired insert with conductor cables.
10. Mobile blocks (in **COB..BC** kit) in self-extinguishing thermoplastic material, with quick release device for insert turnover, wiring operations, verifications and maintenance
11. **COB..BC** panel support for bulkhead mounting in self-extinguishing thermoplastic material, sturdy block support structure, with broad passage for housing of conductor cables.
12. Holes for fixed fastening with screws without DIN EN 60715 rails.
13. Snap fastening on DIN EN 60715 rails, both lengthways and crossways to the support.
14. Rollover pins that can be released and allow the use of pre-wired inserts.

Supports for connector inserts

types	COB TCQ			
fixed	COB 06 BC	COB 10 BC	COB 16 BC	COB 24 BC
types	COB TSF and COB TSFS			
mobile	COB 06 CMS	COB 10 CMS	COB 16 CMS	COB 24 CMS

Insert centre distance

mm				
	44 x 27	57 x 27	49.5 x 16 * 66 x 16 * 77.5 x 27	104 x 27

Insert series and polarity + ⏚

CD			15 *, 25 *, 40	64
CDD	24	42	38 *, 72	108
CDA, CSAH			10 *, 16 *	
CDC			10 *, 16 *	
CDSH, CDS	9	18	27	42
CCE	6	10	16	24
CQE	10	18	32	46
CQEE			40	64
CNE	6	10	16	24
CSH, CSE	6	10	16	24
CMCE		3+2	6+2	10+2 / 16+2
CME		3+2	6+2	10+2 / 16+2
CMSH		3+2	6+2	10+2
CP			6	
CX			4/0, 4/2, 6/36, 12/2	4/8, 6/6
MIXO	2 modules	3 modules	4 modules	6 modules

* for mounting via adaptor plates, see page 654

Figure 1
COB TCQ + COB TSFS (COB...CMS, alternative)
- Snap fastening in window **, panels or control panels.

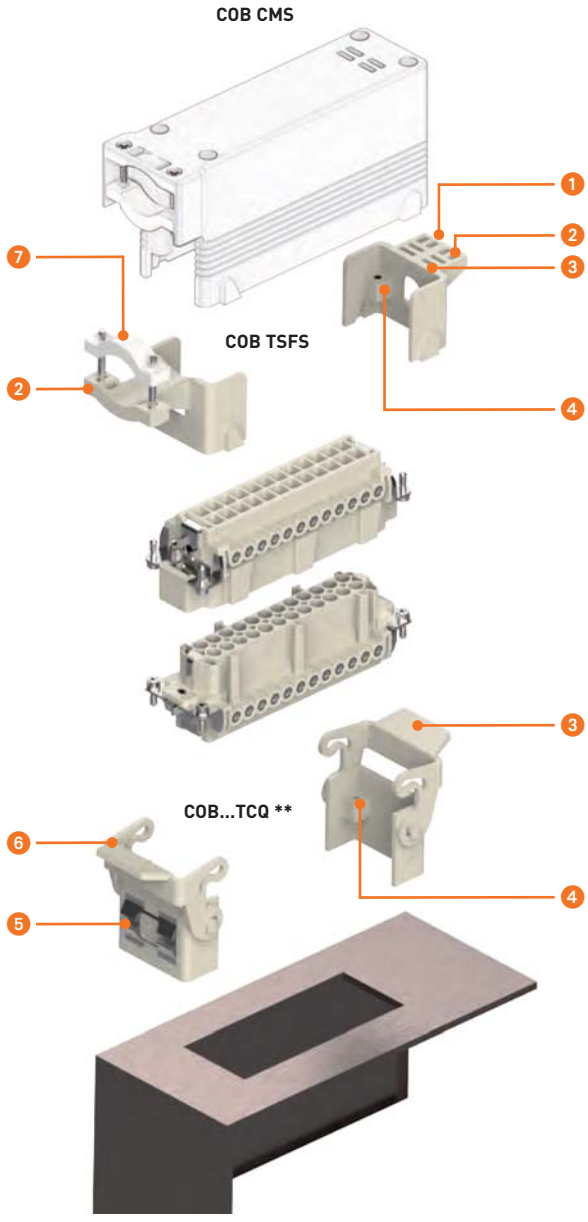

Figure 2
COB..BC + COB..CMS (COB TSF, alternative)
- Snap fastening on DIN EN 60715 rails both lengthways and crossways to the support;
- installation in panels or control panels, with fixed fastening with screws.

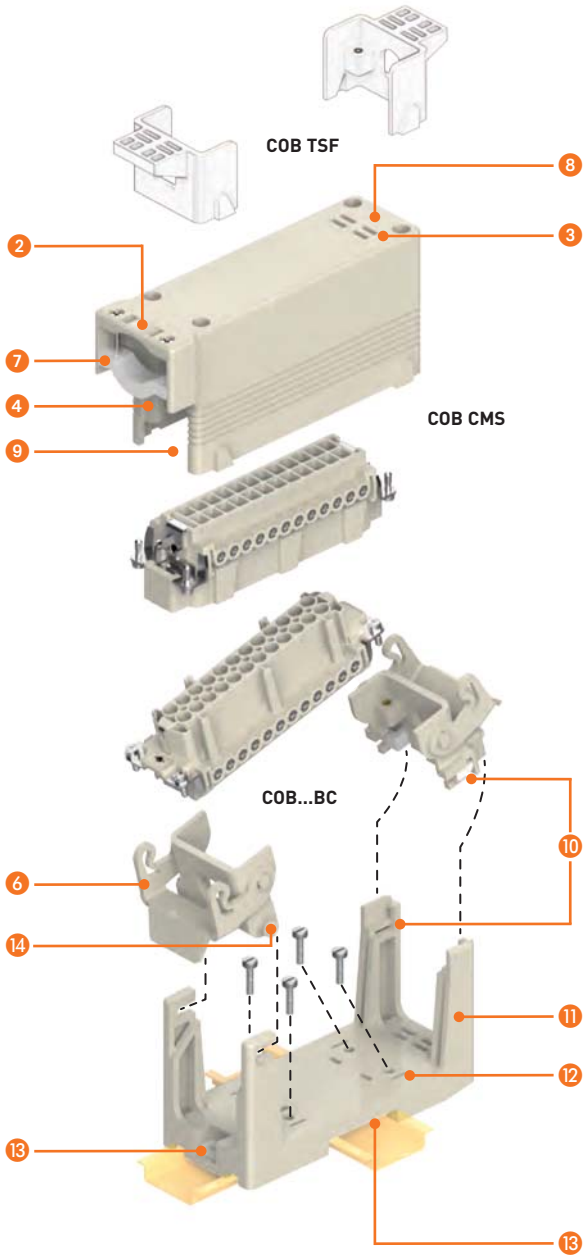

COB panel supports for multipole connectors

inserts		page:
CD	40, 64 poles + ⏚	**70, 72**
CDD	24, 42, 72, 108 poles + ⏚	**76 - 81**
CDS	9, 18, 27, 42 poles + ⏚	**-**
CDSH	9, 18, 27, 42 poles + ⏚	**86 - 89**
CDSH NC	6 poles + ⏚	**95**
CNE	6, 10, 16, 24 poles + ⏚	**110 - 113**
CSE	6, 10, 16, 24 poles + ⏚	**-**
CSH	6, 10, 16, 24 poles + ⏚	**110 - 113**
CSH S	6, 10, 16, 24 poles + ⏚	**122 - 125**
CCE	6, 10, 16, 24 poles + ⏚	**130 - 133**
CME	3+2, 6+2, 10+2 (aux) poles + ⏚	**136 - 140**
CMSH	3+2, 6+2, 10+2 (aux) poles + ⏚	**136 - 140**
CMCE	3+2, 6+2, 10+2 (aux) poles + ⏚	**137 - 141**
CSS	6, 10, 16, 24 poles + ⏚	**148 - 151**
CQE	10, 18, 32, 46 poles + ⏚	**168 - 171**
CQEE	40, 64 poles + ⏚	**176 - 177**
CP	6 poles + ⏚	**178**
CX	8/24, 6/36, 12/2 poles + ⏚	**194 - 199**
CX	4/0, 4/2, 4/8, 6/6 poles + ⏚	**200 - 206**
MIXO	2, 3, 4, 6 modules	**262 - 317**

connector carrier for faceplate mounting in window, snap fastening

connector carrier baseplate for mounting on DIN EN 60715 rail or fixed mounting using screws

description	part No.	part No.
kit with 2 elements, for coupling of inserts with screw fixing centre distance (short side = 27 mm)	**COB TCQ**	
kit comprising frame and mobile blocks, for insert coupling:		
with screw fixing centre distance of 44 x 27 mm		**COB 06 BC**
with screw fixing centre distance of 57 x 27 mm		**COB 10 BC**
with screw fixing centre distance of 77,5 x 27 mm		**COB 16 BC**
with screw fixing centre distance of 104 x 27 mm		**COB 24 BC**

It is the responsibility of the installer to verify the continuity of the PE protective earth circuit ⏚ between the two halves of the connector.

COB TCQ

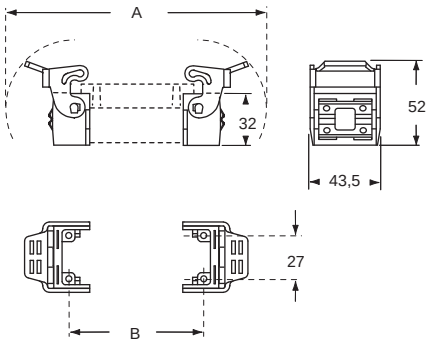

COB TCQ

for inserts	A	B
with centre distance 44 x 27 mm	120	44
with centre distance 57 x 27 mm	133	57
with centre distance 77.5 x 27 mm	153,5	77,5
with centre distance 104 x 27 mm	180	104

COB BC

overall dimensions with longitudinal DIN rails

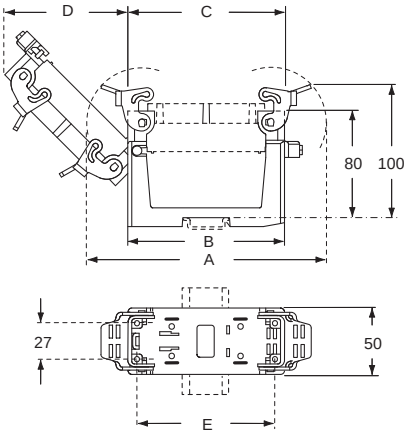

part No.	A	B	C	D	E
COB 06 BC	120	91,5	58	50	44
COB 10 BC	133	91,5	71	59,5	57
COB 16 BC	153,5	91,5	91,5	74	77,5
COB 24 BC	180	118	118	93	104

Optional PE earth jumpers (page 655)

panel cut-out **COB TCQ**

window size on plate thickness 1,3-3 mm

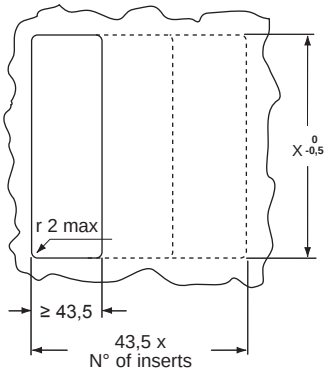

for insert coupling:	X 0 -0,5
with centre distance 44 x 27 mm	65
with centre distance 57 x 27 mm	78
with centre distance 77,5 x 27 mm	98
with centre distance 104 x 27 mm	125

panel cut-out **COB BC**



overall dimensions without DIN rails (values with “asterisk”) overall dimensions with transverse DIN rails



dimensions shown in mm are not binding and may be changed without notice

COB panel supports for multipole connectors

inserts		page:
CD	40, 64 poles + ⏚	70, 72
CDD	24, 42, 72, 108 poles + ⏚	76 - 81
CDS	9, 18, 27, 42 poles + ⏚	-
CDSH	9, 18, 27, 42 poles + ⏚	86 - 89
CDSH NC	6 poles + ⏚	95
CNE	6, 10, 16, 24 poles + ⏚	110 - 113
CSE	6, 10, 16, 24 poles + ⏚	-
CSH	6, 10, 16, 24 poles + ⏚	110 - 113
CSH S	6, 10, 16, 24 poles + ⏚	122 - 125
CCE	6, 10, 16, 24 poles + ⏚	130 - 133
CME	3+2, 6+2, 10+2 (aux) poles + ⏚	136 - 140
CMSH	3+2, 6+2, 10+2 (aux) poles + ⏚	136 - 140
CMCE	3+2, 6+2, 10+2 (aux) poles + ⏚	137 - 141
CSS	6, 10, 16, 24 poles + ⏚	148 - 151
CQE	10, 18, 32, 46 poles + ⏚	168 - 171
CQEE	40, 64 poles + ⏚	176 - 177
CP	6 poles + ⏚	178
CX	8/24, 6/36, 12/2 poles + ⏚	194 - 199
CX	4/0, 4/2, 4/8, 6/6 poles + ⏚	200 - 206
MIXO	2, 3, 4, 6 modules	262 - 317

insert carrier blocks for mobile mounting

insert carrier insulated enclosures for mobile mounting

description	part No.	part No.
kit with 2 elements, for coupling of inserts with screw fixing centre distance (short side = 27 mm) with handle for cable support bands with handle for cable support or cable clamp bands	**COB TSF** **COB TSFS**	
side entry, with cable clamp for insert coupling: with screw fixing centre distance of 44 x 27 mm with screw fixing centre distance of 57 x 27 mm with screw fixing centre distance of 77,5 x 27 mm with screw fixing centre distance of 104 x 27 mm		**COB 06 CMS** **COB 10 CMS** **COB 16 CMS** **COB 24 CMS**

It is the responsibility of the installer to verify the continuity of the PE protective earth circuit ⏚ between the two halves of the connector.

Optional PE earth jumpers (page 655)

COB TSF

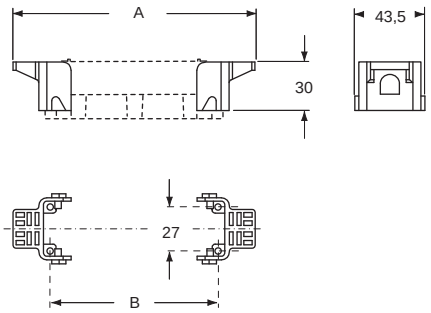

COB TSFS

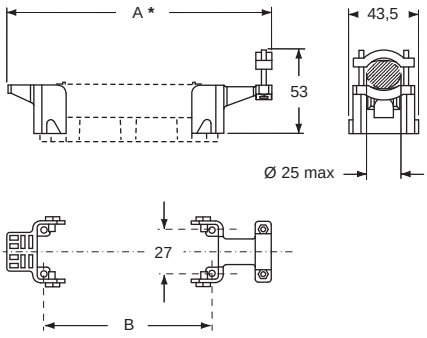

for inserts	A	A *	B
with centre distance 44 x 27 mm	90	104	44
with centre distance 57 x 27 mm	103	117	57
with centre distance 77.5 x 27 mm	123,5	137,5	77,5
with centre distance 104 x 27 mm	150	164	104

COB CMS

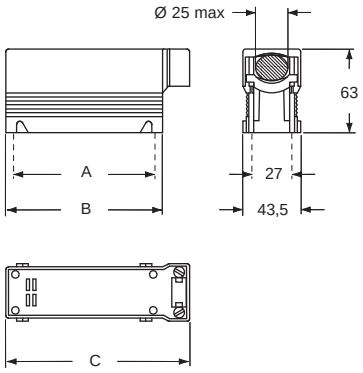

part No.	A	B	C
COB 06 CMS	44	58	74
COB 10 CMS	57	71	87
COB 16 CMS	77,5	91,5	107,5
COB 24 CMS	104	118	134

COB panel supports for multipole connectors

inserts		page:
CD	15, 25 poles + ⏚	68 - 69
CDD	38 poles + ⏚	77
CSAH	10, 16 poles + ⏚	99 - 101
CDA	10, 16 poles + ⏚	98 - 100
CDC	10, 16 poles + ⏚	104 - 105
MIXO	1 module	264 - 316

adaptor plates for insert mounting

levers for coupling with metallic enclosures

description	part No.	part No.
mounting on COB series articles (see below) for 1 insert with centre distance of 49,5 x 16 mm	**CR 15/16**	
mounting on COB series articles (see below) for 1 insert with centre distance of 66 x 16 mm	**CR 25/16**	
kit with 2 elements, to be mounted instead of the standard levers to be coupled with: COB TCQ and COB...BC [1]		**COB L**

[1] They allow the mounting of aluminium hoods with 4 pegs, size 55.27, 77.27 and 104.27

Adaptor plates

They allow the inserting of inserts of “49.16” and “66.16” on the following COB series articles: COB TCQ, COB 16 BC, COB TSF, COB TSFS, COB 16 CMS

It is the responsibility of the installer to verify the continuity of the PE protective earth circuit ⏚ between the two halves of the connector.

CR 15/16



CR 25/16



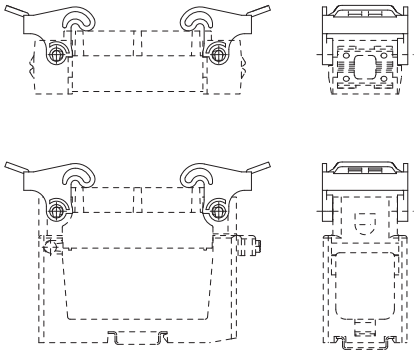

dimensions shown in mm are not binding and may be changed without notice

CR..BPE PE earth jumpers

inserts		page:
CD	40, 64 poles + ⏚	**70, 72**
CDD	24, 42, 72, 108 poles + ⏚	**76 - 81**
CDS	9, 18, 27, 42 poles + ⏚	**-**
CDSH	9, 18, 27, 42 poles + ⏚	**86 - 89**
CDSH NC	6 poles + ⏚	**95**
CNE	6, 10, 16, 24 poles + ⏚	**110 - 113**
CSE	6, 10, 16, 24 poles + ⏚	**-**
CSH	6, 10, 16, 24 poles + ⏚	**110 - 113**
CSH S	6, 10, 16, 24 poles + ⏚	**122 - 125**
CCE	6, 10, 16, 24 poles + ⏚	**130 - 133**
CME	3+2, 6+2, 10+2 (aux) poles + ⏚	**136 - 140**
CMSH	3+2, 6+2, 10+2 (aux) poles + ⏚	**136 - 140**
CMCE	3+2, 6+2, 10+2 (aux) poles + ⏚	**137 - 141**
CSS	6, 10, 16, 24 poles + ⏚	**148 - 151**
CT, CTSE	6, 10, 16, 24 poles + ⏚	**160 - 163**
CQE	10, 18, 32, 46 poles + ⏚	**168 - 171**
CQEE	40, 64 poles + ⏚	**176 - 177**
CP	6 poles + ⏚	**178**
CX	8/24, 6/36, 12/2 poles + ⏚	**194 - 199**

PE optional earth jumpers

description	part No.
galvanized brass, to be optionally used with COB series:	
for inserts “44.27” size	**CR 06 BPE**
for inserts “57.27” size	**CR 10 BPE**
for inserts “77.27” size	**CR 16 BPE**
for inserts “104.27” size	**CR 24 BPE**

CR...BPE accessories PE (protective earth) jumpers could be mounted under the connector inserts for the connection of the two insert’s PE plates.

To guarantee to proper alignment of the insert inside the enclosure, it is necessary to use both jumpers supplied (in the same housing or hood); the jumpers are not usable individually.

Furthermore the user is responsible for verifying the continuity of the PE connection ⏚ (male and female) independently of using CR...BPE earth jumpers.

CH bulkhead connectors

inserts		page:
CD	40, 64 poles + ⏚	70, 72
CDD	24, 42, 72, 108 poles + ⏚	76 - 81
CDS	9, 18, 27, 42 poles + ⏚	-
CDSH	9, 18, 27, 42 poles + ⏚	86 - 89
CDSH NC	6 poles + ⏚	95
CNE	6, 10, 16, 24 poles + ⏚	110 - 113
CSE	6, 10, 16, 24 poles + ⏚	-
CSH	6, 10, 16, 24 poles + ⏚	110 - 113
CSH S	6, 10, 16, 24 poles + ⏚	122 - 125
CCE	6, 10, 16, 24 poles + ⏚	130 - 133
CME	3+2, 6+2, 10+2 (aux) poles + ⏚	136 - 140
CMSH	3+2, 6+2, 10+2 (aux) poles + ⏚	136 - 140
CMCE	3+2, 6+2, 10+2 (aux) poles + ⏚	137 - 141
CSS	6, 10, 16, 24 poles + ⏚	148 - 151
CQE	10, 18, 32, 46 poles + ⏚	168 - 171
CQEE	40, 64 poles + ⏚	176 - 177
CP	6 poles + ⏚	178
CX	8/24, 6/36, 12/2 poles + ⏚	194 - 199
CX	4/0, 4/2, 4/8, 6/6 poles + ⏚	200 - 206
MIXO	2, 3, 4, 6 modules	262 - 317

bulkhead mounting housings with 2 or 4 pegs

bulkhead mounting housings

description	part No.	part No. C-TYPE	part No. C7
size “44.27”	**CHI 06 LCH**	**CHI 06 L**	**C7I 06 L**
size “57.27” [1]	**CHI 10 CH**	**CHI 10**	**C7I 10**
size “77.27” [1]	**CHI 16 CH**	**CHI 16**	**C7I 16**
size “104.27” [1]	**CHI 24 CH**	**CHI 24**	**C7I 24**

[1] may be combined also with enclosures:
- surface mounting housings (CHP / MHP...)
- hoods with lever and gasket (LG)

panel cut-out for bulkhead mounting housings



part No.	A	B
CHI 06 LCH - CHI 06 L - C7I 06 L	52	70
CHI 10 CH - CHI 10 - C7I 10	65	83
CHI 16 CH - CHI 16 - C7I 16	86	103
CHI 24 CH - CHI 24 - C7I 24	112	130

CHI LCH



CHI 10 CH



CHI 16 CH



CHI 16 CH



CHI L

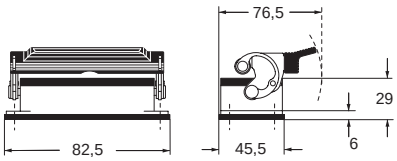

CHI

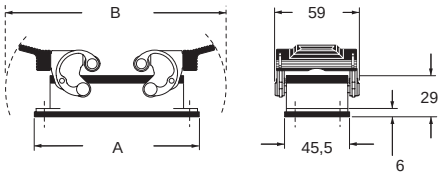

part No.	A	B
CHI 10	95,5	135
CHI 16	115,5	153
CHI 24	142,5	179,5

C7I L

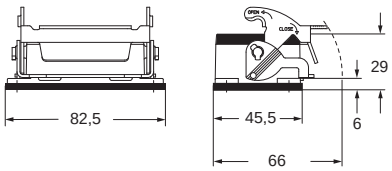

C7I

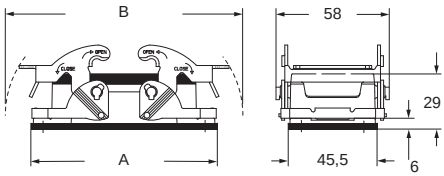

part No.	A	B
C7I 10	95,5	122
C7I 16	115,5	142,5
C7I 24	142,5	169

IMPORTANT NOTE: The enclosures ensure IP66 degree of protection when mated and locked with the closing levers.

c UL us Type 4/4X/12

EN 60529 IP66 IP69 IEC 60529 **CHI**

EN 60529 IP66 IP67 IP69 IEC 60529 **C7I**

SPECIAL ENCLOSURES

dimensions shown in mm are not binding and may be changed without notice

CA bottom entry

inserts		page:
CD	64 poles + ⏚	**72**
CDD	108 poles + ⏚	**81**
CDS	42 poles + ⏚	**-**
CDSH	42 poles + ⏚	**89**
CNE	24 poles + ⏚	**113**
CSE	24 poles + ⏚	**-**
CSH	24 poles + ⏚	**113**
CSH S	24 poles + ⏚	**125**
CCE	24 poles + ⏚	**133**
CMSH	10+2 (aux) poles + ⏚	**140**
CMCE	10+2 (aux) poles + ⏚	**141**
CSS	24 poles + ⏚	**151**
CQE	46 poles + ⏚	**171**
CQEE	64 poles + ⏚	**177**
CX	4/8 and 6/6 poles + ⏚	**204, 206**
MIXO	6 modules	**262 - 317**

surface mounting housings with 2 levers, bottom entry

description	part No.	entry Pg
with levers, high construction, bottom entry with metal adaptor Pg 29 (hole) / Pg 36 (thread)	**CAP 24 G36**	36

IMPORTANT NOTE: The enclosures ensure IP66 degree of protection when mated and locked with the closing levers.

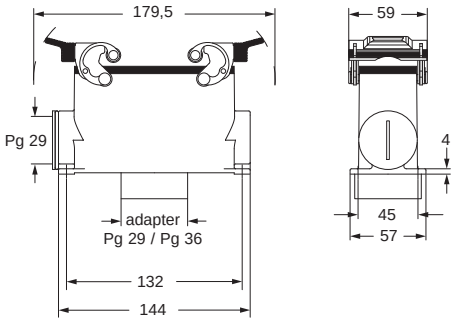

Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket

CYR cable passing hoods

enclosures:

size “77.27”
size “104.27”

cable passing hoods

Note:
cannot be used with T-TYPE series

description	part No.	size
with pegs for two levers		
3 holes for round cables Ø 5 - 13.5 mm	**CYR 16.3**	77.27
4 holes for round cables Ø 5 - 13.5 mm	**CYR 24.4**	104.27

CYR enclosures for round cables

The CYR enclosures are used in installations that require a passage for round cables for data transmission (e.g. computers or PLC) via equipment such as command or control panels, ensuring a good condition of the cable connections.

The enclosures are in two parts and have sealing gaskets to preserve the degree of protection of the equipment. The enclosures also contain a rapid cable block device.

The CYR 16.3 and 24.4 can be used with the **bulkhead mounting housings with 2 levers** respectively.

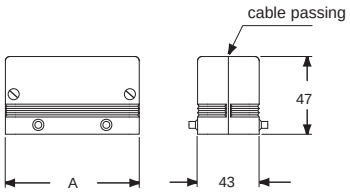

part No.	A	grommet entry	nr.	size
CYR 16.3	93,5	ø 5 / 13,5	3	77.27
CYR 24.4	120	ø 5 / 13,5	4	104.27

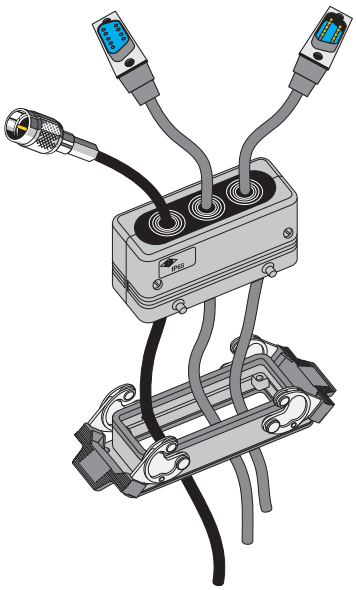

c UL us Type 12

EN 60529 IP54 IEC 60529

dimensions shown in mm are not binding and may be changed without notice

CYG in-line joints

enclosures:

size “77.27”

enclosures for in-line joints

Note:
cannot be used with T-TYPE series
and IP68 series

description	part No.
without housings (to be ordered separately) made in two halves	**CYG 16**

CYG 16 in-line joint
- The joint is made with the CYG 16 enclosure and two bulkhead housings “size 77.27” with one or two levers (to be ordered separately).
- The joint is ideal for use with extension connections and/or as adaptor.
- Made in two halves to facilitate conductor cabling.
- Two inserts in various combinations may be inserted in the joint (to be ordered separately):
  - female/female inserts (as adaptor joint)
  - male/male inserts (as adaptor joint)
  - female/male inserts (as extension joint)



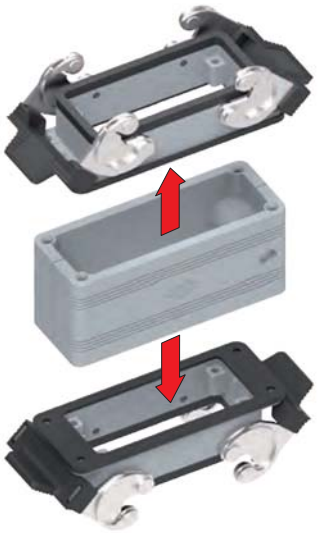

Type
4/4X/12

IP65

T-BOX branch coupling

enclosures:

size “44.27”
size “57.27”

1 branch-off T-BOX coupling

1 branch-off T-BOX coupling to be fitted on DIN rails

description	part No.	part No.
for 2 Ⓒ hoods with lever and gasket “44.27” size and one housing “44.27” Ⓐ size	**CYG 06H06**	
for 2 Ⓒ hoods with lever and gasket “44.27” size and one housing “57.27” Ⓐ size	**CYG 06H10**	
for 2 Ⓒ hoods with lever and gasket “44.27” size and one housing “44.27” Ⓐ size		**CYG 06H06D**
for 2 Ⓒ hoods with lever and gasket “44.27” size and one housing “57.27” Ⓐ size		**CYG 06H10D**

How to use the CYG 06H branch coupling

The cables are branched off by using the CYG 06H coupling in the 1 or 2 branch-off versions.
Multi-pole inserts “44.27” size can be fitted inside the two side recesses.
The entire unit can be used with one lever hoods complete with connector inserts.
The front faces can be fitted with “44.27” and/or “57.27” size bulkhead housings.
The coupling may also be used as an adapter by using a combination of different insert versions.
The CHC 06 LG cover may be used to close the coupling side faces.
In the branch-offs, the CSS series dual spring terminal inserts allow two wires to be connected without having to fit additional terminals inside the coupling.

CYG...H06 / H10

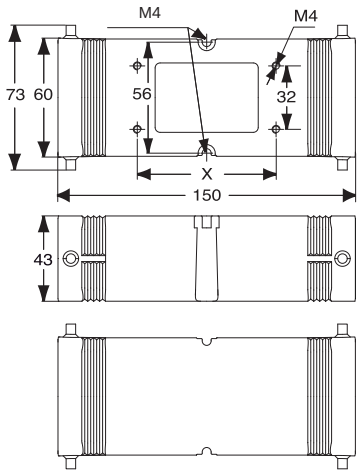

part No.	X
CYG 06H06	70
CYG 06H10	83

CYG...H06D / H10D

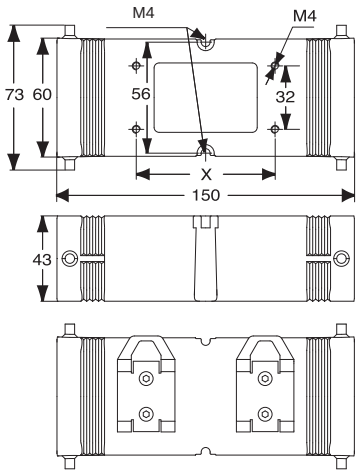

part No.	X
CYG 06H06D	70
CYG 06H10D	83

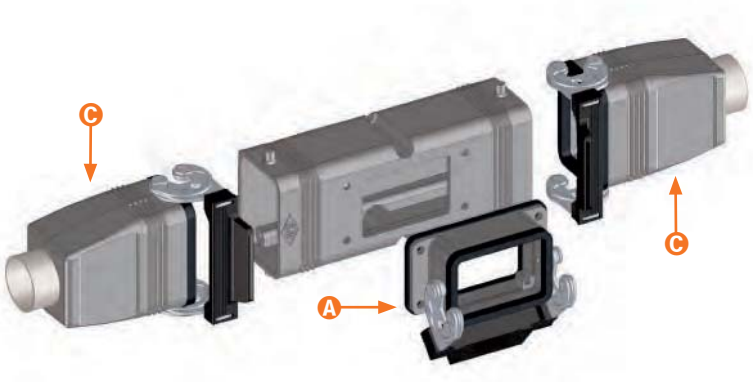

part No.	Ⓐ	Ⓒ
CYG 06H06	06	06
CYG 06H10	10	06
CYG 06H06D	06	06
CYG 06H10D	10	06

Legend:
Ⓐ bulkhead mounting housings
Ⓒ hoods with lever and gasket (LG)

Type 4/4X/12

EN 60529 IP66 IP69 IEC 60529

SPECIAL ENCLOSURES

dimensions shown in mm are not binding and may be changed without notice

T-BOX branch coupling

enclosures:

size “44.27”
size “57.27”

2 branch-off T-BOX coupling

2 branch-off T-BOX coupling

description	part No.	part No.
for 2 C hoods with lever and gasket “44.27” size and one “44.27” B size fixing side housing and one “57.27” A size housing	**CYG 06H0610**	
for 2 C hoods with lever and gasket “44.27” size and one “57.27” B size fixing side housing and one “44.27” A size enclosure	**CYG 06H1006**	
for 2 C hoods with lever and gasket “44.27” size and two “44.27” A and B size housing		**CYG 06H0606**
for 2 C hoods with lever and gasket “44.27” size and two “57.27” A and B size housing		**CYG 06H1010**

How to use the CYG 06H branch coupling

The cables are branched off by using the CYG 06H coupling in the 1 or 2 branch-off versions.
Multi-pole inserts “44.27” size can be fitted inside the two side recesses.
The entire unit can be used with one lever hoods complete with connector inserts.
The front faces can be fitted with “44.27” and/or “57.27” size bulkhead housings.
The coupling may also be used as an adapter by using a combination of different insert versions.
The CHC 06 LG cover may be used to close the coupling side faces.
In the branch-offs, the CSS series dual spring terminal inserts allow two wires to be connected without having to fit additional terminals inside the coupling.

CYG...H0610 / H1006

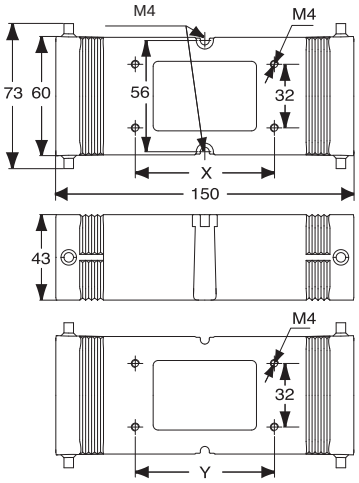

part No.	X	Y
CYG 06H0610	83	70
CYG 06H1006	70	83

CYG...H0606 / H1010

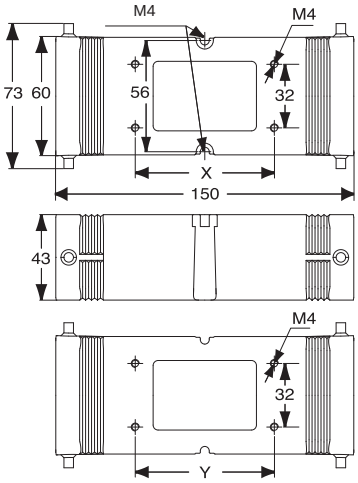

part No.	X	Y
CYG 06H0606	70	70
CYG 06H1010	83	83

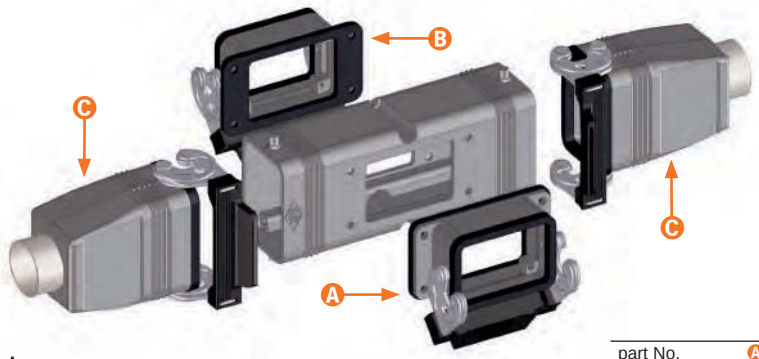

Legend:
A bulkhead mounting housings
B bulkhead mounting housings
C hoods with lever and gasket (LG)

part No.	A	B	C
CYG 06H0610	06	10	06
CYG 06H1006	10	06	06
CYG 06H0606	06	06	06
CYG 06H1010	10	10	06

Type 4/4X/12

EN 60529 IP66 IP69 IEC 60529

SPECIAL ENCLOSURES

ACCESSORIES AND TOOLS

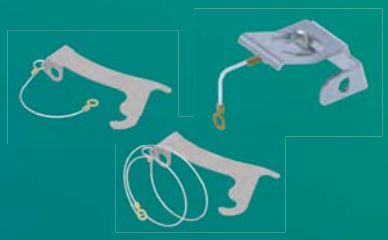

**LOCKING DEVICES
FOR CLASS LOCKING LEVERS,
FOR ENCLOSURES WITH CENTRAL LEVER** ..... 666 - 667

NSERT FASTENING SCREWS

**SCREWS FOR SECOND PROTECTIVE
EARTH TERMINAL** 668

ACCESSORIES FOR CT - CTS - CTSE INSERTS 669

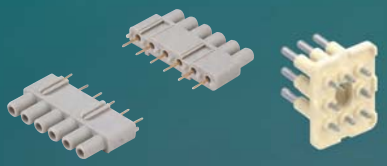

CIF PCB ADAPTERS ..... 670 - 672

CC CRIMP CONTACTS (CONSTANTAN, IRON) 673

**CD - CDF/M 2D - CDF/M JD (10A)
CC - CCF/M 2D - CCF/M JD (16A)
HIGH THICKNESS AND BASIC GOLD
PLATING CONTACTS** ..... 674 - 675

POF CONTACTS CL SERIES ..... 676 - 677



CR ANCHORAGES ..... 678 - 681

CR...DF SELF-CENTRING FLOATING FRAME 682

CR CODING PINS ..... 684 - 692

CKM, CQAM TERMINATION CONNECTOR 693



CR BRIDGES FOR DELTA OR STAR CONNECTION ..... 694 - 695

CHCP, CGKCP, CGCP, PROTECTION COVERS ..... 696 - 697

CBGF INSERT JOINING BLOCK 698
CR TM-1 METAL REPLACEMENT HANDLES 698

CPT TEMPORARY PROTECTION COVER FOR TRANSPORTATION

CPES PLIERS FOR UNCOUPLING CONNECTORS 699

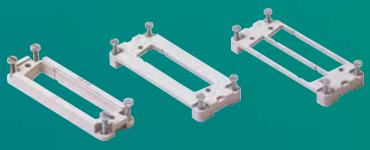

CR...AD - CR...AD1 - CR...AD2 PLATES FOR D-SUB INSERTS 700

SDS - CHSDS KIT FOR CONTROL EQUIPMENT 701

CRH - CRZ CLOSURE AND REDUCTION PLATE 702

CX BES EXTRACTION TOOL FOR MIXO BUS CONNECTORS 703

CRIMPING TOOLS ..... 704 - 741

CR CLK locking device for CLASS locking levers

enclosures		page:
CHI	10/16/24 poles + ⏚	**393, 402, 412**
CHP and MHP	10/16/24 poles + ⏚	**394, 403, 413**

stainless steel locking device for two-lever housings

padlock, 40 mm arc clearance, optional

description	part No.	part No.
stainless steel locking device, with eyelet, for fixing on the housings	**CR CLK**	
padlock, supplied with 2 keys		**TM BLC125**

NOTE: Not suitable neither for hoods with locking levers and gasket nor for surface-mounting housings, high profile.

- **Locking device,** made in **stainless steel,** that can be easily placed on the “Class” locking lever handle of a **two-lever bulkhead mounting housing or a “low profile” surface mounting housing** of sizes “57.27”, “77.27” and “104.27”, in order to avoid unwanted and potentially hazardous accidental opening of the locking lever while the connectors are under working condition;

- **possibility to apply, optionally, a padlock (TM BLC125,** separately available, 5 mm shackle diameter, 40 mm arc clearance) with **anti-tamper function,** i.e. to secure the locking against unauthorized attempts to open the locking lever and disconnect the connector coupling;

- with eyelet cord end, for fastening the locking device to the intended housing when not in use.

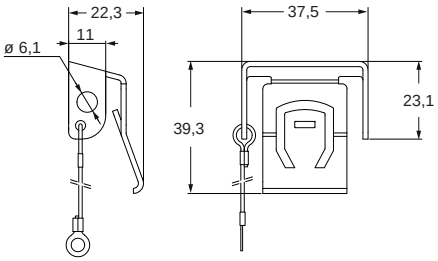

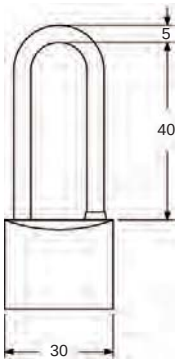

For fixing on housings

eyelet



Anti-tamper function by TM BLC125 padlock (to be ordered separately)

cURus pending

dimensions shown in mm are not binding and may be changed without notice

CR YLK24 – CR YLK24 SL CENTRAL LEVER

enclosures	page:
Central lever size “104.27”	**612 - 614**

locking device for enclosure with central lever size “104.27”

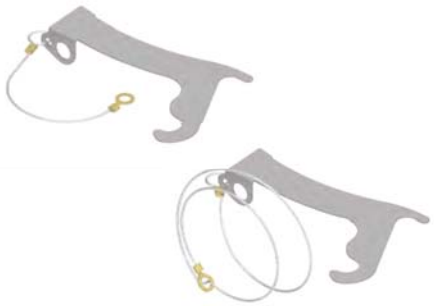

padlock, 22 mm arc clearance, optional

description	part No. (with eyelet)	part No. (with loop)	part. No.
locking device with eyelet for fixing on housings	**CR YLK24**		
locking device with loop for fixing on hoods		**CR YLK24 SL**	
padlock, supplied with 2 keys			**CR BLC622**

CR YLK24 and **CR YLK24 SL**

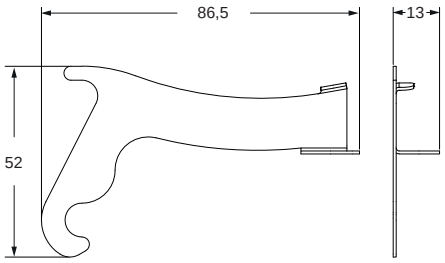



For fixing on housings

eyelet



For fixing on hoods

loop



cURus pending

ACCESSORIES

screws

	insert fastening screws	screws for second protective earth terminal
description	part No.	part No.
to be fitted instead of the current insert fastening screws [1]	**CRIC M3**	
for CDA/CDC, CSAH inserts		**CR VATG**
for CD 15/25, CDD 38 inserts		**CR VDTG**
for CD 40/64, CDD 24/42/72/108, CQE, CNE, CSS, CX 8/24, CCE, CMSH, CME, CMCE, CSH, CDSH inserts		**CR VNTG**
for CP, CX 12/2, CX 6/36, CX 6/12, CX 4/0, CX 4/2 inserts		**CR VPTG**

[1] The approved method of mounting inserts is by fixing the four screws in an ILME enclosure or housing.

ILME will not be responsible for any different mounting applications. It is the responsibility of the installer to ensure the correct coupling and the continuity of the protective earth contact of the inserts.





support for rail mounting DIN EN 60715

CT/CTS/CTSE inserts coupling screws cable-clamping plates

description	part No.	part No.
supports for CT, CTS, CTSE inserts	**CT APE**	
bush for CT, CTS, CTSE inserts		**CRBF**
screw pin for CD, CNE, CCE, CSH inserts		**CRBM**
straight cable clamping plate		**CRAD**
angled cable clamping plate		**CRAS**

Coupling screws for CT/CTSE inserts

The use of CRBF (female) and CRBM (male coupling screws is recommended to guarantee a stable and safe coupling between inserts (without enclosures) with terminal blocks and inserts without terminal blocks.

CRBM **CRBF**

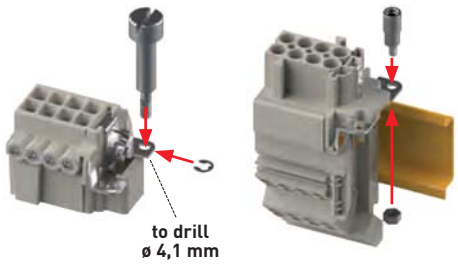

Use of cable-clamping plates

In accordance with the recommendations of standard IEC 60352-2, the weight of the conductor groups or multipolar cables must not cause any stress on the contacts inside the inserts. It is therefore advisable to use cable-clamping plates in those inserts without enclosures.

CRAD **CRAS**

CT APE

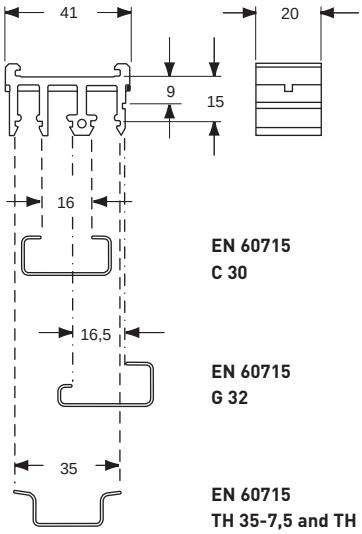

EN 60715 C 30

EN 60715 G 32

EN 60715 TH 35-7,5 and TH 35-15

CRBM **CRBF**

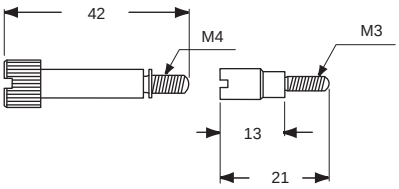

CRAD



CRAS

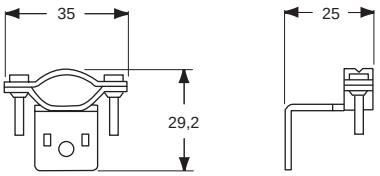

Note:
for conductor groups or cable with
Ø min = 12 mm and Ø max = 23 mm

CIF PCB adapters

inserts		page:
CDD	24 poles + ⏚	**76**
CDD	42 poles + ⏚	**78**
CDD	72 poles + ⏚	**79**
CDD	108 poles + ⏚	**81**
CX	8/24 poles + ⏚	**194**
CX	6/36 poles + ⏚	**198**
CX 12 (MIXO)	12 poles	**281**

interface for printed circuit

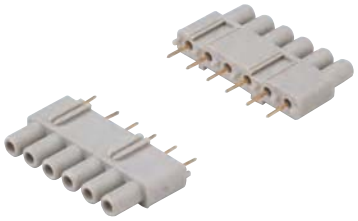

6A contacts for interface silver and gold plated

description	part No.	part No.	part No.
interface module with 6 female contacts (gold) for up to 2,4 mm thick PCB	**CIF 2.4**		
interface module with 6 female contacts (silver) for up to 2,4 mm thick PCB	**CIF 2.4 A**		
6A female contacts for female inserts with terminal Ø 1 mm		**CDFA 6A** silver plated	**CDFD 6A** gold plated
6A male contacts for male inserts with terminal Ø 1 mm		**CDMA 6A**	**CDMD 6A**

CIF interface

The interface block is made according to the multipole connector used by assembling a suitable number of CIF modules (see table).

inserts series	poles n°	modules "CIF" n°
CDD	24	4
CDD	42	7
CDD	72	12
CDD	108	18
CX	8/24	4
CX	6/36	6
CX (MIXO)	12	2

The block is then welded on the printed circuit on which the multipole connector (female or male) equipped with coupling contacts will then be inserted.

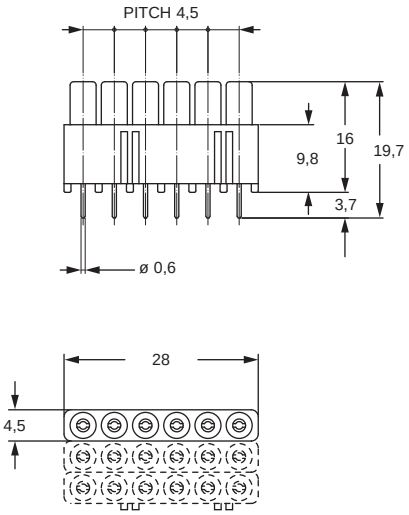

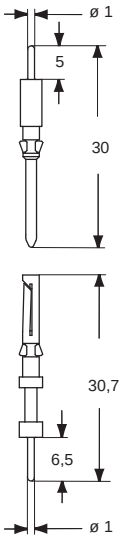

CIF 2.4, CIF 2.4 A PCB ADAPTERS

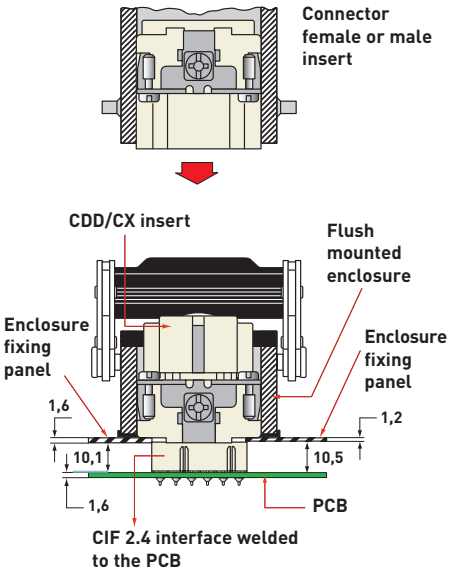

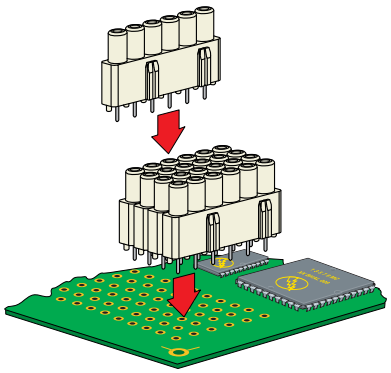

ACCESSORIES

dimensions shown in mm are not binding and may be changed without notice

CIF PCB adapters

inserts		page:
CQ	8 poles + ⏚	192

interface for printed circuit

16A contacts for interface silver plated

description	part No.	part No.
PCB adapter with contacts for up to 1,6 mm thick PCB	**CIF Q08 1.6**	
16A female contacts for female inserts		**CCFFA** silver plated
16A male contacts for male inserts		**CCMFA**

The block is soldered on the printed circuit on which the multipole connector (female or male) equipped with coupling contacts will then be inserted.

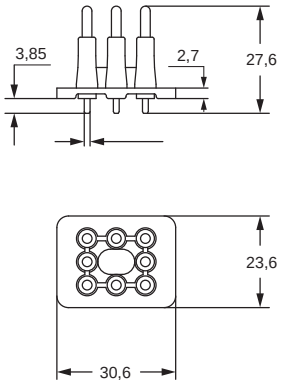

PCB-Layout





CCMFA (M)



CCFFA (F)

CIF PCB adapters

inserts		page:
CQ	4 poles + 2 poles + ⏚	191

interface for printed circuit

7,5A and 30A contacts for interface silver plated

description	part No.	part No.
PCB adapter with contacts for up to 2,4 mm thick PCB	**CIF Q4/2 2.4**	
7,5A female contacts for female inserts 7,5A male contacts for male inserts		**CDFA 6A28** **CDMA 6A**
30A female contacts for female inserts 30A male contacts for male inserts		**CXFFA** **CXMFA**

silver plated

The block is soldered on the printed circuit on which the multipole connector (female or male) equipped with coupling contacts will then be inserted.

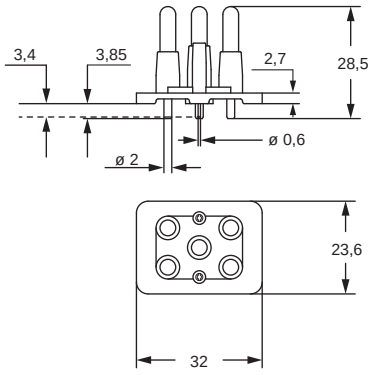

PCB-Layout



CDMA 6A



CXMFA



CDFA 6A28



CXFFA



ACCESSORIES

dimensions shown in mm are not binding and may be changed without notice

CC crimp contacts

inserts		page:
CDC	10, 16 poles + ⏚	**104 - 105**
CCE	6, 10, 16, 24, 32, 48 poles + ⏚	**130 - 135**
CMCE	3+2, 6+2, 10+2, 12+4, 20+4 (aux) poles + ⏚	**137 - 145**
CQE	10, 18, 32, 46, 64, 92 poles + ⏚	**168 - 173**
CQEE	40, 64 poles + ⏚	**176 - 177**
CQ	5 poles + ⏚	**186**
CX	8/24 poles + ⏚	**194**
CX	6/6 poles + ⏚	**206**
MIXO (16A)		**275 - 289**

constantan (Cu Ni)
crimp contacts

iron (Fe)
crimp contacts

description	part No.	part No.
16A, 0,3 mm², AWG 22 female contacts	**CCFC 0.3**	**CCFF 0.3**
16A, 0,3 mm², AWG 22 male contacts	**CCMC 0.3**	**CCMF 0.3**
16A, 0,5 mm², AWG 20 female contacts	**CCFC 0.5**	**CCFF 0.5**
16A, 0,5 mm², AWG 20 male contacts	**CCMC 0.5**	**CCMF 0.5**

Note:

A mixed combination of iron, constantan and silver and gold plated contacts can be fitted in the same insert.

- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 16A contacts, CCF and CCM on pages 705 - 741)
- for type J (iron - constantan) thermocouples compliant with EN 60584-1
- contact resistance ≤ 1 Ohm

CCF and **CCM**



CCF and CCM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length mm
0,3	1,1	7,5
0,5	1,1	7,5

CCF and **CCM**



CCF and CCM contacts

conductor section mm²	conductor slot ø A (mm)	conductors stripping length mm
0,3	1,1	7,5
0,5	1,1	7,5

CD crimp contacts 10A

inserts		page:
CD	(10A)	**66 - 74**
CDD	(10A)	**76 - 83**
CQ	(10A)	**187 - 193**
CX 8/24	(16A / 10A)	**194**
CX 6/**36**	(10A)	**198**
CX 12/**2**	(10A)	**199**
MIXO	(10A)	**271 - 283**

10A crimp contacts
high thickness gold plated

10A crimp contacts
basic gold plated

description			part No.	part No.
10A female contacts				
0,14-0,37 mm²	AWG 26-22	identification No. 1	**CDF2D 0.3**	**CDFJD 0.3**
0,5 mm²	AWG 20	identification No. 2	**CDF2D 0.5**	**CDFJD 0.5**
0,75 mm²	AWG 18	identification No. ②	**CDF2D 0.7**	**CDFJD 0.7**
1,0 mm²	AWG 18	identification No. 3	**CDF2D 1.0**	**CDFJD 1.0**
1,5 mm²	AWG 16	identification No. 4	**CDF2D 1.5**	**CDFJD 1.5**
2,5 mm²	AWG 14	identification No. 5	**CDF2D 2.5**	**CDFJD 2.5**
10A male contacts				
0,14-0,37 mm²	AWG 26-22	identification No. 1	**CDM2D 0.3**	**CDMJD 0.3**
0,5 mm²	AWG 20	identification No. 2	**CDM2D 0.5**	**CDMJD 0.5**
0,75 mm²	AWG 18	identification No. ②	**CDM2D 0.7**	**CDMJD 0.7**
1,0 mm²	AWG 18	identification No. 3	**CDM2D 1.0**	**CDMJD 1.0**
1,5 mm²	AWG 16	identification No. 4	**CDM2D 1.5**	**CDMJD 1.5**
2,5 mm²	AWG 14	identification No. 5	**CDM2D 2.5**	**CDMJD 2.5**

gold plated

The gold plated contacts provide:
- corrosion resistance (according to EN 60068)
- mechanical life: ≥ 500 coupling cycles
- in compliance with EN 61984:2009, IEC 60512, EN 60352-2: 1994
- compliant to directive RoHS2
- contact resistance: ≤ 3 mΩ
- certifications: c UL us (UL for USA and Canada),

CDF2D and **CDM2D**

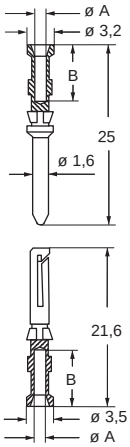

CDFJD and **CDMJD**

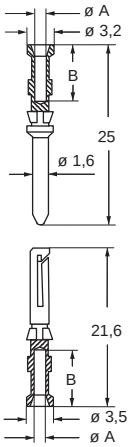

contacts CDF2D and CDM2D

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

contacts CDFJD and CDMJD

conductor section mm²	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

dimensions shown in mm are not binding and may be changed without notice

CC crimp contacts 16A

inserts		page:
CDC	(16A)	**104 - 106**
CCE	(16A)	**130 - 135**
CMCE	(16A)	**137 - 145**
CQE	(16A)	**168 - 173**
CQEE	(16A)	**176 - 177**
CX 8/24	(16A / 10A)	**194**
CX 6/6	(16A / 10A)	**206**
MIXO	(16A)	**275 - 289**

16A crimp contacts high thickness gold plated

16A crimp contacts basic gold plated

description			part No.	part No.
16A female contacts				
0,14-0,37 mm²	AWG 26-22	one groove	**CCF2D 0.3**	**CCFJD 0.3**
0,5 mm²	AWG 20	with no grooves	**CCF2D 0.5**	**CCFJD 0.5**
0,75 mm²	AWG 18	one groove (back side)	**CCF2D 0.7**	**CCFJD 0.7**
1 mm²	AWG 18	one groove	**CCF2D 1.0**	**CCFJD 1.0**
1,5 mm²	AWG 16	two grooves	**CCF2D 1.5**	**CCFJD 1.5**
2,5 mm²	AWG 14	three grooves	**CCF2D 2.5**	**CCFJD 2.5**
3 mm²	AWG 12	one wide groove	**CCF2D 3.0**	**CCFJD 3.0**
4 mm²	AWG 12	with no grooves	**CCF2D 4.0**	**CCFJD 4.0**
16A male contacts				
0,14-0,37 mm²	AWG 26-22	one groove	**CCM2D 0.3**	**CCMJD 0.3**
0,5 mm²	AWG 20	with no grooves	**CCM2D 0.5**	**CCMJD 0.5**
0,75 mm²	AWG 18	one groove (back side)	**CCM2D 0.7**	**CCMJD 0.7**
1 mm²	AWG 18	one groove	**CCM2D 1.0**	**CCMJD 1.0**
1,5 mm²	AWG 16	two grooves	**CCM2D 1.5**	**CCMJD 1.5**
2,5 mm²	AWG 14	three grooves	**CCM2D 2.5**	**CCMJD 2.5**
3 mm²	AWG 12	one wide groove	**CCM2D 3.0**	**CCMJD 3.0**
4 mm²	AWG 12	with no grooves	**CCM2D 4.0**	**CCMJD 4.0**

gold plated

The gold plated contacts provide:
- corrosion resistance (according to EN 60068)
- mechanical life: ≥ 500 coupling cycles
- in compliance with EN 61984:2009, IEC 60512, EN 60352-2: 1994
- compliant to directive RoHS2
- contact resistance: ≤ 1 mΩ
- certifications: c UL us (UL for USA and Canada),

CCF2D and **CCM2D**

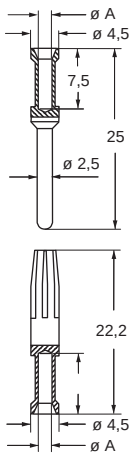

CCFJD and **CCMJD**

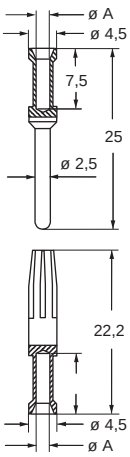

contacts CCF2D and CCM2D

conductor section mm²	conductor slot ø A (mm)	conductors stripping length mm
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3,0	2,55	7,5
4,0	2,85	7,5

contacts CCFJD and CCMJD

conductor section mm²	conductor slot ø A (mm)	conductors stripping length mm
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3,0	2,55	7,5
4,0	2,85	7,5

POF contacts series
CLF DD and CLM DD

Fibre optic cables provide data transmission not subject to electromagnetic interference, contrary to copper-based (electric) data transmission.

The new fibre optic contacts **CL series (CLF DD and CLM DD)** can be used in combination with POF (polymer optical fibre) Ø 1,0 mm (core) / 2,2 mm (sheath) in ILME range of heavy duty multipole connectors, offering the following features:

- inherent immunity to EMI (electromagnetic interference);
- perfect electrical insulation;
- lightweight;
- high transmission capacity and high bandwidth;
- high data security;
- IP66/IP67 recommended to minimize impairing effect of dust contamination;
- male and female contacts CL series for POF Ø 1,0 mm (core) / 2,2 mm (sheath), with same geometry of crimp contacts CD series for conventional copper conductors;
- usable in connector inserts with contact cavities geometry of CDD series, including some modules of MIXO series and some inserts of CQ series, according to **Table 1**.
  Not for use in CD inserts series [1];

Table 1.

CDD series NOTE – Not suitable for CDDF/M 38 /38 N	CDDF/M 24 CDDF/M 42 CDDF/M 72, CDDF/M 72 N CDDF/M 108, CDDF/M 108 N
CQ series	CQF/M 07 CQF/M 12 CQF/M 17
MIXO series modular connectors	CX 12 DF/DM CX 17 DF/DM
CX series combined connectors – aux poles number of cavities highlighted in **bold**	CXF/M 8/24 CXF/M 6/36 CXF/M 12/2

[1] For CD inserts series a similar solution for use of POF Ø 1 mm may be developed upon request: please contact our Sales Department or our local Subsidiaries/Distributors.

- use of **alignment/coding pins on connectors/connector modules is mandatory** for fibre optic applications, in order to avoid damages to contacts and in order to minimize the natural attenuation of light signal which is mainly due to inaccuracy of the mating surfaces of the POF (polishing and perfect cleanliness of the two mating fibres) and to axial misalignment;
- POF to be stripped, crimped, cut and polished according to instructions on pages besides.
- for size “77.62” 2-insert combinations use JCHI 32 L/LP (page 120 catalogue XDG JEI 415) or a special version with stainless steel rigid lever available upon request.
- for the installation of fibre optic, **it is recommended to use only bulkhead mounting housings and corresponding hoods with vertical cable outlet.**

ACCESSORIES

Watch our online tutorial

CLF DD / CLM DD

inserts:		page:
CDD	(10A)	76 - 83
CQF/M 07	(10A)	187
CQF/M 12	(10A)	189
CQF/M 17	(10A)	193
CXF/M 8/24	(10A)	194
CXF/M 6/36	(10A)	198
CXF/M 12/2	(10A)	199
MIXO CX 12 DF/DM	(10A)	281
MIXO CX 17 DF/DM	(10A)	282

POF crimp contacts

description	part No.
female contacts for **POF***	**CLF DD**
male contacts for **POF***	**CLM DD**

***POF = Polymer Optical Fibre**

- ambient temperature limit: -40 °C ... +85 °C
- max external diameter: 2,2 mm (POF)
- polymer fibre diameter: 1 mm (POF)
- to crimp contacts CLF DD and CLM DD please use tool CLPZ R
- we recommend use of guide pins CRM/CRF (refer to page 685)

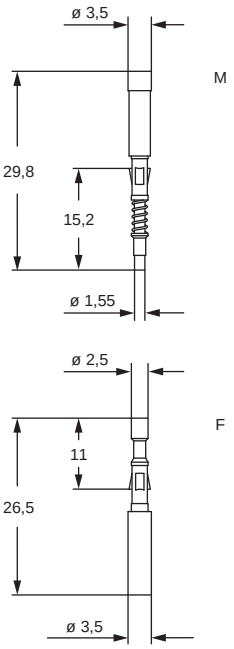

conductor stripping



male contacts



female contacts

CR anchorages

inserts

MIXO series **from page 262**

shield earthing anchorage for shielded cables (for MIXO series)
clamps for cables w/shield Ø 5 mm and Ø 10 mm

anchorages for several PE connection cables (for MIXO series)

description	part No.	part No.
in zinc plated steel, to be mounted on MIXO frames in bulkhead mounting housings, COB series enclosures and high construction hoods with top entry		
enclosures ”44.27” and MIXO frames for 2 modular units	**CR 06 ST**	
enclosures ”57.27” and MIXO frames for 3 modular units *	**CR 10 ST**	
enclosures ”77.27”, ”77.62” and MIXO frames for 4 modular units	**CR 16 ST**	
enclosures ”104.27”, ”104.62” and MIXO frames for 6 modular units	**CR 24 ST**	
to be mounted on CR..ST earthing terminals		
clamp for shielding cables Ø 5 mm	**CR 05 CA**	
clamp for shielding cables Ø 10 mm	**CR 10 CA**	
in zinc plated steel, to be mounted on MIXO frames in bulkhead mounting housings, COB series enclosures and high construction hoods with top entry		
enclosures ”44.27” and MIXO frames for 2 modular units		**CR 06 AT**
enclosures ”57.27” and MIXO frames for 3 modular units		**CR 10 AT**
enclosures ”77.27”, ”77.62” and MIXO frames for 4 modular units		**CR 16 AT**
enclosures ”104.27”, ”104.62” and MIXO frames for 6 modular units		**CR 24 AT**
enclosures ”104.27”, ”104.62” and MIXO frames for 6 modular units		**CR 24 ATD**

***** Fixed using the standard screws of the MIXO frame, the drew size are supplied with a special M4 screw that replaces the standard one.

Anchorages CR .. ST are designed for installation on the frames of the MIXO modular connectors, for earth connecting the screening braid of shielded cables.

Anchorages CR .. AT / ATD are designed for installation on the frames of the MIXO modular connectors for earth connecting several cables.

CR...ST

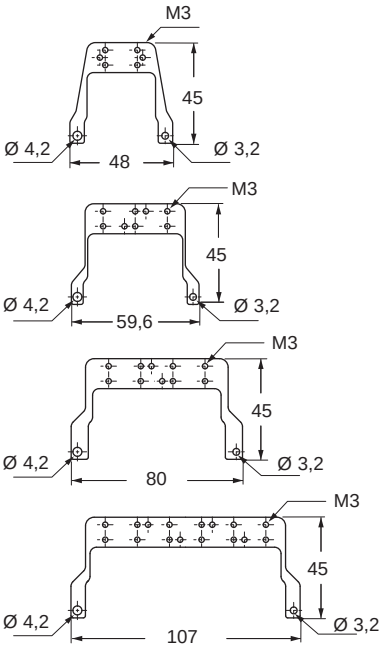

CR...AT

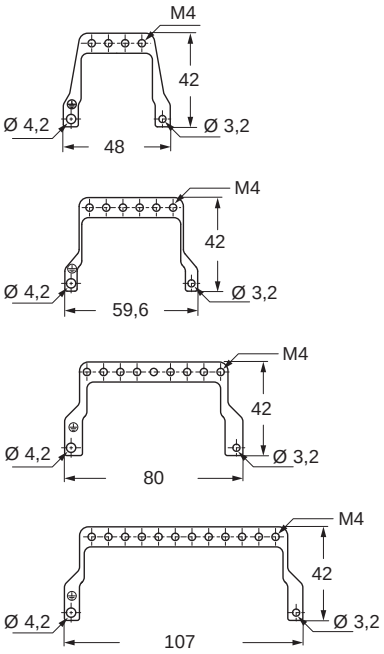

CR...CA

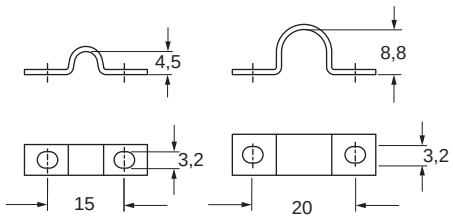

CR 24 ATD



dimensions shown in mm are not binding and may be changed without notice

CR anchorages

inserts		page:
CD	40, 64 poles + ⏚	**70 and 72**
CDD	24, 42, 72, 108 poles + ⏚	**76 - 81**
CDS	9, 18, 27, 42 poles + ⏚	**-**
CDSH	9, 18, 27, 42 poles + ⏚	**86 - 89**
CDSH NC	6 poles + ⏚	**95**
CNE	6, 10, 16, 24 poles + ⏚	**110 - 113**
CSE	6, 10, 16, 24 poles + ⏚	**-**
CSH	6, 10, 16, 24 poles + ⏚	**110 - 113**
CSH S	6, 10, 16, 24 poles + ⏚	**122 - 125**
CCE	6, 10, 16, 24 poles + ⏚	**130 - 133**
CMSH	3+2, 6+2, 10+2 (aux) poles + ⏚	**136 - 140**
CSS	6, 10, 16, 24 poles + ⏚	**148 - 151**
CQE	10, 18, 32, 46 poles + ⏚	**168 - 171**
CQEE	40, 64 poles + ⏚	**176 - 177**
CP	6 poles + ⏚	**178**
CX	8/24, 6/36, 12/2 poles + ⏚	**194 - 199**

ground terminals for shielded cables and for several earth connections

clamps for cables Ø 5 mm and Ø 10 mm

description	part No.	part No.
in zinc plated iron, to be fitted on connectors in bulkhead housings, COB series enclosures and high construction hoods with top entry		
“44.27” enclosures and inserts	**CR 06 SC**	
”57.27” enclosures and inserts	**CR 10 SC**	
”77.27”, ”77.62” enclosures and inserts	**CR 16 SC**	
”104.27”, ”104.62” enclosures and inserts	**CR 24 SC**	
CSS ”104.27” enclosures and inserts *	**CR 24 SCA**	
to be fitted on CR..SC anchors in bulkhead mounting housings and high construction hoods		
U-bolt for Ø 5 mm cable screening		**CR 05 CA**
U bolt for Ø 10 mm cable screening		**CR 10 CA**

***** Can be used only in bulkhead housings.

The CR... SC anchors are fitted on connectors for connecting to earth multiple cables and screened cables braids.

CR...SC

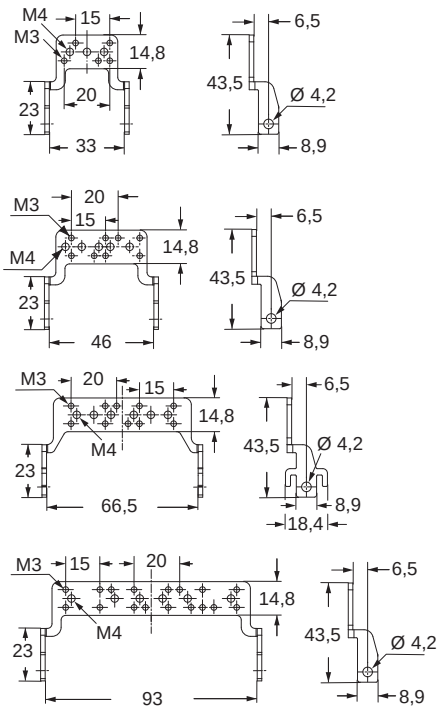

CR...SCA

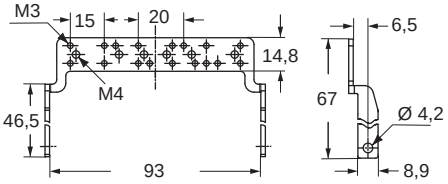

CR...CA

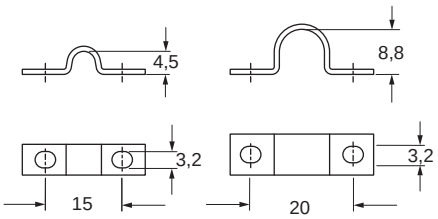

ACCESSORIES

CR anchorages

The CR..FS series anchorages are employed for use of connector inserts (normal or MIXO modular) without enclosures and enable anchoring cables with clamps to prevent transmitting friction forces to contacts. CR..SS anchorages (with grip to facilitate connector disconnection) are used for earth connecting of several conductors and/or of the screen of shielded cables.

cable anchorages / shield earthing strain

supports, screws and clamps for grip panels of cables outside enclosure

description	part No.	part No.
in zinc plated steel, to be mounted on:		
inserts size ”44.27” * and MIXO frames for 2 modular units	**CR 06 FS**	
inserts size ”57.27” * and MIXO frames for 3 modular units	**CR 10 FS**	
inserts size ”77.27” * and MIXO frames for 4 modular units	**CR 16 FS**	
inserts size ”104.27” * and MIXO frames for 6 modular units	**CR 24 FS**	
for shielded cables with grip handle, to be mounted on:		
inserts size ”77.27” * and MIXO frames for 4 modular units	**CR 16 SS**	
inserts size ”104.27” * and MIXO frames for 6 modular units	**CR 24 SS**	
supports in die-cast zinc, 2 pcs. equipped with fixing screws and washers for earth connection		**CR SP**
short screws in zinc iron, 2 pcs.		**CR 26 V**
long screws in zinc iron, 2 pcs.		**CR 42 V**
to be mounted on CR..SS anchorage		
clamp for shielding cables Ø 5 mm		**CR 05 CA**
clamp for shielding cables Ø 10 mm		**CR 10 CA**

***** Except CT, CTS and CTSE

In the fixed part, a pair of **CR SP** supports is fitted on the connector, using its securing screws.
A **CR..FS** or **CR..SS** anchorage is fitted on the supports, using the supplied fixing screws and washers.
All parts are secured on the rear panel with the pair of **CR 26 V** viton screws.
In the mobile part too, a pair of **CR SP** supports are fitted on the connector and a **CR..FS** or **CR..SS** anchorage is secured on it. The pair of **CR 42 V** screws fasten the mobile part to the fixed part.

NOTE: By unscrewing the **CR 26 V** special short screws, the whole assembly (free part + fixed part) can be removed from the panel for inspection.

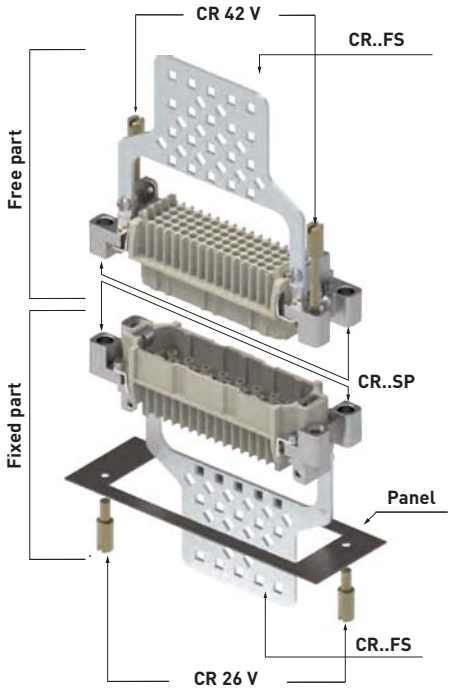

CR...FS

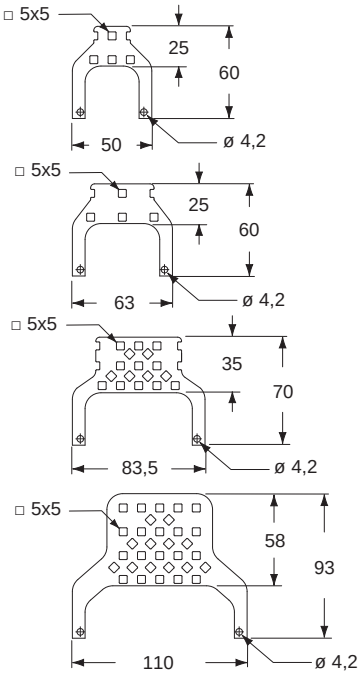

CR 16 SS (CR 24 SS)



CR SP

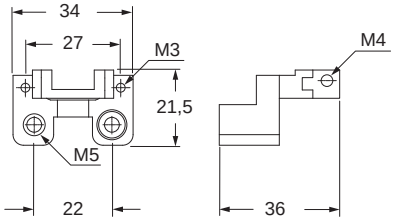

panel cut-out

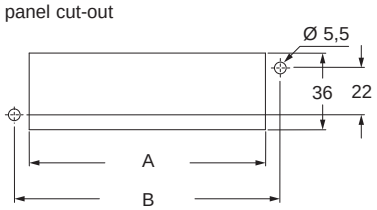

poles	06	10	16	24
A	52	65	85,5	112
B	65	78	98,5	125

CR 26 V



CR 42 V



CR...CA

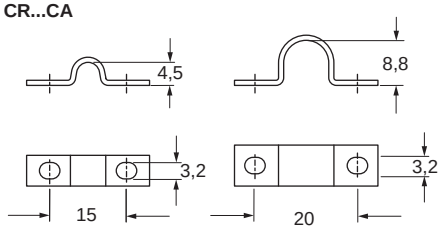

dimensions shown in mm are not binding and may be changed without notice

CR anchorages

anchorage for cables outside enclosure, equipped with fixing screws and washers

support, screws and clamps for grip panels of cables outside enclosure

description	part No.	part No.
for cables, to be mounted on: inserts size ”77.27”***** with CR SP support and MIXO frames for 4 inserts without support inserts size ”104.27”***** with CR SP support and MIXO frames for 6 inserts without support	**CR 16 SSD** **CR 24 SSD**	
support in die-cast zinc, 2 pcs. equipped with fixing screws and rings for earth connecting		**CR SP**
short screws in zinc plated steel, 2 pcs. long screws in zinc plated steel, 2 pcs.		**CR 26 V** **CR 42 V**
to be mounted on CR..SS anchorage clamp for (shielded) cables ø 5 mm clamp for (shielded) cables ø 10 mm		 **CR 05 CA** **CR 10 CA**

***** Except CT, CTS and CTSE

In the fixed part, a pair of **CR SP** supports is fitted on the connector insert, using the insert’s fixing screws.

A **CR..SSD** anchorage is then fitted on the **CR SP** supports, using the supplied fixing screws and washers.

All parts are secured on the rear panel with a pair of **CR 26 V** special short screws.

Also in the free part, a pair of **CR SP** supports is fitted on the connector insert and a **CR..SSD** anchorage is similarly secured on it. A pair of **CR 42 V** long screws fasten the free part to the fixed part.

NOTE: By unscrewing the **CR 26 V** special short screws, the whole assembly (free part + fixed part) can be removed from the panel for inspection.

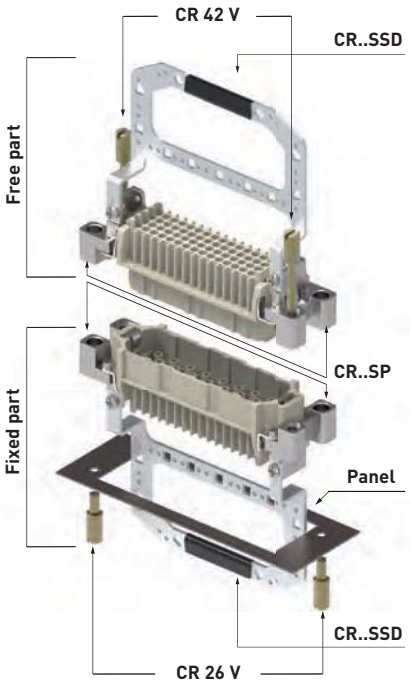

CR 16 SSD

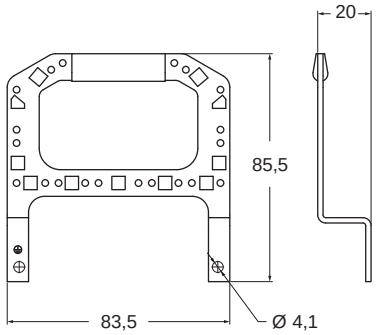

CR 24 SSD

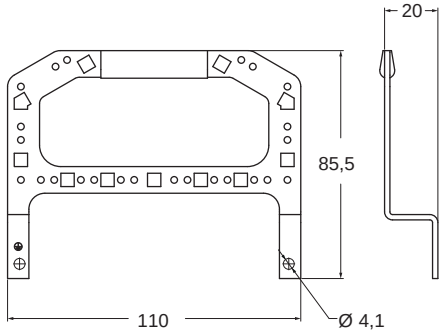

CR SP

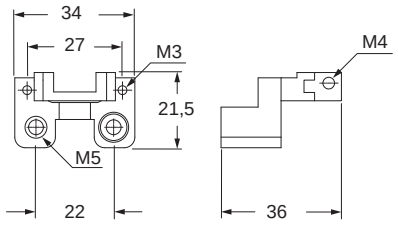

panel cut-out

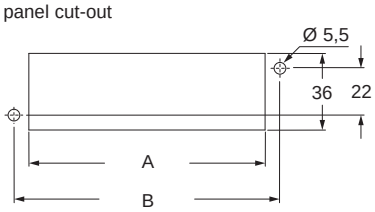

poles	06	10	16	24
A	52	65	85,5	112
B	65	78	98,5	125

CR 26 V



CR 42 V



CR...CA

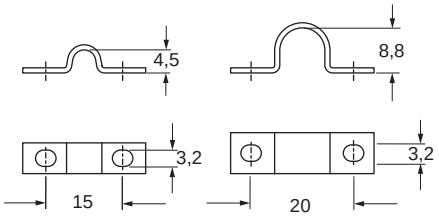

CR...DF self-centring floating frame

CAUTION: As the frames are floating, **the PE earthing connection of the metal surfaces on which they are mounted** (mounting bases) **must be performed separately** and cannot be done by connecting the PE earthing contact to the corresponding connector inserts.

NOTE: The supply includes 1 frame and 4 shoulder screws with cylindrical head and notch to fix the frame in place.

For use with MIXO inserts CX 04 X, please contact ILME S.p.A.

self-centring floating frame

description	part No.
in stainless steel, to be mounted on:	
inserts size “44.27” * and MIXO frames for 2 modular units	**CR 06 DF**
inserts size “57.27” * and MIXO frames for 3 modular units	**CR 10 DF**
inserts size “77.27” * and MIXO frames for 4 modular units	**CR 16 DF**
inserts size “104.27” * and MIXO frames for 6 modular units	**CR 24 DF**

* Except CT, CTS and CTSE

Technical specifications
- materials
  - floating frame, inserts: stainless steel
  - fixing screws: zinc-plated steel
- mechanical endurance: ≥ 500 cycles
- compensation range:
  - x axis: ± 1,5 mm
  - y axis: ± 1,5 mm

Characteristics
- Suitable, depending on size, for all standard and MIXO connector inserts and frames, except series CT, CTS and CTSE.
- Designed to be used in the transportation, printing and power electronic industries (for example boxes for rack cabinets) and in all industrial applications that require, during assembly or maintenance, the connection of connectors without possibility of controlling the alignment.
- Enables the **self-centring coupling of two corresponding** connectors without the use of enclosures; they freely move on their base plate (± 1,5 mm on both axes) ensuring the **alignment of the coupling**.

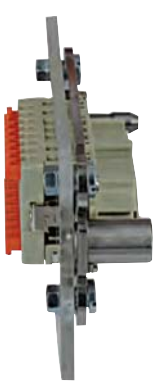

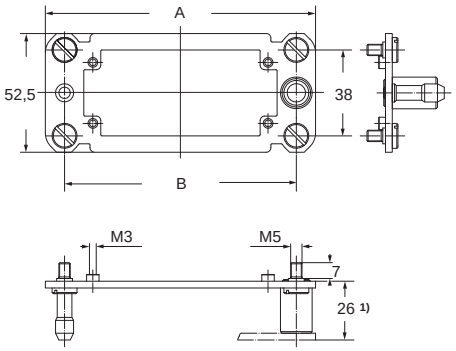

1) distance for electric and fibre optic contacts:
max 27 mm
distance for pneumatic contacts:
max 26,5 mm

panel cut-out

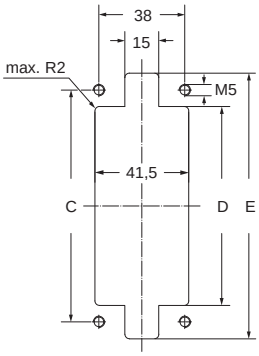

part No.	A	B	C	D	E
CR 06 DF	86	69	69	54,5	84
CR 10 DF	99	82	82	67,5	97
CR 16 DF	119,5	102,5	102,5	88	117,5
CR 24 DF	146	129	129	114,5	144

dimensions shown in mm are not binding and may be changed without notice

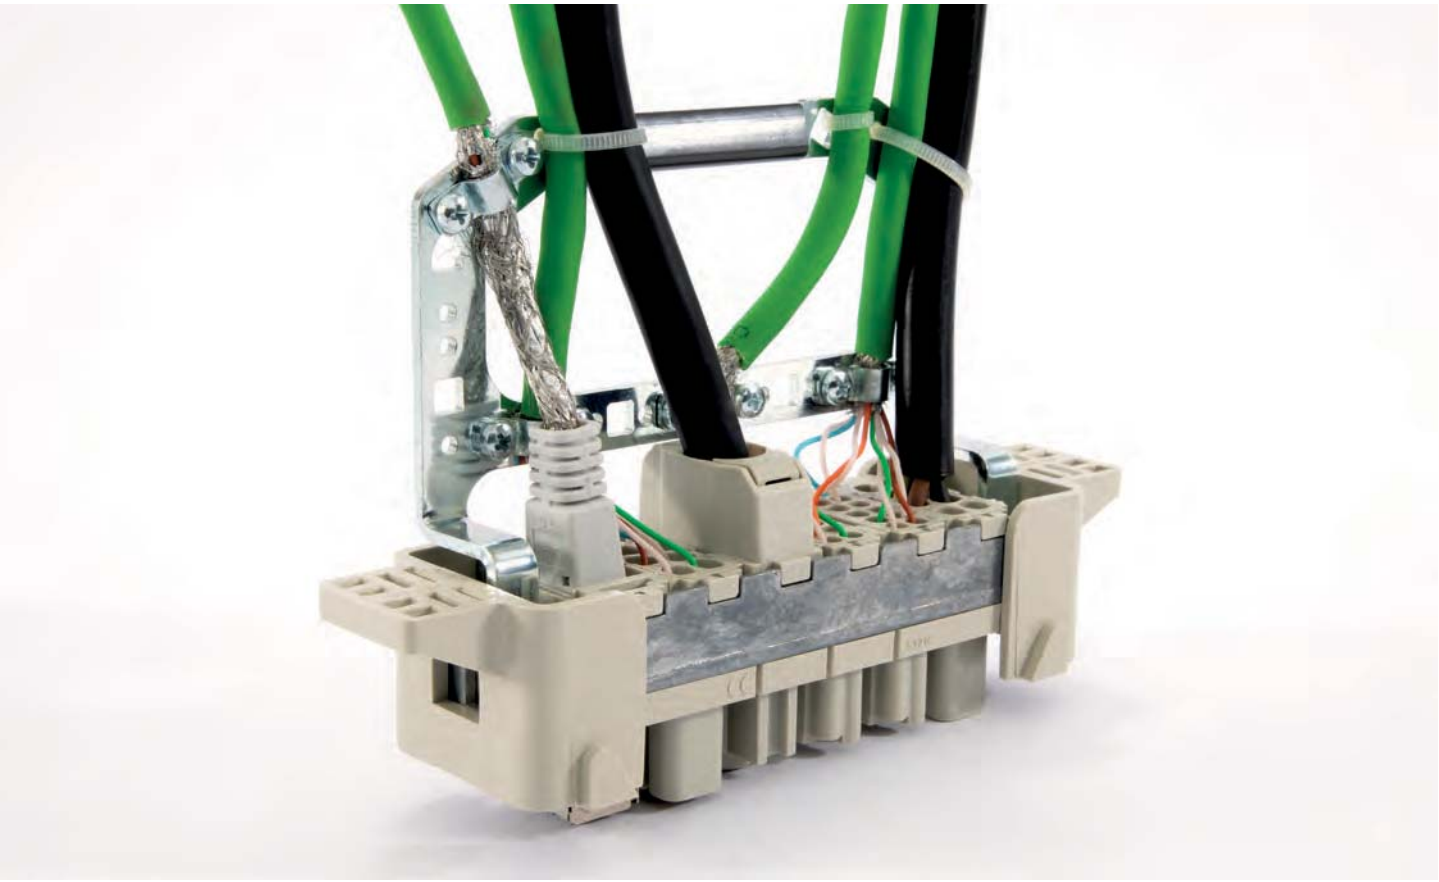

CR coding pins

single coding pins for 6 codings

coding options using single code pins

description	part No.	part No
single code pin (not for MIXO inserts)	stainless steel **CR 20**	zinc plated iron **CR 20 D**
single code pin (for MIXO inserts only)	stainless steel **CR 20 CX**	zinc plated iron **CR 20 CX D**

CR 20/CR 20 D and CR 20 CX/CR 20 CX D coding pins

Each series of connector inserts is made in such a way as to make incorrect coupling between inserts of different series impossible.
When a number of identical connectors with different functions are mounted closely together these must be selected in such a way as to prevent the coupling of a mobile part on a non-corresponding fixed part and consequent damage and breakdown.

Code pins are supplied to apply in place of the normal insert fastening screws (see example below). In this way the coupling of identical connectors is assured. The combination of code pins makes it possible to obtain a high number of selective couplings.

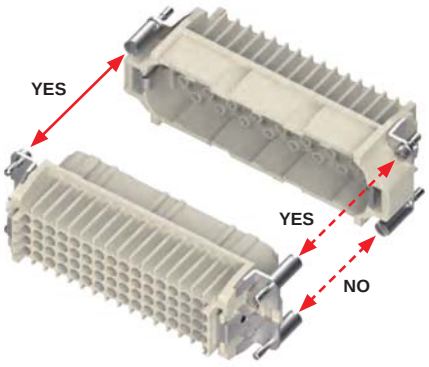

CR 20 / CR 20 D



CR 20 CX / CR 20 CX D



Application with single insert



Application with double inserts



● code pin (CR 20/CR 20 D and CR 20 CX/CR 20 CX D)
\+ normal fixing screw
M = male insert
F = female insert

ACCESSORIES

dimensions shown in mm are not binding and may be changed without notice

CR coding pins

double coding and guide pins for 16 codings

coding options is made by using double coding and guide pins

description	part No.	part No
double coding pins (excluding MIXO inserts)	stainless steel	zinc plated iron
male pin	**CRM**	**CRM D**
female pin	**CRF**	**CRF D**
double code pins (for MIXO inserts only)	stainless steel	zinc plated iron
male pin	**CRM CX**	**CRM CX D**
female pin	**CRF CX**	**CRF CX D**

Coding pins
- CRM/CRM D and CRF/CRF D
- CRM CX/CRM CX D and CRF CX/CRF CX D

Each series of connector inserts is made in such a way as to make incorrect coupling between inserts of different series impossible.
When a number of identical connectors with different functions are mounted closely together these must be selected in such a way as to prevent the coupling of a mobile part on a non-corresponding fixed part and consequent damage and breakdown.

Code pins are supplied to apply in place of the normal insert fastening screws (see example below).
In this way the coupling of identical connectors is assured. The combination of code pins makes it possible to obtain a high number of selective couplings.

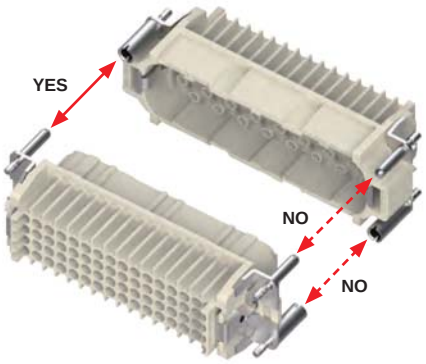

Even when coding is not required, it is recommended to use CRM and CRF pins with CD and CDD inserts to reduce movements when fitting and removing the connectors and to avoid contact damages.
Within this scope, the EN 175301-801 standard (former DIN 43 652) requires a maximum angular fluctuation of ± 5° on the long side, ± 2° on the short side.

CRM / CRM D



CRF / CRF D



CRM CX / CRM CX D



CRF CX / CRF CX D



Application with single insert

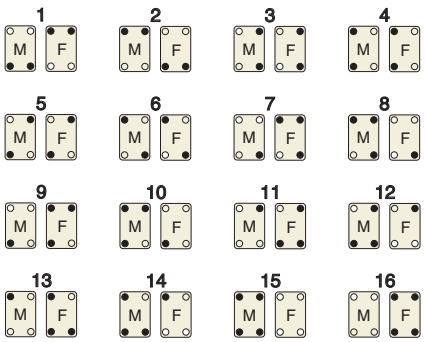

Application with double inserts

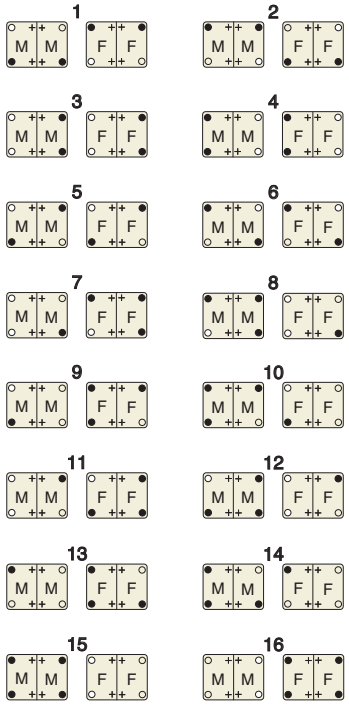

● female code pin (CRF/CRF D and CRF CX/CRF CX D)
○ male code pin (CRM/CRM D and CRM CX/CRM CX D)
\+ normal fixing screw
M = male insert
F = female insert

CR coding pins

coding and guide pins, for 72 codings

description	part No.	part No
double coding pins (excluding MIXO inserts)	stainless steel	zinc plated iron
male pin	**CRM**	**CRM D**
female pin	**CRF**	**CRF D**
single code pin	**CR 72**	**CR 72 D**
double coding pins (for MIXO inserts only)	stainless steel	zinc plated iron
male pin	**CRM CX**	**CRM CX D**
female pin	**CRF CX**	**CRF CX D**
single code pin	**CR 72 CX**	**CR 72 CX D**

Coding pins

- **CRM/CRM D, CRF/CRF D and CR 72/CR 72 D**
- **CRM CX/CRM CX D, CRF CX/CRF CX D and CR 72 CX/CR 72 CX D**

Each series of connector inserts is made in such a way as to make incorrect coupling between inserts of different series impossible.
When a number of identical connectors with different functions are mounted closely together these must be selected in such a way as to prevent the coupling of a mobile part on a non-corresponding fixed part and consequent damage and breakdown.

Code pins are supplied to apply in place of the normal insert fastening screws.
In this way the coupling of identical connectors is assured.
The combination of code pins makes it possible to obtain a high number of selective couplings.

CRM / CRM D



CRF / CRF D



CR 72 / CR 72 D



CRM CX / CRM CX D



CRF CX / CRF CX D



CR 72 CX
CR 72 CX D



dimensions shown in mm are not binding and may be changed without notice

Coding options using the three coding pins

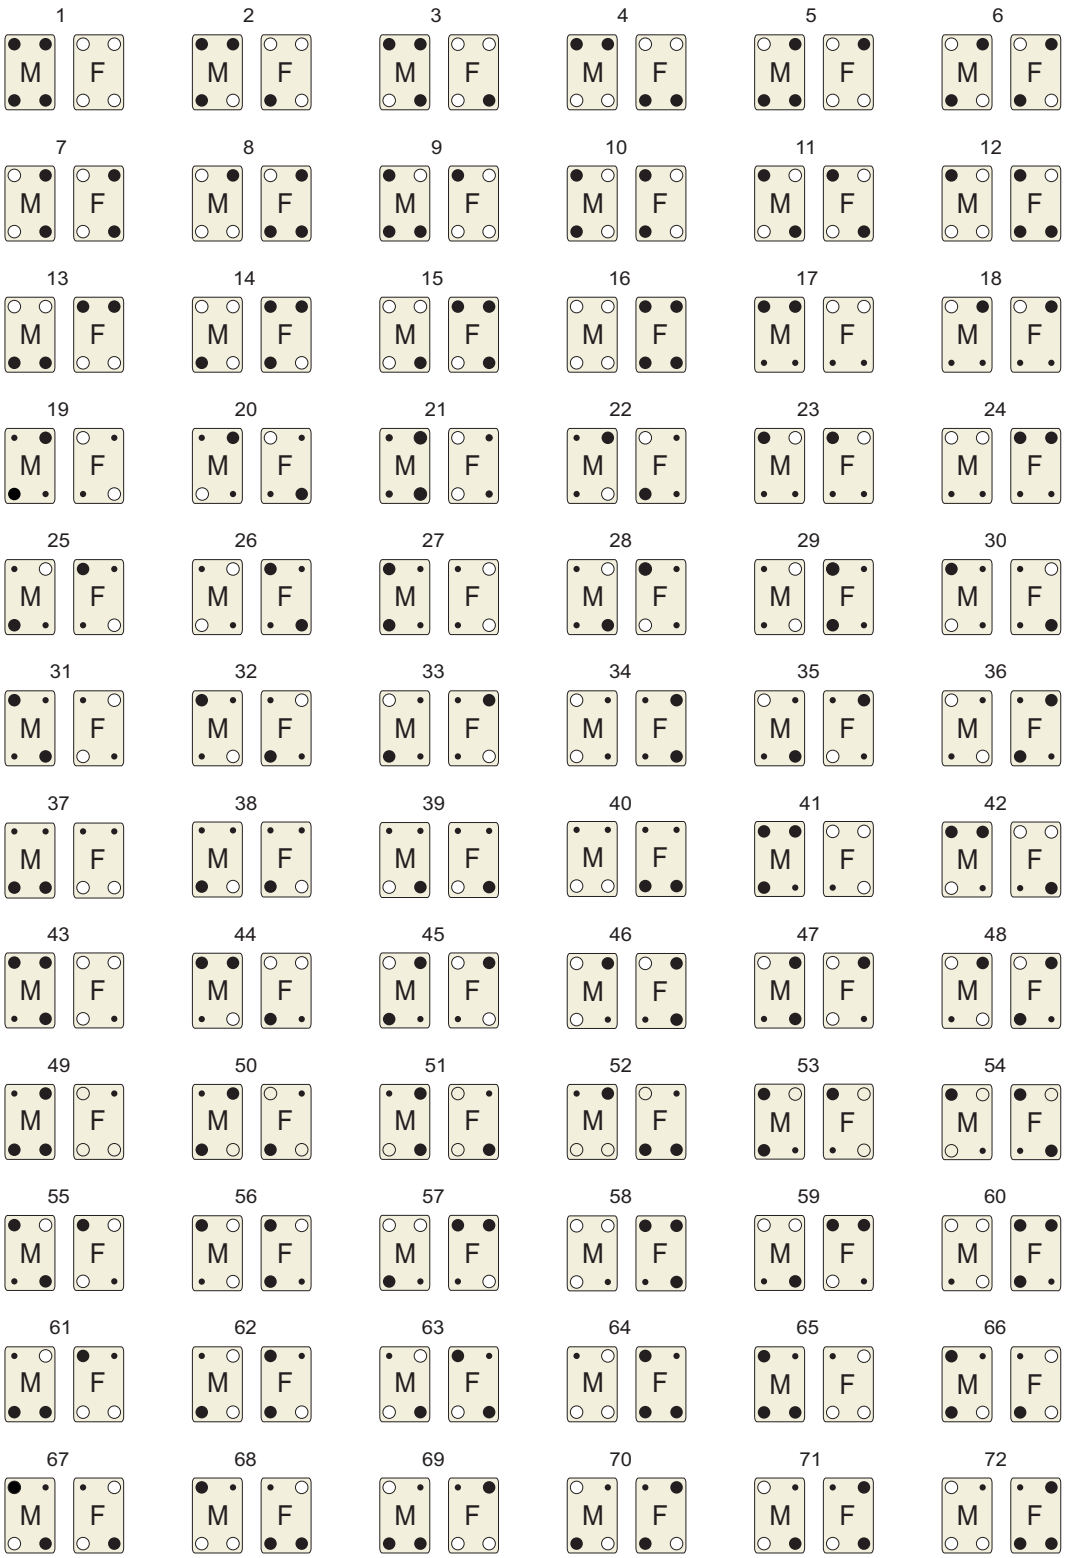

- ● female code pin (CRF/CRF D and CRF CX/CRF CX D)
- ○ male code pin (CRM/CRM D and CRM CX/CRM CX D)
- • single code pin (CR 72/CR 72 D and CR 72 CX/CR 72 CX D)

M = male insert

F = female insert

CR coding pins

coding pin
for CK / CKSH 03 inserts

coding pins
for CK / CKSH 04 inserts

description	part No.	part No.	part No.
coding pin for CK/CKSH 03 inserts	**CR K03**		
coding pins for CK/CKSH 04 inserts		red **CR K04R**	yellow **CR K04G**

CR K03

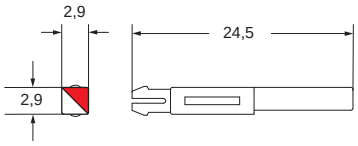

CR K04R



CR K04G





M = male insert
F = female insert



M = male insert
F = female insert

With coding pin
CR K03

dimensions shown in mm are not binding and may be changed without notice

CR coding pins

coding pins for crimp inserts

coding pin for CQ 12 inserts

description	part No.	part No.
coding pins for CDC, CQ, CQE, CCE, CMCE, MIXO (16A) inserts pin to be inserted into one contact cavity of the female insert instead of the crimp contact, the corresponding contact cavity of the male insert must be left empty	**CR CPQ**	
coding pins for CD and CDD inserts plastic pin, to be inserted into one contact cavity of the female insert instead of a crimp contact, the corresponding contact cavity of the male insert must be left empty	**CR CP**	
coding pins for CQ 12 inserts		**CR Q12**

Coding pins

Each series of connector inserts is made in such a way as to make incorrect coupling between inserts of different series impossible.
When a number of identical connectors with different functions are mounted closely together these must be selected in such a way as to prevent the coupling of a mobile part on a non-corresponding fixed part and consequent damage and breakdown.

Within this scope, special coding pins have been manufactured in order to restrict or avoid mating identical multiple connectors.
By combining multiple coding pins, a high number of selected matings can be produced.

CR CPQ



CR CP



CR Q12

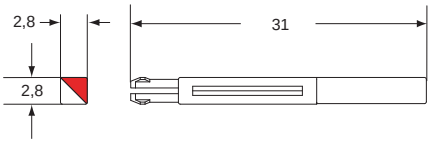

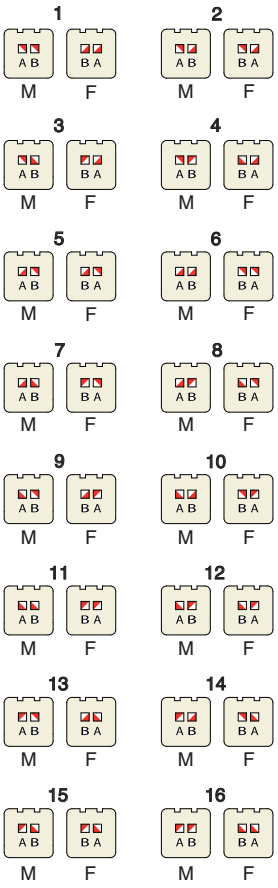

(A B) CQ 12 coding pin

M = male insert
F = female insert

With coding pin CR Q12

With coding pin CR CP

ACCESSORIES

CR coding pins

coding pin for CQF 07 insert

coding pin for CQM 07 insert

description	part No.	part No.
coding pins for CQF 07 inserts	**CR QF07**	
coding pins for CQM 07 inserts		**CR QM07**

Coding pins

Each series of connector inserts is made in such a way as to make incorrect coupling between inserts of different series impossible.
When a number of identical connectors with different functions are mounted closely together these must be selected in such a way as to prevent the coupling of a free part on a non-corresponding fixed part and possible consequent damage and breakdown.

Within this scope, special coding pins have been made available in order to restrict or avoid incorrect mating between multiple identical connectors.





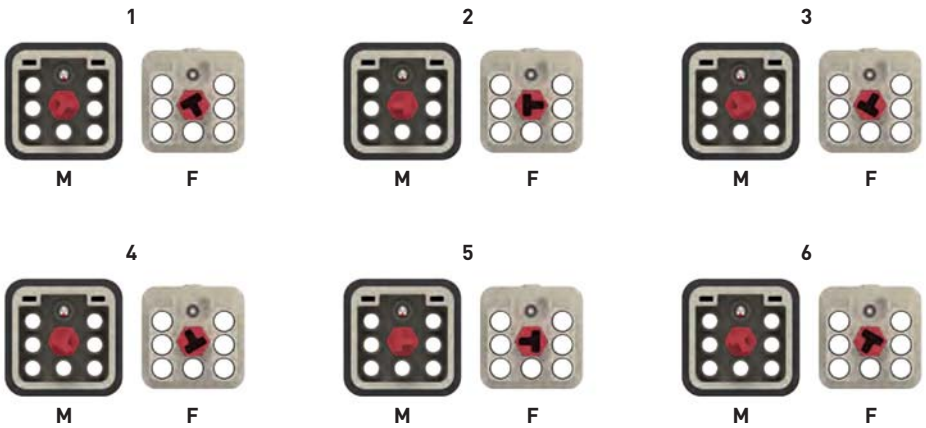

CR QF07 coding pin

CR QM07 coding pin

M = male insert
F = female insert

dimensions shown in mm are not binding and may be changed without notice

CR coding pins

coding pins
for crimp inserts

description	part No.
coding pins (optional) for CQ4 02 inserts	**CR Q02**

It is possible to achieve up to **16 different codings** thanks to the use of **two optional CR Q02 coding pins: 4 coding pins for each connector coupling.** It is possible to install two pins with 4 positions each.

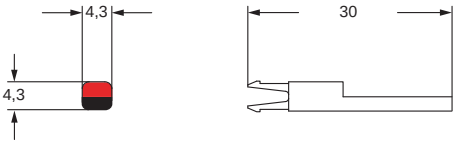

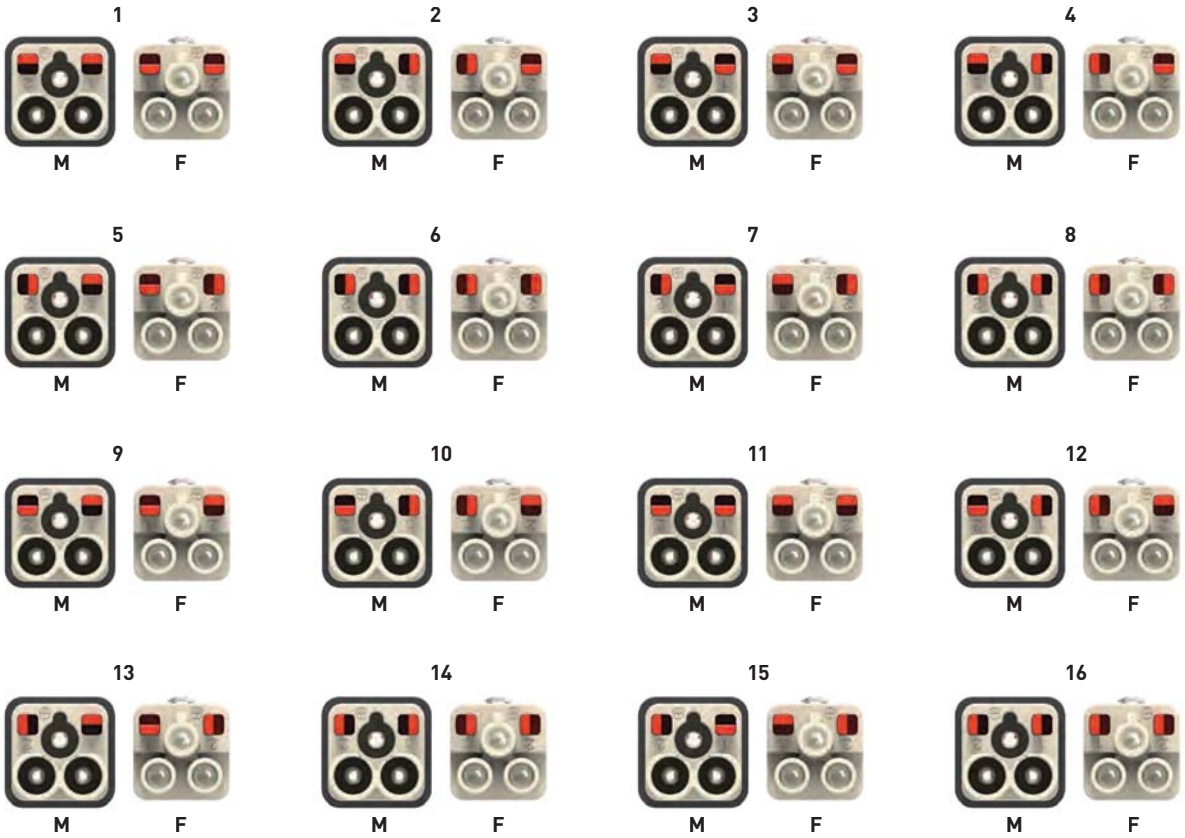

CR Q02 coding pins

M = male insert
F = female insert

CR coding pins

coding pin
for CQAM 12 T1 and CQ4F/M 03

description	part No.
coding pin for CQAM 12 T1 termination connectors and for CQ4F/M 03 connectors	**CR Q03**



for CQAM 12 T1 (2 pins)

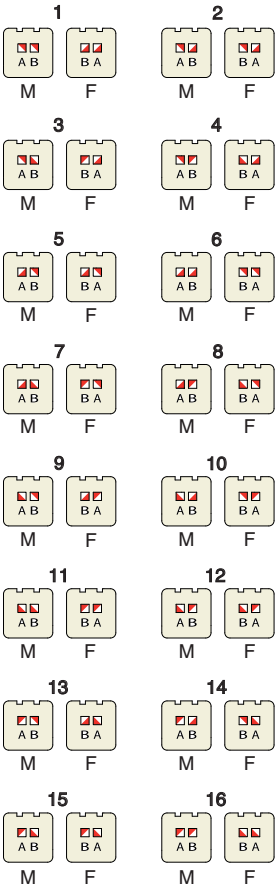

(A B) CQ 12 coding pin

M = male insert
F = female insert

for CQ4F/M 03 (1 pin)



M = male insert
F = female insert

ACCESSORIES

dimensions shown in mm are not binding and may be changed without notice

CKM - CQAM termination connector

termination connector for CKF/CKSF 03 inserts

termination connector for CQF 12 insert

description	part No.	part No.
with pegs and seal, connects pole 2 with pole 3	**CKM 03 T1**	
with pegs and seal, connects pole 1 with pole 2	**CKM 03 T3**	
with pegs and seal, connects pole 5 with pole 6 and pole 7 with pole 8		**CQAM 12 T1**

CKM 03 T1 - CKM 03 T3

- characteristics according to EN 61984:
  10A 400V 4kV 3
- c UL us (UL for USA and Canada), DNV-GL BUREAU VERITAS
  EAC certified

When the termination connector is mated with a CKF/CKSF/CKSHF 03 insert (complete with an enclosure with lever), it performs a dual function:
- connects two socket insert poles
- acts as a cover (IP65 protection rating compliant with EN 60529 standard, with lever closed).

CQAM 12 T1

- characteristics according to EN 61984:
  10A 400V 6kV 3
  10A 400/690V 6kV 2
- c UL us (UL for USA and Canada), DNV-GL BUREAU VERITAS
  EAC certified

When the terminal connector is mated with a CQF 12 insert (complete with an enclosure with lever), it performs a dual function:
- connects two socket insert poles
- acts as a cover (IP65 protection rating compliant with EN 60529 standard, with lever closed).

CR Q03 code pins can be used with CQAM 12 T1, in this case the CQF 12 inserts must be provided by CR Q12.

CKM 03 T1



CKM 03 T3



● interconnected male contacts

CQAM 12 T1



● interconnected male contacts

ACCESSORIES

CR bridges for delta connection

inserts

CQF *	12 poles + ⏚
CDDF	24, 42, 72 (144), 108 (216) poles + ⏚
CX 17 DF (MIXO)	1 module

***** for enclosures C-TYPE series (CKA/MKA ..I/VS) only

bridges for delta connection

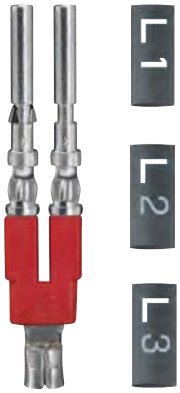

description	part No.
bridge with 2 female 10A contacts, silver plated and open type crimp barrel	**CR BDE**

NOTE:
The typical use of the product requires three bridges each with its shrinking tube with L1 / L2 / L3 marking to identify the phases in the wiring.

1. Cut and strip the wires as shown in **Figure 1.**
2. Crimp the contacts on the auxiliary wires and the bridge end to the phase wires (3 units) using CRPZ pliers and CRD matrix (position 2,5).
3. Insert the insulating heat shrinking tubes on the bridges, their end must be aligned with the position Ⓧ. Then heat them at 90/100 °C till they shrink over the wires.

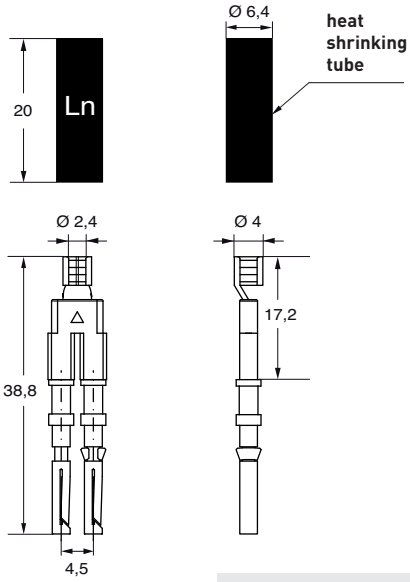

For wires with cross-section ranging from 1,5 to 2,5 mm² (16-14 AWG), crimp connection with **CRPZ** pliers (model CEMBRE IDT) and **CRD** matrix.

Figure 1

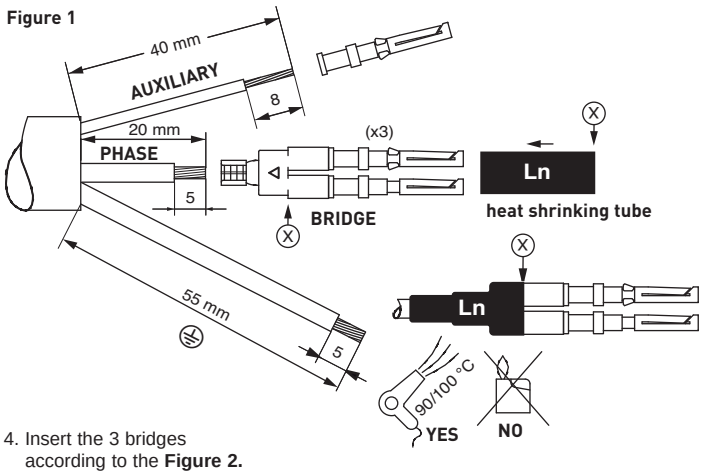

4. Insert the 3 bridges according to the **Figure 2.**

Figure 2



Example of DELTA connection using inserts CQ 12

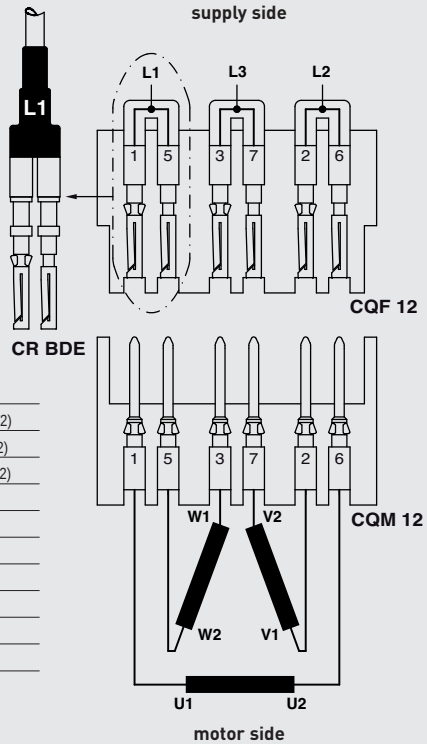

1-5	BRIDGE L1 (winding U1/W2)
2-6	BRIDGE L2 (winding V1/U2)
3-7	BRIDGE L3 (winding W1/V2)
4	auxiliary circuit
8	auxiliary circuit
9	auxiliary circuit
10	auxiliary circuit
11	auxiliary circuit
12	auxiliary circuit
⏚	protective earth

dimensions shown in mm are not binding and may be changed without notice

CR bridges for star connection

inserts

CQF	12 poles + ⏚
CDDF	24, 42, 72 (144), 108 (216) poles + ⏚
CX 17 DF (MIXO)	1 module

bridges for star connection

description	part No.
bridge with 3 female 10A contacts, silver plated	**CR BST**





Example of STAR connection using inserts CQ 12

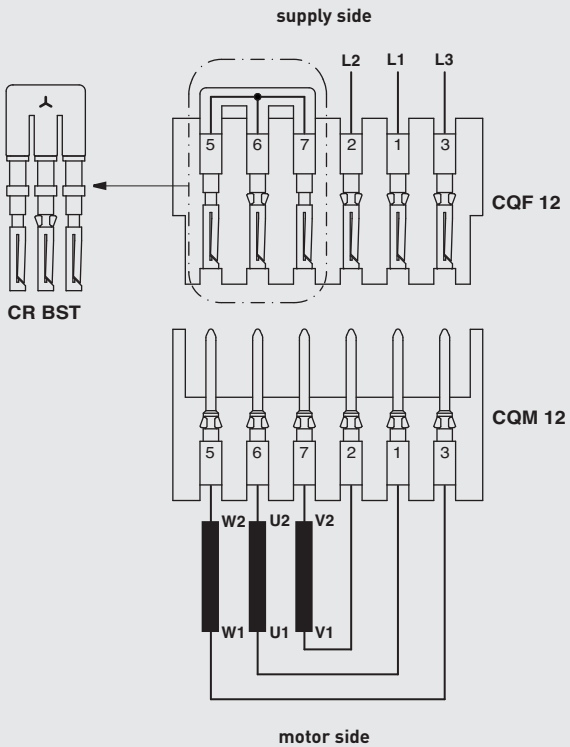

5-6-7	BRIDGE W2-U2-V2
1	L1
2	L2
3	L3
4	auxiliary circuit
8	auxiliary circuit
9	auxiliary circuit
10	auxiliary circuit
11	auxiliary circuit
12	auxiliary circuit
⏚	protective earth



CQF 12
termination side

ACCESSORIES

CHCP protection cover

enclosures

size “44.27”, “57.27”, “77.27”, “104.27”

for versions:
- **C-TYPE IP65/IP66**
- **C7 IP67 stainless steel lever**
- **V-TYPE IP65/IP66 stainless steel lever**
- **BIG hoods**
- **W-TYPE for aggressive environments**
- **EMC**
- **180 °C**
- **central lever**
- **LS-TYPE**

dust protection cover



painting protection cover 2)



description	part No.	part No.
for housings and hoods with 1 or 2 levers, with 2 or 4 pegs		
size “44.27”	**CHCP 06**	
size “57.27”	**CHCP 10**	**CHCP 10 V**
size “77.27”	**CHCP 16**	
size “104.27”	**CHCP 24**	

1) Possibility of using cable ties to increase the retention of the insulating cover on the hood.

2) For housings and hoods with gasket only.

CHCP

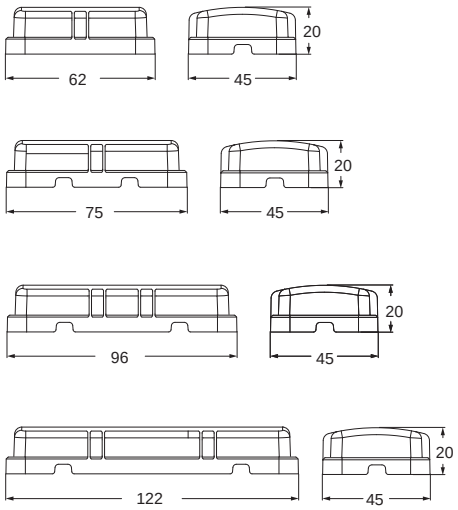

CHCP 10 V



CGKCP - CGCP protection cover

for versions:
- **IP68**

size 21.21", "44.27", "57.27", "77.27", "104.27"

dust protection cover, for housings

dust protection cover, for hoods

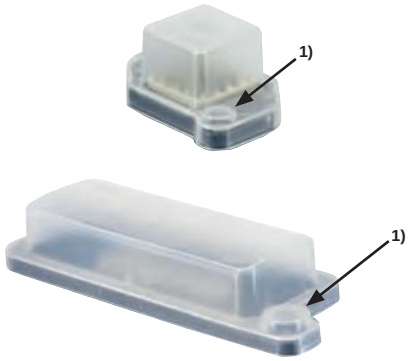

description	part No.	part No.
for housings and hoods		
size "21.21"	**CGKCP FX**	**CGKCP MB**
size "44.27"	**CGCP 06 FX**	**CGCP 06 MB**
size "57.27"	**CGCP 10 FX**	**CGCP 10 MB**
size "77.27"	**CGCP 16 FX**	**CGCP 16 MB**
size "104.27"	**CGCP 24 FX**	**CGCP 24 MB**

[1] Possibility of using cable ties to increase the retention of the insulating cover on the hood.

[2] Possibility to fix by screw:
- CGKCP FX: 2xM3
- CGCP FX: 2xM6

CGKCP FX



CGKCP MB



CGCP FX

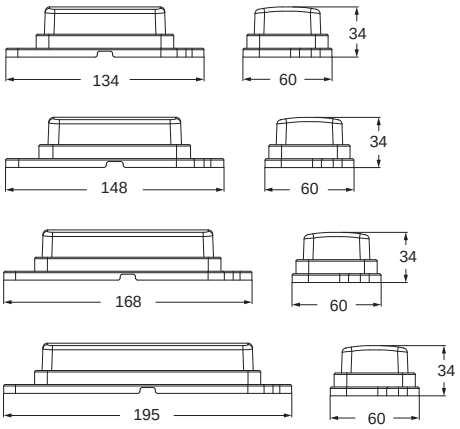

CGCP MB

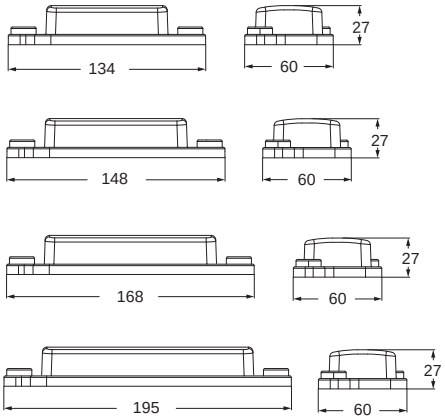

ACCESSORIES

CBGF CR TM-1

insert joining block

metal replacement handles

description	part No.	part No.
made of die cast aluminium alloy to mate two inserts (see below)	**CBGF**	
to replace thermoplastic handles		**CR TM-1**
2 component kit for dual lever enclosures [1]		

[1] can only be used on dual lever enclosures sizes 57.27, 77.27 and 104.27

CBGF combination block

- Allows two "44.27 size" inserts to be inserted in "104.27 size" enclosures and on the following COB series items: COB TCQ, COB 24 BC, COB TSF, COB TSFS, COB 24 CMS
- Allows female inserts and male inserts in the same enclosure or mounting
- Allows mixed type inserts in the same enclosure or mounting (for example, 6 poles 16A CNEF + 24 poles 10A CDDF)

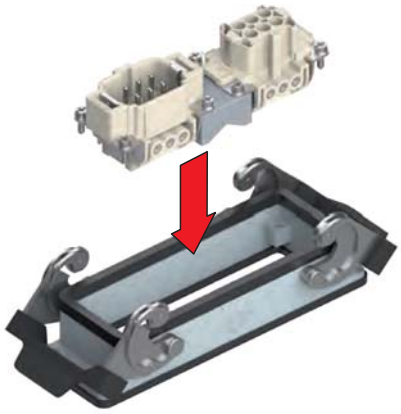



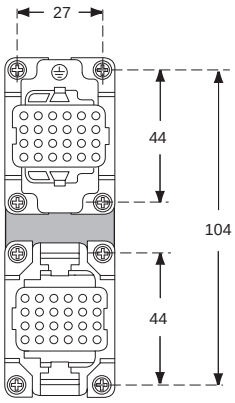

NOTE
Inserts shown in the drawing are just an example; any "44.27" sized inserts may be combined in a "104.27" housing, including of different gender.

C-TYPE enclosures:
size "104.27" from page 412

panel supports:
COB page 652 - 653

C-TYPE enclosures (with two levers only):
size "57.27" from page 393
size "77.27" from page 402
size "104.27" from page 412

CPT - CPES

inserts

size “104.27” **from page 412**

temporary protection cover for transportation

pliers for uncoupling connectors

description	part No.	part No.
for housings and hoods with 1 or 2 levers, with 2 or 4 pegs [1]	**CPT 24**	
for housings and hoods with 2 levers and 4 pegs		**CPES**

[1] Cannot be used with T-TYPE series

CPT 24 for enclosures with 2 levers



CPT 24 for enclosures with 4 pegs



CPT 24 for enclosures with 1 lever

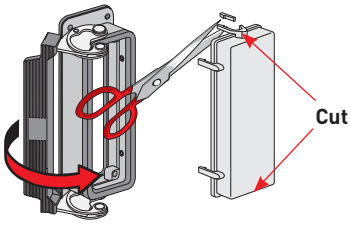

CPT 24 for enclosures with 2 pegs



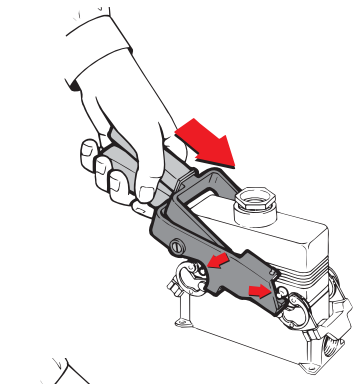

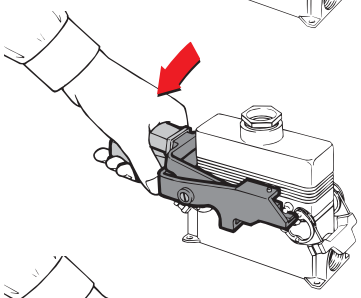

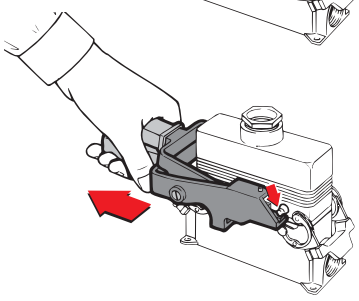

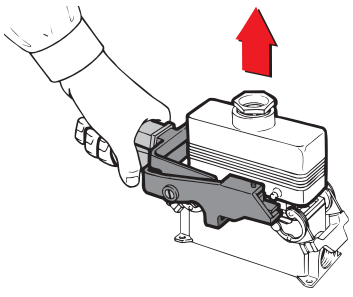

CR..AD - CR..AD1 - CR..AD2 plates

enclosures

size “49.16” **from page 374**
size “66.16” **from page 378**
size “44.27” **from page 387**
size “57.27” **from page 393**
size “77.27” **from page 402**

Use M3 passing screws tightened with nut and washer (not included).
Verify connection continuity of coupled connectors

adapter plates for D-Sub inserts (IEC 60807-2) CZ / MZ / MZF enclosures

adapter plates for D-Sub inserts (IEC 60807-2) CH / CA and MH / MA / MF enclosures

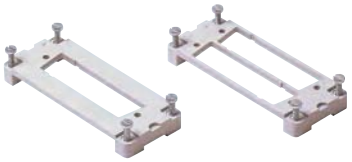

description	part No.	for enclosures size	part No.	for enclosures size
for 1 D-Sub insert 9 poles (not included)	**CR 09 AD**	“49.16”	**CR 09 AD1**	“44.27”
for 1 D-Sub insert 15 poles (not included)	**CR 15 AD**	“49.16”	**CR 15 AD1**	“44.27”
for 1 D-Sub insert 25 poles (not included)	**CR 25 AD**	“49.16”	**CR 25 AD1**	“57.27”
for 1 D-Sub insert 37 poles (not included)	**CR 37 AD**	“66.16”	**CR 37 AD1**	“77.27”
for 1 D-Sub insert 50 poles (not included)	**CR 50 AD**	“66.16”	**CR 50 AD1**	“77.27”
for 2 D-Sub inserts 9 poles (not included)			**CR 09 AD2**	“44.27
for 2 D-Sub inserts 15 poles (not included)			**CR 15 AD2**	“44.27
for 2 D-Sub inserts 25 poles (not included)			**CR 25 AD2**	“57.27”
for 2 D-Sub inserts 37 poles (not included)			**CR 37 AD2**	“77.27
for 2 D-Sub inserts 50 poles (not included)			**CR 50 AD2**	“77.27

Plates CR...AD, CR...AD1 and CR...AD2
For machinery or command equipment that need connection with programming and control electronic devices. The plate housings have notches for the rear insertion of cabled D-Sub inserts.

CR...AD
mounting on bulkhead housings and hoods
one-way mounting in bulkhead housings or hoods.

CR...AD1 and CR...AD2
mounting on bulkhead housings (Figure 1)
The D-Sub connector must be mounted on the side marked with the letter “A“

Mounting on hoods (Figure 2)
The D-Sub connector must be mounted on the side marked with the letter “T“

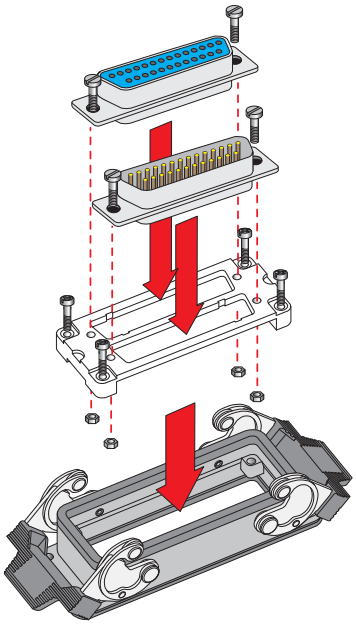

CR...AD



*** For pass-through screws type M3**

The electrical continuity is guaranteed only if mounted in our enclosures.

part No.	A	B
CR 09 AD	49,5	56,5
CR 15 AD	49,5	56,5
CR 25 AD	49,5	56,5
CR 37 AD	66	73,5
CR 50 AD	66	73,5

CR...AD1

Figure 1



Figure 2



*** For pass-through screws type M3**

CR...AD2

Figure 1



Figure 2



*** For pass-through screws type M3**

part No.	A	B
CR 09 AD1 / 2	44	51,5
CR 15 AD1 / 2	44	51,5
CR 25 AD1 / 2	57	64,5
CR 37 AD1 / 2	77,5	85
CR 50 AD1 / 2	77,5	85

dimensions shown in mm are not binding and may be changed without notice

SDS - CHSDS kit for control equipment

enclosures *)	page:
size “104.62”	
C-TYPE IP65/IP66	**430**

***)** normally bulkhead type

kit for control equipment plate only

kit for control equipment plate with enclosure

description	part No.	for enclosures	part No.
with Schuko® socket 16A and 2 seats for: CR 09 AD, CR 15 AD, CR 25 AD plates	**SDS**	CHI 48 LS	
with Schuko® socket 16A and 2 seats for: CR 09 AD, CR 15 AD, CR 25 AD plates			**CHSDS**

Kit for control equipment

For machinery or command equipment that need connection with programming and control electronic devices.
The kit includes the Schuko® socket and 2 seats for the CR…AD plates (not included) for D-sub inserts (not included).
Personal computers, notebooks or printers can be power supplied using a 16A socket.
Monitors, printers and other peripheral devices may be interfaced using D-sub connectors

CR…AD usable plates	
part No.	
CR 09 AD	for 1 D-sub insert 9 poles (not included)
CR 15 AD	for 1 D-sub insert 15 poles (not included)
CR 25 AD	for 1 D-sub insert 25 poles (not included)

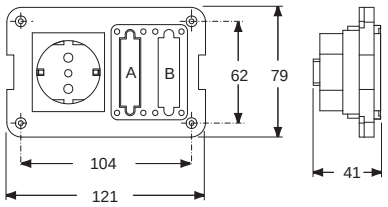

Closed seat “A” for use with one insert only.
The closing is achieved by means of a plastic membrane that can easily be removed if the second seat is required.

CR.. AD plates to be ordered separately

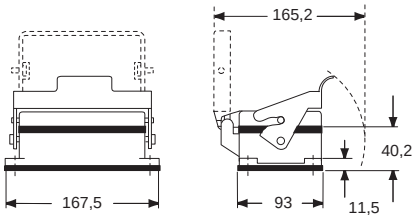



housing panel cut-out

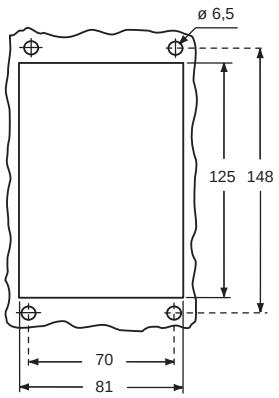

ACCESSORIES

CRH - CRZ closure and reduction plate

enclosures

size “44.27” **from page 387**
size “57.27” **from page 393**
size “77.27” **from page 402**
size “104.27” **from page 412**

“104.27” closure plate

“104.27” reduction plate

description	part No.	part No.
in self-extinguishing thermoplastic resin with gasket in vinil-nitrile elastomer	**CRH 24**	
in self-extinguishing thermoplastic resin with gasket in vinil-nitrile elastomer for bulkhead mounting housings [1] size “44.27”		**CRZ 06**
for bulkhead mounting housings [1] size “57.27”		**CRZ 10**
for bulkhead mounting housings [1] size “77.27”		**CRZ 16**
for bulkhead mounting housings [1] size “104.27”		**CRZ 24**

[1] Cannot be used with T-TYPE series and IP68 CG/MG series

CRH 24

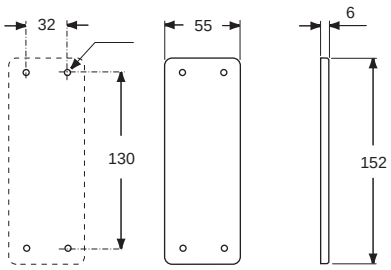

CRZ

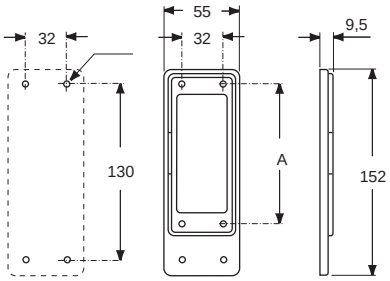

CRZ	A
06	44
10	44
16	57
24	77,5

dimensions shown in mm are not binding and may be changed without notice

CX BES extraction tool

extraction tool for MIXO BUS connectors

description	part No.
tool for the extraction of the shielded connectors (coax **CX 01 BF/M** page 291, **CX 01 BCF/M** page 289, **CX 04 BF/M** page 291, **CX 08 BF/M** page 293) from either the **CX 1/2 BDF/M** adapters (page 243) or the MIXO BUS **CX 02 BF/M** (page 290) modular units.	**CX BES**

The crimping concept

The crimp connection is an irreversible, non-reusable connection between one or two conductors and a crimp contact. It is obtained by compression deformation (cold forming) and consequent reshaping of the contact crimping stem, or crimp barrel. A good crimp connection is provided by a suitable combination between the crimping dies, the contact crimp barrel (hence the crimp contact), and the cross-section of the conductor.

These considerations refer to crimped connections made with flexible copper conductors of class 5 (flexible) or 6 (more flexible than class 5) according to EN IEC 60228 standard.

Solid copper conductors (class 1) or conductors made by other materials (aluminium, iron, etc.) often require special precautions for both crimp contacts and crimping tools, to be agreed upon with the manufacturer.

The main technical advantages provided by crimped connections over soldered connections are:

- Independence from temperature, being this a “cold” process, performed without using heat and not requiring further materials.
- Elimination of the contact uncertainties due to cold solders.
- No degradation of the elastic characteristics of the female contacts (a problem that arises with soldering temperatures).
- No health risks connected with the use of heavy metals or fumes generated from the soldering process.
- Preservation of the conductor’s flexibility immediately beyond connection.
- No conductors with burned, discoloured or overheated insulating material.
- Excellent reproducibility of the performances of the electrical and mechanical connections.
- Easier production controls.

Other advantages obtained by crimping connections over screw-type connections are:

- Lower voltage drop across the connection.
- High stability in time even in the presence of vibrations.
- High durability in presence of corrosion (gas-tightness).
- Individual insertion of the contacts in the connector (it is possible to eliminate unnecessary contacts).
- Less time required for connection.
- Possibility of pre-production of the terminated conductors with crimp contacts.
- Easy replacement of individual contacts during maintenance.
- Possibility of selectively isolating the circuits during maintenance via the extraction of the contacts from the connector.

The crimped connections for wire sections up to 10 mm^2 are covered by the EN 60352-2:2006 European standard equivalent to the IEC 60352-2 Issue 2 (2006-02) international standard.

The **EN 60352-2** standard also includes a practical guidance, which lists the following main points.

The quality of a crimped connection is mainly affected by the quality of the materials used and by the condition of the surfaces both of the crimp contact (in particular the crimp barrel) and of the conductor.

To ensure a good quality crimped connection, an essential parameter is the mechanical retention of the conductor in the contact. The standard makes a distinction between the closed crimp barrel, inherently stronger, and the open crimp barrel. ILME crimp contacts are closed crimp barrel contacts, with inspection hole which ensure a higher mechanical performance compared to the open barrel crimp contacts, such as better mechanical robustness and stability during operation. They have been high speed precision-machined, thus ensuring a better electrical performance (better conductivity).

In 2002 the Amendment 2 of the previous IEC standard had controversially unified the minimum tensile strength for open crimp barrel contacts (curve B of former Figure 5) and closed crimp barrel contacts (curve A of former Figure 5) making them both equal to the lower values (those of curve B), which can be achieved by open barrel crimp contacts. This change has determined an arguable relaxation of the suitability requirements both for closed crimp barrel, typically larger, machine turned and for crimp tools specially made for these contacts. Several industries continue to prefer the higher performance ensured by closed crimp barrel contacts, the only ones able to ensure the higher resistance to tensile stress values believed to be essential for the most demanding industrial applications.

Therefore, ILME continues to refer to curve A of Figure 5 illustrated in the EN 60352-2:1994 standard: ILME closed crimp barrel contacts, used with flexible copper wires, featuring a cross-sectional area included in the ranges shown and correctly crimped with the recommended tools, ensure tensile breaking resistant connections at least equal to the values shown in the table below (for reference, the corresponding R_t/S unified tensile stress load value is also shown [N/mm^2]). See Table 1.

Section S		Resistance to traction R_t	R_t/S
AWG	mm²	(N)	(N/mm²)
26	0,12	18	150
-	0,14	21	150
24	0,22	33	150
-	0,25	37,5	150
22	0,32	48	150
-	0,37	55,5	150
20	(0,6)	75	150
-	0,75	112,5	150
18	(0,82)	125	150
-	1	150	150
16	(1,3)	195	150
-	1,5	220	147
14	(2,1)	300	143
-	2,5	325	130
12	(3,3)	430	130
-	4	500	125
10	(5,3)	635	120
-	6	650	108
7	10	1000	100
		(1300)	*(130)*
-	16	*1650*	*103*
-	25	*2300*	*92*
-	35	*2800*	*80*
	50	*3300*	*66*
-	70	*3900*	*56*

Table 1.

NOTE - For 10 mm² wire sections, the resistance to tensile stress shown in *italics* are those specified in the NF F 61-030 standard (for 10 mm², the value in brackets).

The basic criterion used for the tensile strength values required by EN 60352-2 standard is that such resistance is at least equal to 60% of the per unit breaking load of the same annealed copper conductor.

This applies to conductor cross-sectional areas up to about 1,5 mm²; above this cross-section, the ratio is slightly lower, as retention is also affected by friction, which increases linearly with the housing diameter, whilst the cross-section increases by the square.

IEC/EN 60352-2 standard, which historically targeted the electronics industry, restricts its requirements to crimp connections for conductors with a maximum cross-sectional area of 10 mm². For cross-sections higher than 10 mm², up to 70 mm², the standard to refer to is the NF F 61-030:1989 French standard which relates to electrical connectors to be used on board of railway rolling stock, in particular for large crimp contacts, such as those manufactured by ILME.

NOTE - Alternatively, for wire sections between 35 mm² and 300 mm², EN 61238-1:2003 standard can be referred to.
This standard requires constant R_t/S values equal to 60 N/mm², lower than those established by the above mentioned French standard.

Selecting the crimping tool and relevant controls

When you have selected quality crimp contacts and conductors, the next and most important step is to select the correct crimp tool. The practical guidance of standard EN 60352-2 provides the following recommendations on the subject, listing some of the ideal requirements for crimping tools, some optional characteristics, but, above all, it provides a preview of the indispensable controls:

a) The crimping tools and the contacts used shall be supplied by the same manufacturer, otherwise the user shall assume all responsibility for the quality and reliability of the crimp connections.

b) The crimping tools must function correctly and provide a correct crimp without damage to the pin or the component to crimp.

c) In order to obtain a reliable crimp connection, a crimping device with a mechanism that controls the entire crimping cycle shall be used. At the end of the crimping cycle the handles and the ratchet must return to the open position.

d) In all cases the crimping operation shall be made in one single phase, with no further interventions.

e) The removable parts of the tool such as the crimping dies and the locators must be designed in such a way as to make it possible to be inserted within the tool only in the correct manner.

f) The tools must be supplied with the appropriate means for a correct positioning of the pins to be crimped and of the conductors during crimping.

g) The tools must be designed in such a way so that only the necessary adjustments may be made.

h) The action of the tool must be such that both the pin to be crimped and the fixture of the isolation (when present) are respectively crimped or compressed with a single action.

i) The design of the tool must ensure that the dies for a particular tool may be interchangeable within tools of the same type.
If they are not interchangeable, the identification of tools for which they are suitable must be marked on the dies.

j) The tools may be designed so as to produce a marking or coding of the die on the pin to be crimped so that the crimping may be checked for verification of the correct die.

k) The design of the tool must allow the verification of the dies with gauges to measure wear.
The gauge verification method must be that specified by the manufacturer of the tools.

With suitable flexible copper conductors, the crimping tool proposed by ILME gives 8-indent crimping (**see figure**) in conformity with standard EN 60352-2. Periodic control of the wear of the crimping dies can be carried out with the appropriate “go – no go” gauges (to be purchased separately). For extra operational details, consult the following pages on tools, and the relevant instruction sheets and/or use and maintenance manuals.



The manual and automatic crimping tools selected by ILME are carefully designed to ensure symmetrical deformation of the crimping area of the contact and wire, by means of their own, internal high pressure forming parts. The positioner ensures that the wire and crimp contact meet in the appropriate part of the tool. Sprung mechanisms built into the tools ensure that the contacts are not inserted in the tool before the indenters are fully open, and that the tool does not open before the crimping process has been completed.

The **CIPZ D** (for 5A crimp contacts), **CCPZ MIL** (for 10A and 16A crimp contacts) and **CXPZ D** (for 40A crimp contacts) manual crimping tools are suitable for use when compressed air sources are unavailable, for low or medium-low workloads.

The **CCPZ RN** (for 10A, 16A and 40A crimp contacts) manual crimping tool is also suitable for low or medium-low workloads.

All the above tools provide 8-indent crimping.

The **CCPZ TP** (for 10A and 16A crimp contacts) and **CXPZ TP** (for 40A crimp contacts) manual crimping tools are also suitable for low or medium-low workloads and provide a “square shaped” crimping cross-section. Crimped connections produced by these tools are in compliance with the requirements of EN 60352-2.

The **CCPZP** pneumatic crimping bench tool without automatic positioner (for 10A and 16A crimp contacts) is suitable for use in the workshop (where compressed air is available) for high or medium-high workloads. Using the same manual crimping tool turrets, it is possible to change rapidly from crimping on male contacts to crimping on female contacts of the same series (10A and 16A).

The **CCPZPA** pneumatic crimping bench tool with automatic positioner (for 10A and 16A crimp contacts) is suitable for workshop jobs (where compressed air is available) for medium-high or high workloads. It is recommended in particular for crimping high quantities of contacts that are the same type or have the same section, thus saving a significant amount of time thanks to automatic operation and reduced operator fatigue. Where the type or kind of contact must be changed frequently, it is preferred to use the version without automatic positioner.

The **CXPZP D** pneumatic crimping bench tool without automatic positioner (for 40A crimp contacts) is suitable for use in the workshop (where compressed air is available) for high or medium-high workloads. By using the same positioners as those of manual crimper CXPZ D, the size of a contact can be rapidly changed with one of the same type.

The semiautomatic stripping-crimping machine, type **ZFU-CD**, is suitable to be used in workshops (where an electrical or pneumatic power supply is available) and for heavy workloads. It enables to produce large amounts of crimped connections in less time because of the possibility of simultaneously carrying out stripping and crimping operations. The contact and tool replacement operations, which are minimized because of the pre-set programs that can be stored and customized by the user, require the production to be programmed to reduce downtime. When a sequential processing is required despite the economic advantages offered by the above-described solution, it is preferable to use pneumatic bench pliers without the above-described positioner or one of the manual pliers.

In any case, the quality of the results from the crimping tools, combined with the ILME crimp contacts, is identical and at the highest market levels, exceeding the requirements of the standard EN 60352-2.

Although the crimping appliances and tools suggested here include a set of control automatisms and mechanisms, which prevent the chief misunderstandings and errors, the operator is advised to always take care not to work in inappropriate conditions.

The crimping operation

The practical guide in standard EN 60352-2 supplies further general information regarding crimp contacts for multipole connectors.

1. Insertion of the conductor in the crimp contacts

The conductor must be correctly positioned in the pin to be crimped.
The crimping indentations must be correctly positioned on the foot to be crimped. There must be sufficient space, in conformity with the manufacturer's instructions, between the end of the insulating material of the conductor and the pin to be crimped ("d").
As a general rule, the stripping length is equal to the pin insertion depth + 1 mm (for sections up to 1 mm^2) and + 2 mm (for sections from 1 to 10 mm^2) *. When using closed crimp pins with an inspection hole, the crimp conductor must be visible through the inspection holes.

* Keeping the conductor strands visible above the contact collar enables you to check correct, i.e. make sure no strands have been cut. This also ensures a certain flexibility for the connection, by not transmitting to the contact any flexure stresses caused by installation. However, in practice, some operators give priority to insulation, by reducing to zero the gap between cable insulation and the contact collar.

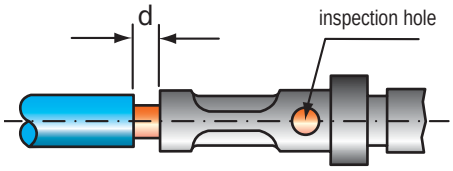

2. Insertion of crimped contacts in the connector insert

It is recommended that the crimped contacts be perfectly straight and inserted within the contact slots in a single operation and without excessive force until a clicking sound is heard.
The correct retention of the contact should be verified with a light pulling of the wire. Non alignment of the crimped contacts must be avoided because this could cause possible loosening of the retention springs and consequently jeopardise the retention of the contact in the insert.
For small section conductors (≤ 0,35 mm^2) or for specific application, the use of the insertion tool specified by the manufacturer is recommended.

3. Removal of inserted contacts

In the case of incorrect insertion or wiring substitution, inserted contacts may only be removed using the removal tools specified by the manufacturer.

4. Mounting and flexure of multi-wired bundles or multipolar cables with crimp contacts

Bundles of conductors or multipolar cables with crimp contacts for multipole connectors must not cause stress to the inserted contacts with their weight as this would cause the contacts to bend over to the coupling area of the connectors and consequently damage them. The connectors must therefore be provided with cable clamps or the conductor bundles or multipolar cables must be mounted as described in the figures below.

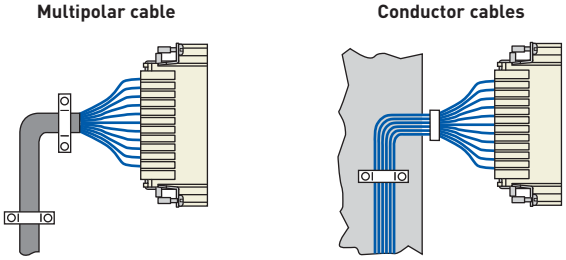

If the conductor bundles or the multipolar cables have to be immediately folded over on the back of the connector insert, it is recommended not to use any mechanical force in the axial direction with respect to the coupled contacts. The figure shows a correct bending and clamping of the multiwire bundles using the crimp contacts.



5. Coupling and uncoupling of multipolar connectors with crimp contacts

In order to prevent stress on the crimp contacts, the connectors must be coupled and uncoupled in the axial direction with respect to the contacts, without touching the conductor bundles or cables.
Standard DIN 43652 (incorporated into specification EN 175301-801) that applies to the ILME inserts of the CD series (this recommendation is also valid for the CDD series) prescribes a maximum deflection from the axis of ± 5° on the greater side and ± 2° on the smaller side.

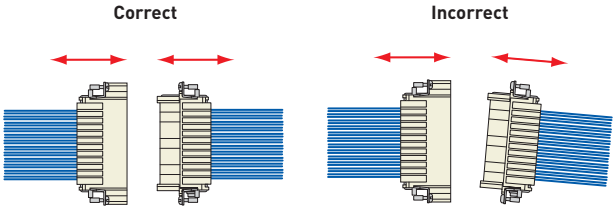

To keep the play within this limit, especially during the uncoupling phase, guide pins CRM and CRF may be used. The use of ILME pliers (code number CPES) is recommended for the uncoupling operations for CD inserts (64 poles) and CDD inserts (108 poles).The pliers work on the fulcrum and lever principle and perform the following main tasks:

I - Reduce effort and coupling times to the minimum, even when working in the most impractical and inaccessible points.

II- Perform the uncoupling of multipolar connectors in full conformity of standard DIN 43652 (now EN 175301-801).

The pliers allow the extraction of the inserts to be made perfectly axially with respect to the contacts, evenly distributing the pressure on four points (housing pins).

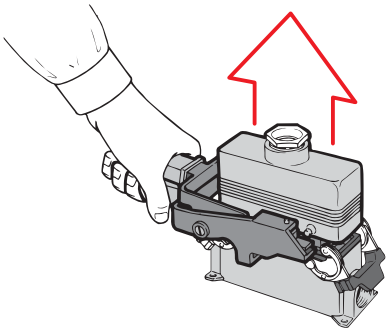

Tools and accessories for crimp contacts

for contacts of inserts series:		page:
CD	(10A)	**66 - 74**
CDD	(10A)	**76 - 83**
CDC	(16A)	**104 - 106**
CCE	(16A)	**130 - 135**
CMCE	(16A)	**137 - 145**
CQE	(16A)	**168 - 173**
CQEE	(16A)	**176 - 177**
CQ	(10A/16A)	**186 - 193**
CX 8/24	(16A/10A)	**194**
CX 6/**36** *	(10A)	**198**
CX 12/**2** *	(10A)	**199**
CX 6/**6** *	(16A)	**206**
MIXO	(10A/16A)	**271 - 306**

* the underlined polarities indicate those contacts that require the tools shown in this page

manual crimping tool positioner - gauge

insertion tool - removal tools replacement tip

description	part No.	part No.
crimping tool for **10A** and **16A** contacts DANIELS AF8 model (turret excluded)	**CCPZ MIL**	
positioner inserts (see note) for **10A** contacts (CDF and CDM series) for **16A** contacts (CCF and CCM series)	**CCTP 10** **CCTP 16**	
"go / no go" control gauge to verify indenter closure (see note)	**CCPNP**	
insertion tool for insertion of the contacts into the inserts for crimped contacts up to 0,75 mm²		**CCINA**
removal tools for the extraction of contacts from the inserts for **10A** contacts [1] for **16A** contacts [2]		**CCES** **CQES**
replacement tip for CCES removal tool		**CCPR RN**

[1] for CQ, CD, CDD, CX inserts (10A auxiliary contacts) and MIXO module (10A)
[2] for CQ, CQE, CQEE, CCE, CMCE inserts (excluded 16+2), MIXO module (16A), CX6/6 (16A) and CDC. For CMCE (16+2), CX inserts (contacts 16A insert CX 8/24) using a flat 3 mm screwdriver.

Notes:
Positioner / Head turret
conforms to international standard MIL-C-22520/1
- An interchangeable and indispensable accessory of the CCPZ MIL crimping tool, it precisely positions the contact where crimping is performed. Each series of contacts requires its own turret.

"go / no go" control gauge
conforms with international standard MIL-C-22520/3
- A tool used to periodically check that the crimping tool meets standard requirements.

CCPNP



CCPZ MIL

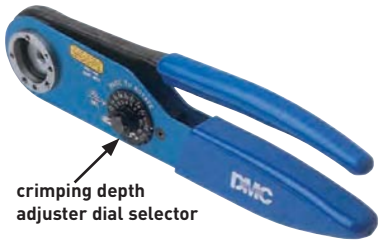

CCTP

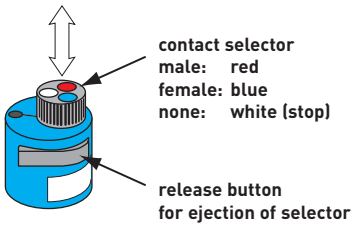

CCINA



CCES



CCPR RN



CQES



16A - CONTACT HEAD TURRET / POSITIONER

CCMA - CCFA CCMD - CCFD		0,14 mm²	0,25 mm²	0,34 mm²	0,5 mm²	0,75 mm²	1,0 mm²	1,5 mm²	2,5 mm²	3,0 mm²	4,0 mm²	conductor section	
red	blue												
male	female	26	24	22	20	18	17	16	14	12	12	AWG	
0,3	0,3	5	5	6								crimping depth adjuster selector	CCTP 16
0,5	0,5		6	6	7								
0,7	0,7			6	6	7							
1,0	1,0			6	6	7	7						
1,5	1,5				6	7	7	8					
2,5	2,5					6	6	7	7				
3,0	3,0							6	7	7			
4,0	4,0									7	8		

10A - CONTACT HEAD TURRET / POSITIONER

CDMA - CDFA CDMD - CDFD		0,14 mm²	0,25 mm²	0,34 mm²	0,5 mm²	0,75 mm²	1,0 mm²	1,5 mm²	2,5 mm²	conductor section	
red	blue										
male	female	26	24	22	20	18	17	16	14	AWG	
0,3	0,3	5	5	6						crimping depth adjuster selector	CCTP 10
0,5	0,5				6						
0,7	0,7					6					
1,0	1,0						6				
1,5	1,5							7			
2,5	2,5								7		

Use and maintenance instructions

1. General specifications

The **CCPZ MIL crimping tool** conforms to the international standard MIL-C-22520/1. Crimping is performed with 8 pressure points. The tool is equipped with a geared mechanism to control the complete crimping cycle. The tool must be equipped with an interchangeable positioner (CCTP) according to the series of contacts to be crimped.

1.1 Crimping range

Conductor cross-sectional area range:
from 0,14 mm² (26 AWG) to 4 mm² (12 AWG) for positioner 16A,
from 0,14 mm² (26 AWG) to 2,5 mm² (14 AWG) for positioner 10A

Caution!
The handle of the tool must be in the open position when the turret is installed, disassembled or opened. If not, the turret and the crimping tool may be damaged.

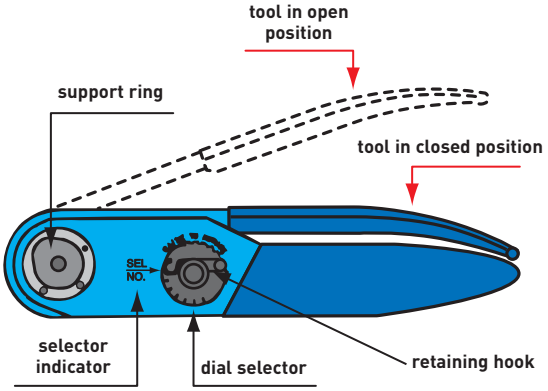

2. CCTP positioner installation

1 The crimping tool must be in the open position.
2 Press the clicking lever that releases the positioner in the adjustment position.
3 Position the previously selected CCTP positioner on the support ring located on the crimping tool (matching the special pin on the base of the turret with the corresponding hole on the support ring), aligning the tapped holes with the socket head screws.
4 With the CCTP positioner positioned against the support ring, tighten the socket head screws with the 3,5 mm Allen wrench (supplied with the kit).
5 Refer to the data plate on the CCTP positioner. From the colour code column, select the colour of the positioner that corresponds to the appropriate code and dimension of the contact to be crimped.
6 With the CCTP positioner in the adjustment position, turn the turret until the colour-coded positioner is aligned with the indicator line. Press the turret until it clicks into the connected position.
7 Refer to the data plate on the CCTP positioner. From the column indicating the proper conductor section, determine the number that corresponds to the contact being used.
8 Remove the retaining hook from the crimping tool dial selector. Lift the dial selector and turn it until the selector number is aligned with the indicator (SEL. NO.). Replace the retaining hook (if necessary).

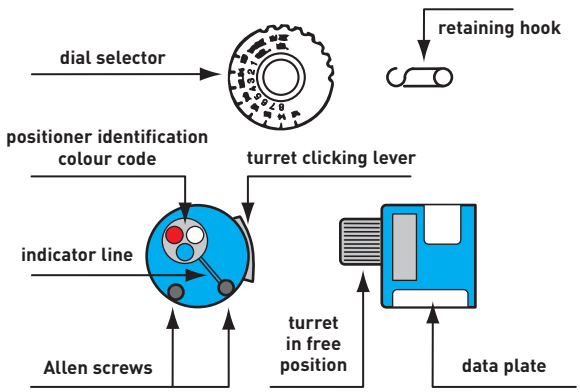

3. Crimping instructions

1 Insert the contact and the prepared conductor through the opening of the indenter in the turret positioner.
2 Tighten the crimping tool handle until the stop gear is released. The tool will return to the open position.
3 Check the position of the crimping on the contact crimping foot. Ideally, the crimping should be between the inspection hole and the top edge of the crimping foot.
The head of the contact should not be squared and the inspection hole should be intact.

4. Removing the CCTP positioner

With the crimping tool in the open position, to disassemble the positioner, loosen the socket head screws using the 3,5 mm Allen key wrench (supplied with the kit). After the threads are released from the support ring, pull off the positioner with a straight movement.

5. Instructions to check calibration

The operations to check the crimping tool must be carried out with the dial selector in position 4 and the CCPNP gauge.
ATTENTION! Do not crimp the gauge.

5.1 Calibration check

Put the crimping tool in the completely closed position.
"GO" - Insert the end (green) of the gauge as shown (Fig. 1).
The gauge must pass freely between the indenter tips.
"NO GO" - Insert the end (red) of the gauge as shown (Fig. 2).
The gauge should not pass through the opening.

Gauge	tool selector pos. No.	Ø A ± 0,00254 mm (GO) green	Ø B ± 0,00254 mm (NO GO) red
CCPNP	4	0,991 (mm)	1,118 (mm)
		0,0390 (in)	0,0440 (in)



Fig. 1



Fig. 2

6. Crimping tool maintenance

No maintenance is required.
However, it is good practice to keep the indenter tips free from residual deposits of the coloured band (some types of crimp contacts as per MIL standards are identified by coloured bands in the crimping area) and any other debris.
A metal brush may be used for this purpose.
The following is strongly recommended:

1 DO NOT immerse the tools in a solution to clean them.
2 DO NOT brush oil in the tools to lubricate them.
3 DO NOT try to disassemble the tool or repair it.

This is a high-precision manual crimping tool and must be used as such.
For automatic crimping operations refer to the CCPZP and/or CCPZPA crimping tool models.

Tools and accessories for crimp contacts

for contacts of inserts series:		page:
CD	(10A)	**66 - 74**
CDD	(10A)	**76 - 83**
CDC	(16A)	**104 - 106**
CCE	(16A)	**130 - 135**
CMCE	(16A)	**137 - 145**
CQE	(16A)	**168 - 173**
CQEE	(16A)	**176 - 177**
CQ	(10A/16A)	**186 - 193**
CX 8/24	(16A/10)	**194**
CX 6/**12** *	(10A)	**197**
CX 6/**36** *	(10A)	**198**
CX 12/**2** *	(10A)	**199**
CX 6/**6** *	(16A)	**206**
RD (HNM)	(10A)	**208 - 209**
RDD (HNM)	(10A)	**210 - 213**
RCE (HNM)	(16A)	**214 - 217**
RQEE (HNM)	(16A)	**218 - 219**
MIXO	(10A/16A)	**271 - 306**

* the underlined polarities indicate those contacts that require the tools shown in this page

manual crimping tool

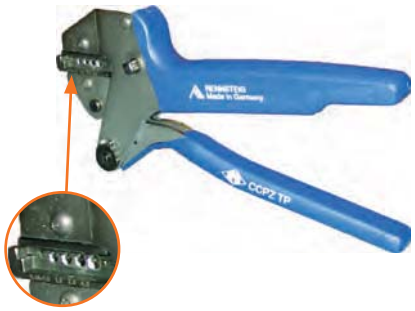

front view showing incorporated crimping dies

insertion tool
removal tools - tip

CCPR RN

description	part No.	part No.
crimping tool for **10A** and **16A** contacts RENNSTEIG model (crimping dies and turret head are included)	**CCPZ TP**	
insertion tool for insertion of the contacts into the inserts for crimped contacts up to 0,75 mm²		**CCINA**
removal tools for the extraction of contacts from the inserts		
for **10A** contacts		**CCES**
for **16A** contacts		**CQES**
replacement tip for CCES removal tool		**CCPR RN**

CCPZ TP is a simple but effective “square shaping” manual crimping tool incorporating discrete (4-size nests) crimping dies and dedicated turret positioner for relevant crimp contacts series and sizes.

For series CD (10A) and CC (16A) contacts (and their corresponding **HNM** variants series RD and RC) manual crimping tool **CCPZ MIL** – or their equivalent pneumatic **CCPZP** or **CCPZPA** for large volumes of crimps, or even the fully automatic stripper crimper machine **ZFU** – as well as the universal crimping tool **CCPZ RN**, by providing 8-indent crimping, are recommended for highly demanding applications, such as in transportation.

CCPZ TP

rear view showing incorporated turret head positioner

CCINA



CCES



CCPR RN



CQES



Tools and accessories for crimp contacts

for contacts of inserts series:		page:
CQ4 03	(40A)	**184**
CQ 04/2	(40A)	**182**
CQ 04/2 H	(40A)	**183**
CX 6/12 *	(40A)	**197**
CX 6/36 *	(40A)	**198**
CX 12/2 *	(40A)	**199**
MIXO	(40A)	**267 - 272**

* the underlined polarities indicate those contacts that require the tools shown in this page

manual crimping tool

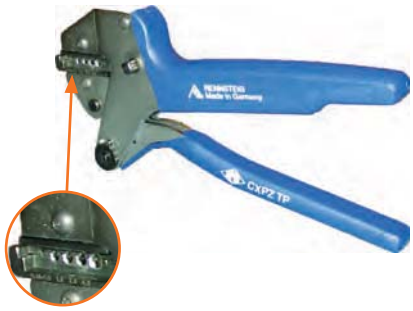

front view showing incorporated crimping dies

removal tool

description	part No.	part No.
crimping tool for 40A contacts RENNSTEIG model (crimping dies and turret head are included)	**CXPZ TP**	
removal tool for the extraction of contacts from the inserts for **40A** contacts		**CXES**

CXPZ TP is a simple but effective “square shaping” manual crimping tool incorporating discrete (3-size nests) crimping dies and turret positioner for relevant crimp contacts sizes ranging from size 1.5 to size 6.0. Size 10 requires **CCPZ RN** (Rennsteig PEW 8.75 universal manual crimp tool) or **CXPZP D** (Daniels WA27-309-EP pneumatic tool)

For series CX (40A) contacts (and their corresponding **HNM** variants series RX) manual crimping tool **CXPZ D** (Daniels M309) up to size 6.0 or CCPZ RN (Rennsteig PEW 8.75) for all sizes – or the pneumatic **CXPZP D** for large volumes of crimps, by providing 8-indent crimping, are recommended for highly demanding applications, such as in transportation.

CXPZ TP

rear view showing incorporated turret head positioner

Tools and accessories for crimp contacts

for contacts of inserts series:		page:
CX 6/12 *	(40A)	**197**
CX 6/36 *	(40A)	**198**
CX 12/2 *	(40A)	**199**
MIXO	(40A)	**267 - 272**

***** the underlined polarities indicate those contacts that require the tools shown in this page

manual crimping tool positioner - gauge

removal tool

description	part No.	part No.
crimping tool for **40A** DANIELS M309 model (turret excluded)	**CXPZ D**	
positioner (see note) for contacts **40A** (**CX** and **RX HNM** series)	**CXTP 40**	
"go / no go" control gauge to verify indenter closure (see note)	**CXPNP**	
removal tool for the extraction of contacts from the inserts for **40A** contacts		**CXES**

Notes:

Positioner

- An interchangeable and indispensable accessory of the CXPZ D crimping tool, it precisely positions the contact where crimping is performed.

"go / no go" control gauge

- A tool used to periodically check that the crimping tool meets standard requirements.

CXPNP



CXPZ D

CXTP 40



CXTP 40

CONTACT	CXMA/CXFA	1.5	2.5	4.0	6.0	10
WIRE SIZE	mm²	1,5	2,5	4	6	10
	AWG	16	14	12	10	8
SEL. NO.		5	5	5	7	8
USE WITH	M309					
	WA-27-309-EP					

Use and maintenance instructions

1. General specifications

The **CXPZ D crimping tool** performed with 8 pressure points.
The tool is equipped with a geared mechanism to control the complete crimping cycle.
The tool must be equipped with an interchangeable turret (CXTP) according to the series of contacts to be crimped.

1.1 Crimping range

Conductor cross-sectional area range: from 1,5 mm² (16 AWG) to 6 mm² (10 AWG).

Caution!
The handle of the tool must be in the open position when the turret is installed, disassembled or opened. If not, the turret and the crimping tool may be damaged.

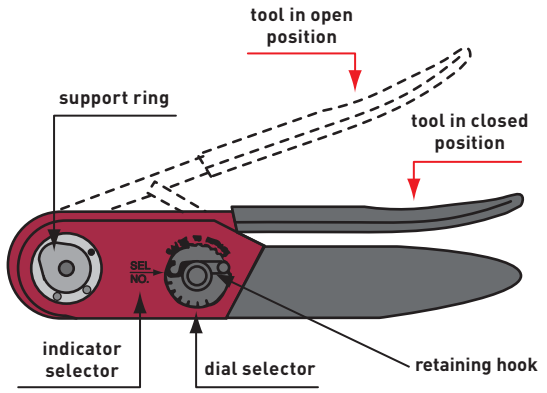

2. CXTP positioner installation

1 The crimping tool must be in the open position.
2 Position the CXTP 40 positioner on the support ring located on the crimping tool (matching the special pin on the base of the turret with the corresponding hole on the support ring), aligning the tapped holes with the socket head screws.
3 With the CXTP 40 positioner positioned against the support ring, tighten the socket head screws with the 3,5 mm Allen wrench (supplied with the kit).
4 Refer to the data plate on the CXTP 40 positioner.
From the column indicating the proper conductor cross-sectional area, determine the number that corresponds to the contact being used.
5 Remove the retaining hook from the crimping tool dial selector.
Lift the dial selector and turn it until the selector number is aligned with the indicator (SEL.NO.).
Replace the retaining hook (if necessary).

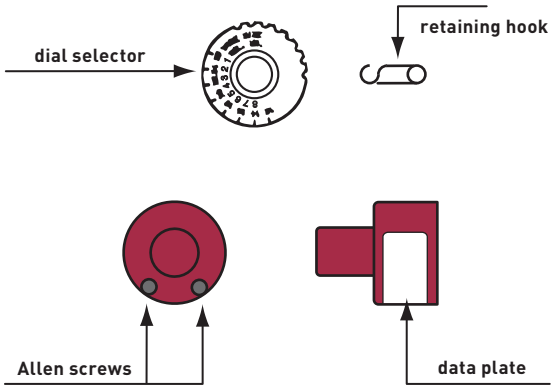

3. Crimping instructions

1 Insert the contact and the prepared * conductor through the opening of the indenter in the turret positioner.
2 Tighten the crimping tool handle until the stop gear is released.
The tool will return to the open position.
3 Check the position of the crimping on the contact crimping foot. Ideally, the crimping should be between the inspection hole and the top edge of the crimping foot.
The head of the contact should not be squared and the inspection hole should be intact.

* i.e. stripped at the correct length and with strands lightly twisted to recover regular lay of strands

4. Removing the CXPT 40 positioner

With the crimping tool in the open position, to disassemble the turret, loosen the socket head screws using the 3,5 mm Allen wrench (supplied with the kit).
After the threads are released from the support ring, pull off the positioner with a straight movement.

5. Instructions to check calibration

The operations to check the crimping tool must be carried out with the dial selector in position 4 and with the CXPNP gauge (formerly Daniels G425, now Daniels G436 or G1004 which are equivalent for the purpose).
ATTENTION! Do not crimp the gauge.

5.1 Calibration check

Put the crimping tool in the completely closed position.
"GO" - Insert the end (green) of the gauge as shown (Fig. 1).
The gauge must pass freely between the indenter tips.
"NO GO" - Insert the end (red) of the gauge as shown (Fig. 2).
The gauge should not pass through the opening.

Gauge	tool selector pos. No.	Ø A ± 0,00254 mm (GO) green	Ø B ± 0,00254 mm (NO GO) red
CXPNP	4	1,549 (mm)	1,676 (mm)
		0,0609 (in)	0,0659 (in)



Fig. 1



Fig. 2

6. Crimping tool maintenance

No maintenance is required.
However, it is good practice to keep the indenter tips free from residual deposits of the coloured band (some types of crimp contacts as per MIL standards are identified by coloured bands in the crimping area) and any other debris.
A metal brush may be used for this purpose.
The following is strongly recommended:

1 DO NOT immerse the tools in a solution to clean them.
2 DO NOT brush oil in the tools to lubricate them.
3 DO NOT try to disassemble the tool or repair it.

This is a high-precision manual crimping tool and must be used as such.

Tools and accessories for crimp contacts

for contacts of inserts series:		page:
CD	(10A)	**66 - 74**
CDD	(10A)	**76 - 83**
CDC	(16A)	**104 - 106**
CCE	(16A)	**130 - 135**
CQE	(16A)	**168 - 173**
CQEE	(16A)	**176 - 177**
CMCE	(16A)	**137 - 145**
CQ	(10A/16A)	**186 - 193**
CX 8/24	(16A/10A)	**194**
CX 6/36	(40A/10A)	**198**
CX 12/2	(40A/10A)	**199**
CX 6/6 *	(16A)	**206**
MIXO	(40A/16A/10A)	**267 - 306**

***** the underlined polarities indicate those contacts that require the tools shown in this page

manual crimping tool gauge

insertion tool - removal tools replacement tip

CCPR RN

description	part No.	part No.
crimping tool for **10A, 16A and 40A** contacts RENNSTEIG model (turret included)	**CCPZ RN**	
"go / no go" control gauge to verify indenter closure (see note)	**CCPNP RN**	
insertion tool for insertion of the contacts into the inserts for crimped contacts up to 0,75 mm²		**CCINA**
removal tools for the extraction of contacts from the inserts for **10A** contacts [1] for **16A** contacts [2] for **40A** contacts [3] and cables Ø < 5 mm for **40A** contacts [4] and cables Ø < 7,5 mm		 **CCES** **CQES** **CXES** **CXES-10**
replacement tip for CCES removal tool		**CCPR RN**

[1] for CQ, CD, CDD, CX inserts (10A auxiliary contacts) and MIXO module (10A)
[2] for CQ, CQE, CQEE, CCE, CMCE inserts (excluded 16+2), MIXO module (16A), CX6/6 (16A) and CDC. For CMCE (16+2), CX inserts (contacts 16A insert CX 8/24) using a flat 3 mm screwdriver.
[3] for CX inserts (40A contacts) and MIXO module (40A)
[4] for MIXO module CX 03 4B and contacts 10 mm².

Notes:

"go / no go" control gauge

- A tool used to periodically check that the crimping tool meets standard requirements.

CCPNP RN



CCPZ RN



CCINA



CCES



CCPR RN



CQES



CXES-10



Watch our online tutorial

Use and maintenance instructions

1. General specifications

The **CCPZ RN crimping tool** crimps with 8 pressure points, obtaining similar results to the prescriptions of standard MIL-C-22520/1.
The tool has a geared mechanism for controlling the complete crimping cycle, and houses a positioning turret with 12 positions, six of which can be used for positioning the ILME male and female crimping contacts of series CD (10A max), CC (16A max) and CX (40A max).

1.1 Crimping range

Conductor cross-sectional area range: from 0,14 mm² (26 AWG) to 10 mm² (8 AWG).
Caution! The handle of the tool must be in the open position when the turret is installed, disassembled or opened. If not, the turret and the crimping tool may be damaged.

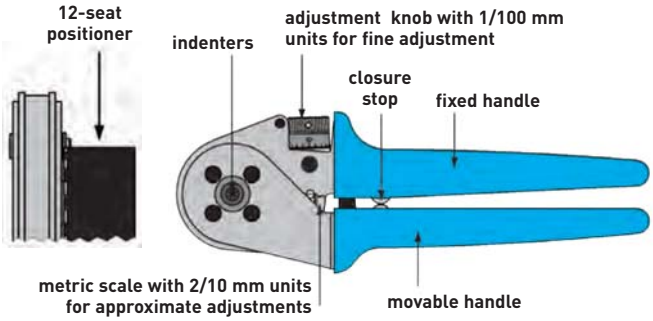

2. Description of tool

Crimping tool components: a first mobile handle, with a precision stop mechanism with teeth and an opening limiting guide; a second fixed handle with metric scale (units of 2/10 mm); an adjustment system with fine step adjustments of 1/100 mm; four indenters; a 12-seat positioner, fully rotating through 360° for accurate positioning of contacts. A reference table engraved on the tool surface provides the positioner (POS) number and crimping depth (SET) to select according to the type and size of the ILME contact (the crimping tool can be set to any crimping depth which may be required by the contact manufacturer).

3. Adjustment of crimp depth

Crimp depth to be adjusted ad follows:
the adjustment knob should be turned clockwise to reduce crimping depth, and anti-clockwise to increase it.

3.1 Adjustment tolerances:

- 1 scale mark on the knob = adjustment of 1/100 mm (0,01 mm);
- 1 complete rotation of knob = adjustment of 2/10 mm (0,2 mm, this indication can be read on the knob and on the approximate scale);
- 5 knob rotations = adjustment of 1,0 mm (this indication can be read on the scale).

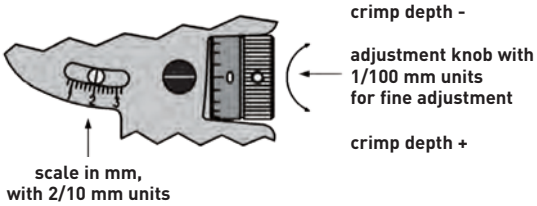

4. Crimping instructions

The reference matrix on the crimping tool indicates the correct seat of the positioner (POS M1, F2, M3, F4, M5, F6) to select, and the crimping depth (SET) to adjust for the contact to be crimped.
The contact is inserted through the crimper entry hole on the opposite side of the positioner.
The contact is closed by closing the handles in the first stop position, in order to prevent the contact coming out off the crimper and to facilitate fitting the conductor in the contact.
The precision stop mechanism with teeth ensures consistently precise crimps, by forcing the crimper to close completely and finish the crimping cycle before the crimper can be re-opened.

Tool adjustment

Positioner seat = M1 (male) - F2 (female)

CDMA/D (male) CDFA/D (female)	Section (mm²)	Crimp depth (mm)
0,3	0,14 0,25 0,37	1,3
0,5	0,5	1,55
0,7	0,75	1,55
1,0	1,0	1,55
1,5	1,5	1,55
2,5	2,5	1,55

Positioner seat = M3 (male) - F4 (female)

CCMA/D (male) CCFA/D (female)	Section (mm²)	Crimp depth (mm)
0,3	0,14	1,2
0,3	0,25-0,37	1,3
0,5	0,5	1,55
0,7	0,75	1,55
1,0	1,0	1,55
1,5	1,5	1,8
2,5	2,5	1,8
3,0	3,0	1,9
4,0	4,0	2,0

Positioner seat = M5 (male) - F6 (female)

CXMA/D (male) CXFA/D (female)	Section (mm²)	Crimp depth (mm)
1,5	1,5	1,55
2,5	2,5	1,8
4,0	4,0	2,0
6,0	6,0	2,5
10,0	10,0	2,3

5. Calibration check

The crimping tool is adjusted in the manufacturer's plant.
To ensure correct calibration, we advise you to check the tool with a gauge every working day.
This is easily done with the CCPNP RN cylindrical gauge in the 2,0 mm Ø position.
ATTENTION!: Do not crimp the gauge.
Crimping depth of 2 mm can be adjusted with the adjustment knob (scale marked on "2", screw indicator on "0" as shown in the above figure).
Put the crimping tool in the completely position.
"GO" - Insert the end of the gauge as shown (Fig. 1).
The gauge must pass freely between the indenter tips.
"NO GO" - Insert the end of the gauge as shown (Fig. 2).
The gauge should not pass through the opening.

Gauge	tool selector pos. No.	Ø A GO	Ø B NO GO
CCPNP RN	2	1,94 (mm)	2,06 (mm)



Fig. 1



Fig. 2

6. Maintenance and repair

Keep the crimping tool clean and store it correctly when not in use.
The joints need to be lubricated periodically, and the pin stop circular clips must always stay in position.
This is a high precision crimping tool and must be used as such.

Tools and accessories for crimp contacts

for contacts of inserts series:	page:
MIXO (CI contacts, 25 poles)	**284**
MIXO Gigabit (CI contacts, 8 poles)	**286**
MIXO (CI contacts, 8 poles)	**293**

manual crimping tool
positioner - gauge

N.B.:
CITP D positioner
(to be ordered separately)

insertion / removal tool

description	part No.	part No.
crimping tool for **CI** contacts DANIELS AFM8 model (**positioner excluded**)	**CIPZ D**	
positioner (DANIELS K1450I) for **CI** contacts (CIMA - CIFA - CIFD - CIMD series)	**CITP D**	
"go / no go" control gauge (DANIELS G125) to verify indenter closure (see note)	**CCPNP**	
insertion tool: for insertion of the contacts into the inserts, and removal tool: for the extraction of contacts from the inserts for **CI** contacts 0,2 - 0,5 mm² (CIMA - CIFA - CIFD - CIMD series)		**CIES**
for **CI** contacts 0,75 mm² (CIMA - CIFA - CIFD - CIMD series)		**CIES B**

Notes:
"go / no go" control gauge
conforms with international standard MIL-C-22520/3
- A tool used to periodically check that the crimping tool meets standard requirements.

CIMA - CIFA - CIFD - CIMD

WIRE	mm²	0,08-0,75
WIRE	AWG	28 - 18
SEL	NO.	7

CITP D

CCPNP



Watch our online tutorial

Tools and accessories for crimp contacts

for contacts of inserts series:	page:
MIXO (D-SUB)	**296**

manual crimping tool
positioner - gauge

N.B.:
CIVTP D positioner
(to be ordered separately)

insertion / removal tool

description	part No.	part No.
crimping tool for **5A** D-SUB contacts (CIVFD and CIVMD series) DANIELS AFM8 model (**positioner excluded**)	**CIPZ D**	
positioner (DANIELS K761) for **5A** D-SUB contacts (CIVFD and CIVMD series)	**CIVTP D**	
"go / no go" control gauge (DANIELS G125) to verify indenter closure (see note)	**CCPNP**	
insertion tool: for insertion of the contacts into the inserts, and removal tool: for the extraction of contacts from the inserts for **5A** D-SUB contacts (CIVFD and CIVMD series)		**CIVES**

Notes:
"go / no go" control gauge
conforms with international standard MIL-C-22520/3
- A tool used to periodically check that the crimping tool meets standard requirements.

CIVFD - CIVMD

mm²	0,08	0,13	0,20	0,32	0,52	0,82
AWG	28	26	24	22	20	18
SEL	6	6	5	6	6	6

CIVTP D

CCPNP



Watch our online tutorial

Use and maintenance instructions

1. General specifications

The **CIPZ D crimping tool** (Daniels designation AFM8) conforms to the U.S. Military Standard MIL-C-22520/2C (designation M22520/2-01) (1). Crimping is performed with 8 pressure points and the tool is equipped with a geared mechanism to control the complete crimping cycle.
The tool must be equipped with an interchangeable positioner (CITP D or CIVTP D) according to the series of contacts to be crimped.

(1) Since October 2011 the MIL-C-22520 series is being progressively replaced by a corresponding SAE (1) AS22520 series. The military series will be fully cancelled once all SAE parts will be published. SAE International, so named since 2006 and established in 1905 as the *Society of Automotive Engineers*, is a U.S.-based, globally active professional association and standards developing organization working in various industries, having as core business the transport industries such as automotive, aerospace, and commercial vehicles.

2. Crimping range

Conductor cross-sectional area range: from 0,08 mm² (28 AWG) to 0,52 mm² (20 AWG).

Caution!
The handle of the tool must be in the open position when the positioner is installed, disassembled or opened. If not, the positioner and the crimping tool may be damaged.

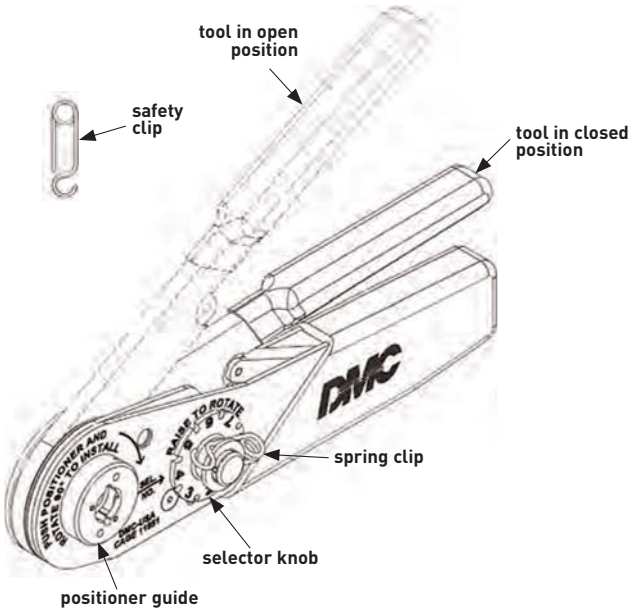



positioner "K" series

Note: dimensions in inches

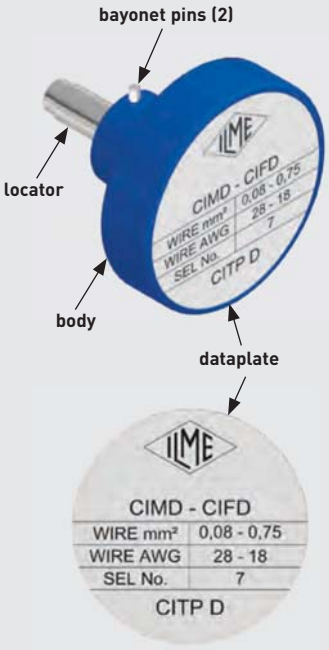

CITP D positioner

3. CITP D or CIVTP D positioner installation

1 The crimping tool must be in the open position.
2 Remove the safety clip from the positioner guide.
3 Insert the previously selected CITP D or CIVTP D positioner into the positioner guide on the head of the tool. Push down and rotate 90 degrees until bayonet pins lock.
4 Refer to the data plate on the CITP D or CIVTP D positioner for the setup of the selector number that determines crimp height, based on the contact size and conductor size.
5 With the tool in open position, remove the spring clip then raise and rotate selector knob until number indicated on data plate for conductor size to be crimped is in line with SEL. NO. arrow. Reinstall spring clip to avoid unintended change of setup

4. Crimping instructions

1 Insert the contact and the prepared (correctly stripped) conductor through the indenter opening in the positioner.
2 Squeeze the crimping tool handles together until ratchet releases. Handles will return to open position.
3 Check the position of the crimping on the contact crimp barrel. Ideally, the crimping should be between the inspection hole and the top edge of the crimp barrel.

The edge of the contact barrel should not result squared and the inspection hole should remain intact.

5. Removing the CITP D or CIVTP D positioner

With the crimping tool in the open position, to disassemble the positioner, push down on the positioner to release the bayonet pins from the positioner guide. Turn 90 degrees anticlockwise and remove the positioner from the tool.

6. Instructions to check calibration

The operations to check the crimping tool must be carried out with the dial selector in position 8 and the CCPNP gauge.
CAUTION! Do not crimp gauge!

6.1 Calibration check

Put the crimping tool in the completely closed position.
"GO" - Insert the end (green) of the gauge as shown (Fig. 1).
The gauge must pass freely between the indenter tips.
"NO GO" - Insert the end (red) of the gauge as shown (Fig. 2).
The gauge should not pass through the opening.

Gauge	tool selector pos. No.	Ø A ± 0,00254 mm (GO) green	Ø B ± 0,00254 mm (NO GO) red
CCPNP	8	0,991 (mm)	1,118 (mm)
		0,0390 (in)	0,0440 (in)



Fig. 1



Fig. 2

7. Crimping tool maintenance

No maintenance is required. However, it is good practice to keep the indenter tips free from residual deposits of the coloured band (some types of crimp contacts as per SAE (MIL) standards are identified by coloured bands in the crimping area) and any other debris. A small wire brush may be used for this purpose.

The following is strongly recommended:
1 DO NOT immerse the tools in a solution to clean them.
2 DO NOT brush oil in the tools to lubricate them.
3 DO NOT try to disassemble the tool or repair it.

This is a high-precision manual crimping tool and must be used as such.

Tools and accessories for crimp contacts

for contacts of inserts series:		page:
CX 6/6	(100A)	**206**
MIXO	(200A/100A/70A)	**262 - 266**

manual crimping tool
crimping dies

removal tool

description	part No.	part No.
crimping tool for **70A/100A/200A** series contacts basic tool mod. CEMBRE HT 45 excluding crimping dies and locators [1]	**CPPZ C**	
crimping dies for CX7 contacts with 10 mm² (AWG 8 - 7) section for CX7 contacts with 16 mm² (AWG 6 - 5) section for CX7 contacts with 25 mm² (AWG 4 - 3) section	 **CGD 10 C** **CGD 16 C** **CGD 25 C**	
crimping dies for CG contacts with 10 mm² (AWG 8 - 7) section for CG contacts with 16 mm² (AWG 6 - 5) section for CG contacts with 25 mm² (AWG 4 - 3) section for CG contacts with 35 mm² (AWG 2) section	 **CGD 10 C** **CGD 16 C** **CGD 25 C** **CGD 35 C**	
crimping dies for CY contacts section 16 mm² (AWG 6) for CY contacts section 25 mm² (AWG 4) and section 35 mm² (AWG 2) for CY contacts section 50 mm² (AWG 1) for CY contacts section 70 mm² (AWG 2/0)	 **CGD 25 C** **CYD 35 C** **CYD 50 C** **CYD 70 C**	
locator for CX7 contacts for CG contacts for CY contacts	 **CX7PZ LOC** **CGPZ LOC** **CYPZ LOC**	
removal tool for 70A CX7 series contact		**C7ES**

[1] part No. **CPPZ CF:** manual crimping tool carrying case (CGPZ VLG) complete with crimping dies (CGD/CYD), locator (CX7PZ LOC, CGPZ LOC, CYPZ LOC) and removal tool (C7ES).

NOTE:
For **CGMA 35** and **CGFA 35** contacts, and their corresponding **CGD 35 C** matrix pair, the contact may be inserted even after closing the head.

part No.	punching	contacts	mm²	AWG min (mm²)	AWG max (mm²)
CGD 10 C	ME 2	**CX7MA 10, CX7FA 10, CGT 6.0, CGT 10**	10	8 (8,4)	7 (10,6)
CGD 16 C	ME 3	**CX7MA 16, CX7FA 16**	16	6 (13,3)	5 (16,8)
CGD 25 C	ME 5	**CX7MA 25, CX7FA 25**	25	4 (21,2)	3 (26,7)
CGD 10 C	ME 2	**CGMA 10, CGFA 10**	10	8 (8,4)	7 (10,6)
CGD 16 C	ME 3	**CGMA 16, CGFA 16, CGT 16**	16	6 (13,3)	5 (16,8)
CGD 25 C	ME 5	**CGMA 25, CGFA 25, CGT 25**	25	4 (21,2)	3 (26,7)
CGD 35 C	ME 7	**CGMA 35, CGFA 35**	35	—	2 (33,6)
CGD 25 C	ME 5	**CYMA 16, CYFA 16**	16	6 (13,3)	—
CYD 35 C	ME 9	**CYMA 25, CYFA 25**	25	4 (21,2)	—
		CYMA 35, CYFA 35	35	2 (33,6)	—
CYD 50 C	ME 12	**CYMA 50, CYFA 50**	50	1 (42,4)	—
CYD 70 C	ME 17	**CYMA 70, CYFA 70**	70	2/0 (67,4)	—

Watch our online tutorial

Use and maintenance instructions

General specifications

The **CPPZ C crimping tool** is a hydraulically operated tool suitable for manually crimping contact series (70A/100A/200A max) removable crimp contacts which may be used in MIXO series type CX7, CG, CY and CGT adaptors. By using a suitable, hexagonal footprint crimp matrix pair, these pliers allow crimped connections to be made which conform to the highest quality standards.

The main features of these pliers are listed below:
- Scope of application: suitable for crimping wire terminals for up to 150 mm² flexible copper wires.
- Force developed: 50 kN (6 tons).
- Nominal operating pressure: 600 bar (8.600 psi).
- Dimensions: length 346 mm (13,6");
  width (locked moving handle) 130 mm (5,1");
  width (free moving handle) 250 mm (9,8").
- Weight: (without matrixes and without ILME locator) 2,0 kg (4,4 lbs).
- Recommended oil: AGIP ARNICA 32 or SHELL TELLUS OIL TX 32 or equivalent.
- Other features: please read the user and maintenance manual supplied with the tool.

The pliers are equipped with a locator specifically designed for ILME crimp contacts to be mounted on the moving part of the pliers head by means of the Allen screw provided.

NOTE: It is possible to use the CPPZ C pliers with the CX7 70A, CG 100A and CY 200A contact series, by simply fitting the CX7PZ LOC, CGPZ LOC or CYPZ LOC locator and crimping matrixes to be purchased separately.

WARNING: For crimping the CGT adaptors, the crimp locating operation must be carried out by the user.

User instructions

1. Preliminary operations

According to requirements, the pliers can be fitted with one or more pairs of crimp matrixes selected from the matrixes listed in the catalogue, to crimp the contacts shown in the table page 720.

NOTE: *The crimp contacts are only suitable for crimping flexible copper wires featuring a nominal section shown in the table with the crimp matrixes shown in the table. Any contacts – wires – matrixes combination which does not conform to these instructions is not physically possible (ex: using 35 mm² contacts with CGD 25 C matrixes is not possible because the pliers head would not close) or produces non conforming crimped connections or not usable in the MIXO series.*

Open the tool head by moving the matrix supporting hook ❸ outwards until the matrix support ❶ is released.

With reference to **Figures 1 and 2**, select a pair of matrixes suitable to the type of contact and insert them in the housings: one in the matrix support ❶, the other one in the matrix pusher support ❷. (NB: the two matrixes of each pair are the same).

Insert the contact by resting it in the locator with the tip forward, then close the head.

The contact crimp housing will be accessible in the mouth between the matrixes.

Remove the moving handle ❹ by removing the handle locking belt from the handle.

Before carrying out the next operations, make sure the head is fully closed to avoid damages.

The pliers head can rotate by 180° in relation to the body, thus allowing the operator to work in the most comfortable position.

WARNING: do not force the head by trying to rotate it when the tool is under pressure.

2. Approaching the matrixes

If possible closing the dies, rest the pliers head on a work top, then move the moving handle to start moving the matrixes closer to the contact, then carry on moving them until the contact is locked between the matrixes.

Push the correctly stripped and suitable long (15 mm) wire all the way in the contact (or the CGT adaptors) crimp housing by carefully checking that the braids are fully compacted, are not damaged and, above all, are all fully inserted. Correctly pushing the contact in the locator ensures that the matrixes are exactly in the right area to compress (the contact crimp shaft centre). Make sure that the locator is free from any residue which would alter the position of the contact. For crimping the CGT 16 earth adaptor, manually locate the area to be crimped between the matrixes. If necessary, re-open the matrixes by following the instructions described in paragraph 4 and reposition the contact.

3. Crimping

Continue to operate the moving handle (pumping): the piston will gradually move forward until the matrixes come into contact.

Continue the pumping action until the maximum pressure valve clicks in.

4. Releasing the dies

Fully press the pressure release lever ❺ located on the pliers pumping body until the piston goes back and the matrixes open.

To remove the crimped contact, re-open the pliers head.

5. Storage

Fully return the piston as described in paragraph 4, then lock the moving handle in position by using the belt provided.

Cleaning and maintenance

The tool is very sturdy and does not required any special care; a correct operation is ensured by following a few simple precautions.

The tool is supplied with a user and maintenance manual, which gives all detailed instructions. Read this manual before use.

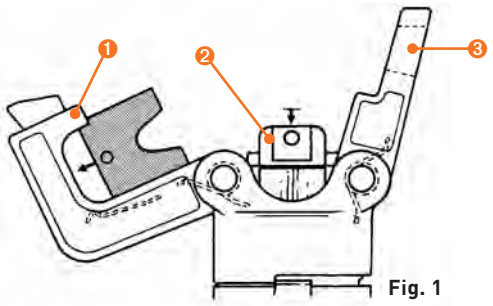

Fig. 1

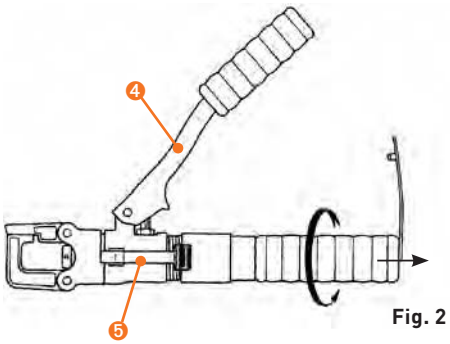

Fig. 2

CGPZ VLG carrying case

for CPPZ C * crimping tool
- dimensions 445 x 290 x h 95 mm
- weight 1,2 kg

houses 20 pairs of matrixes

* to store the CPPZ C crimping tool inside the carrying case, turn the pliers head by 180° so that the locator becomes visible.

Tools and accessories for crimp contacts

for contacts of inserts series:		page:
CD	(10A)	**66 - 74**
CDD	(10A)	**76 - 83**
CDC	(16A)	**104 - 106**
CCE	(16A)	**130 - 135**
CMCE	(16A)	**137 - 145**
CQE	(16A)	**168 - 173**
CQEE	(16A)	**176 - 177**
CQ	(10A/16A)	**186 - 193**
CX 8/24	(16A/10A)	**194**
CX 6/**36** *	(10A)	**198**
CX 12/**2** *	(10A)	**199**
CX 6/**6** *	(16A)	**206**
MIXO	(10A/16A)	**271 - 306**

* the underlined polarities indicate those contacts that require the tools shown in this page

pneumatic crimping tool positioner - gauge

CCSPZP **CCVPP**

insertion tool - removal tools replacement tip

CCPR RN

description	part No.	part No.
pneumatic crimping tool for **10A** and **16A** contacts model DANIELS WA27F (turret excluded)	**CCPZP**	
positioner (see note) for **10A** contacts (CDF and CDM series) for **16A** contacts (CCF and CCM series)	 **CCTP 10** **CCTP 16**	
bench support for CCPZP pneumatic crimping tool (DANIELS BM-2A)	**CCSPZP**	
pneumatic foot valve (DANIELS WA10A)	**CCVPP**	
"go / no go" control gauge to verify indenter closure (see note)	**CCPNP**	
insertion tool for insertion of the contacts into the inserts for crimped contacts up to 0,75 mm²		**CCINA**
removal tools for the extraction of contacts from the inserts for **10A** contacts [1] for **16A** contacts [2]		 **CCES** **CQES**
replacement tip for CCES removal tool		**CCPR RN**

[1] for CQ, CD, CDD, CX inserts (10A auxiliary contacts) and MIXO module (10A)
[2] for CQ, CQE, CQEE, CCE, CMCE inserts (excluded 16+2), MIXO module (16A), CX6/6 (16A) and CDC. For CMCE (16+2), CX inserts (contacts 16A insert CX 8/24) using a flat 3 mm screwdriver.

Notes:
Positioner
conforms to international standard MIL-C-22520/1
- An interchangeable and indispensable accessory of the CCPZP crimping tool, it precisely positions the contact where crimping is performed. Each series of contacts requires its own turret.

"go / no go" control gauge
conforms with international standard MIL-C-22520/3
- A tool used to periodically check that the crimping tool meets standard requirements.

CCPNP



Watch our online tutorial

CCPZP

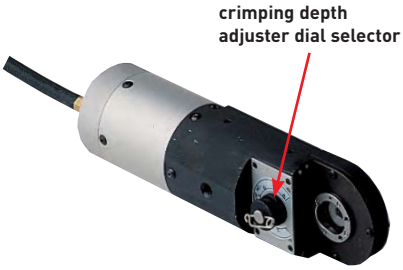

CCTP



CCINA



CCES **CCPR RN**

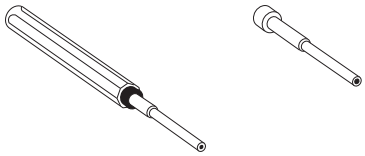

CQES



CRIMPING TOOLS

Use and maintenance instructions

1. General specifications

This is the pneumatic version of the **DANIELS AF8 crimping tool** (CCPZ MIL). Crimping is performed with 8 pressure points.
The tool is equipped with a geared mechanism to control the complete crimping cycle.
The tool must be equipped with an interchangeable turret (CCTP) according to the series of contacts to be crimped.
It is possible to use a hand valve (located on the crimping tool) or a foot valve (optional). The tool operating pressure is 5,5 - 8,3 bar. It is recommended to utilise an adjustment and air filtering unit.

1.1 Crimping range

Conductor cross-sectional area range: from 0,14 mm² (26 AWG) to 4 mm² (12 AWG).

1.2 Operation with pneumatic foot valve (optional)

Connect the foot valve between the compressed air source and the tool air inlet. Lower the hand valve on the tool and stop it in the lowered position with the stop screw (A) using a 1,5 mm Allen wrench.

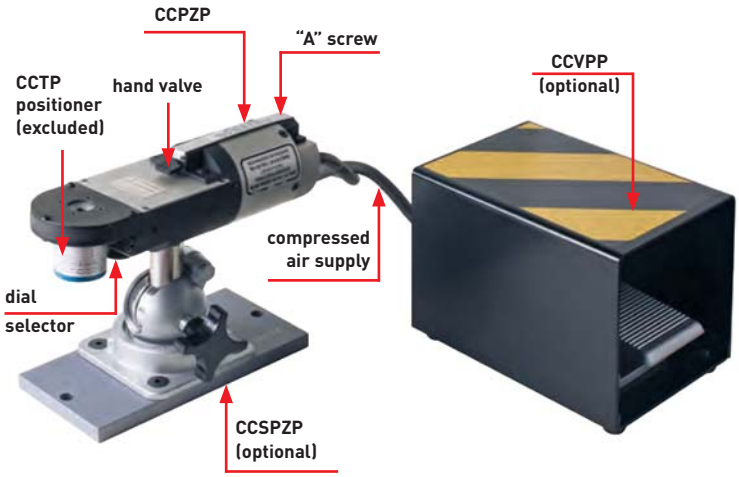

2. Checking the crimping complete cycle control mechanism

Correct operation can be checked based on the following procedure:
1 Install a CCTP turret (see 3).
2 Reduce the pressure to 1 bar.
3 Using a contact that corresponds to the installed turret, with size 0,5, and a wire with section 0,5 mm², use the crimping tool, referring to the crimping instructions.
The indenters will not reach the fully closed position and the contact will be internally blocked if the geared mechanism is operating correctly.
4 To release the partially crimped contact, increase the air pressure of the line to 5,5 - 8,3 bar and again use the crimping tool. It will then complete the crimping, allowing the indenters to return to the fully open position.

3. CCTP positioner installation (Fig. A)

1 Position the previously selected CCTP positioner on the support ring located on the crimping tool (matching the special pin on the base of the turret with the corresponding hole on the support ring), aligning the tapped holes with the socket head screws.
2 With the CCTP positioner positioned against the support ring, tighten the socket head screws with the 3,5 mm Allen wrench (supplied with the kit).
3 Refer to the data plate on the CCTP positioner. From the colour code column, select the colour of the positioner that corresponds to the appropriate code and dimension of the contact to be crimped.
4 With the CCTP positioner in the adjustment position, turn the turret selector until the colour-coded positioner is aligned with the indicator line.
Press the turret until it clicks into the connected position.
5 Refer to the data plate on the CCTP positioner. From the column indicating the proper conductor section, determine the number that corresponds to the contact being used.
6 Remove the retaining hook from the crimping tool dial selector. Lift the dial selector and turn it until the selector number is aligned with the indicator (SEL.NO.). Replace the retaining hook (if necessary).

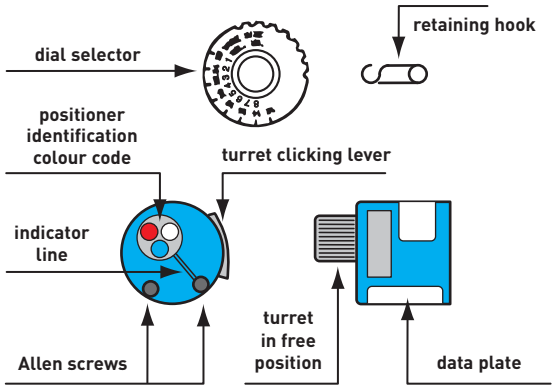

Fig. A

4. Crimping instructions

1 Insert the contact and the prepared conductor through the opening of the indenter in the turret positioner.
2 Activate the hand valve or the foot valve.
Once crimping has been completed, the tool will return to the open position.
3 Check the position of the crimping on the contact crimping foot. Ideally, the crimping should be between the inspection hole and the top edge of the crimping foot.
The head of the contact should not be squared and the inspection hole should be intact.

5. Releasing a partially crimped contact

To release a partially crimped contact, do the following:
1 Increase the air pressure to 8,5 bar and use the crimping tool. If the increase in air pressure does not release the contact, do the following.
2 Turn the dial selector clockwise to the highest lockable setting (the dial selector must be in the blocked position before continuing). Use the crimping tool.
3 If it does not release after several attempts, contact the ILME offices.

6. Removing the CCTP positioner

With the crimping tool in the open position, to disassemble the turret, loosen the socket head screws using the 3,5 mm Allen wrench (supplied with the kit).
After the threads are released from the support ring, pull off the turret with a straight movement.

7. Instructions to check calibration

The operations to check the crimping tool must be carried out with the dial selector in position 4 and the CCPNP gauge.
ATTENTION! Do not crimp the gauge.

7.1 Calibration check

Put the crimping tool in the completely closed position.
"GO" - Insert the end (green) of the gauge as shown (Fig. 1).
The gauge must pass freely between the indenter tips.
"NO GO" - Insert the end (red) of the gauge as shown (Fig. 2).
The gauge should not pass through the opening.

Gauge	tool selector pos. No.	Ø A ± 0,00254 mm (GO) green	Ø B ± 0,00254 mm (NO GO) red
CCPNP	4	0,991 (mm)	1,118 (mm)
		0,0390 (in)	0,0440 (in)



Fig. 1



Fig. 2

8. Crimping tool maintenance

No maintenance is required.
However, it is good practice to keep the indenter tips free from residual deposits of the coloured band (some types of crimp contacts as per MIL standards are identified by coloured bands in the crimping area) and any other debris. A metal brush may be used for this purpose.
The following is strongly recommended:
1 DO NOT immerse the tools in a solution to clean them.
2 DO NOT brush oil in the tools to lubricate them.
3 DO NOT try to disassemble the tool or repair it.
This is a high-precision manual crimping tool and must be used as such.

Tools and accessories for crimp contacts

for contacts of inserts series:		page:
CD	(10A)	**66 - 74**
CDD	(10A)	**76 - 83**
CDC	(16A)	**104 - 106**
CCE	(16A)	**130 - 135**
CMCE	(16A)	**137 - 145**
CQE	(16A)	**168 - 173**
CQEE	(16A)	**176 - 177**
CQ	(10A/16A)	**186 - 193**
CX 8/24	(16A/10A)	**194**
CX 6/**36** *	(10A)	**198**
CX 12/**2** *	(10A)	**199**
CX 6/**6** *	(16A)	**206**
MIXO	(10A/16A)	**271 - 306**

* the underlined polarities indicate those contacts that require the tools shown in this page

pneumatic crimping tool with automatic positioner - inserts - gauge

insertion tool - removal tools replacement tip

CCPR RN

description	part No.	part No.
crimping tool with automatic positioner model DANIELS WA27FAP (inserts excluded)	**CCPZPA**	
positioner inserts (see note) male contacts **10A** (CDM series) female contacts **10A** (CDF series) male contacts **16A** (CCM series) female contacts **16A** (CCF series)	 **CCTPADM** **CCTPADF** **CCTPACM** **CCTPACF**	
"go / no go" control gauge to verify indenter closure (see note)	**CCPNP**	
insertion tool for insertion of the contacts into the inserts for crimped contacts up to 0,75 mm²		**CCINA**
removal tools for the extraction of contacts from the inserts for **10A** contacts [1] for **16A** contacts [2]		 **CCES** **CQES**
replacement tip for CCES removal tool		**CCPR RN**

[1] for CQ, CD, CDD, CX inserts (10A auxiliary contacts) and MIXO module (10A)
[2] for CQ, CQE, CQEE, CCE, CMCE inserts (excluded 16+2), MIXO module (16A), CX6/6 (16A) and CDC. For CMCE (16+2), CX inserts (contacts 16A insert CX 8/24) using a flat 3 mm screwdriver.

Notes:
Positioner inserts
- Interchangeable and indispensable accessories of the CCPZPA crimping tool precisely position the contact where crimping is performed.
  Each contact requires its own positioner insert selected according to the type of contact (10A or 16A) and the kind (male or female).

CCTPADM and CCTPADF
CCTPACM and CCTPACF



"go / no go" control gauge
conforms with international standard MIL-C-22520/3
- A tool used to periodically check that the crimping tool meets standard requirements.

CCPNP



CCPZPA

CCINA



CCES



CCPR RN



CQES



CRIMPING TOOLS

Use and maintenance instructions

1. General specifications

This is the pneumatic version of the manual crimping tool. Crimping is performed with 8 pressure points. The tool is equipped with a geared mechanism to control the complete crimping cycle. Thanks to the automatic positioner it is possible to crimp simply by inserting the uncrimped contact + wire into the tool crimping cavity. It is also necessary to order the interchangeable positioner inserts relative to the series of contacts to be crimped.
The tool operating pressure is 5,5 - 8,3 bar. It is recommended to utilise an adjustment and air filtering unit.

1.1 Crimping range

Conductor cross-sectional area range: from 0,12 mm² (26 AWG) to 4 mm² (12 AWG).

Fig. A (complete crimping tool)

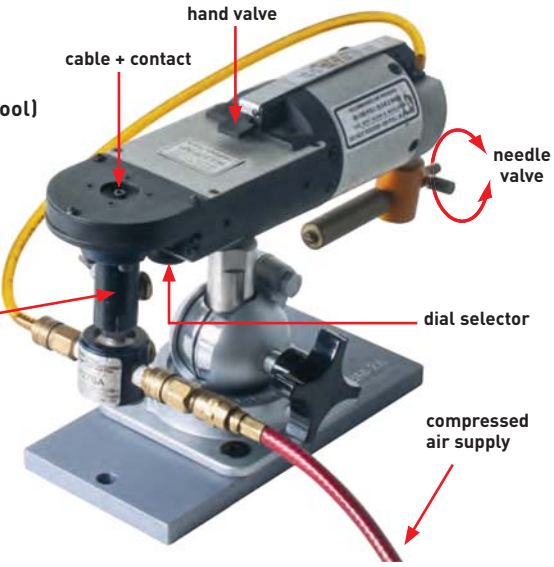

2. Installation or replacement of a positioner insert

1 Disconnect the workshop compressed air source.
2 Disconnect the air hoses from the automatic positioner (rapid connectors).
3 Remove the connection screws, using the 3,5 mm Allen wrench (supplied with the kit), to separate the automatic positioner from the crimping tool.
The indenters will not reach the fully closed position and the contact will be internally blocked if the geared mechanism is operating correctly.
4 Unscrew the positioner closing housing.
5 Install or replace the proper positioner insert in the positioner housing, replacing the underlying spring.
6 Reverse the operations, as described from point 4 to point 1.

3. Crimping position adjustment (Fig. B)

1 Release the automatic positioner from the crimping tool body (see points 1 and 2 “Installation replacement of a positioner insert”).
2 While holding the body positioner in position using a 19 mm wrench, loosen the lock nut with a 14 mm wrench.
3 Push the positioner insert toward the bottom and lock it using the lock pin.
The indenters will not reach the fully closed position and the contact will be internally blocked if the geared mechanism is operating correctly.
4 If the pin doesn’t lock, unscrew the body valve toward the bottom.
5 With the pin locked, tighten the body valve toward the top until it strikes against the positioner insert.
6 While maintaining that position, tighten the lock nut.
7 Replace and connect the positioner on the crimping tool.
8 Release the lock pin in the “free” position.

4. Checking the crimping complete cycle control mechanism

Correct operation can be checked based on the following procedure:
1 Reduce the pressure to 1 bar.
2 Using a contact that corresponds to the installed positioner, with size 0,5 and a wire with section 0,5 mm², use the crimping tool, referring to the crimping instructions. The indenters will not reach the fully closed position and the contact will be internally blocked if the geared mechanism is operating correctly.
3 To release the partially crimped contact, increase the air pressure of the line to 5,5 - 8,3 bar and again use the crimping tool. It will then complete the crimping, allowing the indenters to return to the fully open position.
The indenters will not reach the fully closed position and the contact will be internally blocked if the geared mechanism is operating correctly.

Fig. B (automatic positioner)

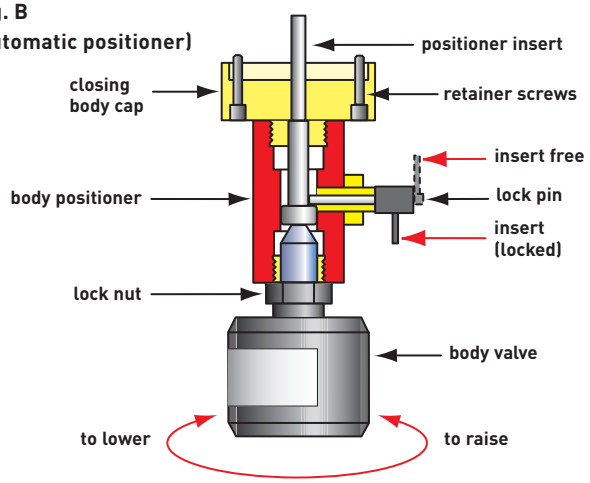

5. Crimping instructions

1 To obtain the suitable selector number, refer to the data plate located on the cover of the positioner insert case, and adjust the dial selector as specified.
2 Insert the contact and the prepared conductor through the opening of the indenter in the crimping tool casing (Fig. A).
3 Exert slight pressure until the crimping tool automatically crimps the contact.
CAUTION: Wire sections less than 0,34 mm² (24 AWG) up to 0,08 mm² (28 AWG) or equivalent are not sufficiently rigid, so that it may be rather difficult to push the contact + wire.
4 Check the position of the crimping on the contact crimping foot. Ideally, the crimping should be between the inspection hole and the top edge of the crimping foot. The head of the contact should not be squared and the inspection hole should be intact.

6. Instructions to check calibration

The operations to check the crimping tool must be carried out with the dial selector in position 4 and the CCPNP gauge.
ATTENTION! Do not crimp the gauge.

6.1 Calibration check

1 Disconnect the compressed air.
2 Push the positioner insert toward the bottom and lock it using the lock pin.
3 Reconnect the compressed air.
4 Turn the needle valve counterclockwise to open the air supply (Fig. A).
5 The indenters will extend and remain in the extracted position until the valve is closed.
6 Check using the gauge, referring to the “go / no go” instructions reported below.
7 When the calibration check has been completed, close the needle valve turning it clockwise (Fig. A).
8 Put the lock pin in the “free” position.
“GO” - Insert the end (green) of the gauge as shown (Fig. 1).
The gauge must pass freely between the indenter tips.
“NO GO” - Insert the end (red) of the gauge as shown (Fig. 2).
The gauge should not pass through the opening.



Fig. 1



Fig. 2

Gauge	tool selector pos. No.	Ø A ± 0,00254 mm (GO) green	Ø B ± 0,00254 mm (NO GO) red
CCPNP	4	0,991 (mm)	1,118 (mm)
		0,0390 (in)	0,0440 (in)

7. Crimping tool maintenance

No maintenance is required. However, it is good practice to keep the indenter tips free from residual deposits of the coloured band (some types of crimp contacts as per MIL standards are identified by coloured bands in the crimping area) and any other debris. A metal brush may be used for this purpose. The following is strongly recommended:
1. DO NOT immerse the tools in a solution to clean them.
2. DO NOT brush oil in the tools to lubricate them.
3. DO NOT try to disassemble the tool or repair it.
This is a high-precision crimping tool and must be used as such.

Tools and accessories for crimp contacts

for contacts of inserts series:		page:
CX 6/12 *	(40A)	**197**
CX 6/36 *	(40A)	**198**
CX 12/2 *	(40A)	**199**
MIXO	(40A)	**267 - 272**

* the underlined polarities indicate those contacts that require the tools shown in this page

pneumatic crimping tool positioner – gauge

CCSPZP **CCVPP**

removal tool

description	part No.	part No.
pneumatic crimping tool for **40A** contacts model DANIELS WA27-309-EP (bench support, positioner and control gauge are optional, pneumatic foot valve with 2,7 m air hose is supplied with tool)	**CXPZP D**	
positioner (see note) for **40A** contacts (**CX** and **RX HNM** series)	**CXTP 40**	
bench support for CXPZP D pneumatic crimping tool (DANIELS BM-2A)	**CCSPZP**	
"go / no go" control gauge (DANIELS G1005) to verify indenter closure or wear (see note)	**CXPNPP**	
removal tool for the extraction of contacts from the inserts for **40A** contacts		**CXES**

Notes:

Positioner

- An interchangeable and indispensable accessory of the CXPZP D pneumatic crimping tool, it precisely positions the contact where crimping is performed.

"go / no go" control gauge

- A tool used to periodically check that the crimping tool meets standard requirements.

CXPNPP



CXPZP D

CXTP 40



CXTP 40

CONTACT	CXMA/CXFA	1.5	2.5	4.0	6.0	10
WIRE SIZE	mm²	1,5	2,5	4	6	10
	AWG	16	14	12	10	8
SEL. NO.		5	5	5	7	8
USE WITH		M309				
		WA-27-309-EP				

CXES



CRIMPING TOOLS

Use and maintenance instructions

1. General specifications

This is the pneumatic version of the CXPZ D hand crimping tool (DANIELS M309). Crimping is performed with 8 pressure points. The tool is equipped with a geared mechanism to control the complete crimping cycle.
The tool must be equipped with the interchangeable positioner CXTP 40 suitable for series CX (or RX HNM version) crimp contacts.
The tool comes already equipped with a pneumatic foot pedal valve (WA10A) attached to the tool through 2,7 m (9 ft.) air hose.
The tool operating pressure is 5,5 – 8,3 bar. It is recommended to utilise a lubrication, adjustment and air filtering unit.

1.1 Crimping range

Conductor cross-sectional area range: from 1,5 mm² (16 AWG) to 10 mm² (8 AWG).

1.2 Operation with pneumatic foot valve (supplied with tool)

Connect the foot valve between the compressed air source and the tool air inlet.

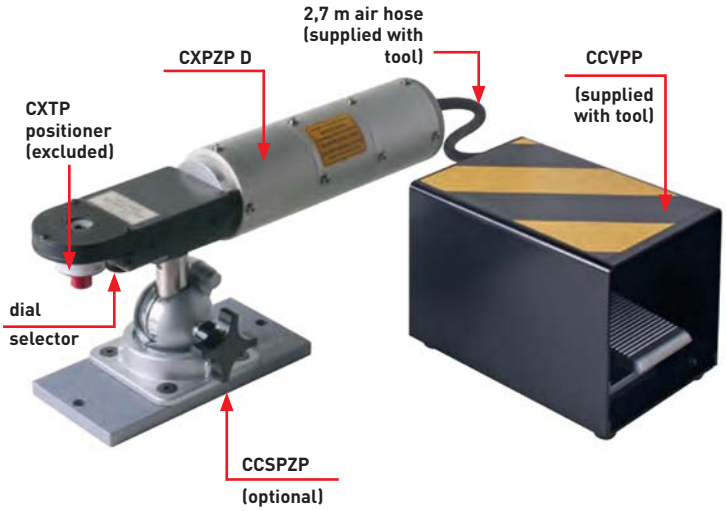

2. CXTP 40 positioner installation

1 Place the CXTP 40 positioner on the support ring located on the crimping tool (matching the special pin on the base of the turret with the corresponding hole on the support ring), aligning the tapped holes with the socket head screws.
2 With the CXTP 40 positioner places against the support ring, tighten the socket head screws with the 3,5 mm Allen wrench (supplied with the kit).
3 Refer to the dataplate on the CXTP 40 positioner. From the column indicating the proper conductor cross-sectional area, determine the number that corresponds to the contact being used.
4 Remove the retaining hook from the crimping tool dial selector.
Lift the dial selector and turn it until the selector number is aligned with the indicator (SEL.NO.). Replace the retaining hook (if necessary).

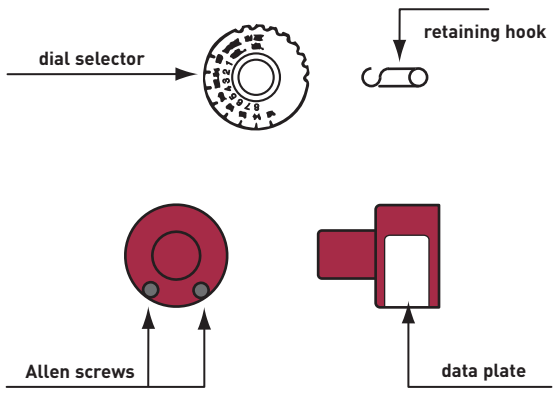

3. Checking the crimping complete cycle ratcheting control mechanism

Correct operation can be checked based on the following procedure:
1 Install the CXTP 40 positioner (see 2).
2 Reduce the pressure to 1 bar.
3 Using a series CX contact that corresponds to the installed turret, e.g. size 1.5, and a wire with cross-sectional area 1.5 mm2 (16 AWG) use the crimping tool, referring to the crimping instructions.
The indenters will not reach the fully closed position and the contact will be internally blocked if the geared mechanism is operating correctly.
4 To release the partially crimped contact, increase the air pressure of the line to 5,5 – 8,3 bar and again use the crimping tool. It will then complete the crimping, allowing the indenters to return to the fully open position.

4. Removing the CXPT 40 positioner

With the crimping tool in the open position, to disassemble the positioner, loosen the socket head screws using the 3,5 mm Allen wrench (supplied with the kit). After the threads are released from the support ring, pull off the positioner with a straight movement.

5. Releasing a partially crimped contact

To release a partially crimped contact, do the following:
1 Increase the air pressure to 8.5 bar and use the crimping tool. If the increase in air pressure does not release the contact, do the following.
2 Turn the dial selector clockwise to the highest lockable setting (the dial selector must be in the blocked position before continuing). Use the crimping tool.
3 If it does not release after several attempts, contact the ILME offices.

6. Crimping instructions

1 Insert the contact and the prepared conductor through the opening of the indenter in the turret positioner.
2 Activate the hand valve or the foot valve.
Once crimping has been completed, the tool will return to the open position.

3 Check the position of the crimping on the contact crimping foot. Ideally, the crimping should be between the inspection hole and the top edge of the crimping foot.
The head of the contact should not be squared and the inspection hole should be intact.

7. Instructions to check calibration

The operations to check the crimping tool must be carried out with the dial selector in position #5 and the CXPNPP gauge (DANIELS G1005 – formerly G425, which is equivalent).
CAUTION! Do not crimp the gauge.

7.1 Calibration check

Put the crimping tool in the completely closed position.
"GO" - Insert the end (green) of the gauge as shown (Fig. 1).
The gauge must pass freely between the indenter tips.
"NO GO" - Insert the end (red) of the gauge as shown (Fig. 2).
The gauge should not pass through the opening.



Fig. 1



Fig. 2

Gauge	tool selector pos. No.	Ø A ± 0,00254 mm (GO) green	Ø B ± 0,00254 mm (NO GO) red
CCPNP	4	0,991 (mm)	1,118 (mm)
		0,0390 (in)	0,0440 (in)

8. Crimping tool maintenance

No maintenance is required. However, it is good practice to keep the indenter tips free from residual deposits of the coloured band (some types of crimp contacts as per MIL standards are identified by coloured bands in the crimping area) and any other debris. A metal brush may be used for this purpose.
The following is strongly recommended

1 DO NOT immerse the tools in a solution to clean them.
2 DO NOT brush oil in the tools to lubricate them.
3 DO NOT try to disassemble the tool or repair it.

This is a high-precision crimping tool and must be used as such.

Tools and accessories for crimp contacts

for contacts of inserts series:		page:
CD	(10A)	**66 - 74**
CDD	(10A)	**76 - 83**
CDC	(16A)	**104 - 106**
CCE	(16A)	**130 - 135**
CMCE	(16A)	**137 - 145**
CQE	(16A)	**168 - 173**
CQEE	(16A)	**176 - 177**
CQ	(10A/16A)	**186 - 193**
CX 8/24	(16A/10A)	**194**
CX 6/**36** *	(10A)	**198**
CX 12/**2** *	(10A)	**199**
CX 6/**6** *	(16A)	**206**
MIXO	(10A/16A)	**271 - 306**

* the underlined polarities indicate those contacts that require the tools shown in this page

stripping and crimping machine

insertion tool - removal tools replacement tip

CCPR RN

description	part No.	part No.
automatic stripping, crimping machine Zoller+Fröhlich AM-03 Universal model	**ZFU-CD**	
insertion tool for insertion of the contacts into the inserts for crimped contacts up to 0,75 mm²		**CCINA**
removal tools for the extraction of contacts from the inserts		
for **10A** contacts [1]		**CCES**
for **16A** contacts [2]		**CQES**
replacement tip for CCES removal tool		**CCPR RN**

[1] for CQ, CD, CDD, CX inserts (10A auxiliary contacts) and MIXO module (10A)
[2] for CQ, CQE, CQEE, CCE, CMCE inserts (excluded 16+2), MIXO module (16A). For CX 6/6 (16A) and CDC. CMCE (16+2), CX inserts (16A contacts CX 8/24 insert) a 3 mm flat screwdriver should be used

Technical specifications

Drive	electro-pneumatic
Electric feeder	230V/50Hz
Absorbed power	120VA
Fuse (on the system filter module)	2 x 2 A mT
Air operating pressure	5.5 bar
Air consumption	2 nl/cycle
Flexible conductors in conformity with	IEC 60228 class 5
Rated section	0,34-2,5 mm² (22 AWG-14 AWG)
Feeding length	52 mm
Contacts	loose, turned
Contact breaker	see list of tools
Feeding	vibrating conveyor
Crimping form	4/8 ratchets
Cycle time	2,5 s - 3 s
Continuous sound level	< 70 dB (A)
Dimensions (l x d x h)	(530 x 500 x 480) mm
Colour	blue, RAL 5012
Weight	40 Kg

Tools list

contacts	**CD... (10A max)**						**CC... (16A max)**				
conductor section (mm²)	0,34	0,5	0,75	1,0	1,5	2,5	0,5	0,75	1,0	1,5	2,5
AWG (approximate)	22	20	18	18	16	14	20	18	18	16	14
feeding bowl/male	A						B (M)				
feeding bowl/female							B (F)				
feeding tube	A						B				
wire holder	0,34	0,5-1,5				2,5	0,5-1,5				2,5
starting unit	AB						AB				
stripping blades	V-shaped blades						V-shaped blades				
rear blade spacers left/right	0,5 mm / 1,0 mm						0,5 mm / 1,0 mm				
contact holder / pins	A (M)						B				
contact holder / bushes	A (F)										
contact stop	A						B				

Preset stripping and contact crimping programs

contacts	**CD... (10A max)**						**CC... (16A max)**				
conductor section (mm²)	0,34	0,5	0,75	1,0	1,5	2,5	0,5	0,75	1,0	1,5	2,5
AWG (approximate)	22	20	18	18	16	14	20	18	18	16	14
Program number	1A	2A	3A	4A	5A	6A	7B	8B	9B	10B	11B
stripping position (mm)	0,75	1,00	1,20	1,30	1,40	1,70	1,00	1,20	1,30	1,40	1,70
crimping position	1,30	1,35	1,40	1,50	1,55	1,60	1,40	1,40	1,50	1,55	1,70

Supplied with the following accessories:

- 1 vibrating conveyor feeder bowl for CD contact series
- 1 vibrating conveyor feeder bowl for male CC contact series
- 1 vibrating conveyor feeder bowl for female CC contact series
- 1 feeder tube (contact passage from vibrating conveyor to machine) for CD contact series
- 1 feeder tube (contact passage from vibrating conveyor to machine) for CC contact series
- 1 contact holder (in crimping position) for male CD contact series
- 1 contact holder (in crimping position) for female CD contact series
- 1 contact holder (in crimping position) for CC contact series
- 1 contact stop for CD contact series
- 1 contact stop for CC contact series
- 1 wire holder for 0,34 mm² cables
- 1 wire holder for 0,5 to 1,5 mm² cables
- 1 wire holder for 2,5 mm² cables
- 1 “GO / NO GO” control gauge
- 1 Allen wrench for setup operations
- 1 set of spacers to regulate the stripping length
- 1 removal tool to extract contacts from the crimping chamber

Use and maintenance instructions

General specifications

The **Zoller+Fröhlich AM-03** Universal stripping-crimping machine is a semi-automatic, electro-pneumatically operated bench machine used to quickly and reliably strip flexible copper wires and to crimp loose, turned crimp male and female, CD series (10A max) and CC series (16A max) contacts in a single run.
The contacts are automatically fed by means of a vibro-conveyor unit fitted on the top section of the machine.
The machine carries out the crimping operation with four, eight pressure point indenters, in compliance with the requirements set out in the MIL-C-22520/1 standard.
The stripping depth and crimping depth adjustment is controlled by a software controlled motor. Up to 50 different combinations may be stored and retrieved from the program; these combinations are useful, for example, to meet different requirements related to the wire insulator type and thickness.
The adjustment and programming operations are carried out by using the keypad located on the front panel. The LCD display shows all the functions, the main information and any errors.
The machine is fitted with devices used to check that the crimping cycle has been completed.
The general safety instructions described in the machine user and maintenance manual must be followed and the use of the machine should only be restricted to qualified and trained personnel.

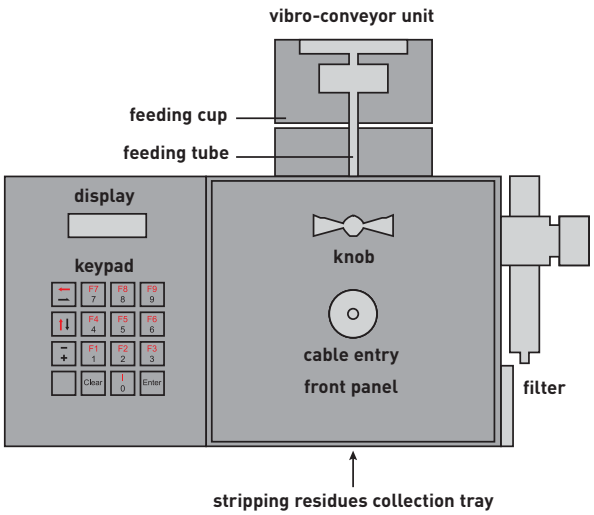

Crimping range

Wire section: from 0,34 mm² (AWG 26) to 2,5 mm² (AWG 14).

Description of the machine

To ensure a correct operation, the machine must be positioned on a hard bench, which does not amplify the effects of the internal movements occurring inside the machine. The machine consists of a vibrator which loads the contacts, of a tube which feeds the contacts and of a motorised wire stripping and contact crimping unit.
For each type and size of contact, the machine is provided with a factory stored preset program (see the machine user manual), which may be customised at any time.
The program allows the user to:
load, edit and save a program, as well as check/edit the stripping length and depth and the crimping depth.

Warning: when the machine is switched on, the working program is always the last program used.
The machine electronics adjustment is carried out by means of the keypad.
Select one of the 12 programs (see table on page 728) according to the contact used *.
Each program stores the stripping and crimping depth.
The stripping depth is the measurement in mm of how much the stripping blades must penetrate the insulator to strip it off, and depends on the type of cable used.
The crimping depth is the measurement in mm of how much the four indenters must penetrate the contact at the end of the crimping operation.
This depth depends on the size and shape of the contact (crimp shaft thickness) and determines the quality of the crimping operation in terms of gas tightness and resistance to tensile stress.

* Note: The machine also has a 12C program suitable for 10A, 2,5 mm² crimp contacts with 6 mm stripping length.
This program is therefore unsuitable for ILME CD series contacts (stripping length 8 mm).

Operational setups

The tool carrier carriage may be accessed by opening the front door, by anticlockwise rotation of the knob, which releases the pressure from all the valves.
For tool selection, see table on page 728.
- For CD series male and female crimp contacts (10A max), the feeding cup A must be fitted onto the machine, whilst for CC series crimp contacts (16A max) feeding cup B (M) for male contacts and B (F) for female contacts must be used.
- The feeding tubes to be fitted are A for CD series contacts and B for CC series contacts respectively.
- The wire holders which support the wire during the stripping stage feature three different sizes for CD contacts and two sizes for CC contacts.
- The contact holders are two (A (M) for male contacts and A (F) for female contacts) for CD series contacts, according to the different rear diameter between male and female contacts in this series, whilst there is only one holder (B) for CC series contacts.
- The contact holder is A for CD series contacts and B for CC series contacts.

Feeding the wire

The wire must be cut straight and the single braids must not be bent or pulled apart; in particular, the first 4cm must be perfectly straight.

Checking the stripping depth:

The machine can be operated simply as a stripping machine by disabling the crimping operation.
Please refer to the machine user manual.

Maintenance and repairs

Stripping residues collection tray: empty the tray approximately every 2000 cycles (the frequency depends on the sizes of the stripped wire and on the stripping length).
Pneumatically controlled maintenance unit: regularly drain any water that may have collected.
The trap may be cleaned with water.
To remove the trap, simply disconnect the air supply.
The filter unit may be unscrewed for cleaning purposes, then immerged in a cleaning agent (such as petrol or oil), thoroughly washed and dried.

Checking the calibration values

The correct calibration of the machine must be periodically checked by using the “GO / NO GO” caliper supplied as standard with the machine, by following the procedure described in the machine user and maintenance manual.

Tools and accessories for crimp contacts

for contacts series:	page:
CX PLF/PLM	299
CX MLF/MLM	299

manual crimping tool

Front view

polishing disc, polish paper, removal tool, jacket stripper and fibre stripper, cable cutter

CLES

description	part No.	part No.
crimping tool for POF **CX PL** and MOST **CX ML** contacts RENNSTEIG model [1]	**CLPZ R**	
polishing disc (RATIOPLAST 910 PS 0SC 00 001) for POF [2] and MOST [3] contacts		**CLDL**
polish paper:		
grain size 1000 (RATIOPLAST 910 PB 001 00 001)		**CLC1**
grain size 4000 (RATIOPLAST 910 PB 001 40 250)		**CLC4**
removal tool for the extraction of contacts from the CX L inserts		**CLES**
jacket stripper (RATIOPLAST 910 AZ 001 00 PA1) for POF [2] and MOST [3] fibre optic with PA jacket		**CLSG**
fibre stripper (RATIOPLAST 910 AB 001 00 001) for POF [2] fibre optic		**CLSP**
cable cutter (RATIOPLAST 910 SW 001 00 001) for Ø 2,3 mm max, for POF [2] and MOST [3] fibre optic		**CLTE**

[1] on request tool **CLPZ** RATIOPLAST 910 CZ 001 00 008 for contacts POF [2] **/** MOST [3] crimping on the back
[2] **POF = POLYMER OPTICAL FIBRE**
[3] **MOST = MEDIA ORIENTED SYSTEM TRANSPORT**

Note:
as alternative to crimping please use glue UHU PLUS ENDFEST 300 (BICOMPONENT), part No. "**CL GL**" (provide a strain relief by cable glands):
- mix the two components on a sheet (just a drop/each)
- the stripped ca. 5 mm POF [2] (that means the inner fibre) has to be dipped in the glue (just 5 mm);
- the POF [2] has to be pushed now in the contact/ferrule;
- min. one night to hard/dry the glue;
- finally the POF [2] has to be polished (polishing disc).

Rear view

CLDL

CLC1 / CLC4

CLSG

CLSP

CLTE

Use and maintenance instructions

General specifications

Strip the fibre about 12 mm for male contact and about 15 mm for female contact (see Figures 1 and 2).



Fig. 1 - Example of cable stripping for male crimp contact



Fig. 2 - Example of cable stripping for female crimp contact

Crimping instructions

- The data sheet for crimping tool CLPZ R explains how the crimping tool works and how to adjust the crimping depth and locator for the contacts to be crimped. Position the turret on 3, push and turn of 90° the knob of turret. Adjust the crimping depth on 2 (unscrew the allen screw, after adjusting refix the screw). For the female contact: unscrew the back of the contact, pull out the internal central part; on Figure 3 is indicated the crimping area (front part of contact). For male contact: crimp the front part of contact.
- Push the stripped fibre as far as possible into the contact sleeve so that it protrudes approx. 1 mm from the tip of the contact.

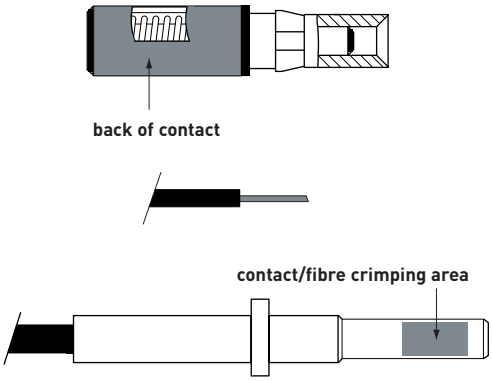

Fig. 3 - Female contact/fibre crimping area



Fig. 4 - Male contact/fibre crimping area

- Insert the contact together with the fibre optic cable as far as possible into the crimping opening of the crimping tool (CLPZ R, see Figure 5) while applying gentle pressure to the fibre optic cable and connector, close the tool until you hear it disengages.

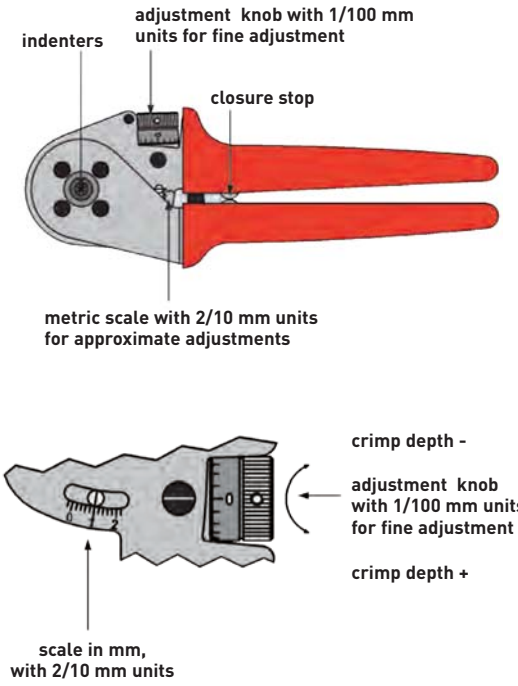

Fig. 5 - Manual crimping tool

Finishing the front surface

- Insert the contact into the polishing disc (CLDL) as shown in Figure 6. Work on a smooth surface (such as a sheet of glass), use grade 1000 polishing paper to grind off the protruding fibre and polish it with grade 4000 polishing paper.
- Wipe away any residue remaining after grinding. The best optical attenuation values are achieved when a wet grinding method is used.

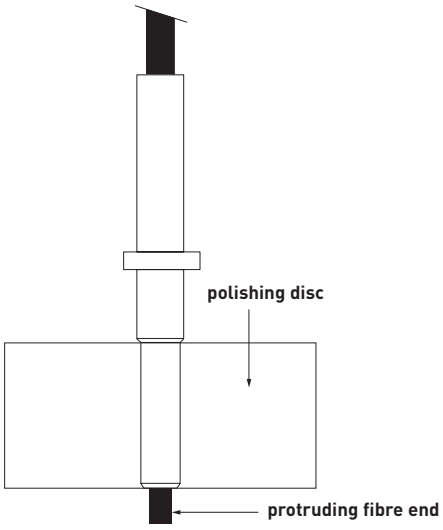

Fig. 6 - Polishing Disc with Guide for Connector Sleeve

Final mounting instructions

Screw the back female part contact. Put inside the CX 04 LF/ CX 04 LM insert.

Tools and accessories for crimp contacts

for contacts series:	page:
CLF DD/CLM DD	677

manual crimping tool

Front view

polishing disc, polish paper, removal tool, jacket stripper and fibre stripper, cable cutter

CCES

description	part No.	part No.
RENNSTEIG model crimping tool for POF [1] CLF DD / CLM DD contacts	**CLPZ R**	
polishing disc (RATIOPLAST 910 PS 0SC 00 001) for POF [1] contacts		**CLDL DD**
polish paper: grain size 1000 (RATIOPLAST 910 PB 001 00 001)		**CLC1**
grain size 4000 (RATIOPLAST 910 PB 001 40 250)		**CLC4**
removal tool, for the extraction of contacts from the CD, CDD, CX inserts		**CCES**
jacket stripper (RATIOPLAST 910 AZ 001 00 PA1) for POF [1] fibre optic with PA jacket		**CLSG**
fibre stripper (RATIOPLAST 910 AB 001 00 001) for POF [1] fibre optic		**CLSP**
cable cutter (RATIOPLAST 910 SW 001 00 001) for Ø 2,3 mm max, for POF [1] fibre optic		**CLTE**

[1] **POF = POLYMER OPTICAL FIBRE**

Rear view

CLDL DD

CLC1 / CLC4

CLSG

CLSP

CLTE

Finishing the front surface of the fibre optic

- Before crimping, insert POF fibre optic into the polishing disc (CLDL DD) as shown in Fig. 1.
- Work on a smooth surface (such as a sheet of glass), use grade 1000 polishing paper to grind off the protruding fibre and polish it with grade 4000 polishing paper.
- Polish making 8-shape circles.
- Wipe away any residue remaining after grinding.

The best optical attenuation values are achieved when a wet grinding method is used.

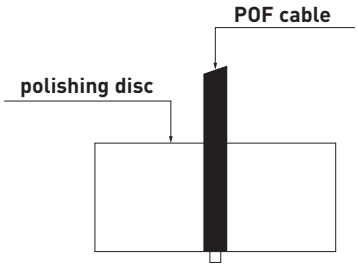

Fig. 1 - Polishing Disc with Guide for POF fibre

General specifications

Strip the fibre 19 mm for male contact and 14 mm for female contact (refer to Figures 2 and 3).



Fig. 2 - Example of cable stripping for male crimp contact



Fig. 3 - Example of cable stripping for female crimp contact

Crimping instructions

- The CLPZ R crimping tool data sheet explains how the crimping tool works and how to adjust the crimping depth and locator to crimp the contacts as shown in Fig. 4.
- Select position no. 1 on the turret (for male contact) and no. 2 (for female contact), push and turn of 90° the knob of the turret.
- Adjust the crimping depth on 1,45 (unscrew the allen screw, after adjusting refix the screw).
- Insert the contact together with the fibre optic cable as far as possible into the crimping opening of the crimping tool (CLPZ R, refer to Fig. 5) while applying gentle pressure to the fibre optic connector, close the tool until you hear it disengages.

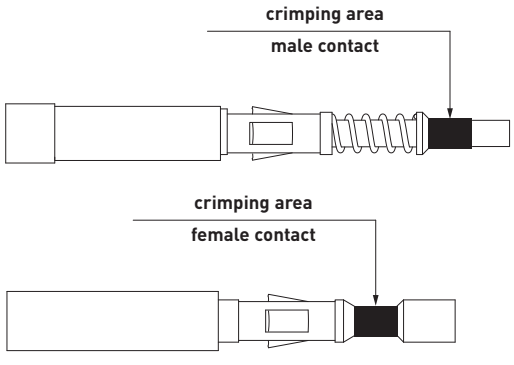

Fig. 4 - Crimping area

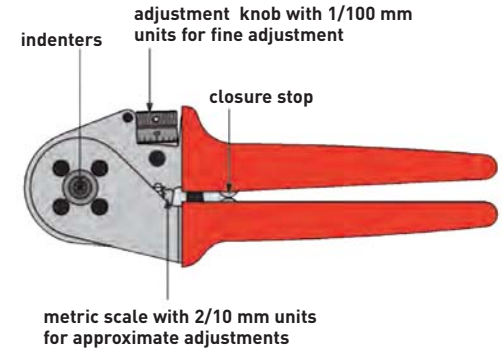

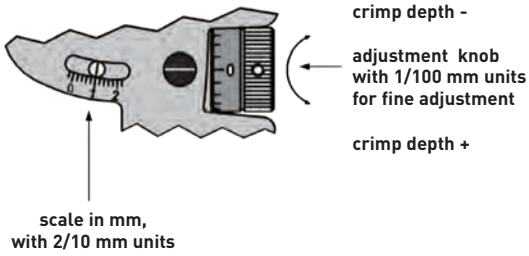

Fig. 5 - Manual crimping tool

Final mounting instructions

Screw the back female part contact. Put inside the CD/CDD/CX insert.

Watch our online tutorial

Tools and accessories for crimp contacts

for contacts series:	page:
CX 50 RF/M	300
CX 75 RF/M	300

manual crimping tool

removal tool
coaxial cable stripper

description	part No.	part No.
crimping tool for **CX 50 RF/M** and **CX 75 RF/M** coaxial contacts	**COPZ**	
removal tool for the extraction of contacts from the CX R inserts		**CLES**
coaxial cable stripper for the preparation of the cable according to the drawing		**COST**

Watch our online tutorial

conductor stripping



coaxial contacts	for cables	ø external	part No.
50Ω	RG 316/U	2,49 ±0,1	CX 50 RF CX 50 RM
	RG 174/U	2,79 ±0,127	
	RG 188 A/U	2,79 max	
75Ω	RG 179 B/U	2,54 ±0,127	CX 75 RF CX 75 RM
	RG 187 A/U	2,79 max	
	TZC 75 101	2,79 max	

Crimping instructions
1) Strip the cable as per drawing using the tool COST.
2) Crimp the central contact of coaxial connector in the correct crimping area with the position 0,72 of crimping tool COPZ.
3) Insert the brass back end on the cable.
4) Insert the central contact in the coaxial connector, put the braid shield around the back cylinder of contact.
5) Insert the brass back end on the braid shield.
6) Crimp the ferrule with position 3,25 of crimping tool COPZ.

We recommend the use of code pins CRF CX / CRM CX.
fit the brass tube on the cable
As alternative to crimping, it is possible to solder the central contact.

CX 50 RF/M and CX 75 RF/M coaxial contacts

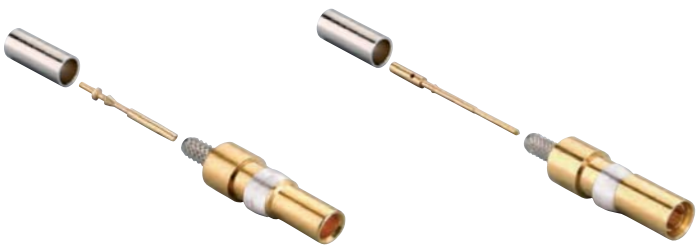

dimensions shown in mm are not binding and may be changed without notice

Tools and accessories for crimp contacts

for insert series:	page:
CJ (RJ45)	223
MIXO (RJ45)	304 - 307

manual crimp pliers

shielded cable stripper

description	part No.	part No.
RJ45 CJ series plug insert crimp pliers basic tool YAMAICHI Y-ConTool-11 mod. with plug insert inserter	**CJPZ Y**	
Y-ConTool-20 cable stripper cuts the cable sheath and releases the wires in a single operation		**CJST**

Watch our CX 8 JM online tutorial

RJ45 plug insert crimp pliers mounting instructions

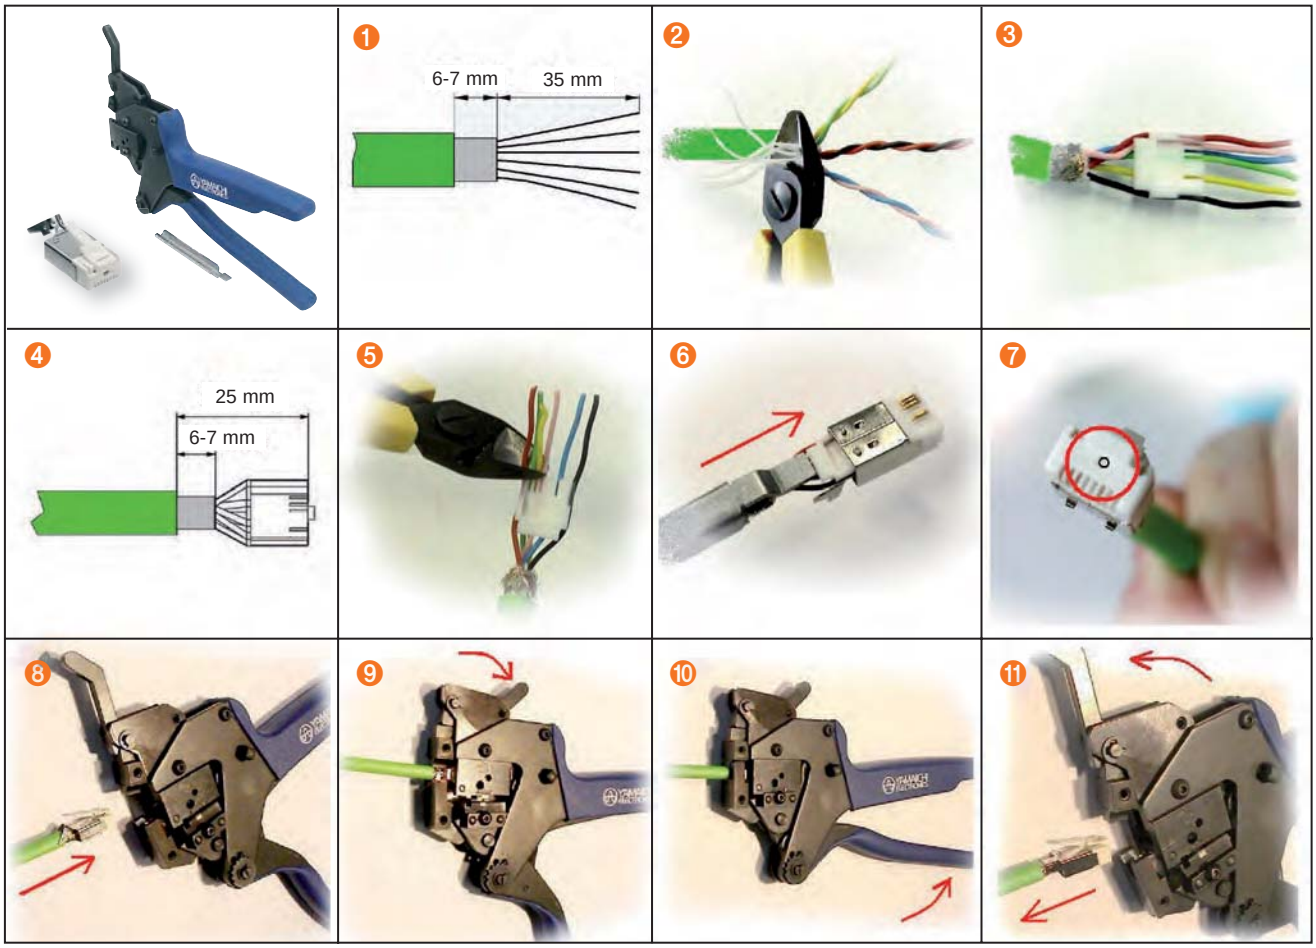

Tools and accessories for crimp contacts

inserts:	page:
MIXO (RJ45) CX 8 J6M	302

manual crimp pliers

shielded cable stripper

description	part No.	part No.
RJ45 CJ series plug insert crimp pliers	**CJPZ T**	
cable stripper cuts the cable sheath and releases the wires in a single operation		**CJST**

RJ45 plug insert crimp pliers mounting instructions

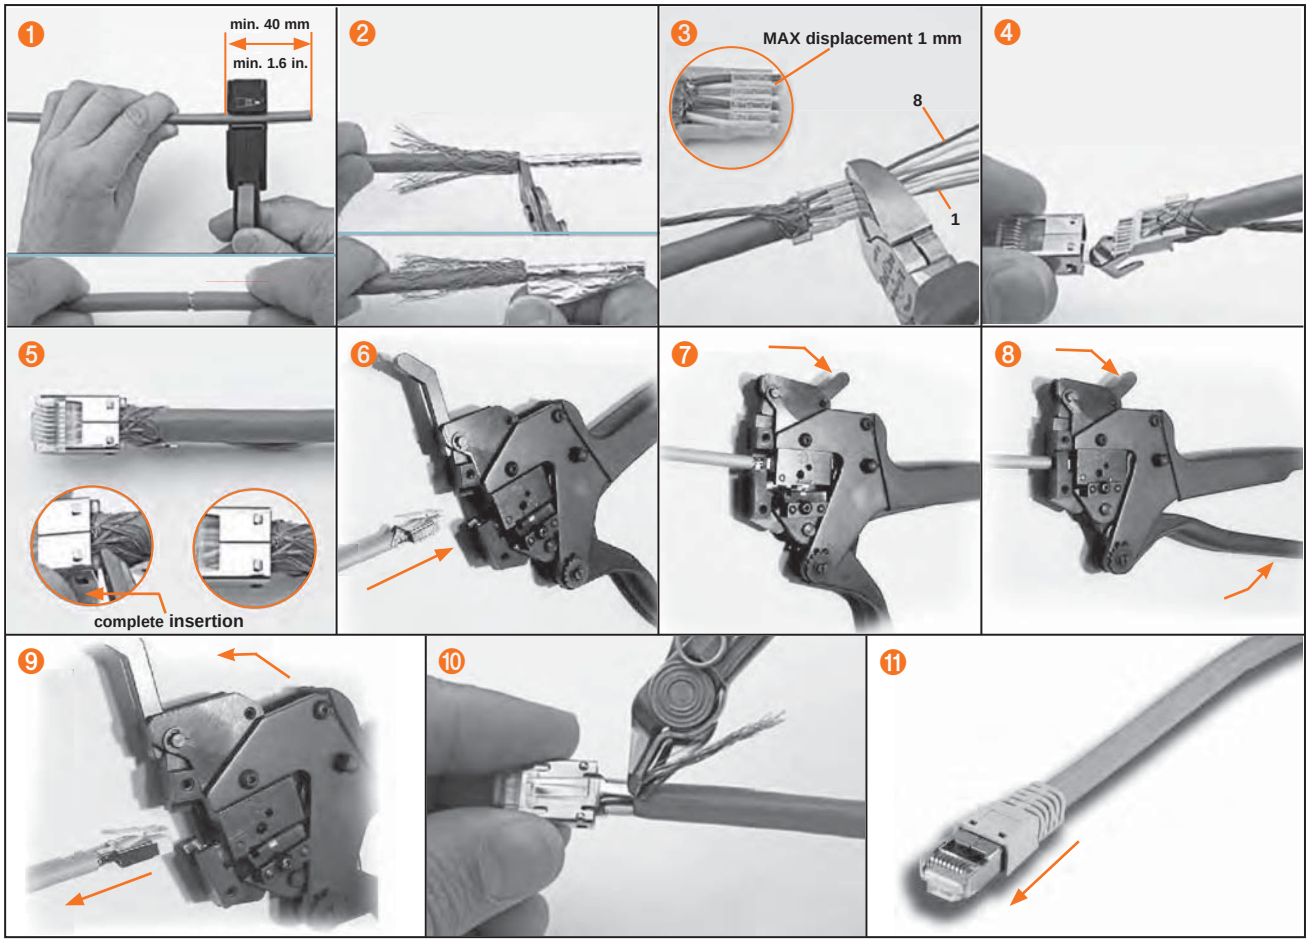

Watch our online tutorial

Tools and accessories for crimp contacts

inserts:	page:
MIXO (RJ45) CX 8 J6IM	302

manual IDC pliers

description	part No.
wrenche pliers for CX 8 J6IM	**CJPW K**

CX 8 J6IM IDC plug insert crimp pliers mounting instructions

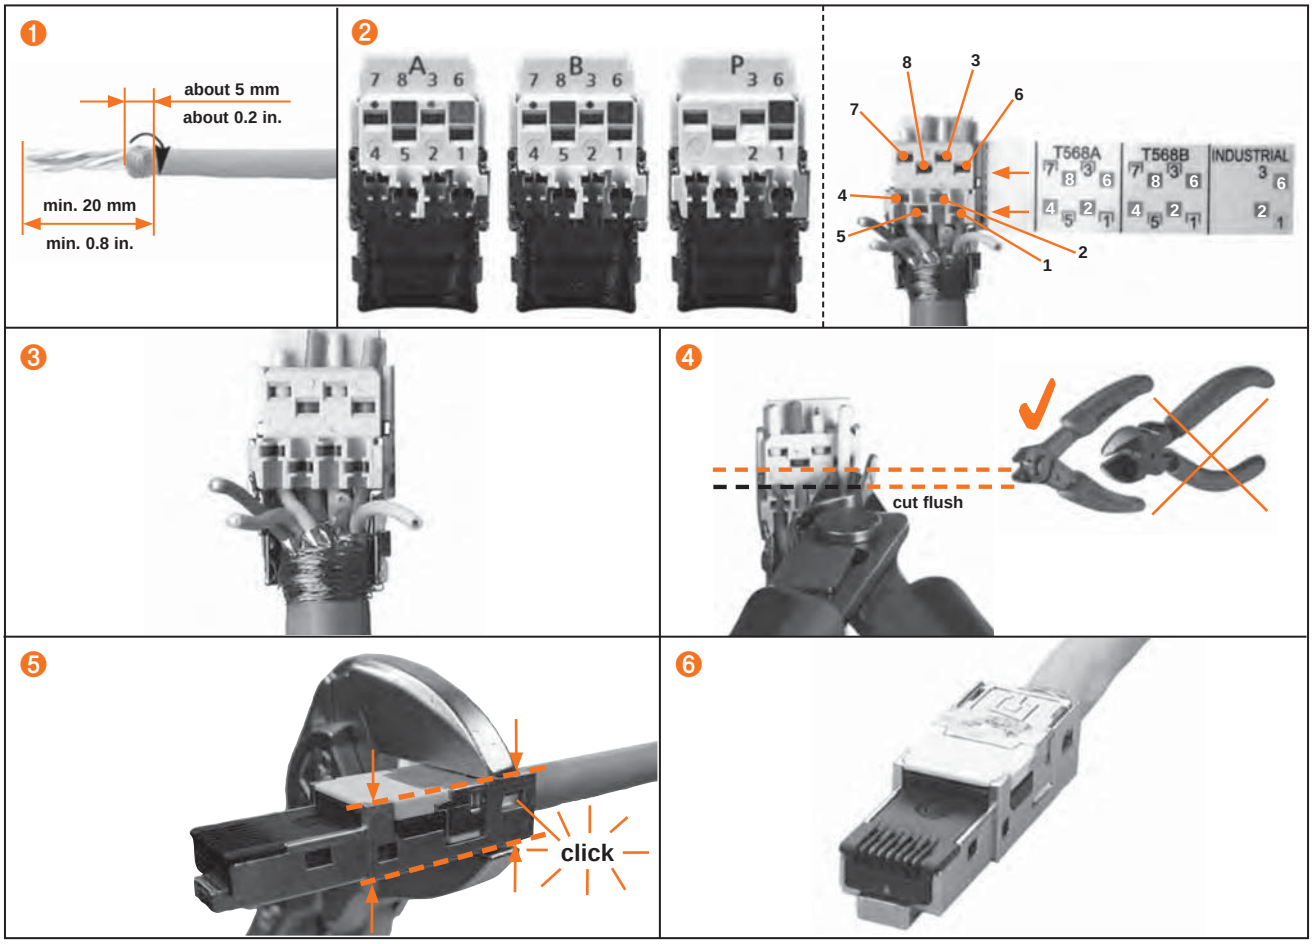

Connection					Application			
RJ45 PIN No.	Colour Code T568 A	Colour Code T568 B	DIN 47100	Industrial PROFINET	10BT/ 100BT	1 Gigabit 10 Gigabit Ethernet	Token Ring ISDN/So	Upo/ TEL
1	WH-GN	WH-OG	WH	YE	•	•		
2	GN	OG	BN	OG	•	•		
3	WH-OG	WH-GN	GN	WH	•	•	•	
4	BU	BU	YE	-		•	•	•
5	WH-BU	WH-BU	GY	-		•	•	•
6	OG	GN	PK	BU	•	•	•	
7	WH-BN	WH-BN	BU	-		•		
8	BN	BN	RD	-		•		

Legend

BN = brown
BU = blue
GN = green
GY = grey
OG = orange
PK = pink
RD = red
WH = white
YE = yellow

Watch our online tutorial

CRIMPING TOOLS

for SQUICH® terminal

for insert series:	page:
CDSH	86 - 91
CSAH	99 - 103
CSH	110 - 115
CSH S	122 - 127
CMSH	136 - 144

reopening tool

description	part No.
reopening tool for **SQUICH®** actuator button	**CSHES**

It allows the release of the connection from a SQUICH® terminal without disassembly of the connector insert from the bulkhead mounting housing, by operating from the accessible rear side of the control panel.
With mains power disconnected (connector not under voltage), the smoothed hook-shaped tool tip is inserted in the slot of the actuator button head of the corresponding terminal, then by a delicate tilt towards the centre of the connector, the tools acts as a lifting lever for the actuator button, releasing the wire.

CAUTION: Not suitable for SQUICH® terminals of CKSH inserts or MIXO CX 05 SH modular inserts.

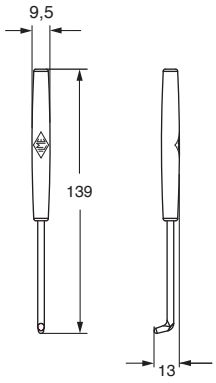

Reopening tool use instructions

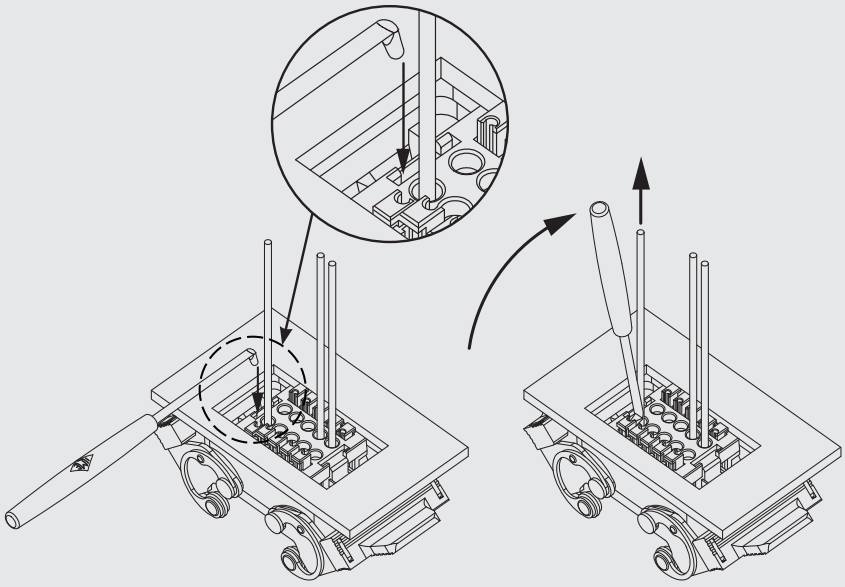

dimensions shown in mm are not binding and may be changed without notice

punching tool for bulkhead mounting housing

hydraulic panel punching tool

punching unit

description	part No.	part No.
hydraulic punching tool (without punching unit)	**CCW CT**	
punching unit for M25 hole [1]		**CCW M25**
punching unit for M32 hole		**CCW M32**
punching units for panel cut-out of bulkhead mounting housings		
for size 21.21 CK/CKA		**CCW PD 03**
for size 21.21 CGK IP68		**CCW PD 03G**
for size 21.21 IVG		**CCW PD 03 IVG**
for MIXO ONE		**CCW PD 1M**
for size 49.16		**CCW PD 15**
for size 66.16		**CCW PD 25**
for size 44.27		**CCW PD 06**
for size 57.27		**CCW PD 10**
for size 77.27		**CCW PD 16**
for size 104.27		**CCW PD 24**

Punching unit	Bulkhead mounting housings Size	Pilot hole (mm)	Mounting configuration: Hydraulic tool operation CCW CT	Mounting configuration: Manual operation	Draw stud (Delivered with)	Adaptor (Delivered with)	Spacer (Delivered with)
CCW M25 [2] dimensions ⌀ 25 mm	M25 hole or MKA IAF25 housings	⌀ 10,0	with adaptor and with spacer	---	**CCW CT**	**CCW CT**	**CCW CT**
CCW M32	M32 hole for MKA IF	⌀ 20,0	with adaptor and with spacer	---	**CCW CT**	**CCW CT**	**CCW CT**
CCW PD 03	21.21	⌀ 14,5	with adaptor and with spacer	with screw ball-bearing nut (no adaptor and no spacer)	**CCW PD 03**	**CCW PD 03**	**CCW CT**
CCW PD 03 G	21.21 (CGK IP68)				**CCW PD 03 G**	**CCW PD 03 G**	**CCW CT**
CCW PD 03 IVG	21.21 (IVG)	⌀ 14,5	with adaptor and with spacer	with screw ball-bearing nut (no adaptor and no spacer)	**CCW PD 03 IVG**	**CCW PD 03 IVG**	**CCW CT**
CCW PD 1M	MIXO ONE	⌀ 14,5	without adaptor and without spacer	with screw ball-bearing nut (no adaptor and no spacer)	**CCW PD 1M**	**CCW PD 1M**	**CCW CT**
CCW PD 15	49.16	⌀ 20,4	without adaptor and without spacer	---	**CCW PD 15**	NN	NN
CCW PD 25	66.16				**CCW PD 25**	NN	NN
CCW PD 06	44.27	⌀ 25,4	without adaptor and without spacer	---	**CCW PD 06**	NN	NN
CCW PD 10	57.27				**CCW PD 10**	NN	NN
CCW PD 16	77.27				**CCW PD 16**	NN	NN
CCW PD 24	104.27				**CCW PD 24**	NN	NN

[2] **CCW M25** can be used to drill M25 pilot hole; NN = Not Needed

❸, ❻ and ❼ delivered with CCW CT

LEGEND:
- ❷ **Punch** [1]
- ❸ **Draw stud 3/8”**
- ❹ **Die**
- ❻ **Spacer**
- ❼ **Adaptor 3/8” - 3/4” UNF**

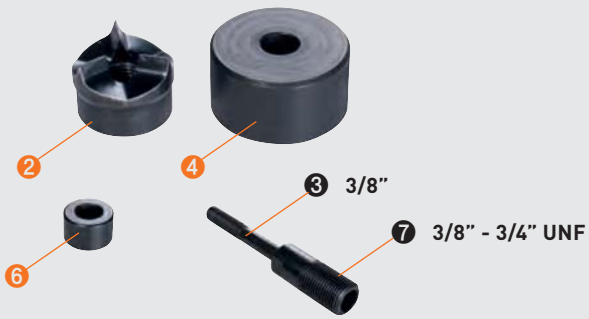

Use and maintenance instructions

Hydraulic operating instructions (CCW PD ..)

1. Screw the short thread of the 13,0/11,0 mm draw stud ❸ into the ¾" UNF adaptor ❼ (CCW PD 03/03 G only).
2. Screw the 13,0/11,0 mm draw stud ❸ complete with the ¾" UNF adaptor ❼ onto the hydraulic cylinder or screw the short thread of any of the larger draw studs ❸ (without the adaptor) directly onto the hydraulic cylinder (CCW PD 03/03 G only).
3. Put the die ❹ onto the draw stud ❸ and move it towards the hydraulic cylinder. If necessary, place the spacer ❻ between the hydraulic cylinder and die ❹.
4. Insert draw stud ❸ with pre-mounted die through the pilot hole in the sheet until the die abuts the sheet.
5. Place the punch ❷ onto the draw stud and move it towards the sheet until it abuts the sheet.
6. Screw the counter nut ❶ onto the thread of the draw stud ❸.
7. Adjust punch rectangularly (4 marks on die) and tighten counter nut manually.

Punching

8. Operate hydraulic punch CCW CT driver until punch is drawn through sheet.
9. Depressurise hydraulic punch driver after punching.
10. Remove the counter nut ❶ and punch ❷ from the draw stud ❸.
11. Remove the die ❹ from the draw stud ❸ and remove slugs from the die ❹.

Drilling mounting holes

When punching, the position of mounting holes are marked. Use suitable spiral drill to drill mounting holes.

Manual operating instructions (CCW PD 03/..03 G/..03 IVG/ and ..1M)

Knockout punch mounting

1. Screw the ball-bearing nut ❺ onto the long thread of the draw stud 13,0/11,0 mm ❸. Put the die ❹ onto the draw stud ❸ and move it towards the ball bearing nut ❺.
2. For further steps refer to hydraulic operating instructions steps 4 to 7.

Punching

3. Use screw wrench SW 24 to rotate ball-bearing nut ❺ until punch is drawn through sheet.
4. For further steps refer to hydraulic operating instructions steps 10 to 11.

Prior to commisioning please read operating instructions
Components under voltage must not be machined.
Prior to operating ensure de-energised state of the work environment (e.g. switch cabinet) or the material to be machined.

Hydraulic operating CCW PD.. (except CCW PD 03/ 03 G)



Hydraulic operating (CCW PD 03G/..03 IVG/..1M and CCW M32)

Manual operating (CCW PD 03/..03 G/..03 IVG/ and ..1M)



LEGEND:

❶ Counter nut
❷ Punch
❸ Draw stud
❹ Die
❺ Ball-bearing nut
❻ Spacer
❼ Adaptor

TOOLS

Use and maintenance instructions

ILME Product Number	Bulkhead mounting housings Size	Accessories	Draw stud [3]	Pilot hole	Sheet thickness	Manual screw-wrench use	Hydraulic use
CCW M25 (***)	M25 hole or MKA IAF25 housings	Punch and die 25,4 M25	3/8”	10,0 mm	St./Fe. 2 mm		● **(**)**
CCW M32	M32 hole for MKA IF	Punch and die 32,5 M32	13,0/11,0 mm	20,0 mm	St./Fe. 2 mm		●
		Panel cut-out (mm)					
CCW PD 03	21.21	22,2 x 22,2	13,0/11,0 mm	14,5 mm	St./Fe. 2 mm	●	● **(*)**
CCW PD 03 G	21.21 (CGK IP68)	21,3 x 21,3	13,0/11,0 mm	14,5 mm	St./Fe. 2 mm	●	● **(*)**
CCW PD 03 IVG	21.21 (IVG)	26 x 26	13,0/11,0 mm	14,5 mm	St./Fe. 2 mm	●	● **(*)**
CCW PD 1M	MIXO ONE	32 x 27,5	13,0/11,0 mm	14,5 mm	St./Fe. 2 mm	●	●
CCW PD 15	49.16	24,0 x 57,0	19,0/14,0 mm	20,4 mm M20	St./Fe. 3 mm		●
CCW PD 25	66.16	24,0 x 73,0	19,0/14,0 mm	20,4 mm M20	St./Fe. 3 mm		●
CCW PD 06	44.27	36,0 x 52,0	25,0/21,0 mm	25,4 mm M25 [2]	St./Fe. 3 mm		●
CCW PD 10	57.27	36,0 x 65,0	25,0/21,0 mm	25,4 mm M25 [2]	St./Fe. 3 mm		●
CCW PD 16	77.27	36,0 x 86,0	25,0/21,0 mm	25,4 mm M25 [2]	St./Fe. 3 mm		●
CCW PD 24	104.27	36,0 x 112,0	25,0/21,0 mm	25,4 mm M25 [2]	St./Fe. 3 mm		●

(*) Adaptor (delivered with **CCW PD 03/03G/IVG**) and spacer (delivered with **CCW CT**) needed; **(**)** Adaptor M25 and spacer (delivered with **CCW CT**) needed;
(***) CCW M25 can be used to drill M25 hole.

Panel cut-out dimensions (in mm)

for size 21.21



for size 21.21 (CGK IP68)



for size 21.21 (MKA IAF25)



for size 49.16

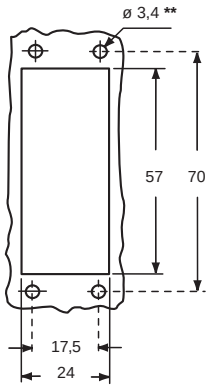

for size 66.16

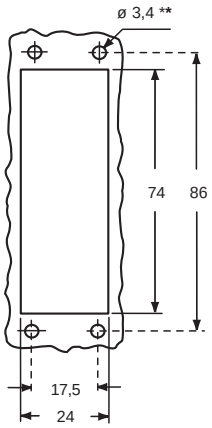

for size 21.21 (IVG)



for one module (MIXO ONE)



for size 21.21 (MKA IF)



for size 44.27



for size 57.27

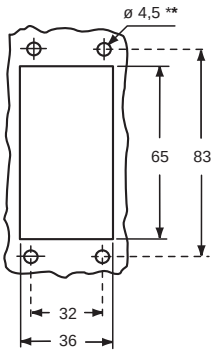

for size 77.27

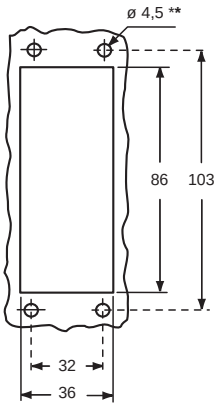

for size 104.27

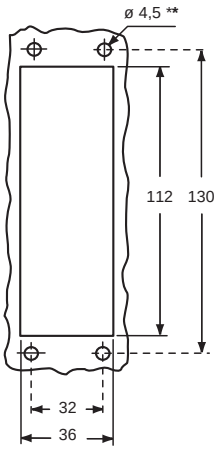

*** the fixing holes are not indicated**
**** fixing holes to be pierced**

TOOLS

APPENDIX

DIMENSIONING OF CLEARANCES AND CREEPAGE DISTANCES 744

EU ENVIRONMENTAL LEGISLATION 750

FIRE PROTECTION STANDARDS FOR RAILWAY APPLICATIONS 751

STANDARS AND CERTIFICATIONS 753

SPECIFICATIONS 753

ILME SMART CONFIGURATOR 754

INDEX OF PART NUMBERS 756

Dimensioning of clearances and creepage distances

European standard EN 61984:2009 which incorporates without modification the corresponding international standard IEC 61984 Ed. 2.0 (2008-10) is the reference standard for safety requirements and the relevant tests for multipole connectors for industrial uses.

It is applicable to connectors with rated voltage values of over 50 V, and up to 1 000 V, and rated currents values of up to 125 A per pole, for which no dedicated standard exists, or to which the detail specifications or the manufacturer refer as regards the safety aspects. It can be used as a guide for connectors with rated current exceeding 125 A per pole and for those with a rated voltage up to 50 V (the latter excluded from the scope of the Low Voltage Directive 2014/35/EU).

The last edition of the EN 61984 standard also introduced the definition of connector without breaking capacity (COC) to better distinguish this category of products from connectors with breaking capacity (CBC).

For the safety and performance requirements of connector terminals, which depend on the connection technology adopted, this standard integrally refers to the corresponding standards (EN IEC 60999 series for screw-type and screwless type terminals, EN IEC 60352 series for solderless connections and relevant terminations).

For determining the minimum clearances and creepage distances (i.e. distances through-air and along the insulating surface) for connectors, this standard now refers, without any modifications to standard IEC 60664-1 Ed. 2.0 (2007-04)[1].

In the following, the method for determining the minimum insulation in connectors is illustrated with reference to the IEC 60664-1 standard. The rated characteristics of each ILME connector family are provided on pages 14-19. As already in the first edition, the following are now obsolete: the insulation group concept and the distinction of rated voltage values into DC and AC, voltage values 220 V and 380 V were adapted to standardised values 230 V and 400 V according to IEC 60038[2] and some concepts were taken from the regulations for LV electrical systems of the IEC 60364[3] series, such as:

a. the overvoltage category (I, II, III, IV), according to the use of the equipment[4]: this is correlated with the transient overvoltages taken as a basis for determining the rated impulse voltage;
b. the pollution degree (1, 2, 3);
c. the material group (I, II, III) classification of insulating materials according to their resistance to tracking;
d. the electric field condition *(homogenous or inhomogeneous)*.

a. Overvoltage categories (or impulse withstand category)

The overvoltage category of a circuit or of an electrical system is identified by a conventional numeral (from I to IV) based on the limitation or the control of the assumed transient overvoltage values obtained on a circuit or electrical system and depends on the means used to reduce the overvoltages.

Table F.1 provides the rated impulse voltage for equipment energised directly from the low voltage mains as a function of the rated voltage of the power supply system, of the relevant line-to-neutral voltage and of the overvoltage category.

TABLE F.1.
Rated impulse voltage for equipment powered directly from the low-voltage mains (IEC 60664-1 Ed. 2.0 2008-10)

Nominal voltage according to IEC 60038 (CENELEC HD 472 S1, CEI 8-6)		Voltage line to neutral derived from nominal voltages a.c. or d.c.	Rated impulse voltage [b] Overvoltage category			
V	V	≤	V			
Three -phase [a]	Single phase		I	II	III	IV
		50	330	500	800	1500
		100	500	800	1500	2500
	120-240	150	800	1500	2500	4000
230/400 277/480		300	1500	2500	4000	6000
400/690		600	2500	4000	6000	8000
1000		1000	4000	6000	8000	12000

a) The "/" symbol indicates a four-wire three phase distribution system (star distribution). The lower value is the voltage between phase and neutral (phase voltage), whereas the higher value is the voltage between the phases (mains voltage). Where only one value is indicated, it refers to three-wire, three-phase systems (delta distribution) and specifies the line-to-line value.
b) Equipment with these rated impulse values can be used in installations in accordance with standard IEC 60364-4-443 (Italian standard CEI 64-8/4 Section 443, German DIN VDE 0100-443).

Industrial machinery and installations with fixed connection to the low voltage supply system, hence their relevant components including multipole connectors, constitute an example of equipment belonging to overvoltage category III.

Examples of general equipment that comes under overvoltage category II are household electrical appliances, portable tools and other household or similar equipment.
For distribution networks with rated voltage 230/400 V (star distribution, neutral-earthed) and overvoltage category III (impulse withstand category III), the required rated impulse withstand voltage is 4 kV.
For distribution networks with rated voltage 400 V or 500 V (star distribution without neutral or with unearthed neutral, or delta distribution unearthed or corner-earthed) and overvoltage category III (impulse withstand category III), the required rated impulse withstand voltage is 6 kV.

b. Pollution degree

Pollution indicates the presence of any kind of foreign matter, whether solid, liquid or gaseous (ionised gas) that can result in a reduction of dielectric strength or surface resistivity of the insulation. The standard establishes four pollution degrees. The categories are identified by conventional numerals based on the quantity of polluting agents or on the frequency of the phenomenon which determines the reduction of the dielectric strength and/or of the surface resistivity.

Pollution degree 1
No pollution or only dry, non-conductive pollution. The pollution has no influence.

Pollution degree 2
Only non-conductive pollution occurs except that occasionally a temporary conductivity caused by condensation is to be expected.

1) Endorsed with modifications as European standard EN 60664-1:2007 and published by CENELEC member countries as a national standard: Italian standard CEI EN 60664-1:2008-04 (CEI 109-1), German standard DIN EN 60664-1:2008-01 (VDE 0110-1)
2) EN 60038:2011 (IEC 60038-2009, modified), Italian standard CEI EN 60038:2012-08 (CEI 8-6), German standard DIN EN 60038:2012-04 (VDE 0175-1)
3) Italian standard CEI 64-8, German standard DIN VDE 0100
4) EN 60664-1 clarifies that the term "overvoltage category" is synonymous with "impulse withstand category" used in Clause 443 of IEC 60364-4-44

Pollution degree 3
Conductive pollution occurs or dry non-conductive pollution occurs which becomes conductive due to condensation which is to be expected.

Pollution degree 4
Continuous conductivity occurs due to conductive dust, rain or other wet conditions.

Pollution degree 3 is typical of an industrial environment or similar, while pollution degree 2 is typical of a household or similar environment.

EN 61984 allows the dimensioning of creepage distances (insulating distances along the surfaces) of connectors installed in enclosures with degree of protection ≥IP54 for the pollution degree immediately below that of the application environment (e.g.: 2 instead of 3).

Abstract from EN 61984
6.19.2.1 For a connector with a degree of protection IP54 or higher according to IEC 60529, the insulating parts inside the enclosure may be dimensioned for a lower pollution degree.
This lower pollution degree also applies to mated connectors where the enclosure is ensured by the connector housing and which may only be disengaged for test and maintenance purposes.

One may therefore use connectors installed in housings or enclosures with a degree of protection ≥ IP54, at the rated voltage suitable to pollution degree 2 in industrial applications with pollution degree 3, if, in compliance with EN 61984, the connector coupling is opened only occasionally for test and maintenance purposes. Even in the event of temporary or limited permanence in uncoupled state, a closing cover is recommended in order to guarantee at least the IP54 degree of protection.
However, this does not apply to connectors which remain uncoupled and exposed to an industrial atmosphere for an indefinite period.
It should also be noted that pollution might penetrate inside coupled connectors also from remote parts of the electrical system, e.g. through conduits providing cable entry to the connectors enclosure.
Moreover, connector enclosures are usually supplied without cable entry devices, to let the installer select the most suitable one for its end-use application. The IP degree of protection – or the Type rating according to North American standards – marked or assigned to the connector enclosures is guaranteed only for mated and locked connectors that employ cable entry devices with IP degree and/or Type rating equal or higher than those of the connector enclosures chosen, installed in a workmanlike manner.

Examples of application for the selection of pollution degree 2 for a connector.
- Connector on an electric motor controller, which is uncoupled only to replace a faulty motor, also in cases where pollution degree 3 is instead specified for the system.
- Connector on a machine built in modules, which is opened only for transport purposes and which is used only for faster installation and for safer putting into service. One must make sure that the connector has not been polluted during transport. To ensure this has not occurred, protective covers or adequate packing must be used.
- Connector inside a panel with degree of protection ≥ IP54. In this case one may even avoid equipping the connector with an IP54 enclosure.

c. Material group

The insulating material influences the determination of the minimum creepage distance. It is characterised according to the damage it suffers from the concentrated release of energy during scintillations when a surface leakage current is interrupted due to the drying of the contaminated surface.

The CTI (comparative tracking index, index of resistance to surface currents, defined in EN IEC 60112) is assumed as index of the resistance to creep currents of the insulating materials in the presence of atmospheric contaminating agents.

The CTI constitutes the numerical value of the maximum voltage at which a material can resist against 50 drops of an electrolytic test solution without tracking failure, i.e. without failure of insulation due to a progressive formation of conductive paths on the surface and/or within the solid insulating material (causing permanent electric arc between the electrodes of the test equipment) due to the combined effect of electric stress and electrolytic contamination.

Solid insulating materials are classified into four groups:

group I	**600 ≤ CTI**
group II	**400 ≤ CTI < 600**
group IIIa	**175 ≤ CTI < 400**
group IIIb	**100 ≤ CTI < 175**

For the purpose of determining the minimum creepage distances, the values for groups IIIa / IIIb (Table F.2, IEC 60664-1) are identical.

The insulating materials used to manufacture the ILME multipole connectors belong to groups IIIa / IIIb.

d. Electric field conditions

Minimum clearance (shortest distance in air between two conductive parts) is determined by Table F.2 of IEC 60664-1, bearing in mind the following influencing factors:

- the rated impulse voltage;
- the electric field condition;
- the altitude: the values specified in Table 2 are valid up to 2 000 m; for higher altitudes, the corrective factors specified in Table F.8 of IEC 60664-1 shall be used;
- the micro-environment.

The shape and arrangement of the conductive parts influence homogeneity of the electric field, hence the clearance able to insulate live parts. Clearances of case A (inhomogeneous field) withstand the corresponding impulse voltage under all conditions: clearances not less than those specified in Table F.2 – case A can be used irrespective of the shape and arrangement of the conductive parts and without verification by an impulse test.

1. Determination of clearances

To determine minimum clearance, the following must be identified in accordance with IEC 60664-1 standard:

a) the rated voltage of the power supply (usually 230/400 V thus a conventional voltage line-to-neutral of 300 V, in star distribution networks with earthed neutral, or 400 V for star networks without neutral, or with unearthed neutral, or in networks with secondary windings of the distribution transformer delta connected, unearthed or corner-earthed and, therefore, with conventional line voltage 600 V);

b) the overvoltage category (usually III).

c) The rated impulse voltage determined from Table B.2 of IEC 60664-1 (usually 4 kV or 6 kV).

d) The electric field condition to which the parts through which the current flows shall be subjected (worst case = inhomogeneous field) and the pollution degree (usually 3).

EN 61984 requires that the clearance be dimensioned according to IEC 60664-1. For clearances up to 2 mm, typically for printed circuit board connectors, the reference standard may alternatively be IEC 60664-5, to be read in conjunction with IEC 60664-1. The minimum clearance (shortest distance in air between two conductive parts) is therefore given by Table F.2 of IEC 60664-1, according to the rated impulse voltage derived from Table B.2 of the same standard, which is part of Annex B (informative) Nominal voltages of supply systems for different modes of overvoltage control. This table is attributable in particular to devices that do not foresee upstream any overvoltage surge arrester; it represents, therefore the "worst case" and replaces Table 5 of the previous edition of EN 61984. The rated impulse voltage must be chosen based on the nominal supply voltage and the overvoltage category. The assignment of connectors to a particular overvoltage category (usually III) is performed according to the rules of IEC 60664-1.

Here below three important definitions from EN 61984 to consider regarding "voltage":

rated voltage
value of voltage assigned by the manufacturer to the connector and to which the operating and performance characteristics are referred

NOTE – A connector may have more than one rated voltage value.

[IEC 60664-1:2007, definition 3.9, modified].

rated impulse voltage
impulse withstand voltage assigned by the manufacturer to the connector, characterizing the specified withstand capability of its insulation against transient overvoltages

[IEC 60664-1:2007, 3.9.2, modified].

impulse withstand voltage
highest peak value of impulse voltage of prescribed form and polarity which does not cause insulation breakdown of insulation under specified conditions

NOTE – The impulse withstand voltage is equal to or higher than the rated impulse voltage

[IEC 60664-1:2007, 3.8.1, modified].

In regard to the choice of the electric field condition, the clearances through possible windows and openings in the insulating material housings, shall comply with the values of Case A of Table F.2 of IEC 60664-1, i.e. for inhomogeneous field conditions.

TABLE B.2
Inherent control or control of equivalent protection [IEC 60664-1 Ed.2.0 (2007-04)].

Voltage line-to-neutral derived from nominal voltages a.c. or d.c. up to and including [1]	Nominal voltages presently used in the world				Rated impulse voltage for the device [1]			
	Three phase four wire systems with earthed neutral	Three-phase three-wire systems earthed or unearthed	Single-phase two-wire systems a.c. or d.c.	Single-phase three-wire systems a.c. or d.c.	V			
					Overvoltage category			
V	V	V	V	V	I	II	III	IV
50			12,5 24 25 30 42 48	30-60	330	500	800	1500
100	66/115	60	60		500	800	1500	2500
150	120/208 *) 127/220	115, 120, 127	100 **), 110, 120	100/-200 *) 110-220 120-240	800	1500	2500	4000
300	220/380, 230/400, 240/415, 260/440, 277/480	200 **), 220, 230, 240, 260, 277	220	220-440	1500	2500	4000	6000
600	347/600 380/660 400/690 417/720 480/830	347, 380, 400, 415, 440, 480, 500, 577, 600	480	480-960	2500	4000	6000	8000
1000		660 690, 720 830/1000	1000		4000	6000	8000	12000

1) These columns are taken from Table F.1 indicating the te rated impulse withstand voltages.
*) Used in the United States and Canada.
**) Used in Japan

With the three values (b) (c) and (d) the minimum clearance is determined in Table F.2 IEC 60664-1

TABLE F.2

Clearances to withstand transient overvoltages [IEC 60664-1 Ed. 2.0 (2007-04)].

Required impulse withstand voltage [1) 5)]	Minimum clearances in air up to 2.000 m. above sea level					
	Case A Inhomogeneous field (see 3.15) Pollution degree [6)]			Case B Homogeneous field (see 3.14) Pollution degree [6)]		
	1	2	3	1	2	3
kV	mm	mm	mm	mm	mm	mm
0,33 [2)]	0,01	0,2 [3) 4)]	0,8 [4)]	0,01	0,2 [3) 4)]	0,8 [4)]
0,4	0,02			0,02		
0,50 [2)]	0,04			0,04		
0,6	0,06			0,06		
0,80 [2)]	0,1			0,1		
1	0,15			0,15		
1,2	0,25	0,25		0,2		
1,5 [2)]	0,5	0,5		0,3	0,3	
2	1	1	1	0,45	0,45	
2,5 [2)]	1,5	1,5	1,5	0,6	0,6	
3	2	2	2	0,8	0,8	
4,0 [2)]	3	3	3	1,2	1,2	1,2
5	4	4	4	1,5	1,5	1,5
6,0 [2)]	5,5	5,5	5,5	2	2	2
8,0 [2)]	8	8	8	3	3	3
10	11	11	11	3,5	3,5	3,5
12 [2)]	14	14	14	4,5	4,5	4,5
15	18	18	18	5,5	5,5	5,5
20	25	25	25	8	8	8
25	33	33	33	10	10	10
30	40	40	40	12,5	12,5	12,5
40	60	60	60	17	17	17
50	75	75	75	22	22	22
60	90	90	90	27	27	27
80	130	130	130	35	35	35
100	170	170	170	45	45	45

1) This voltage is
- — for functional insulation, the maximum impulse voltage expected to occur across the clearance (see 5.1.5),
- — for basic insulation directly exposed or significantly influenced by transient overvoltages from the low-voltage mains (see 4.3.3.3, 4.3.3.4.1 and 5.1.6), the rated impulse voltage of the equipment,
- — for other basic insulations (see 4.3.3.4.2), the highest impulse voltage that can occur in the circuit.

For reinforced insulation see 5.1.6.

2) Preferred values as specified in 4.2.3.

3) For printed wiring material, the values for pollution degree 1 apply except that the value shall not be less than 0,04 mm, as specified in Table F.4.

4) The minimum clearances given for pollution degrees 2 and 3 are based on the reduced withstand characteristics of the associated creepage distance under humidity conditions (see IEC 60664-5).

5) For parts or circuits within equipment subjected to impulse voltages according to 4.3.3.4.2, interpolation of values is allowed. However, standardization is achieved by using the preferred series of impulse voltage values in 4.2.3.

6) The dimensions for pollution degree 4 are as specified for pollution degree 3, except that the minimum clearance is 1,6 mm.

When the clearance is less than the value indicated for case A, an impulse voltage test is required.

Compared to the previous edition of IEC 60664-1, Table F.2 has been modified. In particular: the columns referring to pollution degree 4 have been removed, the definition of this pollution degree has been modified in 4.6.2 to: *"continuous conductivity occurs due to conductive dust, rain or other wet conditions"*, and clearances for pollution degree 4 area as specified for degree of pollution 3, with the exception that the minimum clearance is 1,6 mm.

In 4.6.3 it states: *"The dimensions for creepage distance cannot be specified where permanently conductive pollution is present (pollution degree 4). For temporarily conductive pollution (pollution degree 3), the surface of the insulation may be designed to avoid a continuous path of conductive pollution, e.g. by means of ribs and grooves (see 5.2.2.5 and 5.2.5)".*

The values in bold are the most common in multipole connectors for industrial purposes.

If the component fulfils the minimum clearance prescribed for live parts at opposed polarities, it is exempted from the impulse withstand test. This test is run at sea level using increased voltage values in order to take into account rarefied air at high altitude (the prescribed values refer to 2 000 m a.s.l.). However, if this minimum clearance is not fulfilled, passing the test gives one the right to declare the relevant rated impulse voltage. Declaration of the rated impulse voltage is optional according to EN 61984: if the manufacturer declares the rated impulse voltage, the impulse withstand test is necessary as dielectric verification.

Alternatively, a dielectric voltage withstand test at mains frequencies of 50/60 Hz for 60 s (test 4a of IEC 60512) is necessary, but at reduced values compared to the peak values of the impulse test voltages of wave shape standardised at 1,2/50 µs.

For this purpose, standard EN 61984 provides the following cross-reference table:

TABLE 8

Test voltages (EN 61984 Ed. 2.0 - 2009-06)

Rated impulse withstand voltage U_{ipm} kV	Test voltages		
	Impulse withstand voltage* kV (1.2/50 µs)		Withstand voltage (r.m.s. value) kV (50/60 Hz)
	at 2000 above sea level	at sea level	
0,5	0,5	0,55	0,37
0,8	0,8	0,91	0,5
1,5	1,5	1,75	0,84
2,5	2,5	2,95	1,39
4	4	4,8	2,21
6	6	7,3	3,31
8	8	9,8	4,26
12	12	14,8	6,6

* If the test laboratory is situated between sea level and an altitude of 2 000 m a.s.l., interpolation of impulse withstand voltage is allowed.

NOTE: This table uses the characteristics of an inhomogeneous field, case A of IEC 60664-1 (worst case).

2. Determination of minimum creepage distance

For the minimum creepage distance (*shortest distance along the surface of a solid insulating material between two conductive parts*, IEC 60664-1 definition 3.3) IEC 61984 refers to what prescribed by IEC 60664-1 in Table F.4. It is determined according to: rated voltage, pollution degree and insulating material group.

The rated voltage providing access to Table F.4 (rationalised voltage derived from the nominal voltages at which the connector is deemed to operate) is determined by Table F.3a of IEC 60664-1 for single-phase two or three-wire AC or DC systems or Table F.3b for three-phase three or four-wire AC systems.

TABLE F.3a
Single-phase two or three-wire AC or DC systems
(IEC 60664-1 Ed. 2.0 - 2007-04).

Rated supply voltage *)	Rationalised voltages for Table F.4	
	For insulation phase-phase 1)	For insulation phase-phase 1)
	All systems	Three-wire systems with intermediate earth point
V	V	V
12,5	12,5	-
24	25	-
25	25	-
30	32	-
42	50	-
48	50	-
50 **)	50	-
60	63	-
30-60	63	32
100 **)	100	-
110	125	-
120	125	-
150 **)	160	-
220	250	-
110-220	250	125
120-240	250	125
300 **)	320	-
220-440	500	250
600 **)	630	-
480-960	1000	500
1000 **)	1000	-

1) The line-to-earth insulation level for unearthed or impedance-earthed lines is equal to that between lines (phases), because the operating voltage of any line (phase) can, in practice, approach full voltage between lines (phases) [line voltage]. This is because the actual voltage to earth is determined by the insulation resistance and by the capacitive reactance of each line-to-earth. Consequently, a low (but acceptable) insulation resistance of a line can, in effect, earth it and increase voltage to earth of the other two phases at full voltage between the lines [line voltage].
2) For equipment for use on both three-phase three-wire and three-phase four-wire AC systems, earthed or unearthed, use only the values for three-wire systems.

*) It is assumed that the rated voltage of the equipment is not less than this value.
**) These values correspond to the values given in Table F.1.

Usually for three-phase systems with 230/400 V nominal voltage, the conventional line-to-line insulation voltage is 400 V and the line-to-earth for TT or TN systems is 250 V.

For three-phase systems with 400 V or 500 V nominal voltage, the conventional line-to-line insulation voltage is respectively 400 V and 500 V.

The pollution degree must be specified according to IEC 60664-1.

This strongly influences the rated insulation voltage of a connector. Therefore, the rated insulation voltage of a connector should be reconsidered time by time for each pollution degree.

TABLE F.3b
Three-phase four or three-wire AC systems
(IEC 60664-1 Ed. 2.0 - 2007-04).

Rated supply voltage *)	Rationalised voltages for Table F.4		
	For insulation phase-phase 1)	For insulation phase-phase 1)	
	All systems	Four-wire three-phase systems with earthed neutral	Four-wire three-phase systems unearthed 1) or with earthed phase
V	V	V	V
63	63	32	63
110	125	80	125
120	125	80	125
127	125	80	125
150 **)	160	-	160
208	200	125	200
220	250	160	250
230	250	160	250
240	250	160	250
300 **)	320	-	320
380	400	250	400
400	400	250	400
415	400	250	400
440	500	250	500
480	500	320	500
500	500	320	500
575	630	400	630
600 **)	630	-	630
660	630	400	630
690	630	400	630
720	800	500	800
830	800	500	800
960	1000	630	1000
1000 **)	1000	-	1000

With this rationalized voltage value, the pollution degree and the material group the minimum creepage distance can be determined using Table F.4.

TABLE F.4
Creepage distances to avoid failure due to tracking
[IEC 60664-1 Ed.2.0 (2007-04)].

Effective voltage [1]	Minimum creepage distances								
	Materials for printed circuits		Pollution degree						
V	1	2	1	2			3		
	All material groups	All material groups except IIIb	All material groups	Material group I	Material group II	Material group III	Material group I	Material group II	Material group III [2]
V	mm	mm	mm	mm	mm	mm	mm	mm	mm
10	0,0250	0,040	0,080	0,400	0,400	0,400	1,000	1,000	1,000
12.5	0,0250	0,040	0,090	0,420	0,420	0,420	1,050	1,050	1,050
16	0,0250	0,040	0,100	0,450	0,450	0,450	1,100	1,100	1,100
20	0,0250	0,040	0,110	0,480	0,480	0,480	1,200	1,200	1,200
25	0,0250	0,040	0,125	0,500	0,500	0,500	1,250	1,250	1,250
32	0,0250	0,040	0,14	0,53	0,53	0,53	1,30	1,30	1,30
40	0,0250	0,040	0,16	0,56	0,80	1,10	1,40	1,60	1,80
50	0,0250	0,040	0,18	0,60	0,85	1,20	1,50	1,70	1,90
63	0,0400	0,063	0,20	0,63	0,90	1,25	1,60	1,80	2,00
80	0,0630	0,100	0,22	0,67	0,95	1,30	1,70	1,90	2,10
100	0,1000	0,160	0,25	0,71	1,00	1,40	1,80	2,00	2,20
125	0,1600	0,250	0,28	0,75	1,05	1,50	1,90	2,10	2,40
160	0,2500	0,400	0,32	0,80	1,10	1,60	2,00	2,20	2,50
200	0,4000	0,630	0,42	1,00	1,40	2,00	2,50	2,80	3,20
250	0,5600	1,000	0,56	1,25	1,80	2,50	3,20	3,60	4,00
320	0,75	1,6	0,75	1,60	2,20	3,20	4,00	4,50	5,00
400	1,0	2,0	1,0	2,0	2,8	4,0	5,0	5,6	6,3
500	1,3	2,5	1,3	2,5	3,6	5,0	6,3	7,1	8,0 (7,9) [4]
630	1,8	3,2	1,8	3,2	4,5	6,3	8,0 (7,9) [4]	9,0 (8,4) [4]	10,0 (9,0) [4]
800	2,4	4,0	2,4	4,0	5,6	8,0	10,0 (9,0) [4]	11,0 (9,6) [4]	12,5 (10,2) [4]
1.000	3,2	5,0	3,2	5,0	7,1	10,0	12,5 (10,2) [4]	14,0 (11,2) [4]	16,0 (12,8) [4]
1.250			4,2	6,3	9,0	12,5	16,0 (12,8) [4]	18,0 (14,4) [4]	20,0 (16,0) [4]
1.600			5,6	8,0	11,0	16,0	20,0 (16,0) [4]	22,0 (17,6) [4]	25,0 (20,0) [4]
2.000			7,5	10,0	14,0	20,0	25,0 (20,0) [4]	28,0 (22,4) [4]	32,0 (25,6) [4]
2.500			10,0	12,5	18,0	25,0	32,0 (25,6) [4]	36,0 (28,8) [4]	40,0 (32,0) [4]
3.200			12,5	16,0	22,0	32,0	40,0 (32,0) [4]	45,0 (36,0) [4]	50,0 (40,0) [4]
4.000			16,0	20,0	28,0	40,0	50,0 (40,0) [4]	56,0 (44,8) [4]	63,0 (50,4) [4]
5.000			20,0	25,0	36,0	50,0	63,0 (50,4) [4]	90,0 (56,8) [4]	100,0 (64,0) [4]
6.300			25,0	32,0	45,0	63,0	80,0 (64,0) [4]	110,0 (72,0) [4]	125,0 (80,0) [4]
8.000			32,0	40,0	56,0	80,0	100,0 (80,0) [4]	140,0 (88,0) [4]	160,0 (100,0) [4]
10.000			40,0	50,0	71,0	100,0	125,0 (100,0) [4]	140,0 (112,0) [4]	160,0 (128,0) [4]
12.500			50,0 [3]	63,0 [3]	90,0 [3]	125,0 [3]			
16.000			63,0 [3]	80,0 [3]	110,0 [3]	160,0 [3]			
20.000			80,0 [3]	10,0 [3]	140,0 [3]	200,0 [3]			
25.000			10,0 [3]	125,0 [3]	180,0 [3]	250,0 [3]			
32.000			125,0 [3]	160,0 [3]	220,0 [3]	320,0 [3]			
40.000			160,0 [3]	200,0 [3]	280,0 [3]	400,0 [3]			
50.000			200,0 [3]	250,0 [3]	360,0 [3]	500,0 [3]			
63.000			250,0 [3]	320,0 [3]	450,0 [3]	600,0 [3]			

1) This voltage is
- for functional insulation, the working voltage,
- for basic and supplementary insulation of the circuit energized directly from the supply mains (see 4.3.2.2.1), the voltage rationalized through Table F.3a or Table F.3b, based on the rated voltage of the equipment, or the rated insulation voltage,
- for basic and supplementary insulation of systems, equipment and internal circuits not energized directly from the mains (see 4.3.2.2.2), the highest r.m.s. voltage which can occur in the system, equipment or internal circuit when supplied at rated voltage and under the most onerous combination of conditions of operation within equipment rating.

2) Material group IIIb is not recommended for application in pollution degree 3 above 630 V.
3) Provisional data based on extrapolation. Technical committees who have other information based on experience may use their dimensions.
4) The values given in brackets may be applied to reduce the creepage distance in case of using a rib (see 5.2.5).
NOTE – The high precision used in indicating creepage distances in this table does not mean that the uncertainty of measurement has to be of the same order of magnitude.

In **boldface** the typical values for multipole rectangular connectors for industrial uses are shown.

EU environmental legislation

RoHS 2 (2011/65/EU) and WEEE 2 (2012/19/EU) Directives

The RoHS 2 2011/65/EU Directive (recast) replaced on 2013-01-03 the original RoHS 2002/95/EC Directive (with its later amendment 2008/35/EC).

This Directive introduced the ban of use of certain hazardous substances in new electrical and electronic equipment (end products) placed on the market from 1st of July 2006 (the exceptions for some applications were listed in Annex of the Directive and in a number of further Decisions of the EU Commission). Indirectly – in the supply chain – the ban also applied to the electrical components of said electrical and electronic equipment.

The banned and/or restricted substances originally were:

Lead (Pb) (0,1 %), Mercury (Hg) (0,1 %), Cadmium (Cd) (0,01 %), Hexavalent Chromium (Cr^{6+}) (0,1 %), Poly-brominated biphenyls (PBB) (0,1 %) and Poly-brominated diphenyl ethers (PBDE) (0,1 %) (the latter two being families of flame retardants for thermoplastic materials)

to which the Commission Delegated Directive 2015/863/EU of 2015-03-31 added – with a period of grace of six and a half years – the following ones:

Bis(2-ethylhexyl) phthalate (DEHP) (0,1 %), Butyl benzyl phthalate (BBP) (0,1 %), Dibutyl phthalate (DBP) (0,1 %), Diisobutyl phthalate (DIBP) (0,1 %).

All ILME finished products (industrial electrical equipment) as well as all ILME components (for industrial electrical equipment) in the sense of the Directive are in conformity with the RoHS 2 2011/65/EU Directive and all subsequent modifications within the terms of its scope and the starting dates (transitional periods) established for each category of EEE (electrical and electronic equipment) covered in Annex I of said Directive.

For all components (connector inserts, removable crimp contacts, enclosures for connectors, and accessories related to connectors as far as they are in the scope) the products comply with the limit values for certain substances as set out in said RoHS 2 2011/65/EU Directive and all subsequent modifications, including the permitted exemptions of Annexes III and IV.

Conformity to Directive 2011/65/EU (RoHS II) is intended to the text of the Directive as amended by any applicable later Directive or Commission Delegated Directive associated to it and issued up to the date of this Catalogue (54 documents plus 2 Corrigenda) and to the extent described in the text of this Declaration, including these notes.

Depending on the product, it may make use of exemption 6(b) for lead as an alloying element in aluminium containing up to 0,4% lead by weight (enclosures for multi-pole electrical connectors declared to be made by aluminium die cast alloy, except IP68 series of sizes “44.27” through “104.27” and E-Xtreme® series, which do not use such exemption) or exemption 6(c) for copper alloy containing up to 4% lead by weight (multi-pole connector inserts and removable crimp contacts, except CSH S series, which does not use such exemption as it is not using machined contacts).

NOTE 1 – Expiration of exemption 6(b) has been deferred to 21st July 2021 for our category of products by Commission Delegated Directive (EU) 2018/740; expiration of exemption 6(c) has been deferred to 21st July 2021 for our category of products by Commission Delegated Directive (EU) 2018/741. The above expirations may be subject to further deferment, based on a public enquiry procedure deemed to start on 1st January 2021.
NOTE 2 – Such products by themselves – as components – are not covered by the RoHS 2 Directive; therefore, for such products, there are no direct legal requirements. As no EU Declaration of Conformity can be issued, the above does not constitute a EU Declaration of Conformity to the RoHS 2 2011/65/EU Directive, and the CE marking – which may be applied either on the part or on the packaging label in compliance with other applicable EU Directives, e.g. the Low Voltage Directive 2014/35/EU (a recasting of the previous directive 2006/95/EC in force from 2016-04-20) – is not referred to said RoHS 2 Directive.

The WEEE 2 2012/19/EU Directive (recast) replaced on 2014-02-15 the original WEEE 2002/96/EC Directive (and its later amendments 2003/108/EC and 2008/34/EC). Its last update is Directive 2018/849/EU of 2018-05-30. This Directive aims to recycle and minimise Waste from Electrical and Electronic Equipment (also referred to as WEEE). It encourages recycling, reuse and other forms of recovery of such technological waste and sets ambitious targets for recovery rate, variable depending on the product categories.

In the new Directive, a six-year transitional period was established up to 2018-08-14, during which the equipment included in its “open scope” still remained the same as per the former WEEE Directive. From 15th August 2018, the scope became “open”, subject to the exclusions for various categories of “equipment”, which include the large-scale fixed installations. *These are defined as “a large-size combination of several types of apparatus and, where applicable, other devices, which: (i) are assembled, installed and uninstalled by professionals; (ii) are intended to be used permanently as part of a building or a structure at a pre-defined and dedicated location; and (iii) can only be replaced by the same specifically designed equipment” and large-scale stationary industrial tools defined as “a large size assembly of machines, equipment, and/or components, functioning together for a specific application, permanently installed and uninstalled by professionals at a given place, and used and maintained by professionals in an industrial manufacturing facility or research and development facility”.*

Connectors and their accessories that, as components, are outside the scope of RoHS 2 Directive, do not fall in the scope of WEEE 2 even once “open scope”; moreover, they are primarily used in installations of industrial automation (large-scale stationary industrial tools) which are exempted from conformity to the WEEE 2 Directive.

As required by the WEEE 2 Directive, ILME will take care of any technical and administrative obligation for any ILME product that might be involved.

As a manufacturer of electrical equipment and components for industrial use, ILME acknowledges the regulations introduced by these Directives. The above-mentioned Directives are already effective national law in all EU countries. Similar regional regulations aimed at the preservation of the environment are in force across the world outside Europe.

For the products described in this Catalogue, although the restrictions of use of the above mentioned hazardous substances are not legally applicable, in that no product in this Catalogue belongs to any of the product categories described and illustrated in the above mentioned RoHS 2 and WEEE 2 Directives, the “RoHS conformity” is important, as it is required downstream in the supply chain. ILME has therefore carried out the necessary corrective actions, which have led to the “RoHS conformity” of all products in this Catalogue, wherever required.

ILME products sold after 1st July 2006 do not contain any of the restricted substances in concentrations higher than those allowed by the RoHS 2 Directive and by the subsequent related Decisions taken by the EU Commission.

Fire protection standards for railway applications

The European standard EN 45545 governing fire protection on railway vehicles was published in 2013. In Italy, the various parts are:

- UNI CEI EN 45545-1:2013-05 Railway applications – Fire protection on railway vehicles – Part 1: General;
- UNI CEI EN 45545-2:2013-05 Railway applications – Fire protection on railway vehicles – Part 2: Requirements for fire behaviour of materials and components;
- UNI CEI EN 45545-3:2013-05 Railway applications – Fire protection on railway vehicles – Part 3: Fire resistance requirements for fire barriers;
- UNI CEI EN 45545-4:2013-05 Railway applications – Fire protection on railway vehicles – Part 4: Fire safety requirements for rolling stock design;
- UNI CEI EN 45545-5:2013-05 Railway applications – Fire protection on railway vehicles – Part 5: Fire safety requirements for electrical equipment, including that of trolley buses, track guided buses and magnetic levitation vehicles;
- UNI CEI EN 45545-6:2013-05 Railway applications – Fire protection on railway vehicles – Part 6: Fire control and management systems;
- UNI CEI EN 45545-7:2013-05 Railway applications – Fire protection on railway vehicles – Part 7: Fire safety requirements for flammable liquid and flammable gas installations.

The standard replaces the previous voluntary Technical Specification CEN/TS 45545:2009 and has formalised the withdrawal of all conflicting national standards as of 1st April 2016, the date on which the following parallel standards cease to be effective: in Italy UNI CEI 11170-1:2005, UNI CEI 11170-2:2005 and UNI CEI 11170-3:2005; in France, NF F 16-101:1988 and NF F 16-102:1992; in Germany, DIN 5510-2:2009; in United Kingdom, BS 6853:1999. These, however, remained applicable until 31st march 2016. All certificates covering materials issued in line with national standards remained valid in Europe up until this date. As of 1st April 2016, the only reference standard is EN 45545:2013. However, due to the huge number of customer specifications and technical documents making reference to obsolete standards, the railway business is still moving to a complete unification to the EN 45545 series.

EN 45545-2 specifies the requirements for the fire behaviour of materials and components of railway vehicles according to the different hazard levels defined by EN 45545-1:2013 (HL = Hazard Level). See Table 1 – Classification of hazard levels (EN 45545-2:2013).

Each hazard level provides for its own specific test procedures, test conditions, fire protection requirements and severity (min or max threshold), ranging from R1 to R26. Electrical components of small size and mass, such as electrical connectors, shall have a nominal fire behaviour rating (self-extinguishing) 94V-0 (standard UL 94).

The thermoplastic insulating material used in ILME connectors complies with the requirements of UL 94V-0. There are no requirements applicable to products with a combustible mass < 10 g not in contact with other unclassified products, if they are installed adjacent to components for which no certificates are available. In this case, the requirements depend on the so-called grouping rules.

Connectors are unlisted products in Table 2 of EN 45545-2:2013. As non-listed products, they must satisfy the requirements of Table 3, and as their exposed surface area is ≤ 0,2 m^2, the set of requirements for indoor location in a railway vehicle is R22 while for outdoor location it is R23 (Table 5 of EN 45545-2:2013).

For the materials of connectors, these are the sets of maximum applicable requirements. These sets establish parameters, procedures and limit thresholds (min or max) for the tests. In particular, R22 and R23 specify tests and limit values for oxygen content (oxygen index OI), smoke density (Ds max) and toxicity (conventional toxicity index CIT_{NLP}).

The polycarbonate used by ILME in its connectors meets the limit values specified in EN 45545-2.

See Table 2 – Requirements for unlisted products (including electrical connectors) – at following page.

Until the publication of the previously mentioned series of European standards, the most advanced fire safety standards for the railway industry were French:

- NF F 16-101 Matériel roulant ferroviaire – Comportement au feu–Choix des matériaux;
- NF F 16-102 Matériel roulant ferroviaire – Comportement au feu –Choix des équipements électriques;

which in turn referred to the test methods described in standards:

- NF X 70 100 Analyse de gaz de pyrolyse et de combustion;
- NF X 10 702 Détermination de l'opacité des fumées en atmosphèrenon renouvelée.

Table 1 – Hazard level classification (EN 45545-2:2013)

Operation Category (#)	Design Category			
	A: Vehicles forming part of an automatic train having no emergency trained staff on board	D: Double decked vehicles	S: Sleeping and couchette vehicles	N: All other vehicles (standard vehicles)
OC 1	HL1	HL1	HL2	HL1
OC 2	HL2	HL2	HL2	HL2
OC 3	HL2	HL2	HL3	HL2
OC 4	HL3	HL3	HL3	HL3
(#) Relationship between the service, the infrastructure and the conditions for the evacuation of passengers and staff				

Table 2 – Requirements for unlisted products (including electrical connectors)

Test method	Standard	Parameter	Unit	Interior	Exterior	R22 thresholds (more severe than R23)			ILME (polycarbonate)
Oxygen index OI	EN ISO 4589-2	OI (min)	%	R22	R23	HL1: 28	HL2: 28	HL3: 32	better than R22-HL3
Smoke density	EN ISO 5659-2	D_s max (1)	---	R22	R23	HL1: 600	HL2: 300	HL3: 150	better than R22-HL3
Toxicity of smoke	NF X70-100-1 NF X70-100-2	CIT_{NLP} (max)(2)	---	R22	R23	HL1: 1,2	HL2: 0,9	HL3: 0,75	better than R22-HL3
(1) D_s max = maximum specific optical density of smoke									
(2) CIT_{NLP} (max) = maximum conventional index of toxicity of smoke									

These latter were somewhat similar, in terms of methods, to the American standards:

- ASTM E 662 Standard Test Method for Specific Optical Density of Smoke Generated by Solid Materials;
- ASTM E 162 Standard Test Method for Surface Flammability of Materials Using a Radiant Heat Energy Source.

Test methods referred to in the American reference standard specifying the performance criteria:

- NFPA 130 Standard for Fixed Guideway Transit and Passenger Rail Systems.

Also widely used are the Bombardier Transportation smoke toxicity specifications:

- SMP 800-C Toxic Gas Generation.

In Italy, from 2006 to 31st March 2016, for installation on board railway vehicles, a certificate of conformity to the following Italian railway standards was required:

- UNI CEI 11170-1:2005 Trains and trams – Fire safety guidelines for trains, trams and track guided vehicles – General principles;
- UNI CEI 11170-2:2005 Trains and trams – Fire safety guidelines for trains, trams and track guided vehicles – Design recommendations – Fire containment measures – Indication, monitoring and evacuation systems;
- UNI CEI 11170-3:2005 Trains and trams – Fire safety guidelines for trains, trams and track guided vehicles – Material fire behaviour assessment – Acceptance limits

published jointly by UNI and CEI on 2005-11-30 with parallel validity until 31st March 2016. In these standards, the requirements for materials relating to electrical connectors are contained in the 2nd schedule *"Acceptability criteria for electrical and electronic materials and components"* at the application *"All other applications including flammable materials"* (all applications other than electric cables). For these applications, four material tests are required:

- Exposure to a small flame according to EN ISO 11925-2 with, depending on the level of risk, a resistance to fire of the material of 15 s for LR1 and LR2 and a resistance of 30 s for LR3 and LR4.
- Smokiness in compliance with French standard NF F 16-101 with IF better or equal to F2 for all risk levels. The material we use is classified as F1 (better than F2) according to the tests carried out.
- Smoke optical density measurement, in compliance with French standard NF X 10-702 (from NF F 16-101) with values ≤ 100 for all risk levels LR1…4.
- Toxicity measurement, in compliance with Italian standard CEI 20-37/7, with T ≤ 2 for all risk levels LR1…4.

Tests

EU – The material tested in accordance with the European Norm EN 45545-2:2013 – showed an oxygen index (OI) of 38%, a Ds max (flaming) = 117 and a smoke toxicity index CITNLP = 0,16, compliant with the requirements of EN 45545-2:2013 for all risk levels: HL1 – HL2 – HL3 and, consequently, for all the design categories (A, D, S, N) and operation categories (1, 2, 3, 4) defined in EN 45545-1:2013.

France - The material used in our connectors is certified by an accredited laboratory CERTIFER, according to the previously mentioned French standards NF F 16-101 and NF F 16-102, and has a classification F1 (Index Fumée I.F. = 15) and a smoke toxicity index (Index Toxicité Fumée) I.T.C. = 18.

Both values meet the requirements set out by the French standards and by the Italian standard UNI CEI 11170-3 schedule 2, which relates to electrical connectors.

Germany – The material used in our connectors also complies with the German standard DIN 5510-2:2009 with a flammability class = S4, smoke spreading class = SR2 and drip class = ST2.

UK - The material was also tested according to British Standard BS 6853:1999, with an R (max) index = 0,6, consequently within the limits of Tables 7 and 8 of the standard for vehicle categories Ia, Ib and II.

USA - Tests compliant with American standards have also been carried out at a qualified North American laboratory, confirming compliance with the requirements set out by the US Federal Transit Administration "Recommended Fire Safety Practices for Rail Transit Material Selection" for methods ASTM E 662 (NFPA 258) (specific optical smoke density), ASTM E 162 (ASTM D 3635) (surface flammability → flame propagation index) and Bombardier Transportation SMP 800-C (smoke and gas toxicity).

Standards and Certifications

cULus mark

ILME enclosures have been certified by UL as Recognised Components for the USA and Canada (cUL mark) as accessories of our set of UL and CSA certified connector inserts (file UL E115072, file CSA 082270_0_000).

The certification has been achieved by successfully completing several tests carried out in compliance with standard ANSI/UL 50 (Enclosures for Electrical Equipment) which is equivalent to the North American voluntary standard NEMA 250 (NEMA = National Electrical Manufactures Association) and to the equivalent Canadian standard CSA C22.2 No.94 (Special Purpose Enclosures) for safety levels used in North America and required by the local installation codes (e.g.: NFPA 70 National Electrical Code in the US, CSA system standards for Canada); more specifically:

- Type 12 (= NEMA 12): for internal use, similar to IP54 protection rating according to IEC/EN 60529; it covers Type 1 and Type 2.
- Type 4 (= NEMA 4): for internal and external use, similar to IP66.
- Type 4X (= NEMA 4X): for internal and external use, as Type 4 + corrosion resistance, similar to IP66 protection rating.

The certification includes the enclosure series with ISO, Pg and metric cable entry as well as NPT, all special versions similar to standard types.

Specifications

ISO 23570-3 standard and DESINA® specification compliant

Connectors compliant with DESINA® standard

DESINA® (which stands for DEcentralised and Standardised INstAllation technology) is an innovative installation concept behind a study headed by the German manufacturers of machine tools association (VDW), with the co-operation of users (including German automotive manufacturers) and component manufacturers, which has led to the introduction of a specification aimed to standardise electrical, hydraulic and pneumatic components and their interconnection on common platform for CNC controlled machine tools and manufacturing lines.

In the last few years, the DESINA® specification has been successfully enclosed in the ISO TC 184/SC 1 "Industrial automation systems and integration / Physical device control" as an ISO standard.

This work has been completed, and the following standards have now become available:

ISO 23570-1 Industrial automation systems and integration – Distributed installation in industrial applications: Part 1 – Sensors and actuators.

ISO 23570-2 Industrial automation systems and integration – Distributed installation in industrial applications: Part 2 – Hybrid communication bus.

ISO 23570-3 Industrial automation systems and integration – Distributed installation in industrial applications: Part 3 – Power distribution bus.

EUROMAP (European Plastics and Rubber Machinery)

ILME connectors meet the Technical Recommendations:

- EUROMAP 12: CSAH / CDA / CDC inserts, 32 poles.
- EUROMAP 13: CSAH / CDA / CDC inserts, 16 poles.
- EUROMAP 14 – part 1: CSAH / CDA / CDC inserts, 16 poles (with CDC inserts the iron and constantan thermocouple crimp contacts may also be used).
- EUROMAP 14 – part 2: CSH / CNE / CCE / CSE inserts, 16 poles - CP inserts, 6 poles.
- EUROMAP 16: CD inserts, 8 poles, CSAH / CDA / CDC inserts, 10 poles.
- EUROMAP 27-1: MIXO inserts, CX 08 C and CX 04 B.
- EUROMAP 28: CSH / CSE inserts, 6 poles.
- EUROMAP 29: CSH / CSE inserts, 24 poles.
- EUROMAP 62: CSAH / CDA / CDC inserts, 32 poles.
- EUROMAP 67: CD inserts, 50 poles (CD 25 Z version).
- EUROMAP 67.1: CD inserts, 50 poles (CD 25 Z version).
- EUROMAP 70: MIXO inserts, CX 12 D.
- EUROMAP 71: CD inserts, 50 poles (CD 25 Z version).
- EUROMAP 73: MIXO inserts, CX 12 D.
- EUROMAP 74: MIXO inserts, CX 12 D.
- EUROMAP 78: MIXO inserts, CX 12 D.

Visit ilme.com and watch our Configurator video to discover how easy is to design your connector in real time.

Ilme Smart Configurator is a dynamic tool to digital access and match our database of over 7.000 product codes.

search

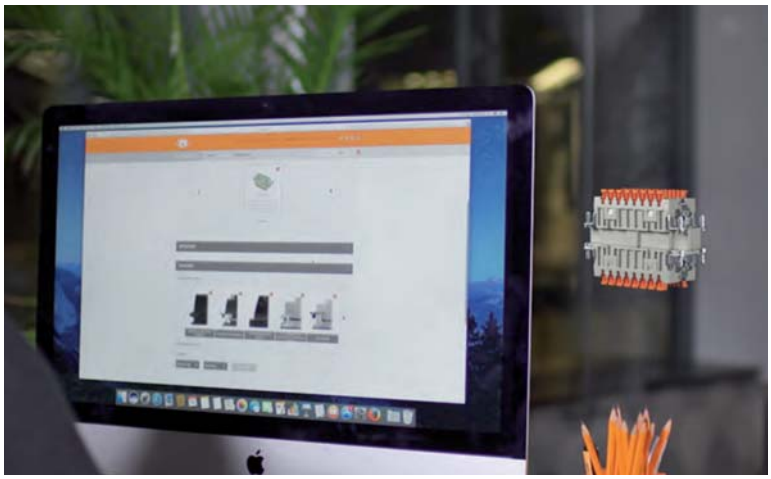

Over 50 million
of online connector
combinations.

choose

Easy selection
of individual parts
for key applications
and recommendations
for custom
environmental
conditions.

download

Smart suggestion
to get the most suitable
configuration.

A

AH M25IF 505
AH M25IFL 505
AH M32IF 505
AH M32IFL 505
AT 8FT 237
AT 8IFT 237
AT LCMM 237
AT LCSM 237
ATR C22 237
AT U2F 237
AT U3F 237
AW M25IJ 233
AW M25INJ 233
AW M25PJ 233

C

C7 06 FL 443
C7 10 FL 443
C7 16 FL 443
C7 24 FL 443
C7AP 06 L 436
C7AP 06 L2 436
C7AP 06 L29 436
C7AP 06 L229 436
C7AP 10.21 438
C7AP 10.29 438
C7AP 10.221 438
C7AP 10.229 438
C7AP 16.21 439
C7AP 16.29 439
C7AP 16.221 439
C7AP 16.229 439
C7AP 24.21 441
C7AP 24.29 441
C7AP 24.221 441
C7AP 24.229 441
C7ES 720
C7I 06 L 436, 656
C7I 06 LS 437
C7I 10 ..... 438, 656
C7I 16 ..... 439, 656
C7I 16 S 440
C7I 24 ..... 441, 656
C7I 24 S 442
C7IE 06 L 530
C7IE 10 532
C7IE 16 534
C7IE 24 536
C7P 06 L 436
C7P 06 L2 436
C7P 10 438
C7P 10.2 438
C7P 16 439
C7P 16.2 439
C7P 24 441
C7P 24.2 441
CAC 06 L 392
CAC 10 401
CAC 10 L 401
CAC 16 411
CAC 16 L 411
CAC 24 423
CAC 24 L 423
CAC 50 434
CAF 10 395
CAF 16 404
CAF 16.221 406
CAF 24.21 414
CAF 24.29 414
CAF 24.221 416
CAN 24 421
CAO 06 L21 389
CAO 06 L29 389
CAO 06 YX21 604
CAO 06 YX29 604
CAO 10.21 395
CAO 10.29 395
CAO 10 L21 396
CAO 10 L29 396
CAO 10 X 400
CAO 10 X29 400
CAO 10 YX21 607
CAO 10 YX29 607
CAO 16.21 404
CAO 16.29 404
CAO 16 L21 405
CAO 16 L29 405
CAO 16 X 410
CAO 16 X29 410
CAO 16 YX21 610
CAO 16 YX29 610
CAO 24.21 414
CAO 24.29 414
CAO 24 L21 415
CAO 24 L29 415
CAO 24 X 422
CAO 24 X29 422
CAO 24 YX21 613
CAO 24 YX29 613
CAO 50.21 432
CAO 50.29 432
CAO 50 X 433
CAO 50 X29 433
CAOR 06 L21 586
CAOR 10.21 587
CAOR 16.21 588
CAOR 24.29 589
CAOS 10.21 579
CAOS 16.29 580
CAOS 24.29 581
CAOW 06 L21 521
CAOW 10.21 522
CAOW 16.29 523
CAOW 24.29 524
CAOW 50.29 527
CAP 06 L 388
CAP 06 L2 388
CAP 06 L29 388
CAP 06 L229 388
CAP 06 LS 388
CAP 06 LS2 388
CAP 06 LS29 388
CAP 06 LS229 388
CAP 06 YC229 603
CAP 10.21 394
CAP 10.29 394
CAP 10.221 394
CAP 10.229 394
CAP 10 CP 394
CAP 10 CP2 394
CAP 10 CP29 394
CAP 10 CP229 394
CAP 10 CS 394
CAP 10 CS2 394
CAP 10 CS29 394
CAP 10 CS229 394
CAP 10 L 394
CAP 10 L2 394
CAP 10 L29 394
CAP 10 L229 394
CAP 10 LS 394
CAP 10 LS2 394
CAP 10 LS29 394
CAP 10 LS229 394
CAP 10 YC229 606
CAP 16.21 403
CAP 16.29 403
CAP 16.221 403
CAP 16.229 403
CAP 16 CP 403
CAP 16 CP2 403
CAP 16 CP29 403
CAP 16 CP229 403
CAP 16 CS 403
CAP 16 CS2 403
CAP 16 CS29 403
CAP 16 CS229 403
CAP 16 L 403
CAP 16 L2 403
CAP 16 L29 403
CAP 16 L229 403
CAP 16 LS 403
CAP 16 LS2 403
CAP 16 LS29 403
CAP 16 LS229 403
CAP 16 YC229 609
CAP 24.21 413
CAP 24.29 413
CAP 24.221 413
CAP 24.229 413
CAP 24 CP 413
CAP 24 CP2 413
CAP 24 CP29 413
CAP 24 CP229 413
CAP 24 CS 413
CAP 24 CS2 413
CAP 24 CS29 413
CAP 24 CS229 413
CAP 24 G36 657
CAP 24 L 413
CAP 24 L2 413
CAP 24 L29 413
CAP 24 L229 413
CAP 24 LS 413
CAP 24 LS2 413
CAP 24 LS29 413
CAP 24 LS229 413
CAP 24 YC229 612
CAPR 10.21 587
CAPR 16.21 588
CAPR 24.21 589
CAPS 06 L 578
CAPS 10.21 579
CAPS 16.21 580
CAPS 24.21 581
CAPW 06 L 521
CAPW 10.21 522
CAPW 16.21 523
CAPW 24.21 524
CAV 06 GYC21 605
CAV 06 GYC29 605
CAV 06 L21 389
CAV 06 L29 389
CAV 06 LG21 390
CAV 06 LG29 390
CAV 06 YX21 604
CAV 06 YX29 604
CAV 10.21 395
CAV 10.29 395
CAV 10.213 397
CAV 10 G 398
CAV 10 G29 398
CAV 10 GYC21 608
CAV 10 GYC29 608
CAV 10 L21 396
CAV 10 L29 396
CAV 10 LG21 399
CAV 10 LG29 399
CAV 10 X 400
CAV 10 X29 400
CAV 10 YX21 607
CAV 10 YX29 607
CAV 16.21 404
CAV 16.29 404
CAV 16.216 406
CAV 16.221 406
CAV 16 G 408
CAV 16 G29 408
CAV 16 GYC21 611
CAV 16 GYC29 611
CAV 16 L21 405
CAV 16 L29 405
CAV 16 LG21 409
CAV 16 LG29 409
CAV 16 X 410
CAV 16 X29 410
CAV 16 YX21 610
CAV 16 YX29 610
CAV 24.21 414
CAV 24.29 414
CAV 24.221 416
CAV 24.229 416
CAV 24 G 419
CAV 24 G29 419
CAV 24 GYC21 614
CAV 24 GYC29 614
CAV 24 L21 415
CAV 24 L29 415
CAV 24 LG21 420
CAV 24 LG29 420
CAV 24 X 422
CAV 24 X29 422
CAV 24 YX21 613
CAV 24 YX29 613
CAV 50.21 432
CAV 50.29 432
CAV 50 G29 432
CAV 50 X 433
CAV 50 X29 433
CAVR 06 L21 586
CAVR 10.21 587
CAVR 16.21 588
CAVR 24.29 589
CAVS 10.21 579
CAVS 16.29 580
CAVS 24.29 581
CAVW 06 L21 521
CAVW 06 LG 521
CAVW 10.21 522
CAVW 10 G 522
CAVW 16.29 523
CAVW 16 G29 523
CAVW 24.29 524
CAVW 50.29 527
CBC 06 L 467
CBC 10 469
CBC 16 471
CBC 24 473
CBGF 698
CC 0.5 AN 104*
CC 0.7 AN 104*
CC 1.0 AN 104*
CC 1.5 AN 104*
CC 2.5 AN 104*
CCEF 06 130
CCEF 10 131
CCEF 16 ..... 132, 134
CCEF 16 N 134
CCEF 24 ..... 133, 135
CCEF 24 N 135

* These items are also shown in various sections throughout the catalogue

CCEM 06 130
CCEM 10 131
CCEM 16 ..... 132, 134
CCEM 16 N 134
CCEM 24 ..... 133, 135
CCEM 24 N 135
CCES 708*
CCF2D 0.3 675
CCF2D 0.5 675
CCF2D 0.7 675
CCF2D 1.0 675
CCF2D 1.5 675
CCF2D 2.5 675
CCF2D 3.0 675
CCF2D 4.0 675
CCFA 0.3 ..... 104*
CCFA 0.5 ..... 104*
CCFA 0.7 ..... 104*
CCFA 1.0 ..... 104*
CCFA 1.5 ..... 104*
CCFA 2.5 ..... 104*
CCFA 3.0 ..... 104*
CCFA 4.0 ..... 104*
CCFC 0.3 673
CCFC 0.5 673
CCFD 0.3 ..... 104*
CCFD 0.5 ..... 104*
CCFD 0.7 ..... 104*
CCFD 1.0 ..... 104*
CCFD 1.5 ..... 104*
CCFD 2.5 ..... 104*
CCFD 3.0 ..... 104*
CCFD 4.0 ..... 104*
CCFF 0.3 673
CCFF 0.5 673
CCFFA 671
CCFJD 0.3 675
CCFJD 0.5 675
CCFJD 0.7 675
CCFJD 1.0 675
CCFJD 1.5 675
CCFJD 2.5 675
CCFJD 3.0 675
CCFJD 4.0 675
CCINA 708*
CCM2D 0.3 675
CCM2D 0.5 675
CCM2D 0.7 675
CCM2D 1.0 675
CCM2D 1.5 675
CCM2D 2.5 675
CCM2D 3.0 675
CCM2D 4.0 675
CCMA 0.3 ..... 104*
CCMA 0.5 ..... 104*
CCMA 0.7 ..... 104*
CCMA 1.0 ..... 104*
CCMA 1.5 ..... 104*
CCMA 2.5 ..... 104*
CCMA 3.0 ..... 104*
CCMA 4.0 ..... 104*
CCMC 0.3 673
CCMC 0.5 673
CCMD 0.3 ..... 104*
CCMD 0.5 ..... 104*
CCMD 0.7 ..... 104*
CCMD 1.0 ..... 104*
CCMD 1.5 ..... 104*
CCMD 2.5 ..... 104*
CCMD 3.0 ..... 104*
CCMD 4.0 ..... 104*
CCMF 0.3 673
CCMF 0.5 673
CCMFA 671
CCMJD 0.3 675
CCMJD 0.5 675
CCMJD 0.7 675
CCMJD 1.0 675
CCMJD 1.5 675
CCMJD 2.5 675
CCMJD 3.0 675
CCMJD 4.0 675
CCPNP 708*
CCPNP RN 714
CCPR RN 708*
CCPZ MIL 708
CCPZP 722
CCPZPA 724
CCPZ RN 714
CCPZ TP 710
CCSPZP 722, 726
CCTP 10 ..... 708, 722
CCTP 16 ..... 708, 722
CCTPACF 724
CCTPACM 724
CCTPADF 724
CCTPADM 724
CCVPP 722
CCW CT 739
CCW M25 739
CCW M32 739
CCW PD 1M 739
CCW PD 03 739
CCW PD 03G 739
CCW PD 03 IVG 739
CCW PD 06 739
CCW PD 10 739
CCW PD 15 739
CCW PD 16 739
CCW PD 24 739
CCW PD 25 739
CDAF 10 98
CDAF 10 X 98
CDAF 16 ..... 100, 102
CDAF 16 N 102
CDAF 16 X 100, 102
CDAF 16 XN 102
CDAM 10 98
CDAM 10 X 98
CDAM 16 ..... 100, 102
CDAM 16 N 102
CDAM 16 X 100, 102
CDAM 16 XN 102
CDCF 10 104
CDCF 16 ..... 105, 106
CDCF 16 N 106
CDCM 10 104
CDCM 16 ..... 105, 106
CDCM 16 N 106
CDDF 24 76
CDDF 38 ..... 77, 80
CDDF 42 78
CDDF 72 ..... 79, 82
CDDF 72 N 82
CDDF 108 ..... 81, 83
CDDF 108 N 83
CDDM 24 76
CDDM 38 ..... 77, 80
CDDM 42 78
CDDM 72 ..... 79, 82
CDDM 72 N 82
CDDM 108 ..... 81, 83
CDDM 108 N 83
CDF2D 0.3 674
CDF2D 0.5 674
CDF2D 0.7 674
CDF2D 1.0 674
CDF2D 1.5 674
CDF2D 2.5 674
CDF 07 66
CDF 07 N 66
CDF 08 67
CDF 15 68
CDF 25 ..... 69, 71
CDF 25 Z 71
CDF 40 ..... 70, 73
CDF 64 ..... 72, 74
CDFA 0.3 ..... 66*
CDFA 0.5 ..... 66*
CDFA 0.7 ..... 66*
CDFA 1.0 ..... 66*
CDFA 1.5 ..... 66*
CDFA 2.5 ..... 66*
CDFA 6A 670
CDFA 6A28 672
CDFD 0.3 ..... 66*
CDFD 0.5 ..... 66*
CDFD 0.7 ..... 66*
CDFD 1.0 ..... 66*
CDFD 1.5 ..... 66*
CDFD 2.5 ..... 66*
CDFD 6A 670
CDFJD 0.3 674
CDFJD 0.5 674
CDFJD 0.7 674
CDFJD 1.0 674
CDFJD 1.5 674
CDFJD 2.5 674
CDM2D 0.3 674
CDM2D 0.5 674
CDM2D 0.7 674
CDM2D 1.0 674
CDM2D 1.5 674
CDM2D 2.5 674
CDM 07 66
CDM 07 N 66
CDM 08 67
CDM 15 68
CDM 25 ..... 69, 71
CDM 25 Z 71
CDM 40 ..... 70, 73
CDM 64 ..... 72, 74
CDMA 0.3 ..... 66*
CDMA 0.5 ..... 66*
CDMA 0.7 ..... 66*
CDMA 1.0 ..... 66*
CDMA 1.5 ..... 66*
CDMA 2.5 ..... 66*
CDMA 6A 670, 672
CDMD 0.3 ..... 66*
CDMD 0.5 ..... 66*
CDMD 0.7 ..... 66*
CDMD 1.0 ..... 66*
CDMD 1.5 ..... 66*
CDMD 2.5 ..... 66*
CDMD 6A 670
CDMJD 0.3 674
CDMJD 0.5 674
CDMJD 0.7 674
CDMJD 1.0 674
CDMJD 1.5 674
CDMJD 2.5 674
CDSHF 06 NC 95
CDSHF 09 86
CDSHF 18 87
CDSHF 27 ..... 88, 90
CDSHF 27 N 90
CDSHF 42 ..... 89, 91
CDSHF 42 N 91
CDSHM 06 NC 95
CDSHM 09 86
CDSHM 18 87
CDSHM 27 ..... 88, 90
CDSHM 27 N 90
CDSHM 42 ..... 89, 91
CDSHM 42 N 91
CFF 10 395
CFF 16 404
CFF 16.221 406
CFF 24.21 414
CFF 24.29 414
CFF 24.221 416
CFO 06 L21 389
CFO 06 L29 389
CFO 10.21 395
CFO 10.29 395
CFO 10 L21 396
CFO 10 L29 396
CFO 16.21 404
CFO 16.29 404
CFO 16 L21 405
CFO 16 L29 405
CFO 24.21 414
CFO 24.29 414
CFO 24 L21 415
CFO 24 L29 415
CFO 32 426
CFO 32.29 426
CFO 32.42 426
CFO 32 L 426
CFO 32 X 427
CFO 48 L 430
CFO 48 L29 430
CFO 48 L42 430
CFO 50.21 432
CFO 50.29 432
CFO 50 X 433
CFO 50 X29 433
CFOS 06 L21 578
CFV 06 GYC21 605
CFV 06 GYC29 605
CFV 06 L21 389
CFV 06 L29 389
CFV 06 LG21 390
CFV 06 LG29 390
CFV 10.21 395
CFV 10.29 395
CFV 10.213 397
CFV 10 G 398
CFV 10 G29 398
CFV 10 GYC21 608
CFV 10 GYC29 608
CFV 10 L21 396
CFV 10 L29 396
CFV 10 LG21 399
CFV 10 LG29 399
CFV 16.21 404
CFV 16.29 404
CFV 16.216 406
CFV 16.221 406
CFV 16 G 408
CFV 16 G29 408
CFV 16 GYC21 611
CFV 16 GYC29 611
CFV 16 L21 405
CFV 16 L29 405
CFV 16 LG21 409
CFV 16 LG29 409
CFV 24.21 414
CFV 24.29 414
CFV 24.221 416
CFV 24 G 419

* These items are also shown in various sections throughout the catalogue

CFV 24 G29 419
CFV 24 GYC21 614
CFV 24 GYC29 614
CFV 24 L21 415
CFV 24 L29 415
CFV 24 LG21 420
CFV 24 LG29 420
CFV 32 426
CFV 32.29 426
CFV 32.42 426
CFV 32 G 426
CFV 32 G29 426
CFV 32 G42 426
CFV 32 L 426
CFV 32 LG 426
CFV 32 X 427
CFV 48 L 430
CFV 48 L29 430
CFV 48 L42 430
CFV 50.21 432
CFV 50.29 432
CFV 50 G29 432
CFV 50 X 433
CFV 50 X29 433
CFVS 06 L21 578
CG 06 FL 648
CG 10 FL 648
CG 16 FL 648
CG 24 FL 648
CGC 06 633
CGC 06 B 635
CGC 10 637
CGC 10 B 639
CGC 16 641
CGC 16 B 643
CGC 24 645
CGC 24 B 647
CGCE 06 551
CGCE 10 553
CGCE 16 555
CGCE 24 557
CGCP 06 FX 697
CGCP 06 MB 697
CGCP 10 FX 697
CGCP 10 MB 697
CGCP 16 FX 697
CGCP 16 MB 697
CGCP 24 FX 697
CGCP 24 MB 697
CGD 10 C 720
CGD 16 C 720
CGD 25 C 720
CGD 35 C 720
CGFA 10 206*
CGFA 16 206*
CGFA 25 206*
CGFA 35 206*
CGI 06 632
CGI 06 B 634
CGI 10 636
CGI 10 B 638
CGI 16 640
CGI 16 B 642
CGI 24 644
CGI 24 B 646
CGIE 06 550
CGIE 10 552
CGIE 16 554
CGIE 24 556
CGKCP FX 697
CGKCP MB 697
CGK I 628
CGK IA 628
CGK IAP13 628
CGK I B 630
CGK V13 629
CGK V13 B 631
CGMA 10 206*
CGMA 16 206*
CGMA 25 206*
CGMA 35 206*
CGO 06.16 633
CGO 06.16 B 635
CGO 06.21 633
CGO 06.21 B 635
CGO 06.29 633
CGO 06.29 B 635
CGO 10.16 637
CGO 10.16 B 639
CGO 10.21 637
CGO 10.21 B 639
CGO 10.29 637
CGO 10.29 B 639
CGO 16.21 641
CGO 16.21 B 643
CGO 16.29 641
CGO 16.29 B 643
CGO 16.36 641
CGO 16.36 B 643
CGO 24.21 645
CGO 24.21 B 647
CGO 24.29 645
CGO 24.29 B 647
CGO 24.36 645
CGO 24.36 B 647
CGP 06.29 632
CGP 10.29 636
CGP 16.36 640
CGP 24.36 644
CGP 24.236 644
CGPZ LOC 720
CGT 6.0 319
CGT 10 319
CGT 16 264*
CGT 25 319
CGV 06.16 633
CGV 06.16 B 635
CGV 06.21 633
CGV 06.21 B 635
CGV 06.29 633
CGV 06.29 B 635
CGV 10.16 637
CGV 10.16 B 639
CGV 10.21 637
CGV 10.21 B 639
CGV 10.29 637
CGV 10.29 B 639
CGV 16.21 641
CGV 16.21 B 643
CGV 16.29 641
CGV 16.29 B 643
CGV 16.36 641
CGV 16.36 B 643
CGV 16.221 641
CGV 16.221 B 643
CGV 24.21 645
CGV 24.21 B 647
CGV 24.29 645
CGV 24.29 B 647
CGV 24.36 645
CGV 24.36 B 647
CGV 24.229 645
CGV 24.229 B 647
CH1ES 279
CHC 06 L 391
CHC 06 LC 391
CHC 06 LG 391
CHC 06 SL 391
CHC 10 400
CHC 10 C 400
CHC 10 G 400
CHC 10 L 400
CHC 10 LG 400
CHC 10 S 400
CHC 10 SL 400
CHC 16 410
CHC 16 C 410
CHC 16 G 410
CHC 16 L 410
CHC 16 LG 410
CHC 16 S 410
CHC 16 SL 410
CHC 24 422
CHC 24 C 422
CHC 24 G 422
CHC 24 L 422
CHC 24 LG 422
CHC 24 S 422
CHC 24 SL 422
CHC 32 427
CHC 32 C 427
CHC 32 G 427
CHC 32 L 427
CHC 32 LG 427
CHC 32 S 427
CHC 32 SL 427
CHC 50 433
CHC 50 G 433
CHC 50 S 433
CHCE 06 L 542
CHCE 06 LG 542
CHCE 10 543
CHCE 10 G 543
CHCE 16 544
CHCE 16 G 544
CHCE 24 545
CHCE 24 G 545
CHCE 32 546
CHCE 32 G 546
CHCE 50 548
CHCE 50 G 548
CHCN 06 L 619
CHCN 06 LG 619
CHCN 10 621
CHCN 10 G 621
CHCN 16 623
CHCN 16 G 623
CHCN 24 625
CHCN 24 G 625
CHCP 06 696
CHCP 10 696
CHCP 10 V 696
CHCP 16 696
CHCP 24 696
CHCR 06 L 586
CHCR 10 587
CHCR 10 G 587
CHCR 16 588
CHCR 16 G 588
CHCR 24 589
CHCR 24 G 589
CHCS 06 L 578
CHCS 06 LG 578
CHCS 10 579
CHCS 10 G 579
CHCS 16 580
CHCS 16 G 580
CHCS 24 581
CHCS 24 G 581
CHCW 06 L 521
CHCW 06 LG 521
CHCW 10 522
CHCW 10 G 522
CHCW 16 523
CHCW 16 G 523
CHCW 24 524
CHCW 24 G 524
CHCW 32 525
CHCW 32 G 525
CHCW 50 527
CHCW 50 G 527
CHES 280
CHI 06 L 387, 656
CHI 06 LC 387
CHI 06 LCH 656
CHI 06 LCP 387
CHI 06 LCS 387
CHI 06 LS 387
CHI 06 YC 603
CHI 10 393, 656
CHI 10 C 393
CHI 10 CH 656
CHI 10 CP 393
CHI 10 CS 393
CHI 10 L 393
CHI 10 LS 393
CHI 10 YC 606
CHI 16 402, 656
CHI 16 C 402
CHI 16 CH 656
CHI 16 CP 402
CHI 16 CS 402
CHI 16 L 402
CHI 16 LS 402
CHI 16 YC 609
CHI 24 412, 656
CHI 24 C 412
CHI 24 CH 656
CHI 24 CP 412
CHI 24 CS 412
CHI 24 L 412
CHI 24 LS 412
CHI 24 YC 612
CHI 32 424
CHI 32 CS 424
CHI 32 L 424
CHI 32 LS 424
CHI 48 L 430
CHI 48 LS 430
CHI 50 431
CHI 50 CS 431
CHIE 06 L 542
CHIE 10 543
CHIE 16 544
CHIE 24 545
CHIE 32 546
CHIE 48 LS 547
CHIE 50 548
CHIN 06 L 618
CHIN 06 LCH 618
CHIN 10 620
CHIN 10 CH 620
CHIN 16 622
CHIN 16 CH 622
CHIN 24 624
CHIN 24 CH 624
CHIR 10 587
CHIR 16 588
CHIR 24 589
CHIR 48 LS 590
CHIS 06 L 578
CHIS 10 579

* These items are also shown in various sections throughout the catalogue

CHIS 16 580
CHIS 24 581
CHIW 06 L 521
CHIW 10 522
CHIW 16 523
CHIW 24 524
CHIW 32 525
CHIW 48 LS 526
CHIW 50 527
CHIX 32 L 428
CHIX 32 LP 428
CHIX 32 LS 428
CHO 06 L13 389
CHO 06 L16 389
CHO 06 LX16 391
CHO 10 395
CHO 10 L 396
CHO 10 X 400
CHO 16 404
CHO 16 L 405
CHO 16 X 410
CHO 24 414
CHO 24 L 415
CHO 24 X 422
CHO 32 426
CHO 32.29 426
CHO 32.42 426
CHO 32 L 426
CHO 32 X 427
CHO 48 L 430
CHO 48 L29 430
CHO 48 L42 430
CHO 50 432
CHO 50 X 433
CHOR 06 L13 586
CHOR 10 587
CHOR 16 588
CHOR 24 589
CHOR 48 L 590
CHOS 16 580
CHOS 24 581
CHOW 16 523
CHOW 24 524
CHOW 32 525
CHOW 48 L 526
CHOW 50 527
CHP 06 L 388
CHP 06 L2 388
CHP 06 LS 388
CHP 06 LS2 388
CHP 10 394
CHP 10.2 394
CHP 10 CP 394
CHP 10 CP2 394
CHP 10 CS 394
CHP 10 CS2 394
CHP 10 L 394
CHP 10 L2 394
CHP 10 LS 394
CHP 10 LS2 394
CHP 16 403
CHP 16.2 403
CHP 16 CP 403
CHP 16 CP2 403
CHP 16 CS 403
CHP 16 CS2 403
CHP 16 L 403
CHP 16 L2 403
CHP 16 LS 403
CHP 16 LS2 403
CHP 24 413
CHP 24.2 413
CHP 24 CP 413
CHP 24 CP2 413
CHP 24 CS 413
CHP 24 CS2 413
CHP 24 L 413
CHP 24 L2 413
CHP 24 LS 413
CHP 24 LS2 413
CHP 32 425
CHP 32.2 425
CHP 32.29 425
CHP 32.42 425
CHP 32.229 425
CHP 32.242 425
CHP 32 L 425
CHP 32 L2 425
CHP 32 L29 425
CHP 32 L42 425
CHP 32 L229 425
CHP 32 L242 425
CHP 32 LS 425
CHP 32 LS2 425
CHP 32 LS29 425
CHP 32 LS42 425
CHP 32 LS229 425
CHP 32 LS242 425
CHP 48 LS 430
CHP 48 LS29 430
CHP 50.21 431
CHP 50.29 431
CHP 50.221 431
CHP 50.229 431
CHP 50 CS 431
CHP 50 CS2 431
CHP 50 CS29 431
CHP 50 CS229 431
CHPR 10 587
CHPR 48 LS 590
CHPW 32 525
CHPW 48 LS 526
CHPW 50.21 527
CHPW 50.229 527
CHPX 32 L 429
CHPX 32 L29 429
CHPX 32 LP 429
CHPX 32 LP29 429
CHPX 32 LS 429
CHPX 32 LS29 429
CHSDS 701
CHV 06 L13 389
CHV 06 L16 389
CHV 06 LG 390
CHV 06 LX16 391
CHV 10 395
CHV 10 G 398
CHV 10 L 396
CHV 10 LG 399
CHV 10 X 400
CHV 16 404
CHV 16 G 408
CHV 16 L 405
CHV 16 LG 409
CHV 16 X 410
CHV 24 414
CHV 24.29 414
CHV 24 G 419
CHV 24 L 415
CHV 24 L29 415
CHV 24 LG 420
CHV 24 X 422
CHV 32 426
CHV 32.29 426
CHV 32.42 426
CHV 32 G 426
CHV 32 G29 426
CHV 32 G42 426
CHV 32 L 426
CHV 32 LG 426
CHV 32 X 427
CHV 48 L 430
CHV 48 L29 430
CHV 48 L42 430
CHVR 06 L13 586
CHVR 10 587
CHVR 16 588
CHVR 24 589
CHVR 48 L 590
CHVS 16 580
CHVS 24 581
CHVW 16 523
CHVW 24 524
CHVW 24 G 524
CHVW 32 525
CHVW 32 G 525
CHVW 48 L 526
CIES 716
CIES B 716
CIF 2.4 670
CIF 2.4 A 670
CIFA 0.2 ..... 190*
CIFA 0.3 ..... 190*
CIFA 0.5 ..... 190*
CIFA 0.7 284
CIFD 0.2 ..... 190*
CIFD 0.3 ..... 190*
CIFD 0.5 ..... 190*
CIFD 0.7 284
CIF Q4/2 2.4 672
CIF Q08 1.6 671
CIMA 0.2 ..... 190*
CIMA 0.3 ..... 190*
CIMA 0.5 ..... 190*
CIMA 0.7 284
CIMD 0.2 ..... 190*
CIMD 0.3 ..... 190*
CIMD 0.5 ..... 190*
CIMD 0.7 284
CIO 16.36 407
CIO 24.36 417
CIO 24 YX36 613
CIPZ D 716, 717
CITP D 716
CIV 16.29 407
CIV 24.36 417
CIV 24 YX36 613
CIVES 717
CIVFD 0.1 296
CIVFD 0.5 296
CIVMD 0.1 296
CIVMD 0.5 296
CIVTP D 717
CJK 8B IFT 228
CJK 8FT 226
CJK 8IFT 228
CJK 8IMT 226, 228
CJK 8M 233
CJK 8MT 226
CJK 8P IFT 228
CJ KF 223
CJ KM 223
CJPW K 737
CJPZ T 736
CJPZ Y 735
CJST 735, 736
CJZ 8 IN 224
CJZA 8 I 224
CK 03 C 340
CK 03 CA 340
CK 03 CAN 340
CK 03 CAS 340
CK 03 CN 340
CK 03 CS 340
CK 03 CX 340
CK 03 CXA 340
CK 03 CXAN 340
CK 03 CXN 340
CK 03 I 339, 346
CK 03 IA 339
CK 03 IAN 339
CK 03 IAPNS 339
CK 03 IAPS 339
CK 03 IN 339, 346
CK 03 VANS 340
CK 03 VAS 340
CK 03 VGNS 340
CK 03 VGS 340
CK 03 VNS 340
CK 03 VS 340
CKA 03 APS 349
CKA 03 C 351
CKA 03 CA 351
CKA 03 CAS 351
CKA 03 CS 351
CKA 03 I 349
CKA 03 IA 349
CKA 03 IA4 357
CKA 03 IAPS 349
CKA 03 ILS 350
CKA 03 ILSA 350
CKA 03 VAS 351
CKA 03 VGS 351
CKA 03 VS 351
CKAG 03 C 353
CKAG 03 V 354
CKAG 03 VA 354
CKAR 03 V 583
CKAR 03 VA 583
CKAS 03 IA4 565
CKAS 03 V 564
CKAS 03 VA 564
CKAW 03 V 512
CKAW 03 VA 512
CKAX 03 349
CKAX 03 APS 349
CKAX 03 CX 351
CKAX 03 CXA 351
CKAX 03 I 353
CKAX 03 IA 349
CKAX 03 IA4 356
CKAX 03 IAPS 349
CKAX 03 ILS 350, 353
CKAX 03 ILSA 350
CKAX 03 VGS 351
CKAXE 03 I 538
CKAXE 03 IA 538
CKAXR 03 AP 583
CKAXR 03 I 583
CKAXR 03 IA 583
CKAXR 03 IAP 583
CKAXR 03 VG 583
CKAXS 03 AP 564
CKAXS 03 I 564
CKAXS 03 IA 564
CKAXS 03 IA4 565
CKAXS 03 IAP 564
CKAXS 03 VG 564
CKAXW 03 AP 512
CKAXW 03 I 512
CKAXW 03 IA 512
CKAXW 03 IA4 513

* These items are also shown in various sections throughout the catalogue

CKAXW 03 IAP 512
CKAXW 03 VG 512
CKAXX 03 IA4 357
CKAXXS 03IA4 565
CKAXXW 03IA4 513
CKF 03 58
CKF 03 N 58
CKF 03 RY 60
CKF 04 58
CKF 04 N 58
CKF 04 RY 60
CKFD 03 59
CKFD 04 59
CKG 03 C 346
CKG 03 CN 346
CKG 03 V 347
CKG 03 VA 347
CKG 03 VAN 347
CKG 03 VN 347
CKM 03 58
CKM 03 N 58
CKM 03 RY 60
CKM 03 T1 693
CKM 03 T3 693
CKM 04 58
CKM 04 N 58
CKM 04 RY 60
CKMD 03 59
CKMD 04 59
CKR 65 ..... 339*
CKR 65 D 339*
CKSHF 03 63
CKSHF 04 63
CKSHM 03 63
CKSHM 04 63
CKX 03 I 344
CKX 03 IA 344
CKX 03 IAP 344
CKX 03 IAPS 344
CKX 03 IN 344
CKX 03 VG 345
CKX 03 VGS 345
CL 125 SC 239, 301
CLC1 ..... 730, 732
CLC4 ..... 730, 732
CLDL 730
CLDL DD 732
CLES 730, 734
CLF DD 677
CLK 04 SCF 239
CLK 04 SCF-H 239
CLK 04 SCM 239
CLM DD 677
CL POF SC 239, 301
CLPZ R 730, 732
CLSG 730, 732
CLSP 730, 732
CLTE 730, 732
CMCEF 03 137
CMCEF 06 ..... 139, 143
CMCEF 06 N 143
CMCEF 10 ..... 141, 145
CMCEF 10 N 145
CMCEM 03 137
CMCEM 06 ..... 139, 143
CMCEM 06 N 143
CMCEM 10 ..... 141, 145
CMCEM 10 N 145
CMSHF 03 136
CMSHF 06 ..... 138, 142
CMSHF 06 N 142
CMSHF 10 ..... 140, 144
CMSHF 10 N 144
CMSHM 03 136
CMSHM 06 ..... 138, 142
CMSHM 06 N 142
CMSHM 10 ..... 140, 144
CMSHM 10 N 144
CNEF 06 RY 116
CNEF 06 T 110
CNEF 06 TX 110
CNEF 10 RY 117
CNEF 10 T 111
CNEF 10 TX 111
CNEF 16 RY 118
CNEF 16 T 112, 114
CNEF 16 TN 114
CNEF 16 TX 112, 114
CNEF 16 TXN 114
CNEF 24 RY 119, 120
CNEF 24 RYN 120
CNEF 24 T 113, 115
CNEF 24 TN 115
CNEF 24 TX 113, 115
CNEF 24 TXN 115
CNEM 06 RY 116
CNEM 06 T 110
CNEM 06 TX 110
CNEM 10 RY 117
CNEM 10 T 111
CNEM 10 TX 111
CNEM 16 RY 118
CNEM 16 T 112, 114
CNEM 16 TN 114
CNEM 16 TX 112, 114
CNEM 16 TXN 114
CNEM 24 RY 119, 120
CNEM 24 RYN 120
CNEM 24 T 113, 115
CNEM 24 TN 115
CNEM 24 TX 113, 115
CNEM 24 TXN 115
COB 06 BC 652
COB 06 CMS 653
COB 10 BC 652
COB 10 CMS 653
COB 16 BC 652
COB 16 CMS 653
COB 24 BC 652
COB 24 CMS 653
COB L 654
COB TCQ 652
COB TSF 653
COB TSFS 653
COPZ 734
COST 734
CPES 699
CPF 06 ..... 178, 179
CPF 06 N 179
CPF 06 RY 178
CPM 06 ..... 178, 179
CPM 06 N 179
CPM 06 RY 178
CPPZ C 720
CPT 24 699
CQ4F 02 182
CQ4F 02 H 183
CQ4F 03 184
CQ4M 02 182
CQ4M 02 H 183
CQ4M 03 184
CQ 08 C 367
CQ 08 CA 367
CQ 08 I 365
CQ 08 IA 365
CQ 08 IAP 365
CQ 08 V 366
CQ 08 VA 366
CQ 08 VG 367
CQAM 12 T1 693
CQEEF 40 176
CQEEF 64 177
CQEEM 40 176
CQEEM 64 177
CQEF 10 168
CQEF 18 169
CQEF 32 ..... 170, 172
CQEF 32 N 172
CQEF 46 ..... 171, 173
CQEF 46 N 173
CQEM 10 168
CQEM 18 169
CQEM 32 ..... 170, 172
CQEM 32 N 172
CQEM 46 ..... 171, 173
CQEM 46 N 173
CQES 708*
CQF 04/2 191
CQF 05 186
CQF 07 187
CQF 08 192
CQF 12 189
CQF 17 193
CQF 21 190
CQM 04/2 191
CQM 05 186
CQM 07 187
CQM 08 192
CQM 12 189
CQM 17 193
CQM 21 190
CQO 24 418
CQS 08 I 573
CQS 08 IA 573
CQS 08 IAP 573
CQS 08 V 574
CQS 08 VA 574
CQS 08 VG 574
CQV 24 418
CR 05 CA 678*
CR 06 AT 678
CR 06 BPE 510, 655
CR 06 DF 601, 682
CR 06 FS 680
CR 06 SC 679
CR 06 ST 678
CR 08 EMC 575
CR 09 AD 700
CR 09 AD1 700
CR 09 AD2 700
CR 10 AT 678
CR 10 BPE 510, 655
CR 10 CA 678*
CR 10 DF 601, 682
CR 10 FS 680
CR 10 SC 679
CR 10 ST 678
CR 15/16 654
CR 15 AD 700
CR 15 AD1 700
CR 15 AD2 700
CR 16 AT 678
CR 16 BPE 510, 655
CR 16 DF 601, 682
CR 16 FS 680
CR 16 SC 679
CR 16 SS 680
CR 16 SSD 681
CR 16 ST 678
CR 20 684
CR 20 CX 684
CR 20 CX D 684
CR 20 D 684
CR 24 AT 678
CR 24 ATD 678
CR 24 BPE 510, 655
CR 24 DF 601, 682
CR 24 FS 680
CR 24 SC 679
CR 24 SCA 679
CR 24 SS 680
CR 24 SSD 681
CR 24 ST 678
CR 25/16 654
CR 25 AD 700
CR 25 AD1 700
CR 25 AD2 700
CR 26 V 680, 681
CR 37 AD 700
CR 37 AD1 700
CR 37 AD2 700
CR 42 V 680, 681
CR 50 AD 700
CR 50 AD1 700
CR 50 AD2 700
CR 72 686
CR 72 CX 686
CR 72 CX D 686
CR 72 D 686
CRAD 669
CRAS 669
CR BDE 694
CRBF 669
CR BLC622 667
CRBM 669
CR BST 695
CR CDS 86*
CR CLK 666
CR CP 689
CR CPQ 689
CR CX01B 371
CR CX01G 371
CR CX01N 371
CR CX01R 371
CRF 685, 686
CRF CX 685, 686
CRF CX D 685, 686
CRF D 685, 686
CR GND 288*
CRH 24 702
CRIC M3 668
CR K03 688
CR K04G 688
CR K04R 688
CR KC 233
CRM 685, 686
CRM CX 685, 686
CRM CX D 685, 686
CRM D 685, 686
CRN 1 421
CRN 2 421
CRN 3 421
CRN P 421
CR Q02 691
CR Q03 692
CR Q12 689
CRQ 16 ..... 367, 575
CRQ 21 ..... 367, 575
CR QF07 690
CR QM07 690
CR SP 680, 681
CR TM-1 698

* These items are also shown in various sections throughout the catalogue

CR TT 262
CR VATG 668
CR VDTG 668
CR VGM4 319
CR VNTG 668
CR VPTG 668
CR YLK24 667
CR YLK24 SL 667
CRZ 06 702
CRZ 10 702
CRZ 16 702
CRZ 24 702
CSAHF 10 99
CSAHF 16 ..... 101, 103
CSAHF 16 N 103
CSAHM 10 99
CSAHM 16 ..... 101, 103
CSAHM 16 N 103
CSHES 738
CSHF 06 110
CSHF 06 S 122
CSHF 10 111
CSHF 10 S 123
CSHF 16 ..... 112, 114
CSHF 16 N 114
CSHF 16 S 124, 126
CSHF 16 SN 126
CSHF 24 ..... 113, 115
CSHF 24 N 115
CSHF 24 S 125, 127
CSHF 24 SN 127
CSHM 06 110
CSHM 06 S 122
CSHM 10 111
CSHM 10 S 123
CSHM 16 ..... 112, 114
CSHM 16 N 114
CSHM 16 S 124, 126
CSHM 16 SN 126
CSHM 24 ..... 113, 115
CSHM 24 N 115
CSHM 24 S 125, 127
CSHM 24 SN 127
CSSF 06 148
CSSF 10 149
CSSF 16 ..... 150, 152
CSSF 16 N 152
CSSF 24 ..... 151, 153
CSSF 24 N 153
CSSM 06 148
CSSM 10 149
CSSM 16 ..... 150, 152
CSSM 16 N 152
CSSM 24 ..... 151, 153
CSSM 24 N 153
CT APE 669
CTF 06 L 160
CTF 06 R 160
CTF 10 L 161
CTF 10 R 161
CTF 16 L 162
CTF 16 R 162
CTF 24 L 163
CTF 24 R 163
CTF 40 L 156
CTF 40 R 156
CTF 64 L 157
CTF 64 R 157
CTM 06 L 160
CTM 06 R 160
CTM 10 L 161
CTM 10 R 161
CTM 16 L 162
CTM 16 R 162
CTM 24 L 163
CTM 24 R 163
CTM 40 L 156
CTM 40 R 156
CTM 64 L 157
CTM 64 R 157
CTSEF 06 L 160
CTSEF 06 R 160
CTSEF 10 L 161
CTSEF 10 R 161
CTSEF 16 L 162, 164
CTSEF 16 LN 164
CTSEF 16 R 162, 164
CTSEF 16 RN 164
CTSEF 24 L 163, 165
CTSEF 24 LN 165
CTSEF 24 R 163, 165
CTSEF 24 RN 165
CTSEM 06 L 160
CTSEM 06 R 160
CTSEM 10 L 161
CTSEM 10 R 161
CTSEM 16 L 162, 164
CTSEM 16 LN 164
CTSEM 16 R 162, 164
CTSEM 16 RN 164
CTSEM 24 L 163, 165
CTSEM 24 LN 165
CTSEM 24 R 163, 165
CTSEM 24 RN 165
CTSF 40 L 156
CTSF 40 R 156
CTSF 64 L 157
CTSF 64 R 157
CTSM 40 L 156
CTSM 40 R 156
CTSM 64 L 157
CTSM 64 R 157
CUK 2FT 236
CUK 3FT 236
CVAP 06 LP 446
CVAP 06 LP2 446
CVAP 06 LP29 446
CVAP 06LP229 446
CVAP 06 LS 446
CVAP 06 LS2 446
CVAP 06 LS29 446
CVAP 06LS229 446
CVAP 06LSP21 445
CVAP 06LSP29 445
CVAP 10 L21 451
CVAP 10 L29 451
CVAP 10 L221 451
CVAP 10 L229 451
CVAP 10 LP21 452
CVAP 10 LP29 452
CVAP 10LP221 452
CVAP 10LP229 452
CVAP 10 LS 452
CVAP 10 LS2 452
CVAP 10 LS29 452
CVAP 10LS229 452
CVAP 10LSP21 449
CVAP 10LSP29 449
CVAP 16 L21 456
CVAP 16 L22 456
CVAP 16 L29 456
CVAP 16 L229 456
CVAP 16 LP21 457
CVAP 16 LP29 457
CVAP 16LP221 457
CVAP 16LP229 457
CVAP 16 LS 457
CVAP 16 LS2 457
CVAP 16 LS29 457
CVAP 16LS229 457
CVAP 16LSP21 455
CVAP 16LSP29 455
CVAP 24 L21 461
CVAP 24 L29 461
CVAP 24 L221 461
CVAP 24 L229 461
CVAP 24 LP21 462
CVAP 24 LP29 462
CVAP 24LP221 462
CVAP 24LP229 462
CVAP 24 LS 462
CVAP 24 LS2 462
CVAP 24 LS29 462
CVAP 24LS229 462
CVAP 24LSP21 460
CVAP 24LSP29 460
CVAV 06 LG21 447
CVAV 06 LG29 447
CVAV 10 G21 453
CVAV 10 G29 453
CVAV 10 LG21 453
CVAV 10 LG29 453
CVAV 16 G21 458
CVAV 16 G29 458
CVAV 16 LG21 458
CVAV 16 LG29 458
CVAV 24 G21 463
CVAV 24 G29 463
CVAV 24 LG21 463
CVAV 24 LG29 463
CVFV 06 LG21 447
CVFV 06 LG29 447
CVFV 10 G21 453
CVFV 10 G29 453
CVFV 10 LG21 453
CVFV 10 LG29 453
CVFV 16 G21 458
CVFV 16 G29 458
CVFV 16 LG21 458
CVFV 16 LG29 458
CVFV 24 G21 463
CVFV 24 G29 463
CVFV 24 LG21 463
CVFV 24 LG29 463
CVI 06 LP 444
CVI 06 LS 444
CVI 06 LSP 445
CVI 10 L 448
CVI 10 LA 450
CVI 10 LP 448
CVI 10 LS 448
CVI 10 LSP 449
CVI 16 L 454
CVI 16 LP 454
CVI 16 LS 454
CVI 16 LSP 455
CVI 24 L 459
CVI 24 LP 459
CVI 24 LS 459
CVI 24 LSP 460
CVP 06 LP 446
CVP 06 LP2 446
CVP 06 LS 446
CVP 06 LS2 446
CVP 06 LSP16 445
CVP 10 L 451
CVP 10 L2 451
CVP 10 LP 452
CVP 10 LP2 452
CVP 10 LS 452
CVP 10 LS2 452
CVP 10 LSP16 449
CVP 16 L 456
CVP 16 L2 456
CVP 16 LP 457
CVP 16 LP2 457
CVP 16 LS 457
CVP 16 LS2 457
CVP 16 LSP21 455
CVP 24 L 461
CVP 24 L2 461
CVP 24 LP 462
CVP 24 LP2 462
CVP 24 LS 462
CVP 24 LS2 462
CVP 24 LSP21 460
CVV 06 LG 447
CVV 10 G 453
CVV 10 LG 453
CVV 16 G 458
CVV 16 LG 458
CVV 24 G 463
CVV 24 LG 463
CW 0.5 J2M4E 308
CW 0.5 J2M8 308
CW 0.5 JM4/2 308
CW 0.5 JM4E 308
CW 0.5 JM8 308
CW 1 J2M87 ..... 227, 303
CW 1 SC9 240
CW 1 SC50 240
CW 1 SC62 240
CW 2 J2M4E 308
CW 2 J2M8 308
CW 2 J2M87 ..... 227, 303
CW 2 JM4/2 308
CW 2 JM4E 308
CW 2 JM8 308
CW 2 SC9 240
CW 2 SC50 240
CW 2 SC62 240
CW 2 UAM 236, 294
CW 3 J2M87 ..... 227, 303
CW 3 SC9 240
CW 3 SC50 240
CW 3 SC62 240
CW 5 J2M4E 308
CW 5 J2M8 308
CW 5 J2M87 ..... 227, 303
CW 5 JM4/2 308
CW 5 JM4E 308
CW 5 JM8 308
CW 5 SC9 240
CW 5 SC50 240
CW 5 SC62 240
CW 7.5J2M87 ..... 227, 303
CW 10 J2M4E 308
CW 10 J2M8 308
CW 10 J2M87 ..... 227, 303
CW 10 JM4/2 308
CW 10 JM4E 308
CW 10 JM8 308
CW 10 SC9 240
CW 10 SC50 240
CW 10 SC62 240
CW 15 J2M87 ..... 227, 303
CWC J5 1M 230
CWC J5 2M 230
CWC J5 3M 230
CWC J5 5M 230
CWC J5 7.5M 230
CWC J5 10M 230

* These items are also shown in various sections throughout the catalogue

CWC J5 15M 230
CWC J6 1M 229
CWC J6 2M 229
CWC J6 3M 229
CWC J6 5M 229
CWC J6 7.5M 229
CWC J6 10M 229
CWC J6 15M 229
CWH J6 0.5M 231
CWH J6 0,5MA 231
CWH J6 0.25M 231
CWH J6 1M 231
CWH J6 1MA 231
CWH J6 2M 231
CWH J6 2MA 231
CWH J6 3M 231
CWH J6 3MA 231
CWH J6 5M 231
CWH J6 5MA 231
CWH J6 7.5M 231
CWH J6 7.5MA 231
CWH J6 10M 231
CWH J6 10MA 231
CWH J6 15M 231
CWH JE 0.5M 231
CWH JE 1M 231
CWH JE 2M 231
CWH JE 3M 231
CWH JE 5M 231
CWH JE 7.5M 231
CWH JE 10M 231
CWH JE 15M 231
CW J5 1M 230
CW J5 2M 230
CW J5 3M 230
CW J5 5M 230
CW J5 7.5M 230
CW J5 10M 230
CW J5 15M 230
CW J6 1M 229
CW J6 2M 229
CW J6 3M 229
CW J6 5M 229
CW J6 7.5M 229
CW J6 10M 229
CW J6 15M 229
CWK 2 J2M8 224
CWK 5 J2M8 224
CWK 10 J2M8 224
CWKA 2 J2M8 224
CWKA 5 J2M8 224
CWKA 10 J2M8 224
CW XJ0.5M 229
CW XJ1M 229
CW XJ2M 229
CW XJ3M 229
CW XJ5M 229
CW XJ7.5M 229
CW XJ10M 229
CX 1/2 BDF 243
CX 1/2 BDM 243
CX 1.6 PF 313
CX 1.6 PM 313
CX 1.6 VC 313
CX 01 9VF 296
CX 01 9VM 296, 298
CX 01 9VTF 298
CX 01 BCF 289
CX 01 BCM 289
CX 01 BF 291
CX 01 BM 291
CX 01 GF 264
CX 01 GM 264
CX 01 J8F 302
CX 01 J8IM 302
CX 01 J8M 302
CX 01 JF 304
CX 01 JM 304
CX 01 T 316
CX 01 UF 294
CX 01 UM 294
CX 01 YF 262
CX 01 YM 262
CX 01 YPEF 263
CX 01 YPEM 263
CX 02 4AF 268
CX 02 4AM 268
CX 02 4BF 268
CX 02 4BM 268
CX 02 4F 267, 321
CX 02 4M 267, 321
CX 02 7F 266
CX 02 7M 266
CX 02 BF 288*
CX 02 BM 288*
CX 02 CHF 279
CX 02 CHM 279
CX 02 GF 265
CX 02 GM 265
CX 02 HF 280
CX 02 HM 280
CX 02 JF 306
CX 02 JM 306
CX 02 P 312
CX 02 TF 317
CX 02 TM 317
CX 3.0 PF 313
CX 3.0 PM 313
CX 3.0 VC 313
CX 03 4BF 270, 323
CX 03 4BM 270, 323
CX 03 4F 269, 322
CX 03 4M 269, 322
CX 3/4 XDF 271, 324
CX 3/4 XDM 271, 324
CX 03 P 312
CX 03 TF 317
CX 03 TM 317
CX 4.0 PF 313
CX 4.0 PM 313
CX 4.0 VC 313
CX 4/2 JM 223*
CX 04 BF 291
CX 04 BM 291
CX 4E JM 223*
CX 4 JM 223*
CX 04 LF 299
CX 04 LM 299
CX 04 RF 300
CX 04 RM 300
CX 04 SCF 301
CX 04 SCF-H 301
CX 04 SCM 301
CX 04 TF 317
CX 04 TM 317
CX 04 XF 272, 325
CX 04 XM 272, 325
CX 5/7 CA 286
CX 05 SHF 274
CX 05 SHM 274
CX 6.0 PF 313
CX 6.0 PM 313
CX 6.0 VC 313
CX 6/2 JM 223*
CX 06 CF 275, 327
CX 06 CM 275, 327
CX 06P CF 276, 326
CX 06P CM 276, 326
CX 06 TF 317
CX 06 TM 317
CX 7/10 CA 286
CX7FA 10 266
CX7FA 16 266
CX7FA 25 266
CX7MA 10 266
CX7MA 16 266
CX7MA 25 266
CX7PZ LOC 720
CX 8/2 JF 223*
CX 08 BF 293
CX 08 BM 293
CX 08 CF 277, 328
CX 08 CM 277, 328
CX 08 I6F 286
CX 08 I6M 286
CX 8 J6IM 226*
CX 8 J6M 226, 302
CX 8 JF 223*
CX 8 JM 223*
CX 10/12 CA 286
CX 12 DF 281, 330
CX 12 DM 281, 330
CX 17 DF 282, 331
CX 17 DM 282, 331
CX 20 CF 278, 329
CX 20 CM 278, 329
CX 25 IBF 284
CX 25 IBM 284
CX 42 DF 283, 332
CX 42 DM 283, 332
CX 50 RF 300
CX 50 RM 300
CX 75 RF 300
CX 75 RM 300
CXA 01 I 369
CX BES 703
CXES 711*
CXES-10 714
CXF 4/0 200
CXF 4/0 RY 202
CXF 4/2 201
CXF 4/2 RY 203
CXF 4/8 204
CXF 4/8 RY 204
CXF 6/6 206
CXF 6/12 197
CXF 6/36 198
CXF 8/24 194
CXF 12/2 199
CXFA 1.5 ..... 182*
CXFA 2.5 ..... 182*
CXFA 4.0 ..... 182*
CXFA 6.0 ..... 182*
CXFA 10 ..... 182*
CXFFA 672
CX FM 309
CXL 2/4 PF 251
CXL 2/4 PFH 251
CXL 2/4 PM 251
CXL 2/4 PMH 251
CXL 2/4 SF 250
CXL 2/4 SM 250
CXL PF 251
CXL PM 251
CXL SF 250
CXL SM 250
CXM 4/0 200
CXM 4/0 RY 202
CXM 4/2 201
CXM 4/2 RY 203
CXM 4/8 204
CXM 4/8 RY 204
CXM 6/6 206
CXM 6/12 197
CXM 6/36 198
CXM 8/24 194
CXM 12/2 199
CXMA 1.5 ..... 182*
CXMA 2.5 ..... 182*
CXMA 4.0 ..... 182*
CXMA 6.0 ..... 182*
CXMA 10 ..... 182*
CXMFA 672
CX MLF 299
CX MLM 299
CXP 01 C 370
CXP 01 CLG 370
CX PLF 299
CX PLM 299
CXPNP 712
CXPNPP 726
CXPZ D 712
CXPZP D 726
CXPZ TP 711
CXTP 40 ..... 712, 726
CYD 35 C 720
CYD 50 C 720
CYD 70 C 720
CYFA 16 ..... 262, 263
CYFA 25 ..... 262, 263
CYFA 35 ..... 262, 263
CYFA 50 ..... 262, 263
CYFA 70 ..... 262, 263
CYG 06H06 660
CYG 06H06D 660
CYG 06H10 660
CYG 06H10D 660
CYG 06H0606 661
CYG 06H0610 661
CYG 06H1006 661
CYG 06H1010 661
CYG 8/2 JF 225
CYG 8/2 JFA 225
CYG 8 JF 225
CYG 8 JFA 225
CYG 16 659
CYMA 16 ..... 262, 263
CYMA 25 ..... 262, 263
CYMA 35 ..... 262, 263
CYMA 50 ..... 262, 263
CYMA 70 ..... 262, 263
CYPZ LOC 720
CYR 16.3 658
CYR 24.4 658
CZ7CE 15 LG 540
CZ7CE 25 LG 541
CZ7CS 15 LG 576
CZ7CS 25 LG 577
CZ7CW 15 LG 519
CZ7CW 25 LG 520
CZ7I 15 L 384
CZ7I 15 LS 384
CZ7I 25 L 385
CZ7I 25 LS 385
CZ7IE 15 L 540
CZ7IE 25 L 541
CZ7IS 15 L 576
CZ7IS 25 L 577
CZ7IW 15 L 519
CZ7IW 25 L 520
CZ7PS 15 L2 576
CZ7PS 25 L2 577

* These items are also shown in various sections throughout the catalogue

CZ7PW 15 L2 519
CZ7PW 25 L2 520
CZAC 15 L 382
CZAC 25 L 382
CZAO 15 L16 376
CZAO 15 L21 376
CZAO 25 L16 380
CZAO 25 L21 380
CZAOW 15 L21 519
CZAOW 25 L21 520
CZAP 25 L 378
CZAP 25 L2 378
CZAP 25 L21 378
CZAP 25 L221 378
CZAP 25 LS 378
CZAP 25 LS2 378
CZAP 25 LS21 378
CZAP 25LS221 378
CZAP 25LSP16 379
CZAP 25LSP21 379
CZAPR 06 L 586
CZAV 15 L16 376
CZAV 15 L21 376
CZAV 25 L16 380
CZAV 25 L21 380
CZAV 25 L216 380
CZAVW 15 L21 519
CZAVW 25 L21 520
CZC 15 L 377
CZC 15 LG 377
CZC 15 SL 377
CZC 25 L 381
CZC 25 LG 381
CZC 25 SL 381
CZCE 15 L 540
CZCE 25 L 541
CZCR 06 LG 586
CZCS 15 L 576
CZCS 25 L 577
CZCW 15 L 519
CZCW 25 L 520
CZFO 15 L16 376
CZFO 15 L21 376
CZFO 25 L16 380
CZFO 25 L21 380
CZFOS 15 L21 576
CZFOS 25 L21 577
CZFV 15 L16 376
CZFV 15 L21 376
CZFV 25 L16 380
CZFV 25 L21 380
CZFV 25 L216 380
CZFVS 15L221 576
CZFVS 25 L21 577
CZI 15 L 374
CZI 15 LS 374
CZI 15 LSP 375
CZI 25 L 378
CZI 25 LS 378
CZI 25 LSP 379
CZIR 06 L 586
CZO 15 L 376
CZO 25 L 380
CZOS 15 L 576
CZOS 25 L 577
CZOW 15 L 519
CZOW 25 L 520
CZP 15 L 374
CZP 15 L2 374
CZP 15 L21 374
CZP 15 L221 374
CZP 15 LS 374
CZP 15 LS2 374
CZP 15 LS21 374
CZP 15 LS221 374
CZP 15 LSP16 375
CZP 15 LSP21 375
CZPR 06 L 586
CZV 15 L 376
CZV 15 LG 376
CZV 25 L 380
CZV 25 LG 381
CZVS 15 L 576
CZVS 25 L 577
CZVW 15 L 519
CZVW 25 L 520

M

M7AP 06 L32 436
M7AP 06 L40 436
M7AP 06 L232 436
M7AP 06 L240 436
M7AP 06 LS32 437
M7AP 06 LS40 437
M7AP 06LS232 437
M7AP 06LS240 437
M7AP 10.32 438
M7AP 10.40 438
M7AP 10.232 438
M7AP 10.240 438
M7AP 16.32 439
M7AP 16.40 439
M7AP 16.232 439
M7AP 16.240 439
M7AP 16 S32 440
M7AP 16 S232 440
M7AP 24.32 441
M7AP 24.40 441
M7AP 24.232 441
M7AP 24.240 441
M7AP 24 S32 442
M7AP 24 S232 442
M7APE 06 L32 530
M7APE 06 L40 530
M7APE 06L232 530
M7APE 06L240 530
M7APE 10.32 532
M7APE 10.40 532
M7APE 10.232 532
M7APE 10.240 532
M7APE 16.32 534
M7APE 16.40 534
M7APE 16.232 534
M7APE 16.240 534
M7APE 24.32 536
M7APE 24.40 536
M7APE 24.232 536
M7APE 24.240 536
M7P 06 L20 436
M7P 06 L220 436
M7P 06 LS20 437
M7P 06 LS220 437
M7P 10.20 438
M7P 10.220 438
M7P 16.25 439
M7P 16.225 439
M7P 24.25 441
M7P 24.225 441
M7PE 06 L20 530
M7PE 06 L220 530
M7PE 10.20 532
M7PE 10.220 532
M7PE 16.25 534
M7PE 16.225 534
M7PE 24.25 536
M7PE 24.225 536
MAF 10.20 395
MAF 16.25 404
MAF 16.225 406
MAF 24.25 414
MAF 24.32 414
MAF 24.225 416
MAO 06 L25 389
MAO 06 L32 389
MAO 06 YX25 604
MAO 06 YX32 604
MAO 10.32 395
MAO 10.40 395
MAO 10 L32 396
MAO 10 L40 396
MAO 10 X32 400
MAO 10 X40 400
MAO 10 YX32 607
MAO 10 YX40 607
MAO 16.32 404
MAO 16.40 404
MAO 16 L32 405
MAO 16 L40 405
MAO 16 X32 410
MAO 16 X40 410
MAO 16 YX32 610
MAO 16 YX40 610
MAO 24.32 414
MAO 24.40 414
MAO 24 L32 415
MAO 24 L40 415
MAO 24 X32 422
MAO 24 X40 422
MAO 24 YX32 613
MAO 24 YX40 613
MAO 50.25 432
MAO 50.32 432
MAO 50 X25 433
MAO 50 X32 433
MAOE 06 L32 542
MAOE 10.32 543
MAOE 16.32 544
MAOE 16.40 544
MAOE 24.32 545
MAOE 24.40 545
MAOE 50.320 548
MAOR 06 L32 586
MAOR 10.32 587
MAOR 16.40 588
MAOR 24.40 589
MAOS 10.32 579
MAOS 16.32 580
MAOS 16.40 580
MAOS 24.32 581
MAOS 24.40 581
MAOW 06 L32 521
MAOW 10.32 522
MAOW 16.32 523
MAOW 16.40 523
MAOW 24.32 524
MAOW 24.40 524
MAOW 50.32 527
MAP 06 L25 388
MAP 06 L32 388
MAP 06 L40 388
MAP 06 L225 388
MAP 06 L232 388
MAP 06 L240 388
MAP 06 LS32 388
MAP 06 LS40 388
MAP 06 LS232 388
MAP 06 LS240 388
MAP 06 YC232 603
MAP 10.25 394
MAP 10.32 394
MAP 10.40 394
MAP 10.225 394
MAP 10.232 394
MAP 10.240 394
MAP 10 CP32 394
MAP 10 CP40 394
MAP 10 CP232 394
MAP 10 CP240 394
MAP 10 CS32 394
MAP 10 CS40 394
MAP 10 CS232 394
MAP 10 CS240 394
MAP 10 L32 394
MAP 10 L40 394
MAP 10 L232 394
MAP 10 L240 394
MAP 10 LS32 394
MAP 10 LS40 394
MAP 10 LS232 394
MAP 10 LS240 394
MAP 10 YC232 606
MAP 16.25 403
MAP 16.32 403
MAP 16.40 403
MAP 16.225 403
MAP 16.232 403
MAP 16.240 403
MAP 16 CP32 403
MAP 16 CP40 403
MAP 16 CP232 403
MAP 16 CP240 403
MAP 16 CS32 403
MAP 16 CS40 403
MAP 16 CS232 403
MAP 16 CS240 403
MAP 16 L32 403
MAP 16 L40 403
MAP 16 L232 403
MAP 16 L240 403
MAP 16 LS32 403
MAP 16 LS40 403
MAP 16 LS232 403
MAP 16 LS240 403
MAP 16 YC232 609
MAP 24.25 413
MAP 24.32 413
MAP 24.40 413
MAP 24.225 413
MAP 24.232 413
MAP 24.240 413
MAP 24 CP32 413
MAP 24 CP40 413
MAP 24 CP232 413
MAP 24 CP240 413
MAP 24 CS32 413
MAP 24 CS40 413
MAP 24 CS232 413
MAP 24 CS240 413
MAP 24 L32 413
MAP 24 L40 413
MAP 24 L232 413
MAP 24 L240 413
MAP 24 LS32 413
MAP 24 LS40 413
MAP 24 LS232 413
MAP 24 LS240 413
MAP 24 YC232 612
MAPE 06 L32 542
MAPE 10.32 543
MAPE 16.32 544
MAPE 24.32 545
MAPN 06 L32 618

* These items are also shown in various sections throughout the catalogue

MAPN 10.32 620
MAPN 16.32 622
MAPN 24.32 624
MAPR 10.32 587
MAPR 16.32 588
MAPR 24.32 589
MAPS 06 L32 578
MAPS 10.32 579
MAPS 16.32 580
MAPS 24.32 581
MAPW 06 L32 521
MAPW 10.32 522
MAPW 16.32 523
MAPW 24.32 524
MAV 06 GYC25 605
MAV 06 GYC32 605
MAV 06 GYC40 605
MAV 06 L25 389
MAV 06 L32 389
MAV 06 LG25 390
MAV 06LG25-F 388
MAV 06 LG32 390
MAV 06 YX25 604
MAV 06 YX32 604
MAV 10.32 395
MAV 10.40 395
MAV 10.220 397
MAV 10 G25 398
MAV 10 G32 398
MAV 10 GYC25 608
MAV 10 GYC32 608
MAV 10 GYC40 608
MAV 10 L32 396
MAV 10 L40 396
MAV 10 LG25 399
MAV 10 LG32 399
MAV 10 X32 400
MAV 10 X40 400
MAV 10 YX32 607
MAV 10 YX40 607
MAV 16.32 404
MAV 16.40 404
MAV 16.220 406
MAV 16.225 406
MAV 16 G25 408
MAV 16 G32 408
MAV 16 G40 408
MAV 16 GYC25 611
MAV 16 GYC32 611
MAV 16 GYC40 611
MAV 16 L32 405
MAV 16 L40 405
MAV 16 LG25 409
MAV 16 LG32 409
MAV 16 LG40 409
MAV 16 X32 410
MAV 16 X40 410
MAV 16 YX32 610
MAV 16 YX40 610
MAV 24.32 414
MAV 24.40 414
MAV 24.232 416
MAV 24 G25 419
MAV 24 G32 419
MAV 24 G40 419
MAV 24 GYC25 614
MAV 24 GYC32 614
MAV 24 GYC40 614
MAV 24 L32 415
MAV 24 L40 415
MAV 24 LG25 420
MAV 24 LG32 420
MAV 24 LG40 420
MAV 24 X32 422
MAV 24 X40 422
MAV 24 YX32 613
MAV 24 YX40 613
MAV 50.25 432
MAV 50.32 432
MAV 50 G32 432
MAV 50 X25 433
MAV 50 X32 433
MAVE 06 L32 542
MAVE 06 LG32 542
MAVE 10.32 543
MAVE 10 G32 543
MAVE 16.32 544
MAVE 16.40 544
MAVE 16 G32 544
MAVE 24.32 545
MAVE 24.40 545
MAVE 24 G32 545
MAVE 50.32 548
MAVR 06 L32 586
MAVR 10.32 587
MAVR 16.40 588
MAVR 24.40 589
MAVS 10.32 579
MAVS 16.32 580
MAVS 16.40 580
MAVS 24.32 581
MAVS 24.40 581
MAVW 06 L32 521
MAVW 06 LG32 521
MAVW 10.32 522
MAVW 10 G32 522
MAVW 16.32 523
MAVW 16.40 523
MAVW 16 G32 523
MAVW 24.32 524
MAVW 24.40 524
MAVW 50.32 527
MBO 06 L40 466
MBO 06 L50 466
MBO 10.40 468
MBO 10.50 468
MBO 16.40 470
MBO 16.50 470
MBO 16.225 471
MBO 24.40 472
MBO 24.50 472
MBO 24.225 473
MBV 06 L40 466
MBV 06 L50 466
MBV 06 L225 466
MBV 06 L320 466
MBV 10.40 468
MBV 10.50 468
MBV 10.225 468
MBV 10.420 468
MBV 16.40 470
MBV 16.50 470
MBV 16.232 470
MBV 16.325 470
MBV 16.620 471
MBV 24.40 472
MBV 24.50 472
MBV 24.240 472
MBV 24.332 472
MBV 24.425 473
MBV 24.720 473
MBVO 06 L240 467
MBVO 10.240 469
MBVO 16.240 471
MBVO 24.250 473
MFF 10.20 395
MFF 16.25 404
MFF 16.225 406
MFF 24.25 414
MFF 24.32 414
MFF 24.225 416
MFO 06 L25 389
MFO 06 L32 389
MFO 06 L40 389
MFO 06 LG40 390
MFO 10.32 395
MFO 10.40 395
MFO 10 G40 398
MFO 10 L32 396
MFO 10 L40 396
MFO 10 LG40 399
MFO 16.32 404
MFO 16.40 404
MFO 16 G40 408
MFO 16 L32 405
MFO 16 L40 405
MFO 16 LG40 409
MFO 24.32 414
MFO 24.40 414
MFO 24 G40 419
MFO 24 L32 415
MFO 24 L40 415
MFO 24 LG40 420
MFO 32.32 426
MFO 32.40 426
MFO 32.50 426
MFO 32 L40 426
MFO 32 X40 427
MFO 48 L32 430
MFO 48 L40 430
MFO 48 L50 430
MFO 50.25 432
MFO 50.32 432
MFO 50 X25 433
MFO 50 X32 433
MFOE 06 L32M 531
MFOE 06 L40M 531
MFOE 10.25M 533
MFOE 10.40M 533
MFOE 16.32M 535
MFOE 16.40M 535
MFOE 24.32M 537
MFOE 24.40M 537
MFON 06 L25 618
MFON 10.32 620
MFON 16.32 622
MFON 24.32 624
MFOS 06 L32 578
MFV 06 GYC25 605
MFV 06 GYC32 605
MFV 06 GYC40 605
MFV 06 L25 389
MFV 06 L32 389
MFV 06 L40 389
MFV 06 LG25 390
MFV 06 LG32 390
MFV 06 LG40 390
MFV 10.32 395
MFV 10.40 395
MFV 10.220 397
MFV 10 G25 398
MFV 10 G32 398
MFV 10 G40 398
MFV 10 GYC25 608
MFV 10 GYC32 608
MFV 10 GYC40 608
MFV 10 L32 396
MFV 10 L40 396
MFV 10 LG25 399
MFV 10 LG32 399
MFV 10 LG40 399
MFV 16.32 404
MFV 16.40 404
MFV 16.220 406
MFV 16.225 406
MFV 16 G25 408
MFV 16 G32 408
MFV 16 G40 408
MFV 16 GYC25 611
MFV 16 GYC32 611
MFV 16 GYC40 611
MFV 16 L32 405
MFV 16 L40 405
MFV 16 LG25 409
MFV 16 LG32 409
MFV 16 LG40 409
MFV 24.32 414
MFV 24.40 414
MFV 24.232 416
MFV 24 G25 419
MFV 24 G32 419
MFV 24 G40 419
MFV 24 GYC25 614
MFV 24 GYC32 614
MFV 24 GYC40 614
MFV 24 L32 415
MFV 24 L40 415
MFV 24 LG25 420
MFV 24 LG32 420
MFV 24 LG40 420
MFV 32.32 426
MFV 32.40 426
MFV 32.50 426
MFV 32 G32 426
MFV 32 G40 426
MFV 32 G50 426
MFV 32 L40 426
MFV 32 LG40 426
MFV 32 X40 427
MFV 48 L32 430
MFV 48 L40 430
MFV 48 L50 430
MFV 50.25 432
MFV 50.32 432
MFV 50 G32 432
MFV 50 X25 433
MFV 50 X32 433
MFVE 06 L32M 531
MFVE 06 L40M 531
MFVE 10.32M 533
MFVE 10.40M 533
MFVE 16.32M 535
MFVE 24.32M 537
MFVE 24.40M 537
MFVN 06 L25 618
MFVN 06 LG25 619
MFVN 10.32 620
MFVN 10 G32 621
MFVN 10 G220 621
MFVN 16.32 622
MFVN 16 G32 623
MFVN 16 G225 623
MFVN 24.32 624
MFVN 24 G32 625
MFVN 24 G232 625
MFVS 06 L32 578
MGK IAP20 628
MGK V20 629
MGK V20 B 631
MGK V25 629
MGK V25 B 631
MGO 06.25 633

* These items are also shown in various sections throughout the catalogue

MGO 06.25 B..... 635
MGO 06.32..... 633
MGO 06.32 B..... 635
MGO 10.25..... 637
MGO 10.25 B..... 639
MGO 10.32..... 637
MGO 10.32 B..... 639
MGO 16.32..... 641
MGO 16.32 B..... 643
MGO 16.40..... 641
MGO 16.40 B..... 643
MGO 16.50..... 641
MGO 16.50 B..... 643
MGO 24.32..... 645
MGO 24.32 B..... 647
MGO 24.40..... 645
MGO 24.40 B..... 647
MGO 24.50..... 645
MGO 24.50 B..... 647
MGOE 06.25..... 551
MGOE 06.32..... 551
MGOE 10.25..... 553
MGOE 10.32..... 553
MGOE 16.32..... 555
MGOE 16.40..... 555
MGOE 16.50..... 555
MGOE 24.32..... 557
MGOE 24.40..... 557
MGOE 24.50..... 557
MGP 06.32 632
MGP 10.32 636
MGP 16.40 640
MGP 24.40 644
MGP 24.240 644
MGPE 06.32..... 550
MGPE 10.32..... 552
MGPE 16.40..... 554
MGPE 24.40..... 556
MGPE 24.240..... 556
MGV 06.25 633
MGV 06.25 B..... 635
MGV 06.32 633
MGV 06.32 B..... 635
MGV 06.40 633
MGV 06.40 B..... 635
MGV 10.25 637
MGV 10.25 B..... 639
MGV 10.32 637
MGV 10.32 B..... 639
MGV 10.40 637
MGV 10.40 B..... 639
MGV 16.25 641
MGV 16.25 B..... 643
MGV 16.32 641
MGV 16.32 B..... 643
MGV 16.40 641
MGV 16.40 B..... 643
MGV 16.50 641
MGV 16.50 B..... 643
MGV 16.225 641
MGV 16.225 B..... 643
MGV 24.32 645
MGV 24.32 B..... 647
MGV 24.40 645
MGV 24.40 B..... 647
MGV 24.50 645
MGV 24.50 B..... 647
MGV 24.232 645
MGV 24.232 B..... 647
MGV 24.240 645
MGV 24.240 B..... 647
MGV 24.325 645
MGV 24.325 B..... 647
MGVE 06.25..... 551
MGVE 06.32..... 551
MGVE 06.40..... 551
MGVE 10.25..... 553
MGVE 10.32..... 553
MGVE 10.40..... 553
MGVE 16.25..... 555
MGVE 16.32..... 555
MGVE 16.40..... 555
MGVE 16.50..... 555
MGVE 16.225..... 555
MGVE 24.32..... 557
MGVE 24.40..... 557
MGVE 24.50..... 557
MGVE 24.232..... 557
MGVE 24.240..... 557
MGVE 24.325..... 557
MHO 06 L20 389
MHO 06 L25 389
MHO 06 LX20..... 391
MHO 06 LX25..... 391
MHO 10.20 395
MHO 10.25 395
MHO 10 L20 396
MHO 10 L25 396
MHO 10 X20..... 400
MHO 10 X25..... 400
MHO 16.25 404
MHO 16.32 404
MHO 16 L25 405
MHO 16 L32 405
MHO 16 X25..... 410
MHO 16 X32..... 410
MHO 24.25 414
MHO 24.32 414
MHO 24 L25 415
MHO 24 L32 415
MHO 24 X25..... 422
MHO 24 X32..... 422
MHO 32.32 426
MHO 32.40 426
MHO 32.50 426
MHO 32 L40 426
MHO 32 X40..... 427
MHO 48 L32 430
MHO 48 L40 430
MHO 48 L50 430
MHO 50.25 432
MHO 50.32 432
MHO 50 X25..... 433
MHO 50 X32..... 433
MHOE 06 L20M..... 531
MHOE 06 L25M..... 531
MHOE 10.20M..... 533
MHOE 10.25M..... 533
MHOE 16.25..... 544
MHOE 16.25M..... 535
MHOE 16.32..... 544
MHOE 16.32M..... 535
MHOE 24.25..... 545
MHOE 24.25M..... 537
MHOE 24.32..... 545
MHOE 24.32M..... 537
MHOE 32.40..... 546
MHOE 48 L40..... 547
MHOE 50.25..... 548
MHOE 50.32..... 548
MHON 06 L25..... 618
MHON 10.25..... 620
MHON 16.32..... 622
MHON 24.32..... 624
MHOR 06 L20..... 586
MHOR 10.20..... 587
MHOR 16.25..... 588
MHOR 24.25..... 589
MHOR 48 L40..... 590
MHOS 16.25..... 580
MHOS 16.32..... 580
MHOS 24.25..... 581
MHOS 24.32..... 581
MHOW 16.25..... 523
MHOW 16.32..... 523
MHOW 24.25..... 524
MHOW 24.32..... 524
MHOW 32.40..... 525
MHOW 48 L40..... 526
MHOW 50.25..... 527
MHOW 50.32..... 527
MHP 06 L20..... 388
MHP 06 L220..... 388
MHP 06 LS20 388
MHP 06 LS220 388
MHP 10.20..... 394
MHP 10.220..... 394
MHP 10 CP20..... 394
MHP 10 CP220..... 394
MHP 10 CS20..... 394
MHP 10 CS220..... 394
MHP 10 L20..... 394
MHP 10 L220..... 394
MHP 10 LS20 394
MHP 10 LS220 394
MHP 16.25..... 403
MHP 16.225..... 403
MHP 16 CP25..... 403
MHP 16 CP225..... 403
MHP 16 CS25..... 403
MHP 16 CS225..... 403
MHP 16 L25..... 403
MHP 16 L225..... 403
MHP 16 LS25 403
MHP 16 LS225 403
MHP 24.25..... 413
MHP 24.225..... 413
MHP 24 CP25..... 413
MHP 24 CP225..... 413
MHP 24 CS25..... 413
MHP 24 CS225..... 413
MHP 24 L25..... 413
MHP 24 L225..... 413
MHP 24 LS25 413
MHP 24 LS225 413
MHP 32.40..... 425
MHP 32.50..... 425
MHP 32.240..... 425
MHP 32.250..... 425
MHP 32 L40..... 425
MHP 32 L50..... 425
MHP 32 L240..... 425
MHP 32 L250..... 425
MHP 32 LS40 425
MHP 32 LS50 425
MHP 32 LS240 425
MHP 32 LS250 425
MHP 48 LS40 430
MHP 48 LS50 430
MHP 50.32..... 431
MHP 50.40..... 431
MHP 50.232..... 431
MHP 50.240..... 431
MHP 50 CS32..... 431
MHP 50 CS40..... 431
MHP 50 CS232..... 431
MHP 50 CS240..... 431
MHPE 32.50 546
MHPE 48 LS40..... 547
MHPE 50.32 548
MHPE 50.240 548
MHPR 10.20..... 587
MHPR 48 LS40..... 590
MHPW 32.50 525
MHPW 48 LS40..... 526
MHPW 50.32 527
MHPW 50.240 527
MHPX 32 L40 429
MHPX 32 LP40..... 429
MHPX 32 LP50..... 429
MHPX 32 LS40..... 429
MHV 06 L20..... 389
MHV 06 L25..... 389
MHV 06 LG25..... 390
MHV 06 LX20 391
MHV 06 LX25 391
MHV 10.20..... 395
MHV 10.25..... 395
MHV 10 G25..... 398
MHV 10 L20..... 396
MHV 10 L25..... 396
MHV 10 LG25..... 399
MHV 10 X20 400
MHV 10 X25 400
MHV 16.25..... 404
MHV 16.32..... 404
MHV 16 G32..... 408
MHV 16 L25..... 405
MHV 16 L32..... 405
MHV 16 LG32..... 409
MHV 16 X25 410
MHV 16 X32 410
MHV 24.25..... 414
MHV 24.32..... 414
MHV 24.40..... 414
MHV 24 G32..... 419
MHV 24 L25..... 415
MHV 24 L32..... 415
MHV 24 L40..... 415
MHV 24 LG32..... 420
MHV 24 X25 422
MHV 24 X32 422
MHV 32.32..... 426
MHV 32.40..... 426
MHV 32.50..... 426
MHV 32 G32..... 426
MHV 32 G40..... 426
MHV 32 G50..... 426
MHV 32 L40..... 426
MHV 32 LG40..... 426
MHV 32 X40 427
MHV 48 L32..... 430
MHV 48 L40..... 430
MHV 48 L50..... 430
MHVE 06 L20M 531
MHVE 06 L25M 531
MHVE 10.20M 533
MHVE 10.25M 533
MHVE 16.2 544
MHVE 16.25M 535
MHVE 16.32 544
MHVE 16.32M 535
MHVE 24.25 545
MHVE 24.25M 537
MHVE 24.32 545
MHVE 24.32M 537
MHVE 24.40M 537
MHVE 32.40 546
MHVE 32 G40 546
MHVE 48 L40 547
MHVN 06 L25 618
MHVN 06 LG25 619

* These items are also shown in various sections throughout the catalogue

MHVN 10.25 620
MHVN 10 G25 621
MHVN 16.32 622
MHVN 16 G32 623
MHVN 24.32 624
MHVN 24 G32 625
MHVR 06 L20 586
MHVR 10.20 587
MHVR 16.25 588
MHVR 24.25 589
MHVR 48 L40 590
MHVS 16.25 580
MHVS 16.32 580
MHVS 24.25 581
MHVS 24.32 581
MHVW 16.25 523
MHVW 16.32 523
MHVW 24.25 524
MHVW 24.32 524
MHVW 24 G32 524
MHVW 32.40 525
MHVW 32 G40 525
MHVW 48 L40 526
MIO 16.40 407
MIO 16.50 407
MIO 24.40 417
MIO 24.50 417
MIO 24 YX40 613
MIO 24 YX50 613
MIV 16.40 407
MIV 24.40 417
MIV 24.50 417
MIV 24 YX40 613
MIV 24 YX50 613
MKA AP20 349
MKA AP25 359
MKAE V20 538
MKAE VA20 538
MKAG V20 354
MKAG V25 355
MKAG VA20 354
MKA IAF20 350
MKA IAF25 350
MKA IAP20 349
MKA IAP25 359
MKA IF 363
MKAR V20 583
MKAR VA20 583
MKAS AP25 567
MKAS IAP25 567
MKAS IF 569
MKAS IVG20 571
MKAS V20 564
MKAS V25 564
MKAS VA20 564
MKAS VG25 572
MKA V20 351
MKA V25 352
MKA VA20 351
MKA VG20 351
MKA VG25 361
MKAW V20 512
MKAW V25 512
MKAW VA20 512
MKAX AP20 349
MKAX AP25 358
MKAXE AP20 538
MKAXE IAF20 539
MKAXE IAF25 539
MKAXE IAP20 538
MKAXE VG20 538
MKAX IAF20 350
MKAX IAF25 350
MKAX IAP20 349
MKAX IAP25 358
MKAX IF 362
MKAXR AP20 583
MKAXR IAP20 583
MKAXR IF 584
MKAXR VG20 583
MKAXS AP20 564
MKAXS AP25 566
MKAXS IAP20 564
MKAXS IAP25 566
MKAXS IF 568
MKAXS IVG20 570
MKAXS VG20 564
MKAXS VG25 572
MKAX VG20 351
MKAX VG25 360
MKAXW AP20 512
MKAXW AP25 514
MKAXW IAP20 512
MKAXW IAP25 514
MKAXW IF 516, 517
MKAXW VG20 512
MKAXW VG25 518
MKAXX AP25 359
MKAXX IAP25 359
MKAXX IF 363
MKAXXR IF 585
MKAXXS AP25 567
MKAXXS IAP25 567
MKAXXS IF 569
MKAXXS IVG20 571
MKAXXS VG25 572
MKAXX VG25 361
MKAXXW AP25 515
MKAXXW IAP25 515
MKAXXW VG25 518
MKG V20 347
MKG V25 348
MKG VA20 347
MKG VAN20 347
MKG VN20 347
MKG VN25 348
MK IAP20 339
MK IAPN20 339
MK V20 340
MK V25 341
MK VA20 340
MK VAN20 340
MK VG20 340
MK VG25 342
MK VGN20 340
MK VGN25 343
MK VN20 340
MK VN25 341
MQ 08 VO225 366
MQO 24.40 418
MQV 24.40 418
MVAP 06 LP32 446
MVAP 06 LP40 446
MVAP 06LP232 446
MVAP 06LP240 446
MVAP 06 LS32 446
MVAP 06 LS40 446
MVAP 06LS232 446
MVAP 06LS240 446
MVAP 06LSP25 445
MVAP 06LSP32 445
MVAP 06LSP40 445
MVAP 10 L32 451
MVAP 10 L40 451
MVAP 10 L232 451
MVAP 10 L240 451
MVAP 10 LP32 452
MVAP 10 LP40 452
MVAP 10LP232 452
MVAP 10LP240 452
MVAP 10 LS32 452
MVAP 10 LS40 452
MVAP 10LS232 452
MVAP 10LS240 452
MVAP 10LSP25 449
MVAP 10LSP32 449
MVAP 10LSP40 449
MVAP 16 L32 456
MVAP 16 L40 456
MVAP 16 L232 456
MVAP 16 L240 456
MVAP 16 LP32 457
MVAP 16 LP40 457
MVAP 16LP232 457
MVAP 16LP240 457
MVAP 16 LS32 457
MVAP 16 LS40 457
MVAP 16LS232 457
MVAP 16LS240 457
MVAP 16LSP25 455
MVAP 16LSP32 455
MVAP 16LSP40 455
MVAP 24 L32 461
MVAP 24 L40 461
MVAP 24 L232 461
MVAP 24 L240 461
MVAP 24 LP32 462
MVAP 24 LP40 462
MVAP 24LP232 462
MVAP 24LP240 462
MVAP 24 LS32 462
MVAP 24 LS40 462
MVAP 24LS232 462
MVAP 24LS240 462
MVAP 24LSP25 460
MVAP 24LSP32 460
MVAP 24LSP40 460
MVAV 06 LG25 447
MVAV 06 LG32 447
MVAV 10 G25 453
MVAV 10 G32 453
MVAV 10 LG25 453
MVAV 10 LG32 453
MVAV 16 G25 458
MVAV 16 G32 458
MVAV 16 LG25 458
MVAV 16 LG32 458
MVAV 24 G25 463
MVAV 24 G32 463
MVAV 24 LG25 463
MVAV 24 LG32 463
MVFV 06 LG25 447
MVFV 06 LG32 447
MVFV 10 G25 453
MVFV 10 G32 453
MVFV 10 LG25 453
MVFV 10 LG32 453
MVFV 16 G25 458
MVFV 16 G32 458
MVFV 16 LG25 458
MVFV 16 LG32 458
MVFV 24 G25 463
MVFV 24 G32 463
MVFV 24 LG25 463
MVFV 24 LG32 463
MVI 10 LAP32 450
MVP 06 LP20 446
MVP 06 LP220 446
MVP 06 LS20 446
MVP 06 LS220 446
MVP 06 LSP20 445
MVP 10 L20 451
MVP 10 L220 451
MVP 10 LP20 452
MVP 10 LP220 452
MVP 10 LS20 452
MVP 10 LS220 452
MVP 10 LSP20 449
MVP 10 LSP25 449
MVP 16 L25 456
MVP 16 L225 456
MVP 16 LP25 457
MVP 16 LP225 457
MVP 16 LS25 457
MVP 16 LS225 457
MVP 16 LSP25 455
MVP 24 L25 461
MVP 24 L225 461
MVP 24 LP25 462
MVP 24 LP225 462
MVP 24 LS25 462
MVP 24 LS225 462
MVP 24 LSP25 460
MVV 06 LG25 447
MVV 10 G25 453
MVV 10 LG25 453
MVV 16 G32 458
MVV 16 LG32 458
MVV 24 G32 463
MVV 24 LG32 463
MXA 01 O25 369
MXA 01 V25 369
MXA 01 V32 369
MZ7P 15 L25 384
MZ7P 15 L225 384
MZ7P 15 LS25 384
MZ7P 15LS225 384
MZ7P 25 L25 385
MZ7P 25 L225 385
MZ7P 25 LS25 385
MZ7P 25LS225 385
MZ7PE 15L225 540
MZ7PE 25L225 541
MZ7PS 15L225 576
MZ7PS 25L225 577
MZ7PW 15L225 519
MZ7PW 25L225 520
MZAO 15 L20 376
MZAO 15 L25 376
MZAO 25 L20 380
MZAO 25 L25 380
MZAOE 15 L25 540
MZAOE 25 L25 541
MZAOW 15 L25 519
MZAOW 25 L25 520
MZAP 25 L25 378
MZAP 25 L225 378
MZAP 25 LS25 378
MZAP 25LS225 378
MZAP 25LSP20 379
MZAP 25LSP25 379
MZAPR 06 L32 586
MZAV 15 L20 376
MZAV 15 L25 376
MZAV 25 L20 380
MZAV 25 L25 380
MZAV 25 L220 380
MZAVE 15 L25 540
MZAVE 25 L25 541
MZAVW 15 L25 519
MZAVW 25 L25 520
MZFO 15 L20 376

* These items are also shown in various sections throughout the catalogue

MZFO 15 L25 376
MZFO 25 L20 380
MZFO 25 L25 380
MZFOS 15 L25 576
MZFOS 25 L25 577
MZFV 15 L20 376
MZFV 15 L25 376
MZFV 25 L20 380
MZFV 25 L25 380
MZFV 25 L220 380
MZFVS 15 L25 576
MZFVS 25 L25 577
MZO 15 L20 376
MZO 15 L25 376
MZO 25 L20 380
MZO 25 L25 380
MZOE 15 L20 540
MZOE 15 L25 540
MZOE 25 L20 541
MZOE 25 L25 541
MZOS 15 L20 576
MZOS 15 L25 576
MZOS 25 L20 577
MZOS 25 L25 577
MZOW 15 L20 519
MZOW 15 L25 519
MZOW 25 L20 520
MZOW 25 L25 520
MZP 15 L25 374
MZP 15 L225 374
MZP 15 LS25 374
MZP 15 LS225 374
MZP 15 LSP20 375
MZP 15 LSP25 375
MZPR 06 L20 586
MZV 15 L20 376
MZV 15 LG20 376
MZV 25 L20 380
MZV 25 LG20 381
MZVE 15 L20 540
MZVE 25 L20 541
MZVS 15 L20 576
MZVS 25 L20 577
MZVW 15 L20 519
MZVW 25 L20 520

R

RAC 06 L 600
RAC 10 L 600
RAC 16 L 600
RAC 24 L 600
RCEF 06 214
RCEF 10 215
RCEF 16 216
RCEF 24 217
RCEM 06 214
RCEM 10 215
RCEM 24 217
RCF2D 0.3 ..... 214*
RCF2D 0.5 ..... 214*
RCF2D 0.7 ..... 214*
RCF2D 1.0 ..... 214*
RCF2D 1.5 ..... 214*
RCF2D 2.5 ..... 214*
RCF2D 3.0 ..... 214*
RCF2D 4.0 ..... 214*
RCM2D 0.3 ..... 214*
RCM2D 0.5 ..... 214*
RCM2D 0.7 ..... 214*
RCM2D 1.0 ..... 214*
RCM2D 1.5 ..... 214*
RCM2D 2.5 ..... 214*
RCM2D 3.0 ..... 214*
RCM2D 4.0 ..... 214*
RDDF 24 210
RDDF 42 211
RDDF 72 212
RDDF 108 213
RDDM 24 210
RDDM 42 211
RDDM 72 212
RDDM 108 213
RDF2D 0.3 ..... 208*
RDF2D 0.5 ..... 208*
RDF2D 0.7 ..... 208*
RDF2D 1.0 ..... 208*
RDF2D 1.5 ..... 208*
RDF2D 2.5 ..... 208*
RDF 40 208
RDF 64 209
RDM2D 0.3 ..... 208*
RDM2D 0.5 ..... 208*
RDM2D 0.7 ..... 208*
RDM2D 1.0 ..... 208*
RDM2D 1.5 ..... 208*
RDM2D 2.5 ..... 208*
RDM 40 208
RDM 64 209
RFO 06 L32 593
RFO 10 L32 595
RFO 16 L32 597
RFO 24 L40 599
RFV 06 L32 593
RFV 10 L32 595
RFV 16 L32 597
RFV 24 L40 599
RHO 06 L25 593
RHO 10 L25 595
RHO 16 L32 597
RHO 24 L32 599
RHV 06 L25 593
RHV 10 L25 595
RHV 16 L32 597
RHV 24 L32 599
RQEEF 40 218
RQEEF 64 219
RQEEM 40 218
RQEEM 64 219
RVAP 06 L32 592
RVAP 06 L232 592
RVAP 10 L32 594
RVAP 10 L232 594
RVAP 16 L32 596
RVAP 16 L232 596
RVAP 24 L32 598
RVAP 24 L232 598
RVI 06 L 592
RVI 10 L 594
RVI 16 L 596
RVI 24 L 598
RVP 06 L20 592
RVP 06 L220 592
RVP 10 L20 594
RVP 10 L220 594
RVP 16 L25 596
RVP 16 L225 596
RVP 24 L25 598
RVP 24 L225 598
RX 02 TF 333
RX 02 TM 333
RX 03 TF 333
RX 03 TM 333
RX 04 TF 333
RX 04 TM 333
RX 06 TF 333
RX 06 TM 333
RXF2D 1.5 ..... 221*
RXF2D 2.5 ..... 221*
RXF2D 4.0 ..... 221*
RXF2D 6.0 ..... 221*
RXF2D 10 ..... 321, 323
RXF 12/2 221
RXM2D 1.5 ..... 221*
RXM2D 2.5 ..... 221*
RXM2D 4.0 ..... 221*
RXM2D 6.0 ..... 221*
RXM2D 10 ..... 321, 323
RXM 12/2 221

S

SDS 701

T

TAPC 06 L25 506
TAPC 06 L32 506
TAPC 10.25 507
TAPC 10.32 507
TAPC 16.32 508
TAPC 16.40 508
TAPC 24.32 509
TAPC 24.40 509
TAPH 06 L25 501
TAPH 06 L32 501
TAPH 10.25 502
TAPH 10.32 502
TAPH 16.32 503
TAPH 16.40 503
TAPH 24.40 504
TAPH 24.322 504
TAPW 06 L25 489
TAPW 06 L32 489
TAPW 10.25 490
TAPW 10.32 490
TAPW 16.32 491
TAPW 16.40 491
TAPW 24.32 492
TAPW 24.40 492
TAVC 06 LG25 506
TAVC 06 LG32 506
TAVC 10 G25 507
TAVC 10 G32 507
TAVC 16 G32 508
TAVC 16 G40 508
TAVC 24 G32 509
TAVC 24 G40 509
TAVH 06 LG25 501
TAVH 06 LG32 501
TAVH 10 G25 502
TAVH 10 G32 502
TAVH 16 G32 503
TAVH 16 G40 503
TAVH 24 G32 504
TAVH 24 G40 504
TAVW 06 LG25 489
TAVW 06 LG32 489
TAVW 10 G25 490
TAVW 10 G32 490
TAVW 16 G32 491
TAVW 16 G40 491
TAVW 24 G32 492
TAVW 24 G40 492
TCHC 06 L 481
TCHC 06 LG 481
TCHC 06 SL 481
TCHC 10 483
TCHC 10 G 483
TCHC 10 S 483
TCHC 16 485
TCHC 16 G 485
TCHC 16 S 485
TCHC 24 487
TCHC 24 G 487
TCHC 24 S 487
TCHI 06 L 480
TCHI 10 482
TCHI 16 484
TCHI 24 486
THCC 06 LG 506
THCC 10 G 507
THCC 16 G 508
THCC 24 G 509
THCH 06 LG 501
THCH 10 G 502
THCH 16 G 503
THCH 24 G 504
THCW 06 LG 489
THCW 10 G 490
THCW 16 G 491
THCW 24 G 492
THIC 06 L 506
THIC 10 507
THIC 16 508
THIC 24 509
THIH 06 L 501
THIH 10 502
THIH 16 503
THIH 24 504
THIW 06 L 489
THIW 10 490
THIW 16 491
THIW 24 492
TMAO 06 L25 480
TMAO 06 L32 480
TMAO 10.25 482
TMAO 10.32 482
TMAO 16.32 484
TMAO 16.40 484
TMAO 24.32 486
TMAO 24.40 486
TMAP 06 L25 480
TMAP 06 L32 480
TMAP 10.25 482
TMAP 10.32 482
TMAP 16.32 484
TMAP 16.40 484
TMAP 24.32 486
TMAP 24.40 486
TMAV 06 L25 480
TMAV 06 L32 480
TMAV 06 LG25 481
TMAV 06 LG32 481
TMAV 10.25 482
TMAV 10.32 482
TMAV 10 G25 483
TMAV 10 G32 483
TMAV 16.32 484
TMAV 16.40 484
TMAV 16 G32 485
TMAV 16 G40 485
TMAV 24.32 486
TMAV 24.40 486
TMAV 24 G32 487
TMAV 24 G40 487
TM BLC125 666

Z

ZFU-CD 728

* These items are also shown in various sections throughout the catalogue

Worldwide Sales Organization

Headquarters

ILME S.p.A.
Via M.A. Colonna, 9
20149 Milano, Italia
T +39 0234560522
info@ilme.com

France

ILME FRANCE S.A.R.L.
431 rue Roland Garros
Parc d'Activités de l'Aéroport
42160 Andrézieux-Bouthéon
T +33 04 7736 2336
ilme-france@ilme.fr

Germany

ILME GmbH
Max-Planck-Straße 12
51674 Wiehl
T +49 (0)2261 7955 0
technik@ilme.de

Sweden and Nordic Countries

ILME NORDIC AB
Transportvägen 18
246 42 Löddeköpinge
T +46 4618 2800
info@ilme.se

United Kingdom

ILME UK LIMITED
50 Evans Road, Venture Point
Speke, Liverpool L24 9PB
T +44 0151 336 9321
sales@ilmeuk.co.uk

China

ILME CHINA CO. LTD.
Room 101, Building 3,
188 Xinjunhuan Road, Minhang
Shanghai 201114
T +86 21 6248 9961
info@ilmechina.com

Japan

ILME JAPAN CO. LTD.
K.I.B.C. Bldg 5-2,
Minatojima Minamimachi 5-Chome,
Chuo-Ku, Kobe 650-0047
T +81 78 302 2005
info@ilmejapan.co.jp

Korea

ILME KOREA CO.
714, DaeRyung Technotown 20th,
5 Gasan Digital 1-Ro, GeumCheon-Gu,
Seoul, South Korea (08594)
T +82-2-2225-8432
sales@ilme.kr

www.ilme.com

Copyright @ 2019 ILME S.p.A. All Rights Reserved
ILME retains all copyrights in any text, graphic image and picture.
No part of this publication may be modified, reproduced or distributed, in any form or by any means,
without the prior written permission of ILME.

ILME S.p.A.
Via M.A. Colonna 9
20149 Milano, Italy
www.ilme.com

catalogues

XDG CN 919
8 015747 270564